

**PMF-G Series** General Transformer  
 Guitar Tube Amplifier Output Transformer (It also can be used for audio applications.)


PMF-G8	PMF-G5	PMF-G3.5
--------	--------	----------

Brown	Brown	Brown	P1
-------	-------	-------	----

Orange	Orange	Orange	B
--------	--------	--------	---



Yellow	Green	Red	P2
--------	-------	-----	----

Wiring

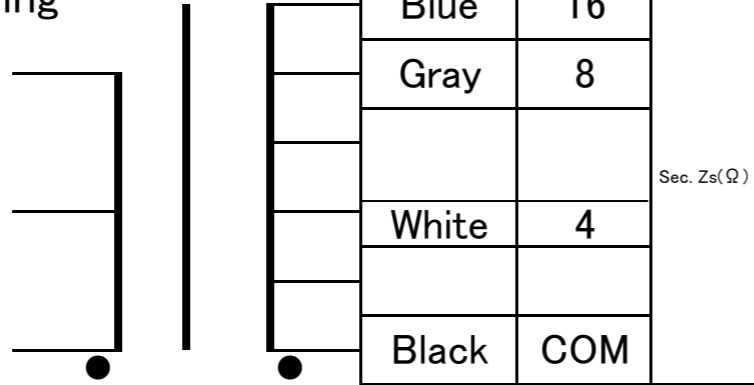

PMF-G8	PMF-G5	PMF-G3.5	Model No
8kΩ	5kΩ	3.5kΩ	Pri. Zp
14H	8.5H	6H	Pri. Inductance
250mA	300mA	350mA	Pri. Max. DC Current (2 tubes)
30mA	40mA	50mA	Unbalance Current

Output 40W (60Hz)  
 Freq. Respoi 15~44kHz (5k-16Ω -3dB)  
 Dimension 104x78x68 (H)

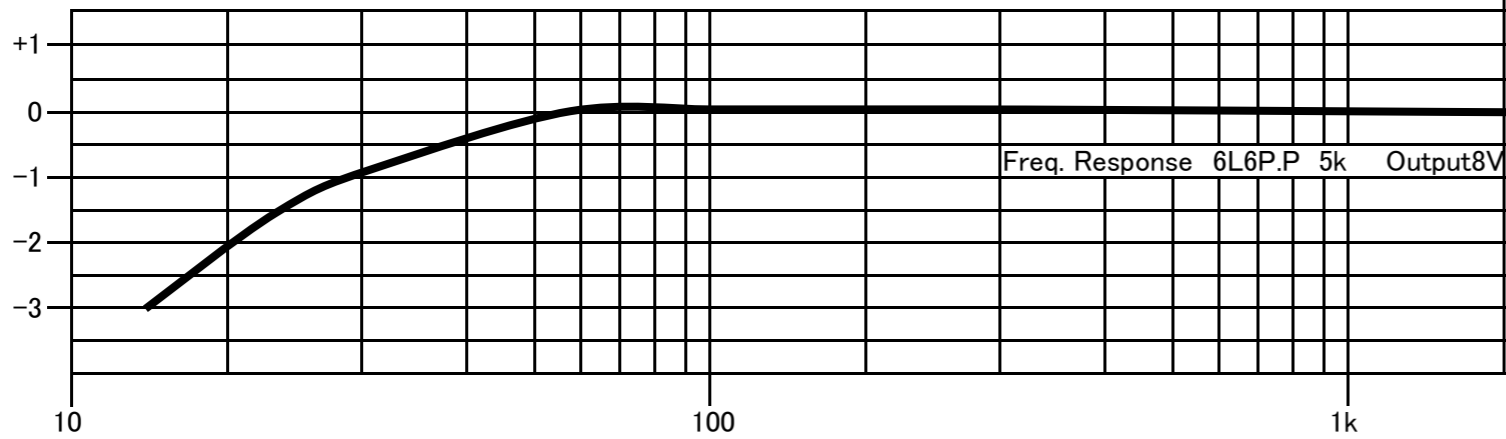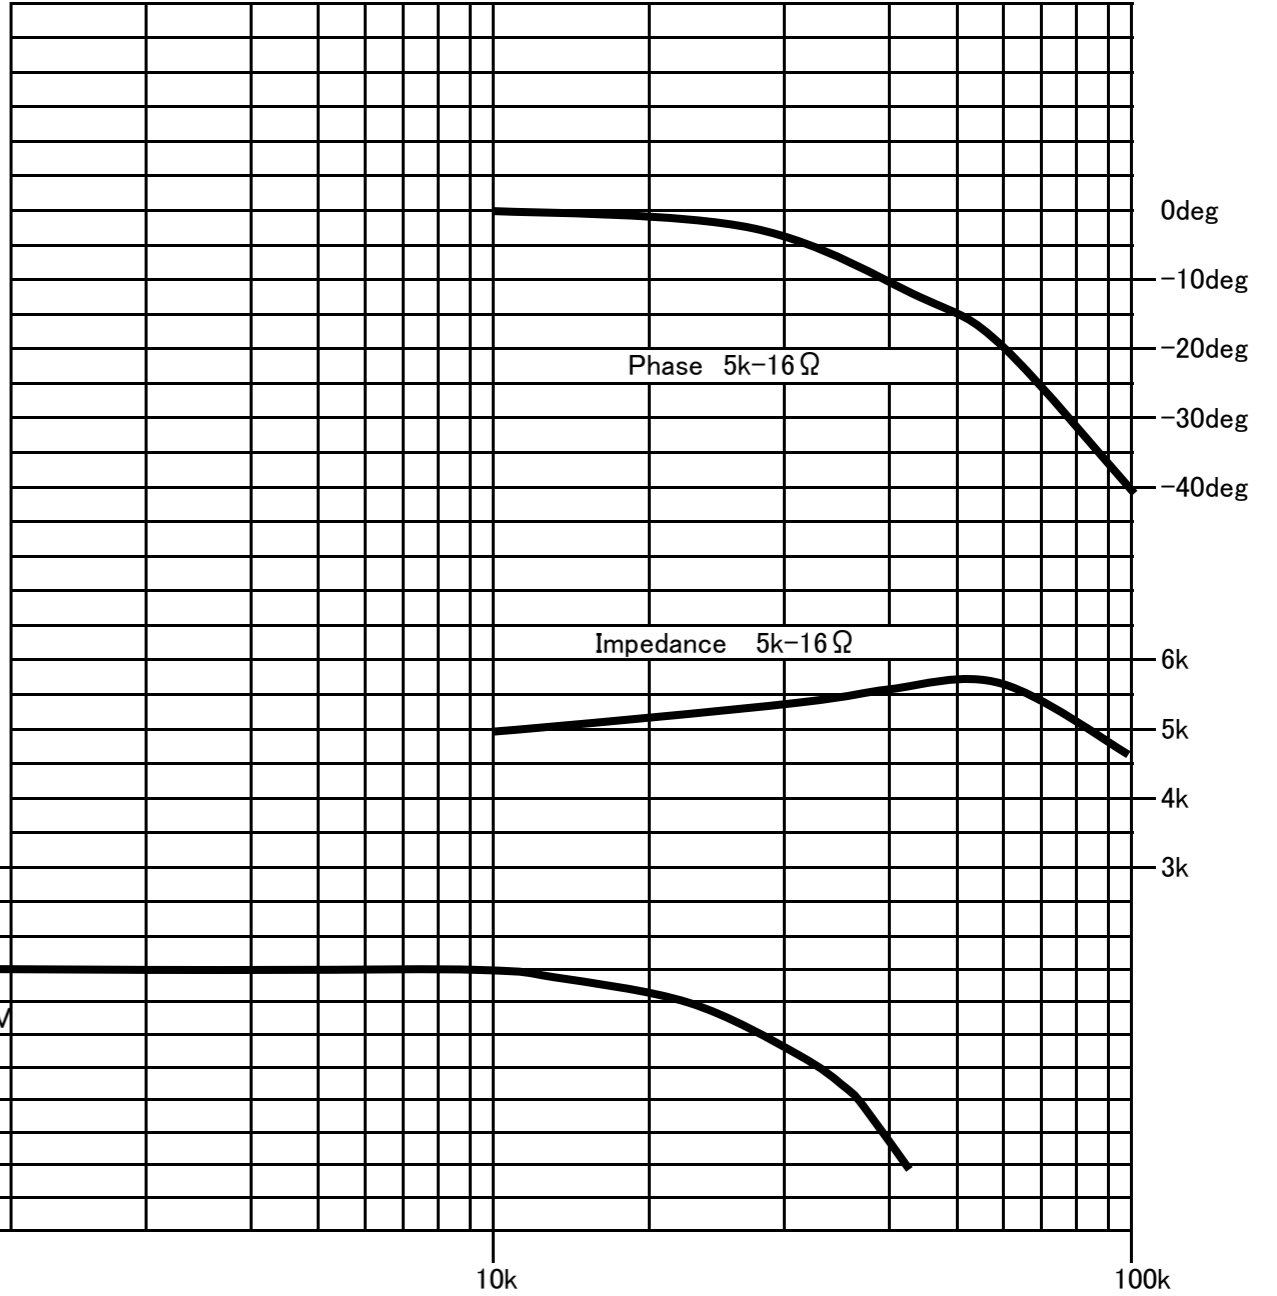

General Transformer / made in Japan