Edition 1

one LIGHT

Lighting Catalogue

2022





INTALITE UK

Loving Light!


one
LIGHT

Message from our CEO

It is with great pleasure that we present to you our new catalogue,

ONE Light 2022 – Edition 1.

In this catalogue, we are introducing a new family of magnetic profiles and expanding our existing technical lighting ranges with new products.

In 2021 we launched two new features on our B2B platform, where distributors can make orders online and also create quotations for their customers using our E-shop.

We expanded our production facility in China from 2000m2 to 4000m2 and added 4 new production lines.

Despite the difficulties and challenges of 2021, with your support ONE Light has managed to increase sales by 40% and start cooperation more than 60 new partners globally.

We would like to thank you for your trust as it is our driving force to achieve better every year.

Yiotis Demetriou
CEO
ONE Light Ltd



"Do it with passion or forget it!"

The Company

Founded in 2011 ONE Light supplies technical lighting to retailers, wholesalers and distributor partners across 65 countries globally. ONE Light specialises in modern design LED lighting offering quality at affordable prices.



Warehouse

Operating from it's modern 5000m^2 warehouse, ONE Light provides 99% stock availability on all catalogue products. All orders can be prepared for dispatch within 24hours.



Symbols

Decoding our catalogue.

EUROPEAN CONFORMITY MARK

CE

ITEMS OFFERED AT SPECIAL PRICE

offer

CLASS PROTECTION

III

MOUNTING POSITION

FIRE RATED

FIRE RATED

INDOOR/OUTDOOR INSTALLATION

YEARS OF WARRANTY

2 YEAR 3 YEAR 5 YEAR

IP RATING

IP20 IP65

NEW PRODUCTS

new

LED BUILT IN

LED BUILT IN



ROTATION RANGE

ADJUSTABLE 2 directions

ADJUSTABLE 1 direction

CEILING DEPTH REQUIRED

CABLE LENGTH

BATTERY

COLOUR RENDERING INDEX

80 CRI

CUTOUT HOLE

DARK LIGHT

DARK LIGHT

FAST CONNECTION

QUICK FIX

SOLAR PANEL

Solar

IMPACT PROTECTION RATING

IK 08

LIGHT DISTRIBUTION & BEAM ANGLE

30°

PIECES PER BOX

MAXIMUM UNDERWATER DEPTH

1m max

SENSOR

DIMMABLE

DIMMABLE

PUSH TO DIM

PUSH TO DIM

Colour Codes

Decoding our colours.







NEW PRODUCTS 2022

EDITION 2

Recessed Spots Fixed LED



10112K/B/W + 050280/BS

10112K | 12W | COB LED | Die cast

Reflector must be ordered separately.

new
DARK LIGHT
IP20

LED BUILT IN
90 CRI
DIMMABLE
QUICK FIX
CE
5 YEAR



10112K/W/W + 050280/B

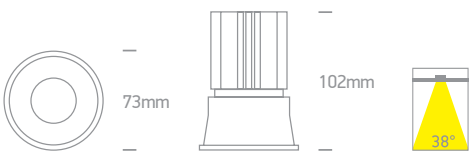



050280/W White



050280/B Black



050280/BS Brass

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10112K/W/C	White	Cool white	4000K	12W	1100lm	38°	700mA	III	40cm	67mm	120mm	50	Requires 700mA driver
10112K/W/W	White	Warm white	3000K	12W	1100lm	38°	700mA	III	40cm	67mm	120mm	50	Requires 700mA driver
10112K/B/C	Black	Cool white	4000K	12W	1100lm	38°	700mA	III	40cm	67mm	120mm	50	Requires 700mA driver
10112K/B/W	Black	Warm white	3000K	12W	1100lm	38°	700mA	III	40cm	67mm	120mm	50	Requires 700mA driver



10112HA/W/W

10112HA | 12W | COB LED | Die cast

Accessories on page 16.

new
DARK LIGHT
IP20

LED BUILT IN
90 CRI
DIMMABLE
QUICK FIX
CE
5 YEAR



10112HA/B/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10112HA/W/W	White	Warm white	3000K	12W	1100lm	38°	700mA	III	40cm	66mm	135mm	50	Requires 700mA driver
10112HA/B/W	Black	Warm white	3000K	12W	1100lm	38°	700mA	III	40cm	66mm	135mm	50	Requires 700mA driver



11105ABG | 10W | MR16 | GU10 | Aluminium

new

IP20

ADJUSTABLE

5 YEAR



Complete with 0950GB.



Order Code	Colour	Watts	Input	Class					Notes
11105ABG/B	Black	10W	100-240V		15cm	80mm	100mm	50	-



51105ABG | 10W | MR16 | GU10 | Aluminium

new

IP20

ADJUSTABLE

5 YEAR



Complete with 0950GB.



Order Code	Colour	Watts	Input	Class					Notes
51105ABG/B	Black	10W	100-240V		15cm	80mm	100mm	50	-



51205ABG | 2x10W | MR16 | GU10 | Aluminium

new

IP20

ADJUSTABLE

5 YEAR



Complete with 0950GB.



Order Code	Colour	Watts	Input	Class					Notes
51205ABG/B	Black	2x10W	100-240V		15cm	162x82mm	100mm	20	-



50140BU | 40W | SMD 2835 | 595x595mm | Aluminium + Steel

Backlit

new

IP20

LED BUILT IN

80 CRI

CE

3 YEAR

UGR19



Optional suspension kit. Order code 050017.



Optional recessed kit (4pcs). Order code 050108.



Optional DALI & Push to DIM driver. Order code 89042L.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
50140BU/W/C	White	Cool white	4000K	40W	4000lm	230V		60mm	6	Complete with 1000mA driver



50140BW | 40W | SMD 2835 | 595x595mm | Aluminium + Steel

Backlit

new

IP65

LED BUILT IN

80 CRI

CE

3 YEAR



Optional suspension kit. Order code 050017.



Optional recessed kit (4pcs). Order code 050108.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
50140BW/W/C	White	Cool white	4000K	40W	4000lm	230V		60mm	6	Complete with IP65 950mA driver

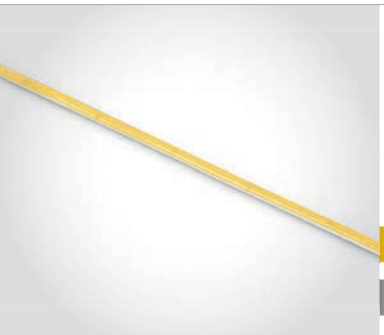

7843 | 4W/m | COB LED | Ultra slim

3M Double face adhesive.

new

IP20

LED BUILT IN · 90 CRI · DIMMABLE · CE · 5 YEAR



Supplied in 5m roll.



Dimming remote control.
Order code 20030.



Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7843/C	Cool white	4000K	4W/m	440lm/m	24V DC	III	50	Requires 24V DC driver
7843/W	Warm white	3000K	4W/m	410lm/m	24V DC	III	50	Requires 24V DC driver



RGB

7846/RGB | 15W/m | COB LED | RGB

3M Double face adhesive.

new

IP20

LED BUILT IN · DIMMABLE · CE · 5 YEAR



Supplied in 5m roll.



Dimming remote control.
Order code 20034.



Order Code	Light Colour	Watts	Input	Class		Notes
7846/RGB	RGB	15W/m	24V DC	III	50	Requires 24V DC driver



new

7846RB Corner connector for 7846/RGB



new

7846RC Connector for 7846/RGB



new

7846RP Power supply for 7846/RGB



7884 | 33W/m | SMD 2835 | 320LEDs/m

3M Double face adhesive.

IP20

LED BUILT IN · 90 CRI · DIMMABLE · CE · 5 YEAR



Supplied in 5m roll.



Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7884/C	Cool white	4000K	33W/m	4700lm/m	24V DC	III	20	Requires 24V DC driver
7884/W	Warm white	3000K	33W/m	4100lm/m	24V DC	III	20	Requires 24V DC driver



7904R/B | 2m Recessed profile + PC opal diffuser | Aluminium | Suitable for 7820, 7829, 7835 & 7846 LED Strips 12mm

80

5 YEAR

new



Complete with 2 pairs end cups.







7922/W | 2m Wall profile + PC opal diffuser | Aluminium | Suitable for 7820 & 7843 LED Strip 8mm

12

5 YEAR

new



Complete with 2 pairs end cups.





7922/B | 2m Wall profile + PC opal diffuser | Aluminium | Suitable for 7820 & 7843 LED Strip 8mm

12

5 YEAR

new



Complete with 2 pairs end cups.



Track Lights



65168T/W/W

65168T | 50W | SMD 2835 | Linear track light | Aluminium

LED BUILT IN

80 CRI

ADJUSTABLE

5 YEAR

IP20

new



65168T/B/W





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
65168T/W/W	White	Warm white	3000K	50W	6250lm	230V	⏚	6	Complete with 1400mA driver
65168T/B/W	Black	Warm white	3000K	50W	6250lm	230V	⏚	6	Complete with 1400mA driver



42001 | 48V | 1m Magnetic profile | ON/OFF / DALI | Aluminium | Max 10m/driver | Max 400W/circuit

5 YEAR

new



Optional suspension kit. Order code 42026.



Complete with 2pcs end cups.



Complete with cover.



Order Code	Colour	Input	Class		Notes
42001/B	Black	48V	III	1	-



42002 | 48V | 2m Magnetic profile | ON/OFF / DALI | Aluminium | Max 10m/driver | Max 400W/circuit

5 YEAR

new



Optional suspension kit. Order code 42026.



Complete with 2pcs end cups.



Complete with cover.



Order Code	Colour	Input	Class		Notes
42002/B	Black	48V	III	1	-

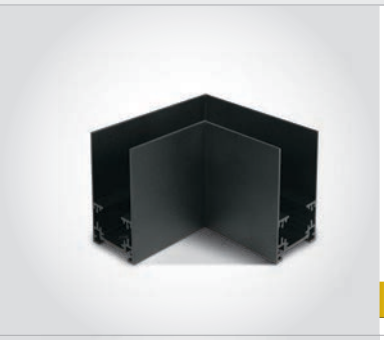

42012A/B | Corner for 42001 & 42002 | Aluminium

5 YEAR

new



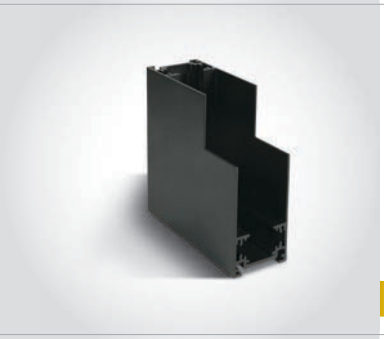

42012B/B | Corner wall to wall (IN) for 42001 & 42002 | Aluminium

5 YEAR

new



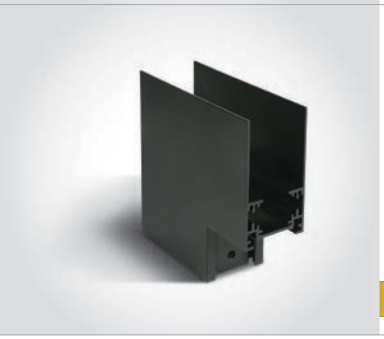

42012C/B | Corner wall to wall (OUT) for 42001 & 42002 | Aluminium

5 YEAR

new





42032 | Mechanical connector for 42001 & 42002

5 YEAR

new





42004A/B | 48V | Power supply cable for 42001 & 42002 | ON/OFF / DALI | Plastic

5 YEAR

200cm

new





42004C/B | 48V | Live connector/corner for 42001 & 42002 | ON/OFF / DALI | Plastic

5 YEAR

new





42022/B | End cups for 42001 & 42002

5 YEAR

new



42100A | 15W | SMD 2835 | Linear light | Aluminium + polycarbonate







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42100A/B/W	Black	Warm white	3000K	15W	1200lm	120°	48V		40	-



42100B | 25W | SMD 2835 | Linear light | Aluminium + polycarbonate







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42100B/B/W	Black	Warm white	3000K	25W	2000lm	120°	48V		20	-



42120B | 12W | SMD 3535 | Linear light | Assymetric | Aluminium + polycarbonate







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42120B/B/W	Black	Warm white	3000K	12W	960lm	90°	48V		40	-



42100E | 25W | SMD 2835 | Corner light | Aluminium + polycarbonate







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42100E/B/W	Black	Warm white	3000K	25W	2000lm	120°	48V		12	-



42102A | 12W | SMD 3535 | Linear spots | Aluminium







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42102A/B/W	Black	Warm white	3000K	12W	960lm	38°	48V	III	40	-



42102B | 22W | SMD 3535 | Linear spots | Aluminium







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42102B/B/W	Black	Warm white	3000K	22W	1760lm	38°	48V	III	30	-



42104B | 12W | SMD 3535 | Linear spots | Aluminium







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42104B/B/W	Black	Warm white	3000K	12W	840lm	36°	48V	III	40	-



42106A | 12W | SMD 3535 | Linear spots | Adjustable | Aluminium





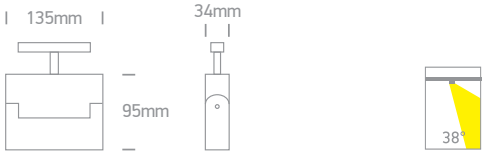

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42106A/B/W	Black	Warm white	3000K	12W	960lm	38°	48V	III	30	-



42106B | 22W | SMD 3535 | Linear spots | Adjustable | Aluminium

new

IP20

LED BUILT IN

90 CRI

ADJUSTABLE

3 YEAR





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42106B/B/W	Black	Warm white	3000K	22W	1760lm	38°	48V	III	30	-



42108 | 6W | COB LED | Aluminium

new

IP20

LED BUILT IN

90 CRI

ADJUSTABLE

3 YEAR





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42108/B/W	Black	Warm white	3000K	6W	480lm	38°	48V	III	30	-



42108A | 2x6W | COB LED | Aluminium

new

IP20

LED BUILT IN

90 CRI

ADJUSTABLE

3 YEAR





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42108A/B/W	Black	Warm white	3000K	2x6W	960lm	38°	48V	III	40	-



42110 | 8W | COB LED | Honeycomb | Aluminium

new

DARK LIGHT

IP20

LED BUILT IN

90 CRI

ADJUSTABLE

3 YEAR





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42110/B/W	Black	Warm white	3000K	8W	640lm	15°	48V	III	30	-



42114A | 12W | COB LED | Aluminium









Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42114A/B/W	Black	Warm white	3000K	12W	960lm	38°	48V	III	24	-



42114B | 24W | COB LED | Aluminium









Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42114B/B/W	Black	Warm white	3000K	24W	1920lm	38°	48V	III	16	-



42114C | 30W | COB LED | Aluminium









Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42114C/B/W	Black	Warm white	3000K	30W	2400lm	38°	48V	III	16	-



42134 | 7W | COB LED | Aluminium









Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42134/B/W	Black	Warm white	3000K	7W	560lm	36°	48V	III	30	-



42134A | 2x7W | COB LED | Aluminium









Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42134A/B/W	Black	Warm white	3000K	2x7W	1120lm	36°	48V	III	30	-



42118 | 26W | COB LED | Aluminium









Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42118/B/W	Black	Warm white	3000K	26W	2080lm	50°	48V	III	20	-



42116C | 15W | COB LED | Aluminium









Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42116C/B/W	Black	Warm white	3000K	15W	1200lm	38°	48V	III	16	-



42130A | 5W | COB LED | Aluminium





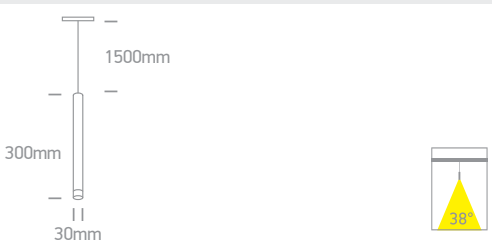

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42130A/B/W	Black	Warm white	3000K	5W	350lm	38°	48V	III	30	-



42130B | 9W | COB LED | Aluminium





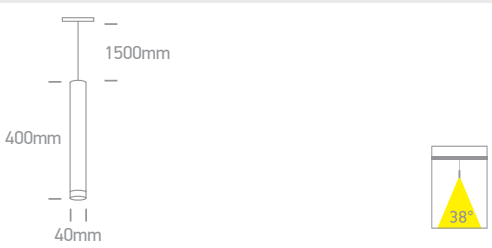

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42130B/B/W	Black	Warm white	3000K	9W	630lm	38°	48V	III	30	-



42132 | 7W | COB LED | Aluminium

With removable tube.





With tube.



Without tube.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42132/B/W	Black	Warm white	3000K	7W	490lm	10° / 38°	48V	III	30	-



42134B | 7W | COB LED | Aluminium





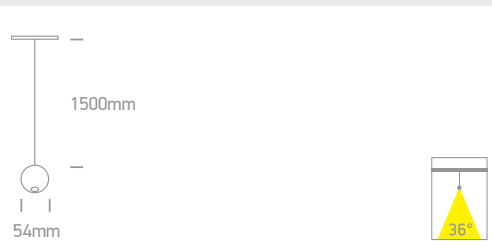

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42134B/B/W	Black	Warm white	3000K	7W	560lm	36°	48V	III	30	-



42100BL | 25W | SMD 2835 | Linear light | DALI | Aluminium + polycarbonate







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42100BL/B/W	Black	Warm white	3000K	25W	2000lm	120°	48V	III	20	-



42102BL | 22W | SMD 3535 | Linear spots | DALI | Aluminium







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42102BL/B/W	Black	Warm white	3000K	22W	1760lm	38°	48V	III	30	-



42106BL | 22W | SMD 3535 | Linear spots | DALI | Adjustable | Aluminium





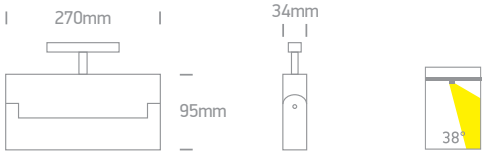

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42106BL/B/W	Black	Warm white	3000K	22W	1760lm	38°	48V	III	30	-



42114BL | 24W | COB LED | DALI | Aluminium

new

IP20

LED BUILT IN · 90 CRI · DALI DIMMABLE · ADJUSTABLE · CE · 3 YEAR · DALI







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42114BL/B/W	Black	Warm white	3000K	24W	1920lm	38°	48V	III	16	-



42114CL | 30W | COB LED | DALI | Aluminium

new

IP20

LED BUILT IN · 90 CRI · DALI DIMMABLE · ADJUSTABLE · CE · 3 YEAR · DALI







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42114CL/B/W	Black	Warm white	3000K	30W	2400lm	38°	48V	III	16	-



42118L | 26W | COB LED | DALI | Aluminium

new

IP20

LED BUILT IN · 90 CRI · DALI DIMMABLE · ADJUSTABLE · CE · 3 YEAR · DALI







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42118L/B/W	Black	Warm white	3000K	26W	2080lm	50°	48V	III	20	-



67426D/W

67426D | 10W | MR16 | GU10 | Die cast





67426D/AN | 67426D/B | 67426D/G | 67426D/BR



Order Code	Colour	Watts	Input	Class		Notes
67426D/W	White	10W	100-240V		18	-
67426D/AN	Anthracite	10W	100-240V		18	-
67426D/B	Black	10W	100-240V		18	-
67426D/G	Grey	10W	100-240V		18	-
67426D/BR	Rust brown	10W	100-240V		18	-



67426B/W

67426B | 10W | MR16 | GU10 | Die cast





67426B/AN | 67426B/B | 67426B/G | 67426B/BR



Order Code	Colour	Watts	Input	Class		Notes
67426B/W	White	10W	100-240V		18	-
67426B/AN	Anthracite	10W	100-240V		18	-
67426B/B	Black	10W	100-240V		18	-
67426B/G	Grey	10W	100-240V		18	-
67426B/BR	Rust brown	10W	100-240V		18	-



67426C/W

67426C | 2x10W | MR16 | GU10 | Die cast





67426C/AN | 67426C/B | 67426C/G | 67426C/BR



Order Code	Colour	Watts	Input	Class		Notes
67426C/W	White	2x10W	100-240V		18	-
67426C/AN	Anthracite	2x10W	100-240V		18	-
67426C/B	Black	2x10W	100-240V		18	-
67426C/G	Grey	2x10W	100-240V		18	-
67426C/BR	Rust brown	2x10W	100-240V		18	-

Wall & Ceiling



67400D/BR

67400D | 20W | PAR30 | E27 | Die cast

new

IP65

IK06

CE 3 YEAR



Suitable for PAR30 LED lamp.



Order Code	Colour	Watts	Input	Class		Notes
67400D/BR	Rust brown	20W	100-240V		6	-

Wall & Ceiling LED



67524A/AN/W

67524A | 6W | COB LED | Die cast

new

IP65

LED BUILT IN

80 CRI

IK10

CE

2 YEAR



67524A/W/W





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
67524A/W/W	White	Warm white	3000K	6W	500lm	36°	230V		12	Complete with 500mA driver
67524A/AN/W	Anthracite	Warm white	3000K	6W	500lm	36°	230V		12	Complete with 500mA driver



67524B/AN/W

67524B | 2x6W | COB LED | Die cast

new

IP65

LED BUILT IN

80 CRI

IK10

CE

2 YEAR



67524B/W/W





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
67524B/W/W	White	Warm white	3000K	2x6W	1000lm	36°	230V		12	Complete with 500mA driver
67524B/AN/W	Anthracite	Warm white	3000K	2x6W	1000lm	36°	230V		12	Complete with 500mA driver



62130L/BBS/W

62130L | 30W | SMD 2835 | Aluminium

new

IP20

LED BUILT IN

80 CRI

CE

3 YEAR





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62130L/BBS/W	Brushed brass	Warm white	3000K	30W	2550lm	230V		1	Complete with 750mA driver



62148L/BBS/W

62148L | 48W | SMD 2835 | Aluminium

new

IP20

LED BUILT IN

80 CRI

CE

3 YEAR





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62148L/BBS/W	Brushed brass	Warm white	3000K	48W	4080lm	230V		1	Complete with 1200mA driver



62134N | 30W | SMD 2835 | Metal

new

IP20

LED BUILT IN

80 CRI

CE

3 YEAR





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
62134N/BBS/W	Brushed brass	Warm white	3000K	30W	2550lm	120°	230V		1	Complete with 700mA driver



62144N | 50W | SMD 2835 | Metal

new

IP20

LED BUILT IN

80 CRI

CE

3 YEAR





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
62144N/BBS/W	Brushed brass	Warm white	3000K	50W	4250lm	120°	230V		1	Complete with 1200mA driver

Plafo



62132N/BBS/W

62132N | 32W | SMD 2835 | Aluminium

LED BUILT IN · 80 CRI · CE · 3 YEAR · new · IP20



62132N/MG/W





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
62132N/BBS/W	Brushed brass	Warm white	3000K	32W	2720lm	120°	230V		1	Complete with 800mA driver
62132N/MG/W	Metal grey	Warm white	3000K	32W	2720lm	120°	230V		1	Complete with 800mA driver

Decorative



62144NB | 50W | SMD 2835 | Metal

LED BUILT IN · 80 CRI · CE · 3 YEAR · new · IP20







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62144NB/BBS/W	Brushed brass	Warm white	3000K	50W	3000lm	230V		1	Complete with 1200mA driver



62156C | 65W | SMD 2835 | Aluminium

LED BUILT IN · 80 CRI · CE · 3 YEAR · new · IP20







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62156C/BBS/W	Brushed brass	Warm white	3000K	65W	4300lm	230V		1	Complete with 1600mA driver



69064B | 6x1W | SMD 3030 | Stainless steel 316

Underwater only / 2m max depth.





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
69064B/W	Stainless steel	Warm white	3000K	6x1W	400lm	24V DC	III	500cm	10	Requires 24V DC driver



69064C | 9x1W | SMD 3030 | Stainless steel 316

Underwater only / 2m max depth.





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
69064C/W	Stainless steel	Warm white	3000K	9x1W	600lm	24V DC	III	500cm	8	Requires 24V DC driver



69066M | 0,3W | SMD 2835 | Stainless steel 316

Underwater only / 2m max depth.





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class					Notes
69066M/C	Stainless steel	Cool white	4000K	0,3W	30lm	24V DC	III	500cm	22mm	45mm	100	Requires 24V DC driver
69066M/W	Stainless steel	Warm white	3000K	0,3W	30lm	24V DC	III	500cm	22mm	45mm	100	Requires 24V DC driver



69066 | 1W | SMD 3030 | Stainless steel 316

Underwater only / 2m max depth.





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class					Notes
69066/W	Stainless steel	Warm white	3000K	1W	70lm	24V DC	III	500cm	46mm	90mm	20	Requires 24V DC driver

Garden & Underwater



69066B | 6x1W | SMD 3030 | Stainless steel 316

Underwater only / 2m max depth.





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class					Notes
69066B/W	Stainless steel	Warm white	3000K	6x1W	420lm	24V DC		500cm	140mm	110mm	8	Requires 24V DC driver

Industrial & Floodlights



38280 | 80W | SMD 3030 & SMD 2835 | Aluminium

Supermarket / Surface / Suspended.



Complete with 2 Fixing clips & 2 connectors.



Complete with 2 suspension kits.

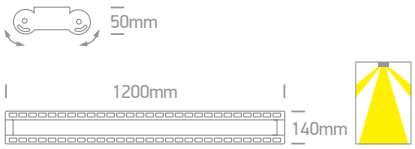

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38280/W/C	White	Cool white	4000K	80W	7400lm	230V		4	Complete with 600mA & 1500mA drivers
38280/B/C	Black	Cool white	4000K	80W	7400lm	230V		4	Complete with 600mA & 1500mA drivers



7028CF | 250W | SMD 2835 | Die cast + tempered glass



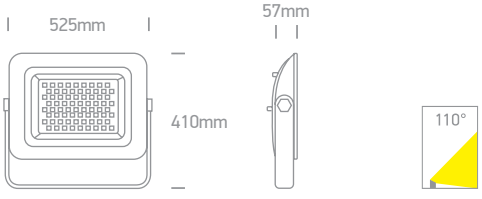

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
7028CF/B/D	Black	Daylight	6000K	250W	22500lm	110°	230V		30cm	4	AC LED



89200X | 200W | 48V DC

5 YEAR

new

IP20



Order Code	Input	Power	Output	Class	Dimmable		Notes
89200X	230V	200W	48V DC		NO	25	-



89320X | 320W | 48V DC

5 YEAR

new

IP20



Order Code	Input	Power	Output	Class	Dimmable		Notes
89320X	230V	320W	48V DC		NO	20	-



89200XN | 200W | 48V DC

3 YEAR

new

IP20



Order Code	Input	Power	Output	Class	Dimmable		Notes
89200XN	100-240V	200W	48V DC		NO	40	-



89350XN | 350W | 48V DC

3 YEAR

new

IP20



Order Code	Input	Power	Output	Class	Dimmable		Notes
89350XN	100-240V	350W	48V DC		NO	27	Cooling fan

Drivers



89240XR | 240W | DIN RAIL driver 48V DC

new

IP20

5 YEAR



Order Code	Input	Power	Output	Class	Dimmable		Notes
89240XR	100-240V	240W	48V DC	⏚	NO	20	-



89042L | DALI and Push to DIM | Dimmable

Adjustable output using DIP switches.

new

IP20

PUSH TO DIM

DALI DIMMABLE

5 YEAR

DALI

LED Current Selection

	1	2	3	4	5
1050mA	●	●	●	●	●
1000mA	●	●	●	●	○
950mA	●	○	●	●	●
900mA	●	○	●	●	○
800mA	●	●	●	○	○
700mA	●	○	●	○	○
600mA	●	●	○	○	○
500mA	●	○	○	○	○
350mA	○	○	○	○	○



Output Current	350mA	500mA	600mA	700mA	800mA	900mA	950mA	1000mA	1050mA
Output Power	3,5-19W	5-27W	6-32W	7-38W	8-42W	9-45W	9,5-45W	10-45W	10,5-44W

Order Code	Input	Power	Output	Class	Dimmable		Notes
89042L	230V	Refer to table	Adjustable	☐	YES	18	DALI, Push to DIM

Control & Dimming



22022 | 400W (LED) / 800W (Incandescent) | IR Motion Sensor

Sensor head IP65 / Sensor controller IP20.

new

3m/6m

120°/360°

3 YEAR

Detection Range: 120° / 360°
Detection Distance: 3m / 6m (adjustable) (<24°C)
Ambient Light: <10-2000lux (adjustable)
Time Delay: 5s, 30s, 1min, 3min, 5min, 8min (adjustable)
Detection Moving Speed: 0,6-1,5m/s
Working Humidity: <93% RH
Ambient Temperature: -20 up to +40°C
Installation height: 1,8-2,5m (wall mount)
Installation height: 2,2-4m (ceiling mount)



Order Code	Colour	Power	Input	Class		Notes
22022	White	400W (LED) / 800W (Incandescent)	230V	☐	100	-



7107ALG | 7W | SMD 2835 | G9

new

LED 80 CRI

CE 2 YEAR





Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Dimmable	
7107ALG/C	G9	Cool white	4000K	7W	700lm	230V	NO	100
7107ALG/W	G9	Warm white	3000K	7W	700lm	230V	NO	100



61134A | 10W | LED | Variable colour temperature | ABS + PC + Metal tripod

Includes phone/camera bracket.

new

IP20

LED BUILT IN

DIMMABLE ADJUSTABLE CE

2 YEAR



Includes 7cm table tripod & 150cm floor tripod.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
61134A	Black	Warm white - Cool white - Daylight	3000K - 4000K - 6000K	10W	800lm	100-240V	⏚	1	AC adaptor



61134B | 40W | LED | CCT Adjustable | ABS + PC + Metal tripod

Includes 3 phone/camera brackets.

new

IP20

LED BUILT IN

DIMMABLE ADJUSTABLE CE

2 YEAR



Complete with remote control.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
61134B	Black	Warm white - Cool white - Daylight	3000K - 4000K - 6500K	40W	3600lm	100-240V	⏚	1	AC adaptor



060048 | ONE LIGHT Catalogue 2022 | Edition 1

5

new

01 | Recessed Spots Fixed

pages 03-42

03 10102

04 10105X

10105XS

05 10103

10105

06 10105GU

07 10105CM

08 10105A1

10 10105ALG

11 50105ALG

50105D7

12 10105D3

10105D4

10110T

13 10105TG

50105TG

10105T

50105T

14 10105D1

10105D2

10105DG

15 10105H

10112HA

16 050182

050182R

050182RA

050182RB

17 10105D9

18 10105E1

19 10105AD

20 10105D8

21 10105M/W

22 10105M/B

23 10105MD/W

24 10105MD/B

25 50105MA

26 50105M

27 10105L

10105F

50205D

28 10105AC

10105GL2

50105AR

29 10105CJ

10105Q

30 10105R

50105R

31 10105R2

32 10105R2P

34 10105R1

10105R1P

35 10109F

36 50105GL4

37 10105GT1

10105GT2

50105GT1

50105GT2

38 10105TR

40 10105RM

050099 Reflectors

42 50105RM

050098 Reflectors

02 | Recessed Spots Fixed LED

pages 45-90

45 10101L

10101LA

10101D

46 10103DL

10103DE

48 10103B

50 10103E

51 10103L

50103L

50401L

50601L

52 10103N

53 10108D

10108R

54 10108A

50108A

55 10108D1

10112H

56 10112R

050162 Rings

57 10107DC

58 10112TD

60 10105FD

10110FD

10115FD

62 10107Z

10112Z

10120Z

64 10106DC

10112DC


10118DC

65

10107K


050104 Reflectors


10112L


10112LR Reflectors

66

10106DH


10112DH


10118DH

67

50106B


50306B


50406B


50906B

68

50506B


50006B

69

50102B


50202B

70

50302B


50502B


50902B

71

50107B


50207B


50307B


50507B

72

50406C


50906C

73

10103M


10103P

74

10102H


10107DL


10107H

75

10107WD


10107M


10113P

76

10107HC


10108H

77

10107P


10107DB


10107WP

78

10112P

79

10112C

10112TP

10110P

80

10106V

10103NP

10106P

81

10106PF

050042 Rings

050042A Rings

82

10107DF

10107DFV

050178 Rings

83

10101C

50101

84

10101G

10106G

85

10104M

50104M

86

10103GL

10103A

87

10103BTR

88

10112BTR

89

10101TR

10107BT

50103GT4

90

50103ATR

50203ATR

50403ATR

03 | Recessed Spots Adjustable

pages 93-118

93

11103A

11103C

11105

94

11105GU

95

11105C

96

11105CGU

51105CGU

97

11105CF

98

51105CD

99

51103

51105

100

51105GA

101

51103AB

51105AB

102

11105AL

11105AC

103

51105B

51205B

51305B

104

11105U

11105UA

11105UB

105

11105ABGL

106

11105ABG

51105ABG

51205ABG

107

11105M/W

108

11105M/B

109

51105B1

51105D7

110

11105A1

11105B1

11105D7
111

51105TG

51105DG

51105D
112

11105D4

11105DT

11105TG

11105CDG
113

51105N

51205N
114

11105D8

51105D5
115

11105E
116

11105TA

51105TA
117

11105TR

11105UTR

11105DTR
118

51105TR

51010TR

51020TR
119

11105GT5

11105GT4

51105GT4
120

11109FA

11105F

04 | Recessed Spots Adjustable LED

pages 123-156

123

11103B
124

11103K
125

11101B

51101W

51101B

51101AL
126

51201AL

51301AL

51401AL
127

11103LC
128

11103N
129

11103L

11103LW

11103LB

11303L
130

51103L

51103LW

51103LB
131

11106K
132

11106KD
133

11109KD

11102DB

11106DB
134

11107B

51107
135

11106A

51106A

51110A
136

11112

51112
137

11112H

050086 Rings

050086A Ring

51112H

050088 Rings

050088A Ring
138

11104K

050100 Rings

11107K

050102 Rings
139

11103E

11112D

11103D
140

11107FD

11107DL

11107DA
141

11112TA
142

11112E

51112E

51212E
143

11113E

51113E
144

11108LA
145

11103M

11106M
146

51106M

51206M

51306M
147

11107WD

11207WD
148

11107P

11107D

11113D
149

11112P
150

51406B

51506B
151

11107RA

11112RA
152

11112RB
153

11111C


51111C


51211C

154

11109B


11107C


11207C

155

11106PF


050044 Rings

156

11107BT


11112T

05 | Downlights

pages 159-170

159

10004


10007

160

11110N


51110N


51210N


51310N

161

11110U


11110AB


11070RD

162

51110


51110AB


51310AB

163

11110AD


51110AD

164

11110ATR


51110ATR

165

11110GT1

166

11110H

167

11100R


51200R


51200AR

168

11110R


11070R


11106R

169

51100TR

170

11110TR


11070TR

06 | Downlights Fixed LED

pages 173-218

173

10103FA


10108FA


10112F


10112FA

174

10118FA

10120F

10130FA

175

50108F

50108FA

50116FA

176

50122FA

50130F

50130FA

177

10140F

10148PE

10148P

178

50148PE

179

50140B

180

50148E

50148U

50143F

181

50140AE

50140AU

50148AU

182

50148RE

50160E

183

50136P

184

50136RP

185

62116F

62116FA

10115

186

10124

187

10103T

10107T

10115T

188

10124T

10130T

189

10110U

10124U

10130U

10107UV

190

10113UV

10120UV

10130UV

192

10110CE

10114CE

10120CE

193

10107CD

10115CD

10140CD

194 10110C | 10120C | 10130C | 10130CR
195 10107CA | 10110CA | 10115CA
196 10120CA | 10130CA | 10160CA
198 10110TD | 10118TD | 10125TD
200 10108ED | 10112ED | 10130ED
201 10116FD/../BS
202 10108FD | 10116FD | 10122FD
203 10105E | 10115E | 10130A
204 10112KD | 10113A
205 10112 | 10128
206 10120 | 10142 | 10100 Rings
207 10140P | 10105K | 10110K
208 10120K | 10130K | 10130KA
209 50105K | 50130K
210 50120B | 50220B
211 50130B | 10109D | 10122D | 50122D
212 10109FD | 10120FD
213 10107B | 10113B
214 10118B | 10125B
215 10110G | 10115G
216 10120G | 10130G | 10150G
217 10106CF | 10108CF
218 10115CF | 050146 Base | 10130CF
050148 Base

07 | Downlights Adjustable LED

pages 221-234

221 11130BT
222 11106LB | 11109L | 11112L | 11118L
223 51125 | 51138 | 51140 | 51145
224 51120
225 51130 | 51230 | 11110E | 11120E | 11130E
226 11150A | 51125A | 11125B
227 51109B | 51120B
228 51140B | 51240B | 11140B | 11150B
229 11118TR
230 51120TR | 51140TR
231 11115E | 11126F
232 11118H


11114R


11125R

233


11110F


11120F

234


11125RA


11135L


11140L

08 | Strips & Profiles

pages 237-288

237


7848


7848/RGBW

238


7823


7833

239


7820


Accessories for 7820

240


7820W


Accessories for 7820W

241


7829

242


7835C


Accessories for 7835C

243


7835


Accessories for 7835

244


7835W


7827

245


7846


7846B


7846C


7846P

246


7846W


7827A

247


7813L


7820L


7820WL


Accessories for 7820WL

248


7820V


7835V


Accessories for 7820V & 7835V

249


7825


7870


7875

250


7845


7887

251

7880

7882

7885

252

7835/DEW

20032

253

7820/BL

7820W/BL

7820A/RGB

254

255

7830/RGB

Accessories for 7830/RGB

7830/RGBW

256

7830W/RGB

7827

7830W/RGBW

7827A

257

7903

258

7903R

7903TR

259

7902/B/B

7904/B/B

7912/B/B

260

7902R/B/B

7910R/B/B

7912R/B/B

7901TR/B/B

7904TR/B/B

261

7900

7901

7836

7902

262

7904

7905

263

7912

7912A

050122

264

7910

7910A

050122

265

7908A

7908

7937T

266

7906

7906D

267

7920

7916

268

7901R

7902R

7904R

269

7906R

7912R

270

7910R

7910AR

271

7900TR

7901TR

7904TR

7906TR

7904ATR

272

7918

7914R

7915R
273

7840

7842
274

7840A

7840B

7840C

7840D
275

38104L
276

38115L

38207L

38215L
277

38230L

38001A

38002A

38005A

38006 & 38007
278

38104B

38108B
279

38114B

38103

38105
280

38110

38102A

38102B

38102C

38101A

38101B

38101C
281

38101D

7850

Accessories for 7850

7860

Accessories for 7860
282

7862

Accessories for 7862
283

7810/D

7810/BL

7810/P

Accessories for 7810

7815

7815B
284

7846WA

Accessories for 7846WA
285

7864

Accessories for 7864
286

7841

7841F

7901A

7901AR

7811

Accessories for 7811
287

7868

Accessories for 7868
288

7866

7866F

7866E

09 | Track Lights

pages 291-326

291

65608T
292

65610AT

65620AT
293

65640BT
294

65611T

65612T

65614T

65616T
295

65611NT/W

65612NT/W
296

65614NT/W

65611NT/B

65612NT/B

65614NT/B
297

65654AT/W

65654BT/W

65654CT/W

65654CTT/W
298

65654AT/B

65654BT/B
299

65654CT/B

65654CTT/B

65642AT/W
300

65642BT/W

65642CT/W

65642AT/B

65642BT/B

65642CT/B
301

65656AT/W

65656BT/W
302

65656CT/W

65656DT/W

65656AT/B

65656BT/B

65656CT/B

65656DT/B
303

65306BT

65506BT
304

65406BT

65906BT

305

65644T

65652T
306

65646T

65108T

65524T
307

65628T

65620TA

65620T
308

65618T

65619T

65624T

65638T
309

65632T

65632CT
310

65630T

65626T

65226T

65622T
311

65008T
312

65012T

65019T

65011T
313

65020T

65042T

65040T
314

65650AT

65650T

65648T
315

65024T

65026T
316

65024TA

65018T

65025T
317

65170AT
318

65170BT
319

65105NT
320

65105NAT
321

65105BT

65105WT
322

65105CT
323

65520T

65522T

65519T

65105GT
324

65518T

65514T
325

65111AT
326

65118AT

10 | Tracks & Magnetic

pages 329-336

329

40002A

40003A

40002C

40020
330

41026R

41032
331

41020

41004A

41010A

41008A
332

41012A

41016A

41024A

41022A
333

40003

41020

41004

41010

41008
334

41012

41016

41018

41022
335

40003R

41004B

41008B

41012B

41016B
336

41002

41002A

41030

11 | Office & Kitchen

pages 339-356

339

61070


61072

340

61130

341

61066


61066T

342

38148N

343

38225M


38248M

344

38120L


38135L


38248L

345

38150B


38150C


38150BU

346

38150E


050170C


050170

347

38150A


38151A

348

38150E


050170C


050170

349

38160A


050170

350

38140AU

351

38152R


38152RC


38152RL

352

38145AR


38150AR


38145BR

353

38150BR

354

38154A


38154M

355

36002

356

36004

12 | Wall & Ceiling

pages 359-400

359

12105F


12105L

360

12105J


12105K

361

12105H

362

12105E1

12105E2

12105E3

363

12105M

050112 Reflectors

364

12105MA

050112 Reflectors

365

12105N

366

12105NA

12205NA

367

12105T

12205T

368

12105TA

12205TA

369

12132

12126

12124

12134

12120

370

12105E

12105AL

371

12105AC

12105B

372

12105AB

373

12105Y

12205Y

374

12105YA

12205YA

375

65105N/B

65205N/B

65305N/B

65405N/B

65505N/B

376

65105N/BBS

65205N/BBS

65305N/BBS

65405N/BBS

65505N/BBS

377

67164

67162

378

12105E4

12105E6

379

12140

12142

12138G

12144

380

12144A

381

62210B

382

62110

62110A

62310A

383

60056

6017

6017A

6030

384

6017G

6012

6022

6005

385

60038

60040

60042

60054

386

67518

67302A

387

67134A

67400A

67400B

388

67400D

389

67400E

67426

390

67426A

67130DD

391

67130C

67130E

392

67130

67130D

67130F

393

67130A

67132C

67132

394

67132D

67132F

67132A

395

67204B

396

67204

67206

67216

67208B

397

67208

67210

398

67328

67328A

67292

67420

399

67420A

67420B

67032

400

67160

13 | Wall & Ceiling LED

pages 403-476

403

67454

404

60008A

60008

65102

405

62401AL

65110B

406

65110E

65110F

407

12108LA

12208LA

408

12112LA

65107

409

60032

60034

410

12101

60004

60001

60010

412

67466A

67466B

413

67466C

12106C

12110D

12104M

414

12107K

12107KA

050106 Rings

415

12115D

12124D

416

12107V

417

12108C

12122C

12108D

12108DB

418

050206 Reflectors

12122D

419

050208 Reflectors

12112Z

12120Z

12130Z

420

12112ZA

12120ZA

421

12107B

12207B

422

12307B

12110HA

423

12115HA

12106B

12406B

12906B

424

12406C

12606C

12906C
425

12106CA

12107AL
426

12108X

12108XA

12208XA
427

12115L

12125L

428

12135L

12107LD

12115LD
429

12125LD

12108FD

12116FD
430

12115LA

12125LA

12130LA
431

67380

432

67380A

67516A

67516C
433

67138E/G

67138C/G

67138D/G
434

67138C

67138D
435

67138E
436

67138F

437

67138

67138A

67138EL
438

67138L

67420L

67420AL
439

67420BL

67440
440

67440A
441

67076

442

67076A

67356

67342
443

67374

67374A
444

67492

67492P
445

67474

67474A
446

67474B

446

67362B

67362C

67392
447

67378

67378A
448

67376

67376A
449

67412

67274A
450

67274B

451

67340A

67354

67398
452

67398A

67398C
453

67480A

67480B
454

67422

67422A

67512

455

67468

67124

67304
456

67170

67424
457

67424A

67424B
458

67364

67394B

67394A

459

67394

67386A

67386C
460

67396

67396A

67388A
461

67388B

67388C

67359

67360

462

67359A

67360A

67359B
463

67430B

67430A
464

67414

67416

67418
465

67472A

67472

466

67522A

67522B

67174
467

67176

67502A
468

67502B

67502C
469

67126

67128
470

67116


67118


67242

471


67444C


67442B


67442C


67442

472


67220A


67222A


67484


67478

473


67334


67336

474


67346

475


67450


67450A

476


24002

14 | Plafo

pages 479-522

479


64002


64004

480


64008


64010

481


62010


62010A

482


62014


62012

483


62024B


62024C

484


62026A


62026B


62026C


62026D

485


62022A


62022B


62022C


62022AM

486


67404M


67404A

487


67448


67448A

488


62154

489


62118D

62125D

62150D

490

67438

67438A

491

62146

62146A

492

62160

62160A

493

62140FB

62160FB

494

62152

62152A

495

62130N

62132N

496

62142N

62132NA

497

62142NA

62134N

498

62144N

499

62130L

500

62148L

501

62112

67452

62135NA

502

62182

62182A

503

67402

62025

504

62018

62018A

505

62116F

62116FA

506

62018F

62030F

62038F

62046F

507

62018AF

62115F

508

62130F

62122F

509

62130AF

62140AE

510

62140RE

62140F

62140AF

62140RF

511

62102

62104

512

67436

513

67366

67366E

67368

67368M

514

67370

67372

515

67384



15 | Pendants

pages 525-542

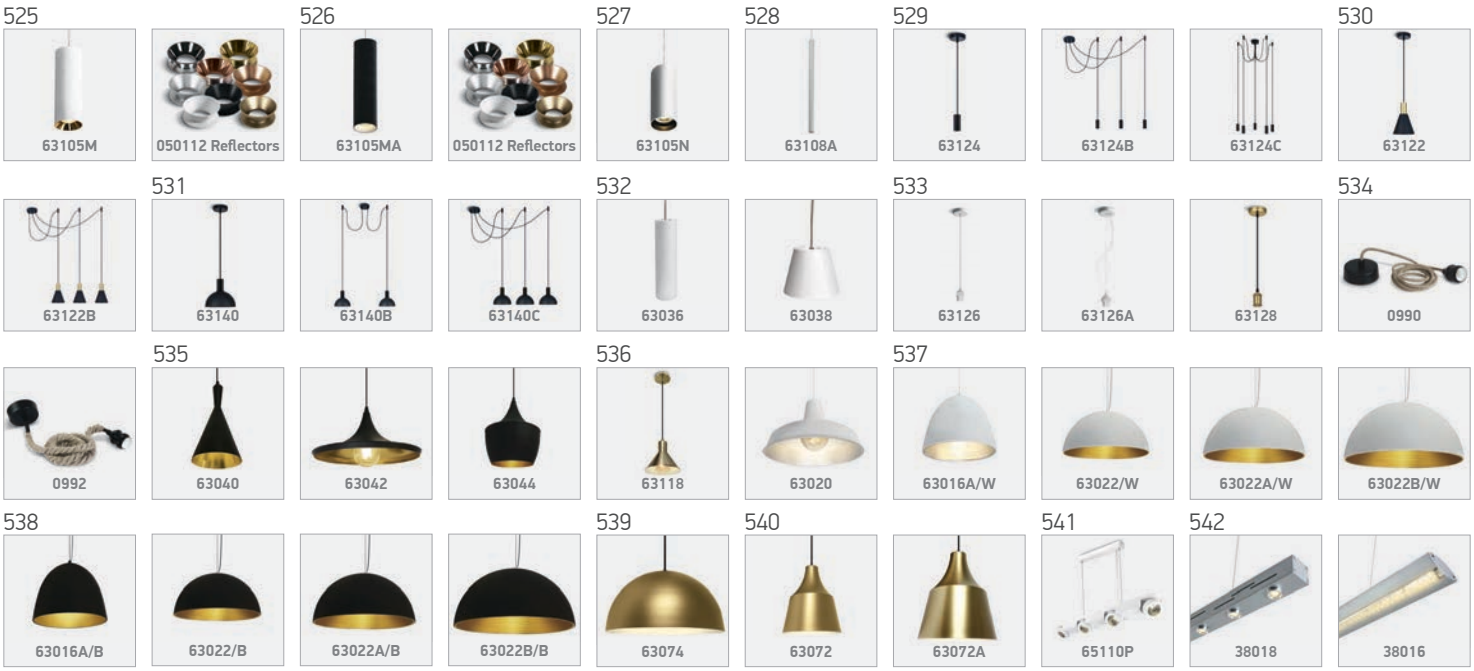

16 | Decorative

pages 545-582

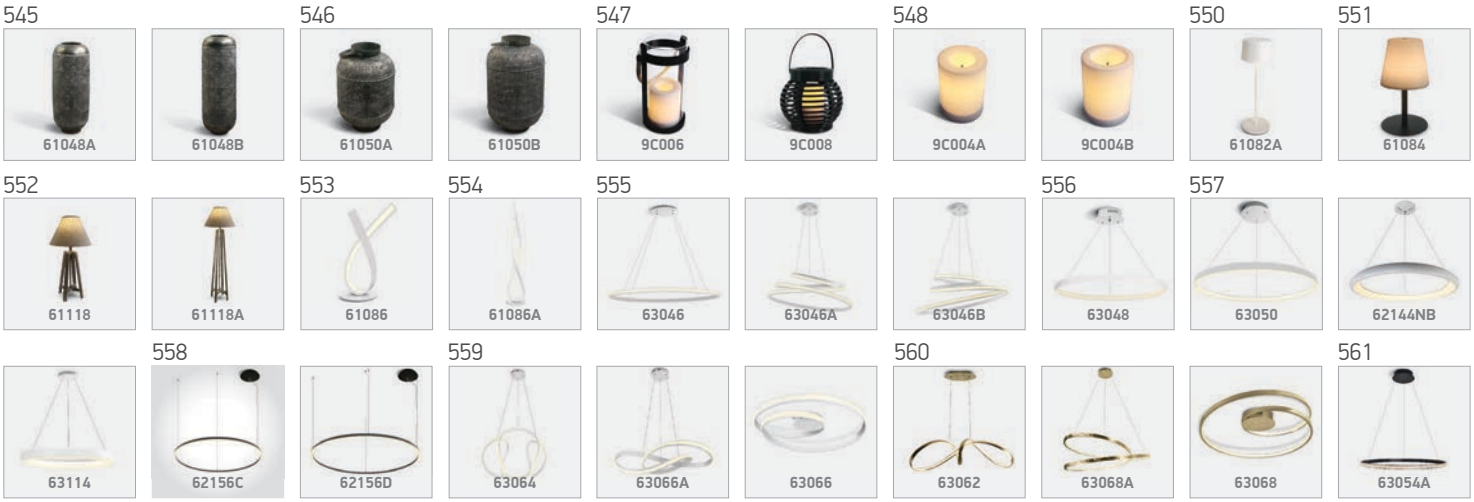

562

63056

563

63058


63058A

564

62142NB


62180NB

565

62148A


62148B


62148D

566

63110C


63110D


63112

567

62116


62116A


60116


61116

568

63116


63116A

569

62174A


62174B


63174C

570

62172A


62172B


62172C

571

63134P

572

63132P


60132

573

63136


63138

574

62170A


62170B

575

62176A


62176B


60176

576

62162A


62162B


60162

577

62158A


62158B

578

60158


63130P

579

62166B

63166P

580

62164A

62164B

62168B

60168

581

10105C4

582

10104C4

65305B

17 | Hotel & Bedroom

pages 585 - 598

585

61046

61076

61078

586

65138

61044

61074

587

61080

61124

588

61120

61122

589

61044A

61042A

61038

590

60118

61116A

591

65746

65746A

65742

592

65746R

65746B

65142

593

65738

594

65738A

65744

595

65146

65144

596

61132A

61132B

597

65740

65740A

598

65105NA

18 | Bathroom

pages 601-612

601

38118K

602

38118N

603

38115C


38120C

604

38114M


38114MA

605

38114EL


38121EL

606

38116F


38116P

607

38121D


38114C

608

38114DE


38114EE


38114GE


38114CE

609

61126


60204

610

38110BD


60106


60106A

611

60107A


60107B

612

60107C


60107D

19 | Wall Recessed & Inground

pages 615-648

615

68007

616

68006N


050176
Cover plates


68006N/BOX

617

68054


68005

618

68008

619

68070A


68004B


68078

620

68070


68004


68004A

621

68052

622

68046

68048

68050

623

68030

624

68032

625

68074

68074A

68074B

626

68076

68076A

627

68072A

68072B

68072C

628

68068

68068A

68068C

630

68062

68064

68066

631

68001

68002

632

68012

68016

633

69042M

69042

634

69042A

69042B

69044

635

69016G

69016AG

69016BG

636

69016

69016A

69016B

637

69028

69012

638

69052

69052A

639

69056A

69056B

69056C

640

69040

69050

69050A

641

69054

69054A

642

69060

643

69062

644

69058A

69058B

69058C

645

69006G

69008G

646

69046G

69048G

647

69006


69008

648

69002A

20 | Garden & Underwater

pages 651- 688

651

7070

7068

67456

67458

67482

652

67198G

67198AG

67464G

653

7046

654

7047

655

67196BG

656

67196A

67196B

67196C

657

67488A

67488B

67488C

658

7052B

67514

7052

659

7008A

7010

7010A

660

67494

67494A

661

67094

67098

662

67090

67092

67100

663

67102

67236

67236A

664

67036

67034

665

67470

67470A

666

67460A

67460B

667

67508

668

67358

67490

67490A

669

67506

67506A

670

67504

67504A

671

67510

67510A

67510B

672

050210

67410

67410A

673

67286

67002

67050

674

67408

675

67406

67406A

67406B

676

67406C

67406D

67406E

677

67462

678

67520

67520A

050250

67428

679

67496

67496A

680

67500

67500A

681

63028

63028A

63028B

682

7072

7072A

683

0994

684

61040

686

69064A

69064B

69064C

687

69066

69066A

688

69066B

69066D

21 | Industrial & Floodlights

pages 691-716

691

38136P

38218P
692

38118E

38136E

38158E

38218E

38236E

38258E
693

38118M

38136M
694

38158M

38236M

38258M
695

38118LC

38136LC

38145LC
696

38236LC

38245LC
697

38118LA

38136LA
698

38145LA

38136R

38236R
699

38120E

38220E
700

7056

7056A
701

63100E
702

63100N

63150N
703

63200N

22002

7020
704

7030

7022
705

7028AR
706

7064

7040

7032
707

7034B
708

7034C

7034D

7028A
709

7028E

7028CA
710

7028CB

7028CC

7028CD

7028CE

7028CF
711

7028AG

7028BG

7028CG
712

7055A

7055B

7055B/RGB
713

7058
714

70080
715

70104

70112
716

70110

70105

22 | Emergency Lights

pages 719-728

719

67366E
720

67284LE

67280ANE

67282ANE
721

89406

89406R
722

89404
723

89005A/EME
724

89005/EME
725

89009/EME
726

89002A
727

89143F
728

89002

23 | Drivers

pages 731-754

731

89004

89004T

89004A

89004AT

732

89006P

89006PC

89006PA

733

89008

89015

89020

734

89015C

89020C

89030C

735

89008A

89015A

89030A

736

89048T

737

89008UT

89016UT

89024UT

738

89030UT

89015T

89015CT

739

89006AT

89015AT

89040AT

740

89028M

89028AM

89008W

89015W

741

89030W

89075W

89015V

742

89030V

89075V

89100V

743

89150V

89200V

89320V

89060WD

744

89040VT

89075VT

89100VT

745

89030VL

89060VL

89075VL

746

89100VL

89150VL

89060VLD

89100VLD

747

89150VLD

89100VLL

89150VLL

748

89060VN

890100VN

890150VN

749

89200VN

89350VN

89100VND

89200VND

750

89060AR

89060VR

89090VR

751

89100VP

89150VP

89200VP

752

89030VD

89075L

753

89027D

89020L

754

89025L

89042L

89050TLD

24 | Control & Dimming

pages 757-764

757

22006

22010

758

22008

22004

22012

22014

759

89024D

89024E

760

89010D

89100L

761

89104LT

89302

89302A

762

89100LP

22000

22020

763

20030

20032

764

20034

20036

25 | Lamps

pages 767-802

767

7101AL

768

7106GPH


7102LG


7103LG

769

7103ALG


7106ALG


7109ALG

770

7103ALGD


7103ALGT


7106ALGD


7103ALG/DW

771

7201G

772

7303G


7304G


7304AG


7305AG


7308G

773

7301


7306CG/BL

774

7307BG

775

7306CG


7306CBG

776

7306CHG


7306CGD

777

7306KGD


7308GD

778

7306GC


7306GCD

779

7312M/AL/W


7312M

780

7306GDV

781

7310H

782

7315G


7315GB


7315GD

783

10106NA

784

7512D


7524D


7524BD

785

7513A

786

9F01

9F07L

9F07LD

787

9G10L

9G10M

9G10V

9G09/RGBW

788

9G07B

9G12B

9G12BD

9G12D

789

9G80N

790

7604

7610A

791

9G03RAD

9T05RD

9G04RAD

9G06RD

792

9C02R

9G03R

9G06R

9G06RD

793

9G04A

9G04H

9G02H/RGB

794

9G04F

9G08B

9G08C

9G08K

795

9G04E/A

9G08D/A

9G08E/A

796

9G04D/DC

9G04E/DC

9G08D/DC

9G08E/DC

797

9G01/../E

9G01/../B

798

9S13/GR/E

9S23/Y/E

799

9922L

9940L

800

9021LB

9026L

801

9007L

9009L

802

9018L

9022L

26 | Accessories & Gadgets

pages 805-812

805


89003/EXT


89006A/EXT

806


0903F


0903M


0983M


0904F


0904M


0904MA

807


0800BA


0800B


0800A


0800C

808


0950GA


0950G


0950GB


050180


0802

809


70028


70026

810


70038


70036


70034

811


094004


062002

812


60000


7010P

27 | Marketing

pages 815-816

815


060020 / 060020A



060016



060018


060008

816


060010



060012


060014


060027 / 060028


060029 / 060030





01

Recessed Spots Fixed

Pages 03-42

MR11 | MR16 | G4 | GU4 | GU5,3 | GU10

Die cast | Glass | Aluminium | Metal | Gypsum | Steel | Semi trimless

IP20 IP43 IP44 IP65

DARK LIGHT CE 5 YEAR

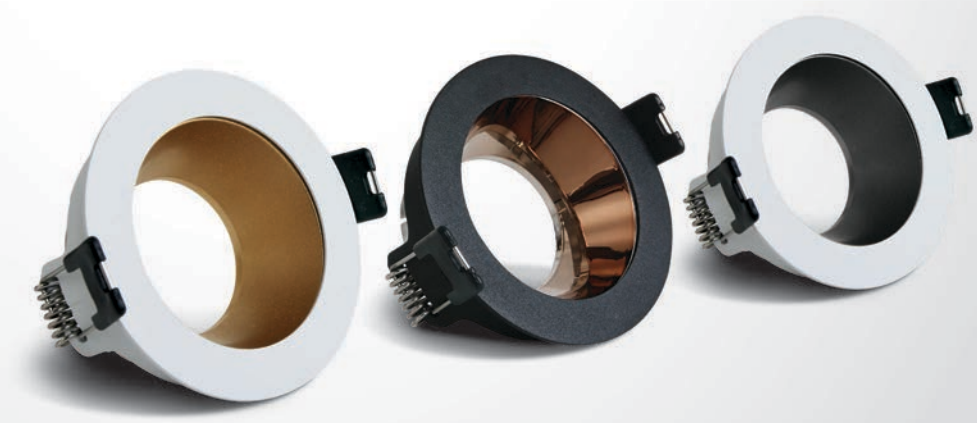

The Star Light G4





10102 | 20W | G4 | Die cast

5 YEAR

IP20

offer





Suitable for G4 LED lamp.



Order Code	Colour	Watts	Input	Class					Notes
10102/BS	Brass	20W	12V	III	40cm	24mm	30mm	100	-





10105X/C

10105X | 50W | MR16 | GU5,3 | Die cast

5 YEAR

IP20

offer



10105X/W





10105X/MC

10105X | 50W | MR16 | GU5,3 | Die cast

5 YEAR

IP20

offer







10105XS/C

10105XS | 50W | MR16 | GU5,3 | Pressed metal

5 YEAR

IP20

offer



offer

10105XS/MC



Order Code	Colour	Watts	Input	Class					Notes
10105X/W	White	50W	12V	III	40cm	63mm	60mm	100	-
10105X/C	Chrome	50W	12V	III	40cm	63mm	60mm	100	-
10105X/MC	Brushed chrome	50W	12V	III	40cm	63mm	60mm	100	-
10105XS/C	Chrome	50W	12V	III	40cm	63mm	60mm	100	-
10105XS/MC	Brushed chrome	50W	12V	III	40cm	63mm	60mm	100	-

The Classic MR11 & MR16
12V





10103 | 35W | MR11 | GU4 | Die cast

5 YEAR

IP20

offer



Suitable for MR11 LED lamp.





10105/W

10105 | 50W | MR16 | GU5,3 | Die cast

5 YEAR

IP20







10105/MC

10105 | 50W | MR16 | GU5,3 | Die cast

5 YEAR

IP20





Order Code	Colour	Watts	Input	Class					Notes
10103/BS	Brass	35W	12V	III	40cm	51mm	45mm	100	-
10105/W	White	50W	12V	III	40cm	70mm	60mm	100	-
10105/MC	Brushed chrome	50W	12V	III	40cm	70mm	60mm	100	-





10105GU/W

10105GU | 10W | MR16 | GU10 | Die cast

5 YEAR

IP20



Complete with 0950G.





10105GU/G

10105GU | 10W | MR16 | GU10 | Die cast

5 YEAR

IP20

offer



Complete with 0950G.



Order Code	Colour	Watts	Input	Class					Notes
10105GU/W	White	10W	100-240V		15cm	70mm	150mm	100	-
10105GU/G	Grey	10W	100-240V		15cm	70mm	150mm	100	-

The Cement Range





10105CM | 10W | MR16 | GU10 | Cement + aluminium reflector

DARK LIGHT
IP20
offer

5 YEAR









Order Code	Colour	Watts	Input	Class					Notes
10105CM	Cement	10W	100-240V	⏚	15cm	95mm	120mm	12	-



The Dual Ring Range
Aluminium



10105A1/W

10105A1 | 10W | MR16 | GU10 | Aluminium

5 YEAR

IP20



Complete with 0950G.





10105A1/B

10105A1 | 10W | MR16 | GU10 | Aluminium

5 YEAR

IP20



Complete with 0950G.



Order Code	Colour	Watts	Input	Class					Notes
10105A1/W	White	10W	100-240V	⏚	15cm	68mm	120mm	100	-
10105A1/B	Black	10W	100-240V	⏚	15cm	68mm	120mm	100	-

The Dark Light Dual Ring, Aluminium



10105ALG/W/B



10105ALG/W/GL



10105ALG/B/GL

The Dark Light Dual Ring
Aluminium



10105ALG/W/B

10105ALG | 10W | MR16 | GU10 | Aluminium

5 YEAR

DARK LIGHT

IP20



Complete with 0950GB.





10105ALG/W/GL

10105ALG | 10W | MR16 | GU10 | Aluminium

5 YEAR

DARK LIGHT

IP20



Complete with 0950GB.





10105ALG/B/GL

10105ALG | 10W | MR16 | GU10 | Aluminium

5 YEAR

DARK LIGHT

IP20



Complete with 0950GB.





10105ALG/W

10105ALG | 10W | MR16 | GU10 | Aluminium

5 YEAR

DARK LIGHT

IP20



Complete with 0950GB.





10105ALG/B

10105ALG | 10W | MR16 | GU10 | Aluminium

5 YEAR

DARK LIGHT

IP20



10105ALG/AL



Order Code	Colour	Reflector	Watts	Input	Class					Notes
10105ALG/W/B	White	Black	10W	100-240V		15cm	78mm	150mm	50	-
10105ALG/W/GL	White	Gold	10W	100-240V		15cm	78mm	150mm	50	-
10105ALG/B/GL	Black	Gold	10W	100-240V		15cm	78mm	150mm	50	-
10105ALG/W	White	White	10W	100-240V		15cm	78mm	150mm	50	-
10105ALG/B	Black	Black	10W	100-240V		15cm	78mm	150mm	50	-
10105ALG/AL	Aluminium	Aluminium	10W	100-240V		15cm	78mm	150mm	50	-

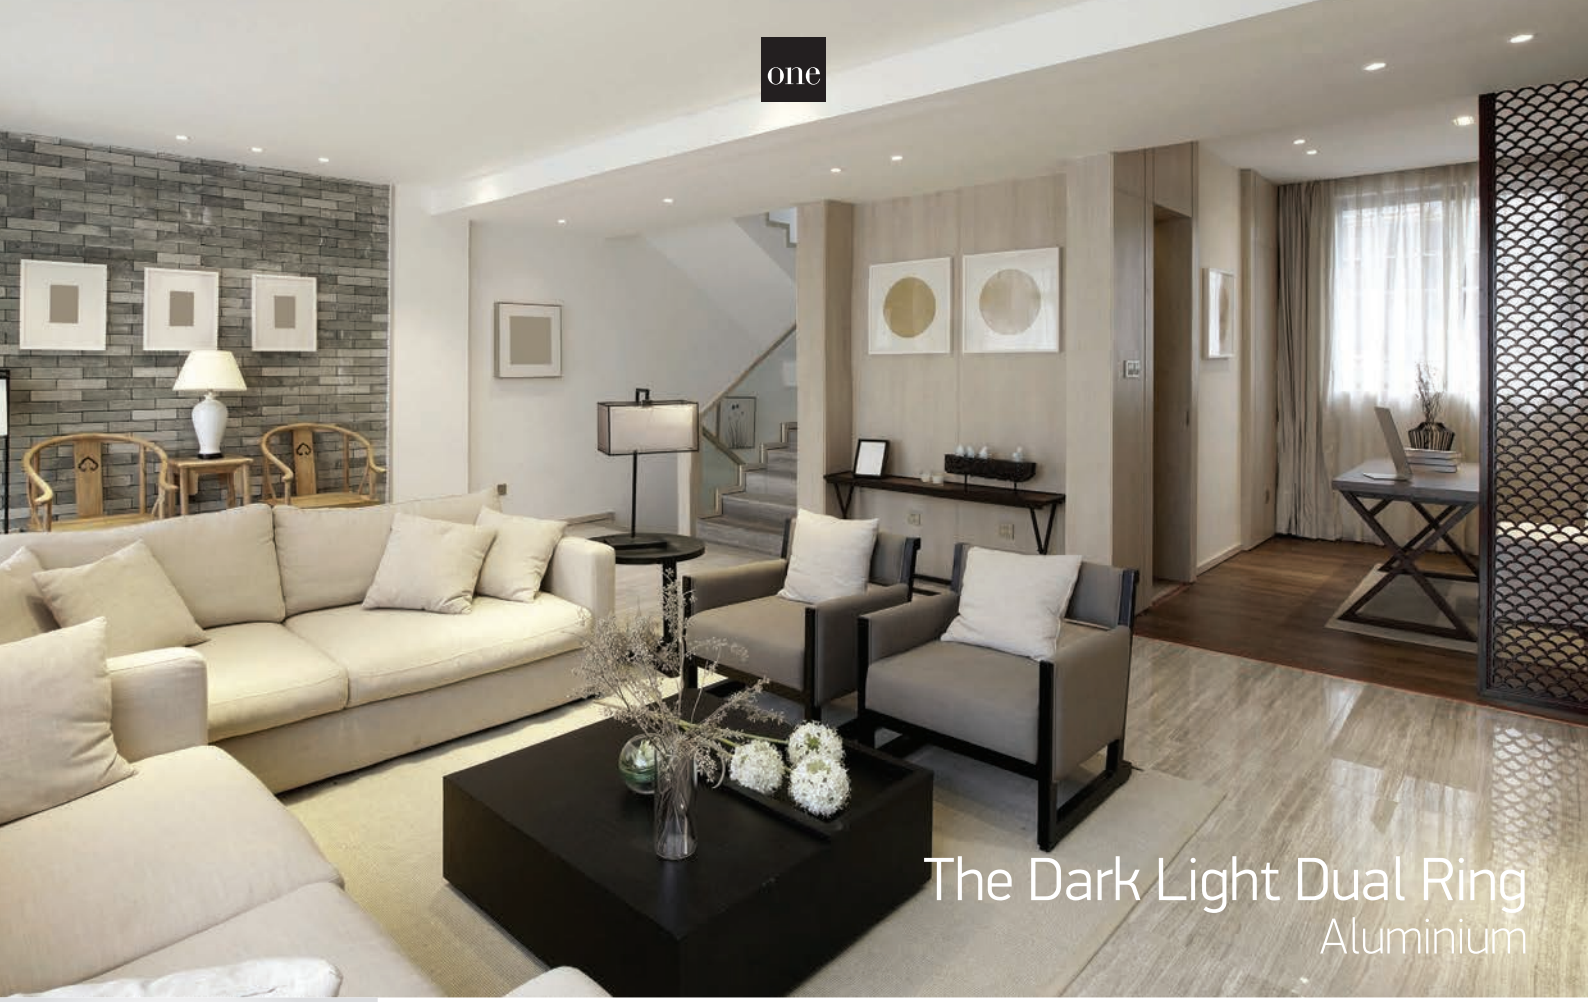

The Dark Light Dual Ring
Aluminium



50105ALG/W

50105ALG | 10W | MR16 | GU10 | Aluminium

5 YEAR

DARK LIGHT

IP20



Complete with 0950GB.





50105ALG/AL

50105ALG | 10W | MR16 | GU10 | Aluminium

5 YEAR

DARK LIGHT

IP20

offer



Complete with 0950GB.





50105D7 | 10W | MR16 | GU10 | Aluminium

5 YEAR

DARK LIGHT

IP20



Complete with 0950G.



Order Code	Colour	Watts	Input	Class					Notes
50105ALG/W	White	10W	100-240V		15cm	78mm	150mm	50	-
50105ALG/AL	Aluminium	10W	100-240V		15cm	78mm	150mm	50	-
50105D7/W	White	10W	100-240V		15cm	80mm	120mm	50	-



The Dark Light Range



10105D3 | 10W | MR16 | GU10 | Aluminium

5 YEAR

DARK LIGHT

IP20



Complete with 0950G.





10105D4/W

10105D4 | 10W | MR16 | GU10 | Aluminium

5 YEAR

DARK LIGHT

IP20



Complete with 0950G.





10105D4/B

10105D4 | 10W | MR16 | GU10 | Aluminium

5 YEAR

DARK LIGHT

IP20



Complete with 0950G.





10110T | 75W | R111 | G53 | Semi trimless | Pressed metal

5 YEAR

DARK LIGHT

IP20

offer



Suitable for R111 LED lamp.



Order Code	Colour	Watts	Input	Class					Notes
10105D3/W	White	10W	100-240V		15cm	68mm	120mm	100	-
10105D4/W	White	10W	100-240V		15cm	68mm	140mm	50	-
10105D4/B	Black	10W	100-240V		15cm	68mm	140mm	50	-
10110T/W	White	75W	12V		40cm	175mm	210mm	8	-

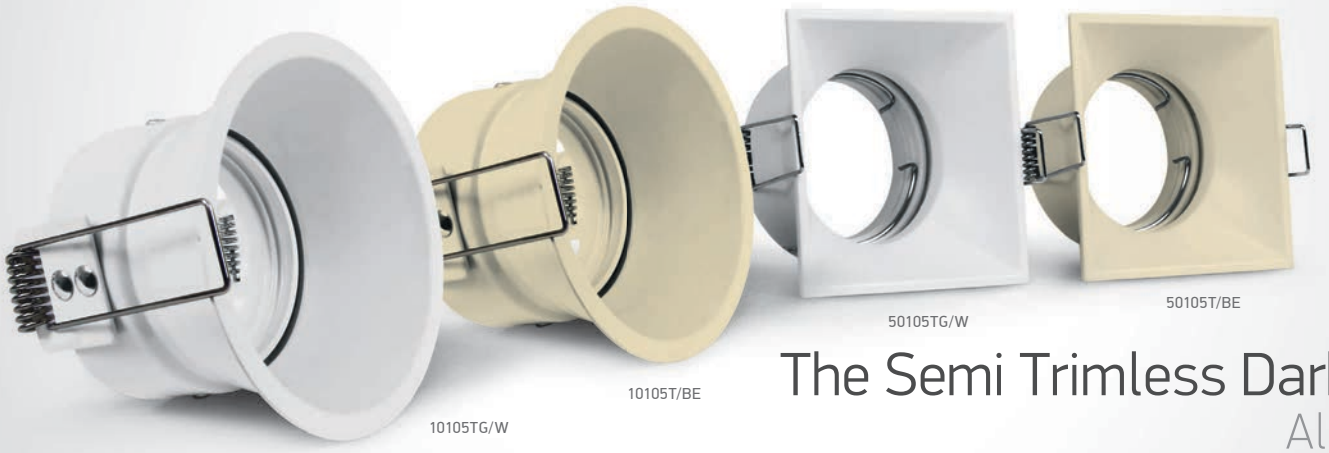

The Semi Trimless Dark Light
Aluminium



10105TG/W

10105TG | 10W | MR16 | GU10 | Semi trimless | Aluminium

DARK LIGHT
IP20



10105TG/B



Complete with 0950G.





50105TG | 10W | MR16 | GU10 | Semi trimless | Die cast

DARK LIGHT
IP20





Complete with 0950G.





10105T | 50W | MR16 | GU5,3 | Semi trimless | Aluminium

DARK LIGHT
IP20
offer







50105T | 50W | MR16 | GU5,3 | Semi trimless | Die cast

DARK LIGHT
IP20
offer





Order Code	Colour	Watts	Input	Class					Notes
10105TG/W	White	10W	100-240V		15cm	75mm	150mm	50	-
10105TG/B	Black	10W	100-240V		15cm	75mm	150mm	50	-
50105TG/W	White	10W	100-240V		15cm	76x76mm	140mm	50	-
10105T/BE	Beige	50W	12V		40cm	75mm	130mm	100	-
50105T/BE	Beige	50W	12V		40cm	75x75mm	130mm	100	-



The Semi Dark Light Range
Aluminium



10105D1/W

10105D1 | 10W | MR16 | GU10 | Aluminium

5 YEAR

IP20



10105D1/B



Complete with 0950GB.





10105D2/W

10105D2 | 10W | MR16 | GU10 | Aluminium

5 YEAR

IP20



10105D2/B



Complete with 0950GB.





10105DG | 10W | MR16 | GU10 | Semi trimless | Aluminium

5 YEAR

DARK LIGHT

IP20





Complete with 0950G.



Order Code	Colour	Watts	Input	Class					Notes
10105D1/W	White	10W	100-240V		15cm	62mm	135mm	50	-
10105D1/B	Black	10W	100-240V		15cm	62mm	135mm	50	-
10105D2/W	White	10W	100-240V		15cm	62mm	120mm	50	-
10105D2/B	Black	10W	100-240V		15cm	62mm	120mm	50	-
10105DG/W	White	10W	100-240V		15cm	76mm	155mm	50	-

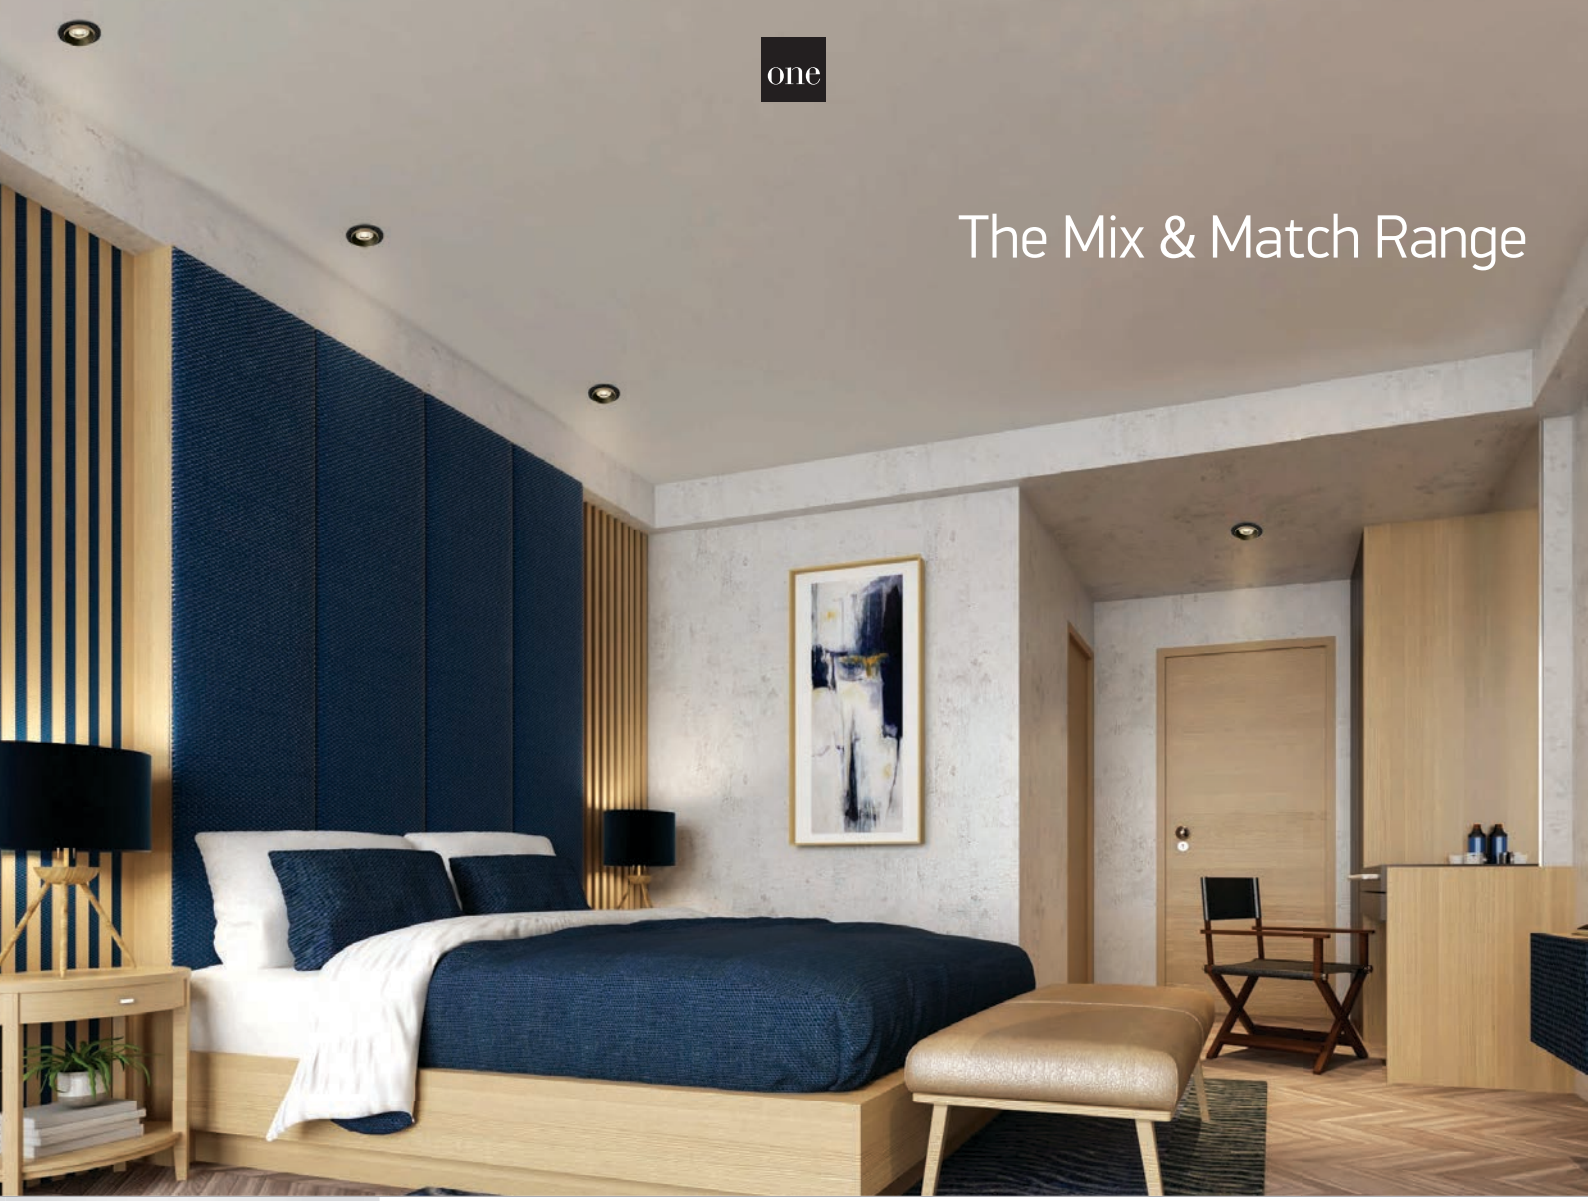

The Mix & Match Range

10105H | 10W | MR16 | GU10 | Die cast



10105H/W





10105H/B



10105H/BS



Complete with 0950GB.



Order Code	Colour	Watts	Input	Class					Notes
10105H/W	White	10W	100-240V		15cm	64mm	100mm	50	-
10105H/B	Black	10W	100-240V		15cm	64mm	100mm	50	-
10105H/BS	Brass	10W	100-240V		15cm	64mm	100mm	50	-

10112HA | 12W | COB LED | Die cast



10112HA/W/W





10112HA/B/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10112HA/W/W	White	Warm white	3000K	12W	1100lm	38°	700mA		40cm	66mm	135mm	50	Requires 700mA driver
10112HA/B/W	Black	Warm white	3000K	12W	1100lm	38°	700mA		40cm	66mm	135mm	50	Requires 700mA driver

The Mix & Match Range



10105H/B + 050182/W + 050182R/W

050182 | Rings for 10105H & 10112HA | Aluminium



050182/W White

IP20



050182/B Black



050182/BS Brass



050182R | Round base for 10105H & 10112HA | Aluminium



050182R/W White

IP20



050182R/B Black



050182R/BS Brass



050182RA | Square base for 10105H & 10112HA | Aluminium



050182RA/W White

IP20



050182RA/B Black



050182RA/BS Brass



050182RB | Double Square base for 10105H & 10112HA | Aluminium



050182RB/W White

IP20



050182RB/B Black



050182RB/BS Brass





Recessed Cylinders
Aluminium



10105D9/W/B

10105D9 | 10W | MR16 | GU10 | Aluminium

5 YEAR

DARK LIGHT

IP20



Complete with 0950GB.





10105D9/W/GL

10105D9 | 10W | MR16 | GU10 | Aluminium

5 YEAR

DARK LIGHT

IP20



Complete with 0950GB.





10105D9/B/B

10105D9 | 10W | MR16 | GU10 | Aluminium

5 YEAR

DARK LIGHT

IP20



Complete with 0950GB.





10105D9/B/GL

10105D9 | 10W | MR16 | GU10 | Aluminium

5 YEAR

DARK LIGHT

IP20



Complete with 0950GB.



Order Code	Colour	Reflector	Watts	Input	Class					Notes
10105D9/W/B	White	Black	10W	100-240V		15cm	62mm	100mm	50	-
10105D9/W/GL	White	Gold	10W	100-240V		15cm	62mm	100mm	50	-
10105D9/B/B	Black	Black	10W	100-240V		15cm	62mm	100mm	50	-
10105D9/B/GL	Black	Gold	10W	100-240V		15cm	62mm	100mm	50	-



Recessed Cut Cylinders
Aluminium



10105E1/W/B

10105E1 | 10W | MR16 | GU10 | Aluminium

5 YEAR

DARK LIGHT

IP20



Complete with 0950GB.





10105E1/B/GL

10105E1 | 10W | MR16 | GU10 | Aluminium

5 YEAR

DARK LIGHT

IP20



Complete with 0950GB.



Order Code	Colour	Reflector	Watts	Input	Class					Notes
10105E1/W/B	White	Black	10W	100-240V		15cm	62mm	100mm	50	-
10105E1/B/GL	Black	Gold	10W	100-240V		15cm	62mm	100mm	50	-



Semi Trimless Dark Light
Aluminium



10105AD/W

10105AD | 10W | MR16 | GU10 | Aluminium

5 YEAR

DARK LIGHT

IP20





Complete with 0950GB.





10105AD/B/BS

10105AD | 10W | MR16 | GU10 | Aluminium

new

5 YEAR

DARK LIGHT

IP20





Complete with 0950GB.



Order Code	Colour	Reflector	Watts	Input	Class					Notes
10105AD/W	White	Black	10W	100-240V		15cm	64mm	130mm	36	-
10105AD/B/BS	Black	Brass	10W	100-240V		15cm	64mm	130mm	36	-

Semi Trimless Dark Light
Aluminium

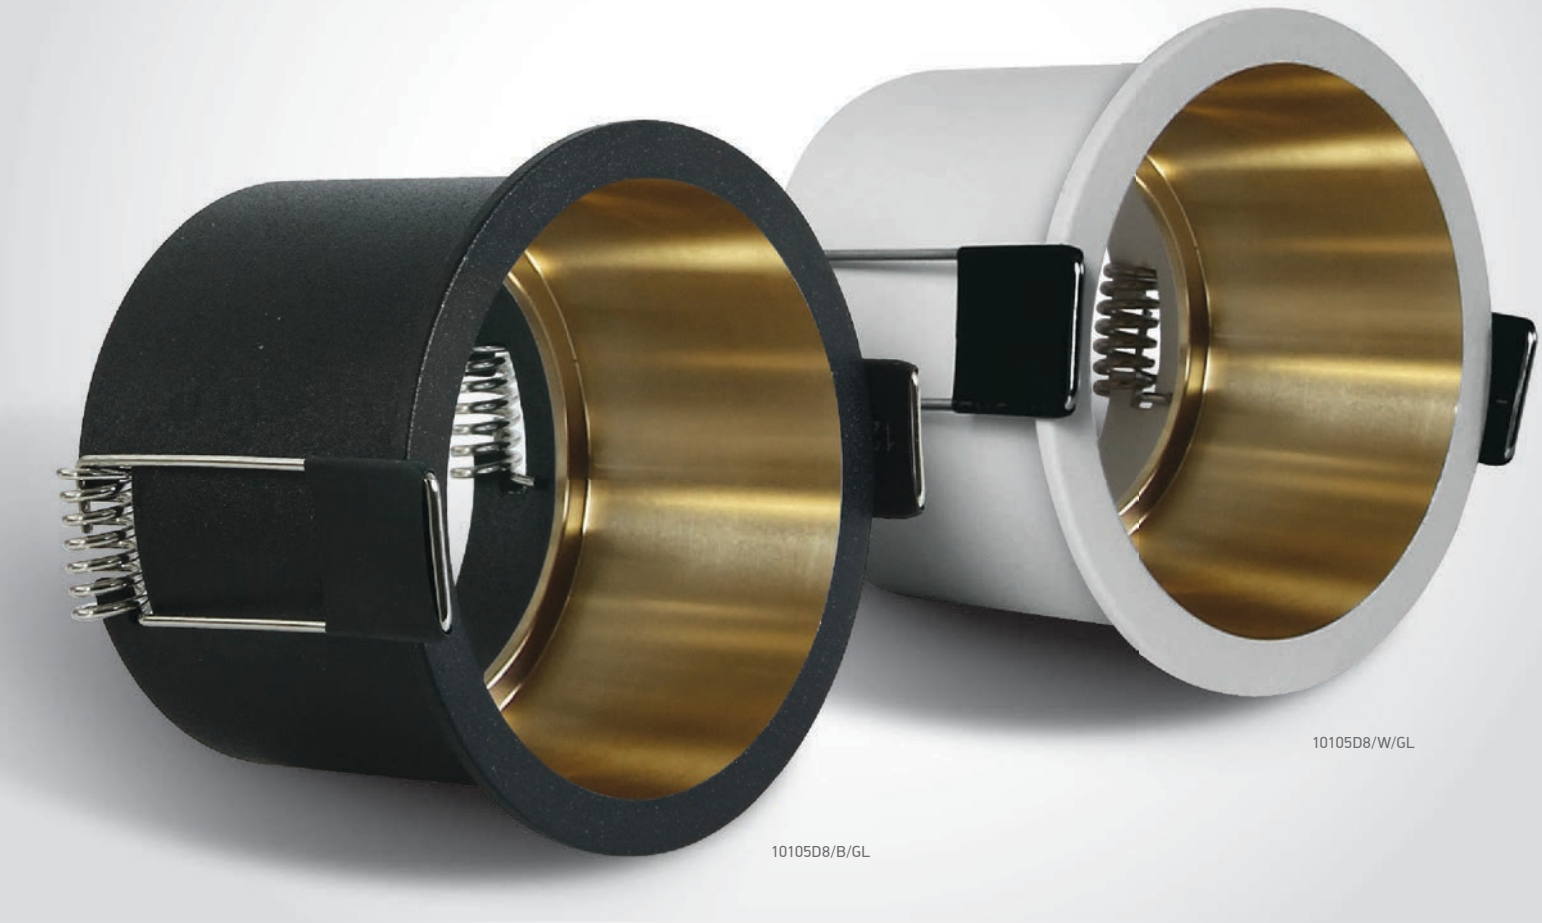



10105D8/W/GL

10105D8 | 10W | MR16 | GU10 | Aluminium

5 YEAR

DARK LIGHT

IP20



10105D8/W/B



Complete with 0950GB.





10105D8/B/GL

10105D8 | 10W | MR16 | GU10 | Aluminium

5 YEAR

DARK LIGHT

IP20



10105D8/B/B



Complete with 0950GB.



Order Code	Colour	Reflector	Watts	Input	Class					Notes
10105D8/W/B	White	Black	10W	100-240V		15cm	62mm	130mm	50	-
10105D8/W/GL	White	Gold	10W	100-240V		15cm	62mm	130mm	50	-
10105D8/B/B	Black	Black	10W	100-240V		15cm	62mm	130mm	50	-
10105D8/B/GL	Black	Gold	10W	100-240V		15cm	62mm	130mm	50	-

The Chill Out Range
Round





10105M/W/W

10105M | 10W | MR16 | GU10 | Aluminium body + plastic reflector

5 YEAR

DARK LIGHT

IP20



Complete with 0950GB.





10105M/W/B

10105M | 10W | MR16 | GU10 | Aluminium body + plastic reflector

5 YEAR

DARK LIGHT

IP20



Complete with 0950GB.





10105M/W/BS

10105M | 10W | MR16 | GU10 | Aluminium body + plastic reflector

5 YEAR

DARK LIGHT

IP20



Complete with 0950GB.





10105M/W/CU

10105M | 10W | MR16 | GU10 | Aluminium body + plastic reflector

5 YEAR

DARK LIGHT

IP20



Complete with 0950GB.



Order Code	Colour	Reflector	Watts	Input	Class					Notes
10105M/W/W	White	White	10W	100-240V		15cm	70mm	120mm	50	-
10105M/W/B	White	Black	10W	100-240V		15cm	70mm	120mm	50	-
10105M/W/BS	White	Brass	10W	100-240V		15cm	70mm	120mm	50	-
10105M/W/CU	White	Copper	10W	100-240V		15cm	70mm	120mm	50	-



The Chill Out Range
Round



10105M/B/W

10105M | 10W | MR16 | GU10 | Aluminium body + plastic reflector

DARK LIGHT IP20



Complete with 0950GB.





10105M/B/B

10105M | 10W | MR16 | GU10 | Aluminium body + plastic reflector

DARK LIGHT IP20



Complete with 0950GB.





10105M/B/BS

10105M | 10W | MR16 | GU10 | Aluminium body + plastic reflector

DARK LIGHT IP20



Complete with 0950GB.





10105M/B/CU

10105M | 10W | MR16 | GU10 | Aluminium body + plastic reflector

DARK LIGHT IP20



Complete with 0950GB.



Order Code	Colour	Reflector	Watts	Input	Class					Notes
10105M/B/W	Black	White	10W	100-240V		15cm	70mm	120mm	50	-
10105M/B/B	Black	Black	10W	100-240V		15cm	70mm	120mm	50	-
10105M/B/BS	Black	Brass	10W	100-240V		15cm	70mm	120mm	50	-
10105M/B/CU	Black	Copper	10W	100-240V		15cm	70mm	120mm	50	-

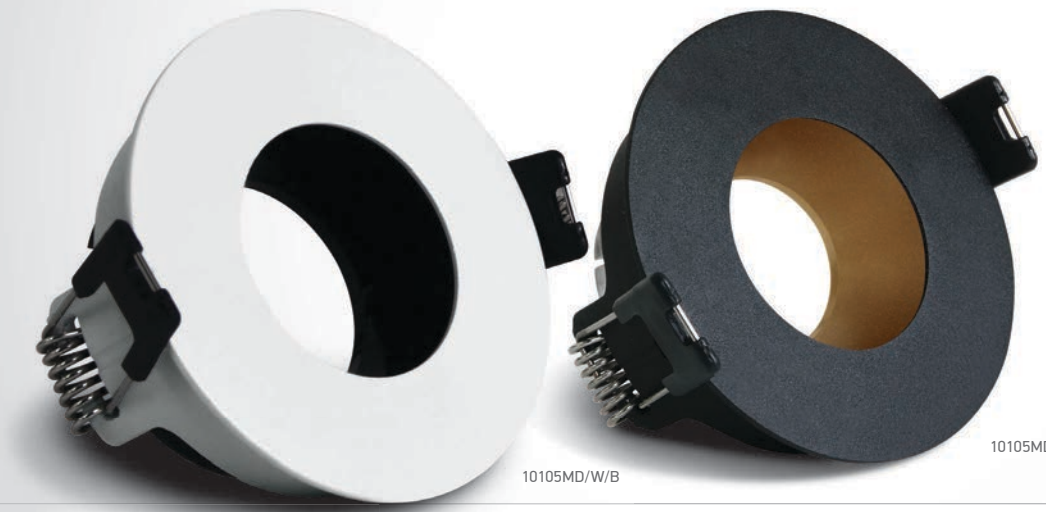

The Chill Out Range
Round



10105MD/W/B

10105MD | 10W | MR16 | GU10 | Aluminium body + plastic reflector

5 YEAR

DARK LIGHT

IP20



Complete with 0950GB.





10105MD/W/BS

10105MD | 10W | MR16 | GU10 | Aluminium body + plastic reflector

5 YEAR

DARK LIGHT

IP20



Complete with 0950GB.





10105MD/W/C

10105MD | 10W | MR16 | GU10 | Aluminium body + plastic reflector

5 YEAR

DARK LIGHT

IP20



Complete with 0950GB.





10105MD/W/GL

10105MD | 10W | MR16 | GU10 | Aluminium body + plastic reflector

5 YEAR

DARK LIGHT

IP20



Complete with 0950GB.



Order Code	Colour	Reflector	Watts	Input	Class					Notes
10105MD/W/B	White	Black	10W	100-240V	⏚	15cm	70mm	120mm	50	-
10105MD/W/BS	White	Brass	10W	100-240V	⏚	15cm	70mm	120mm	50	-
10105MD/W/C	White	Chrome	10W	100-240V	⏚	15cm	70mm	120mm	50	-
10105MD/W/GL	White	Gold	10W	100-240V	⏚	15cm	70mm	120mm	50	-





10105MD/B/B

10105MD | 10W | MR16 | GU10 | Aluminium body + plastic reflector

5 YEAR

DARK LIGHT

IP20



Complete with 0950GB.





10105MD/B/BS

10105MD | 10W | MR16 | GU10 | Aluminium body + plastic reflector

5 YEAR

DARK LIGHT

IP20



Complete with 0950GB.



Order Code	Colour	Reflector	Watts	Input	Class					Notes
10105MD/B/B	Black	Black	10W	100-240V	⏚	15cm	70mm	120mm	50	-
10105MD/B/BS	Black	Brass	10W	100-240V	⏚	15cm	70mm	120mm	50	-

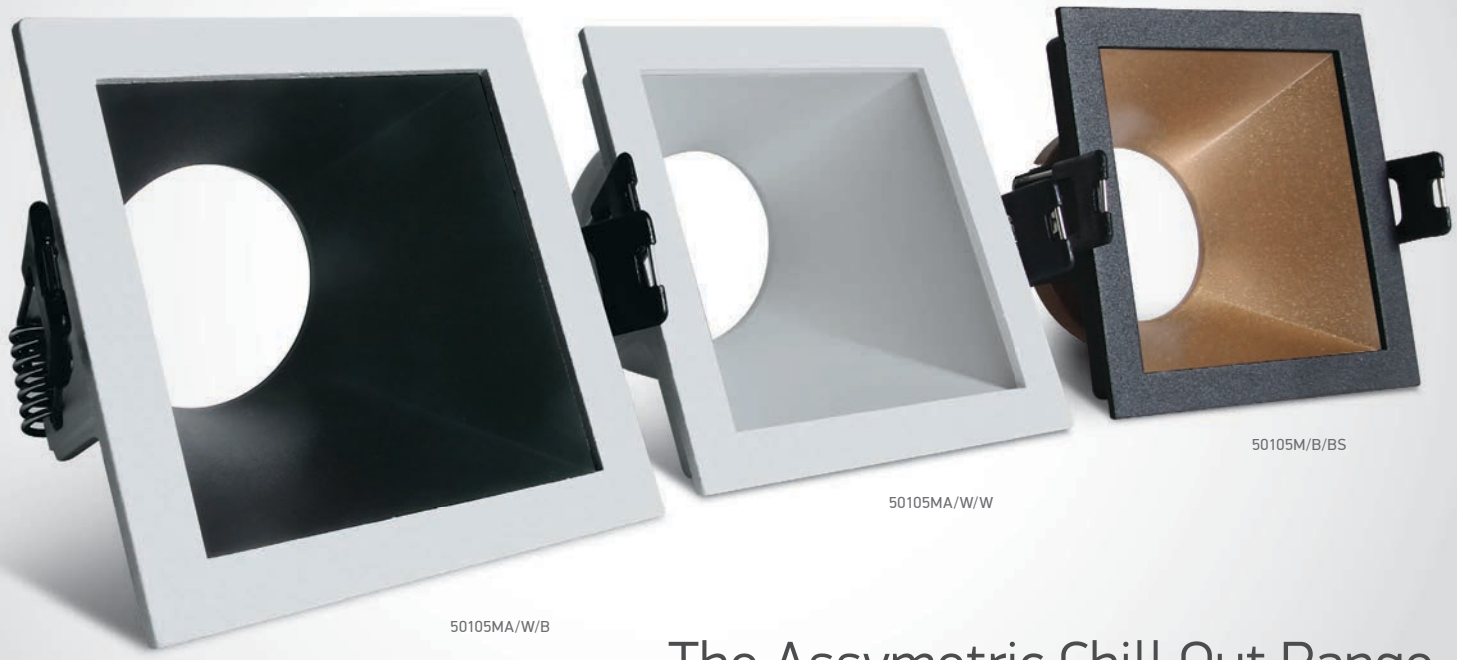

The Assymetric Chill Out Range

Square



50105MA/W/W

50105MA | 10W | MR16 | GU10 | Aluminium body + plastic reflector

Asymmetric for shelf illumination.

5 YEAR

DARK LIGHT

IP20



Asymmetric.





50105MA/W/B

50105MA | 10W | MR16 | GU10 | Aluminium body + plastic reflector

Asymmetric for shelf illumination.

5 YEAR

DARK LIGHT

IP20



Asymmetric.





50105MA/B/B

50105MA | 10W | MR16 | GU10 | Aluminium body + plastic reflector

Asymmetric for shelf illumination.

5 YEAR

DARK LIGHT

IP20



Asymmetric.



Order Code	Colour	Reflector	Watts	Input	Class					Notes
50105MA/W/W	White	White	10W	100-240V		15cm	76x76mm	150mm	50	Asymmetric
50105MA/W/B	White	Black	10W	100-240V		15cm	76x76mm	150mm	50	Asymmetric
50105MA/B/B	Black	Black	10W	100-240V		15cm	76x76mm	150mm	50	Asymmetric



The Chill Out Range
Square



50105M/W/BS

50105M | 10W | MR16 | GU10 | Aluminium body + plastic reflector

5 YEAR

DARK LIGHT

IP20



50105M/W/CU



Complete with 0950GB.





50105M/B/W

50105M | 10W | MR16 | GU10 | Aluminium body + plastic reflector

5 YEAR

DARK LIGHT

IP20



50105M/B/B



Complete with 0950GB.





50105M/B/BS

50105M | 10W | MR16 | GU10 | Aluminium body + plastic reflector

5 YEAR

DARK LIGHT

IP20



50105M/B/CU



Complete with 0950GB.



Order Code	Colour	Reflector	Watts	Input	Class					Notes
50105M/W/BS	White	Brass	10W	100-240V		15cm	76x76mm	130mm	50	-
50105M/W/CU	White	Copper	10W	100-240V		15cm	76x76mm	130mm	50	-
50105M/B/W	Black	White	10W	100-240V		15cm	76x76mm	130mm	50	-
50105M/B/B	Black	Black	10W	100-240V		15cm	76x76mm	130mm	50	-
50105M/B/BS	Black	Brass	10W	100-240V		15cm	76x76mm	130mm	50	-
50105M/B/CU	Black	Copper	10W	100-240V		15cm	76x76mm	130mm	50	-



The Dark Light Range



10105L | 50W | MR16 | GU5,3 | Adjustable ring | Steel

DARK LIGHT
IP20
offer

5 YEAR

CE







10105F | 50W | MR16 | GU5,3 | Adjustable ring | Steel

DARK LIGHT
IP20
offer

5 YEAR

CE







50205D | 2x50W | MR16 | GU5,3 | Aluminium

DARK LIGHT
IP20

5 YEAR

CE





Order Code	Colour	Watts	Input	Class					Notes
10105L/C	Chrome	50W	12V		40cm	90mm	95mm	50	-
10105F/MC	Brushed chrome	50W	12V		40cm	90mm	90mm	50	-
50205D/AL	Aluminium	2x50W	12V		40cm	220x110mm	130mm	20	-



The Decorative Spots



10105AC | 50W | MR16 | GU5,3 | Natural aluminium

IP20







10105GL2 | 50W | MR16 | GU5,3 | Natural aluminium + glass

IP20
offer







50105AR | 50W | MR16 | GU5,3 | Natural aluminium

IP20
offer





Order Code	Colour	Watts	Input	Class					Notes
10105AC/AL	Aluminium	50W	12V	III	40cm	60mm	60mm	50	-
10105GL2/AL	Aluminium	50W	12V	III	40cm	60mm	50mm	50	-
50105AR/AL	Aluminium	50W	12V	III	40cm	70mm	75mm	50	-



10105CJ/ABS/5

10105CJ/MC/5

The Bathroom Range
Die cast



10105CJ/MC/5

10105CJ | 50W | MR16 | GU5,3 | Die cast

DARK LIGHT
IP43
offer

5 YEAR

CE







10105CJ/ABS/5

10105CJ | 50W | MR16 | GU5,3 | Die cast

DARK LIGHT
IP43
offer

5 YEAR

CE







10105Q | 50W | MR16 | GU5,3 | Die cast

IP44
offer

5 YEAR

CE





Order Code	Colour	Watts	Input	Class					Notes
10105CJ/MC/5	Brushed chrome	50W	12V	III	40cm	102mm	120mm	50	-
10105CJ/ABS/5	Antique brass	50W	12V	III	40cm	102mm	120mm	50	-
10105Q/MC	Brushed chrome	50W	12V	III	40cm	70mm	110mm	50	-



The IP44 Bathroom Range
Die cast



10105R | 50W | MR16 | GU5,3 | Die cast

CE 5 YEAR

IP44







50105R/W

50105R | 50W | MR16 | GU5,3 | Die cast

CE 5 YEAR

IP44







50105R/MC

50105R | 50W | MR16 | GU5,3 | Die cast

CE 5 YEAR

IP44





Order Code	Colour	Watts	Input	Class					Notes
10105R/W	White	50W	12V	III	40cm	70mm	100mm	50	-
50105R/W	White	50W	12V	III	40cm	70mm	100mm	50	-
50105R/MC	Brushed chrome	50W	12V	III	40cm	70mm	100mm	50	-

The IP65 Dark Light Range
Aluminium





10105R2 | 10W | MR16 | GU10 | Aluminium

5 YEAR

DARK LIGHT

IP65



Complete with 0950G.



Clear glass.



Order Code	Colour	Watts	Input	Class					Notes
10105R2/W	White	10W	100-240V	⏚	15cm	82mm	130mm	50	Clear glass

The IP65 Dark Light Range
Aluminium



10105R2P | 10W | MR16 | GU10 | Aluminium

5 YEAR

DARK LIGHT

IP65



Complete with 0950G.



Prismatic glass.



Order Code	Colour	Watts	Input	Class					Notes
10105R2P/W	White	10W	100-240V	⏚	15cm	82mm	130mm	50	Prismatic glass

The IP65 Bathroom Range

Aluminium



10105R1/W



10105R1/B



10105R1/AL

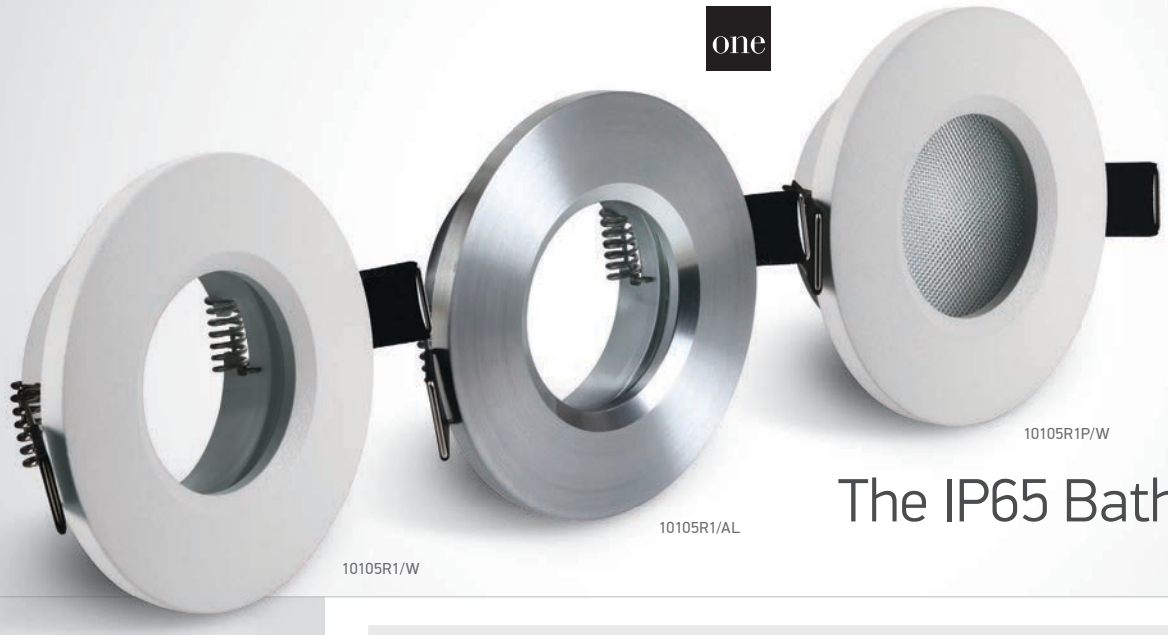

The IP65 Bathroom Range
Aluminium


10105R1/W

10105R1 | 10W | MR16 | GU10 | Aluminium

5 YEAR

IP65


Complete with 0950GB.


Clear glass.




10105R1/B

10105R1 | 10W | MR16 | GU10 | Aluminium

5 YEAR

IP65


Complete with 0950GB.


Clear glass.




10105R1/AL

10105R1 | 10W | MR16 | GU10 | Aluminium

5 YEAR

IP65


Complete with 0950GB.


Clear glass.





10105R1P | 10W | MR16 | GU10 | Aluminium

5 YEAR

IP65


Complete with 0950GB.


Prismatic glass.



Order Code	Colour	Watts	Input	Class					Notes
10105R1/W	White	10W	100-240V	⏚	15cm	68mm	120mm	50	Clear glass
10105R1/B	Black	10W	100-240V	⏚	15cm	68mm	120mm	50	Clear glass
10105R1/AL	Aluminium	10W	100-240V	⏚	15cm	68mm	120mm	50	Clear glass
10105R1P/W	White	10W	100-240V	⏚	15cm	68mm	120mm	50	Prismatic glass

The Fire Rated Dark Light



10109F | 10W | MR16 | GU10 | Fire Rated | Die cast

new
DARK LIGHT
IP65

FIRE RATED
5 YEAR





Order Code	Colour	Watts	Input	Class				Notes
10109F/W	White	10W	100-240V	⏚	73mm	160mm	30	-

The Glass Decorative





50105GL4 | 10W | MR16 | GU10 | Metal + glass

IP20

offer



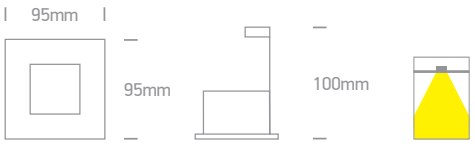

Order Code	Colour	Watts	Input	Class					Notes
50105GL4/MC	Brushed chrome	10W	100-240V	⏚	15cm	88mm	130mm	50	-



Trimless Gypsum



10105GT1 | 10W | MR16 | GU10 | Trimless | Gypsum

CE 5 YEAR

IP20



Suitable for GU10 LED lamp.





10105GT2 | 10W | MR16 | GU10 | Trimless | Gypsum

CE 5 YEAR

DARK LIGHT

IP20



Suitable for GU10 LED lamp.





50105GT1 | 10W | MR16 | GU10 | Trimless | Gypsum

CE 5 YEAR

IP20



Suitable for GU10 LED lamp.

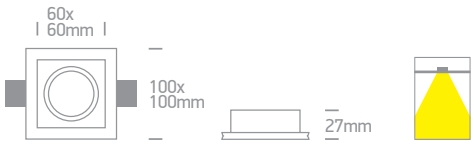



50105GT2 | 10W | MR16 | GU10 | Trimless | Gypsum

CE 5 YEAR

DARK LIGHT

IP20



Suitable for GU10 LED lamp.



Order Code	Colour	Watts	Input	Class					Notes
10105GT1	White	10W	100-240V	☐	15cm	102mm	100mm	24	-
10105GT2	White	10W	100-240V	☐	15cm	132mm	150mm	24	-
50105GT1	White	10W	100-240V	☐	15cm	102x102mm	100mm	24	-
50105GT2	White	10W	100-240V	☐	15cm	122x122mm	150mm	24	-

The Trimless Chill Out Range

Aluminium





10105TR | 10W | MR16 | GU10 | Trimless | Aluminium

5 YEAR

DARK LIGHT

IP20



Complete with 0950GB.



2 Step reflector.



10105TR/W

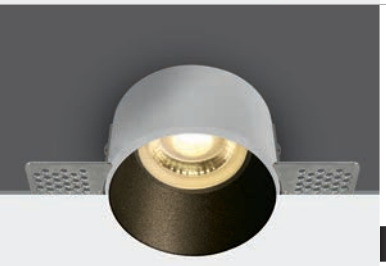

10105TR | 10W | MR16 | GU10 | Trimless | Aluminium

5 YEAR

DARK LIGHT

IP20



Complete with 0950GB.



2 Step reflector.



10105TR/B



10105TR | 10W | MR16 | GU10 | Trimless | Aluminium

5 YEAR

DARK LIGHT

IP20



Complete with 0950GB.



2 Step reflector.



10105TR/BS

Order Code	Colour	Watts	Input	Class					Notes
10105TR/W	White	10W	100-240V		15cm	70mm	120mm	60	-
10105TR/B	Black	10W	100-240V		15cm	70mm	120mm	60	-
10105TR/BS	Brass	10W	100-240V		15cm	70mm	120mm	60	-

The Trimless Chill Out Range
Round



10105RM + 050099/W



10105RM + 050099/B



10105RM + 050099/G



10105RM + 050099/GL



10105RM + 050099/CU



10105RM + 050099/DC

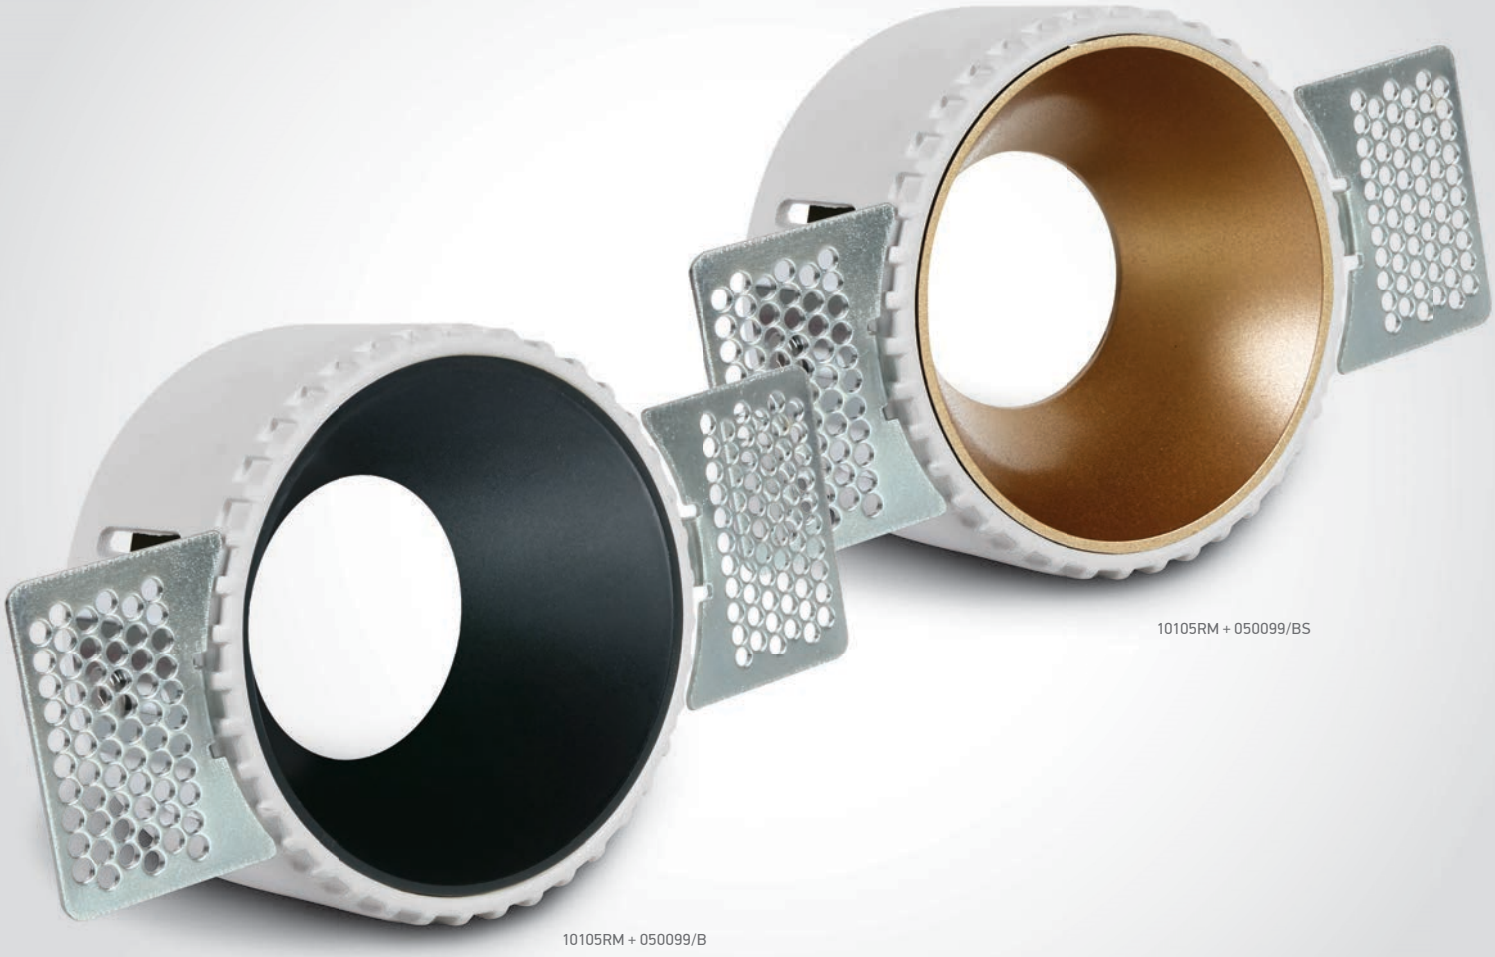

10105RM + 050099/BS

10105RM + 050099/B

The Trimless Chill Out Range
Round



10105RM | 10W | MR16 | GU10 | Trimless | Die cast body + plastic reflector

Reflector must be ordered separately.

5 YEAR

DARK LIGHT

IP20



Complete with 0950GB.

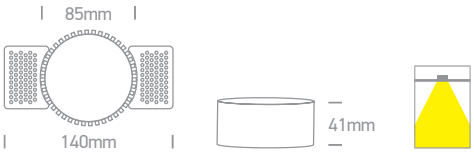



050099/W White | 050099/B Black | 050099/G Grey | 050099/BS Brass | 050099/GL Gold | 050099/CU Copper | 050099/DC Dark chrome

Order Code	Colour	Watts	Input	Class					Notes
10105RM	White	10W	100-240V	⏚	15cm	90mm	130mm	50	-

The Trimless Chill Out Range
Square



50105RM + 050098/W



50105RM + 050098/B



50105RM + 050098/BS



50105RM + 050098/C



50105RM + 050098/GL

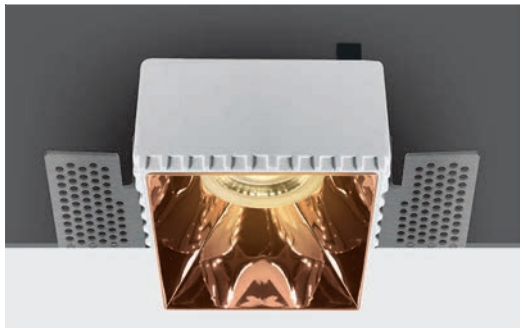

50105RM + 050098/CU

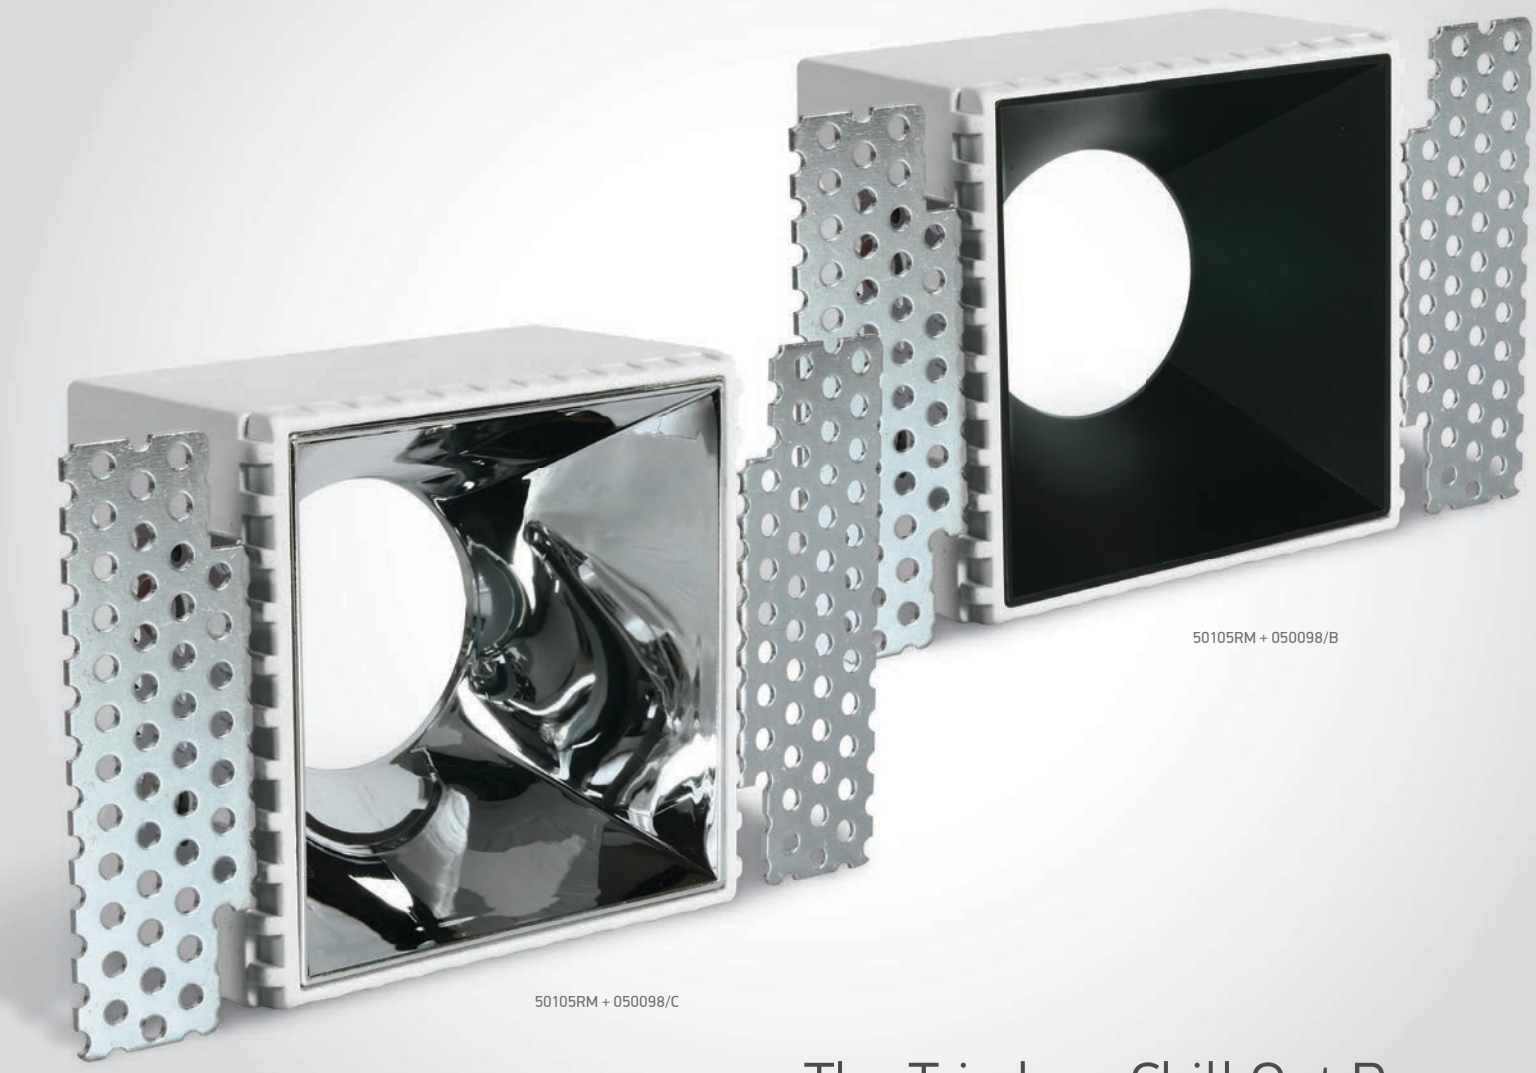

50105RM + 050098/B

50105RM + 050098/C

The Trimless Chill Out Range
Square



50105RM | 10W | MR16 | GU10 | Trimless | Die cast body + plastic reflector

Reflector must be ordered separately.

DARK LIGHT

IP20



Complete with 0950GB.

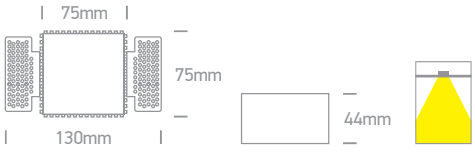



050098/W White



050098/B Black



050098/BS Brass



050098/C Chrome



050098/GL Gold



050098/CU Copper

Order Code	Colour	Watts	Input	Class					Notes
50105RM	White	10W	100-240V	⏚	15cm	85x75mm	130mm	50	-



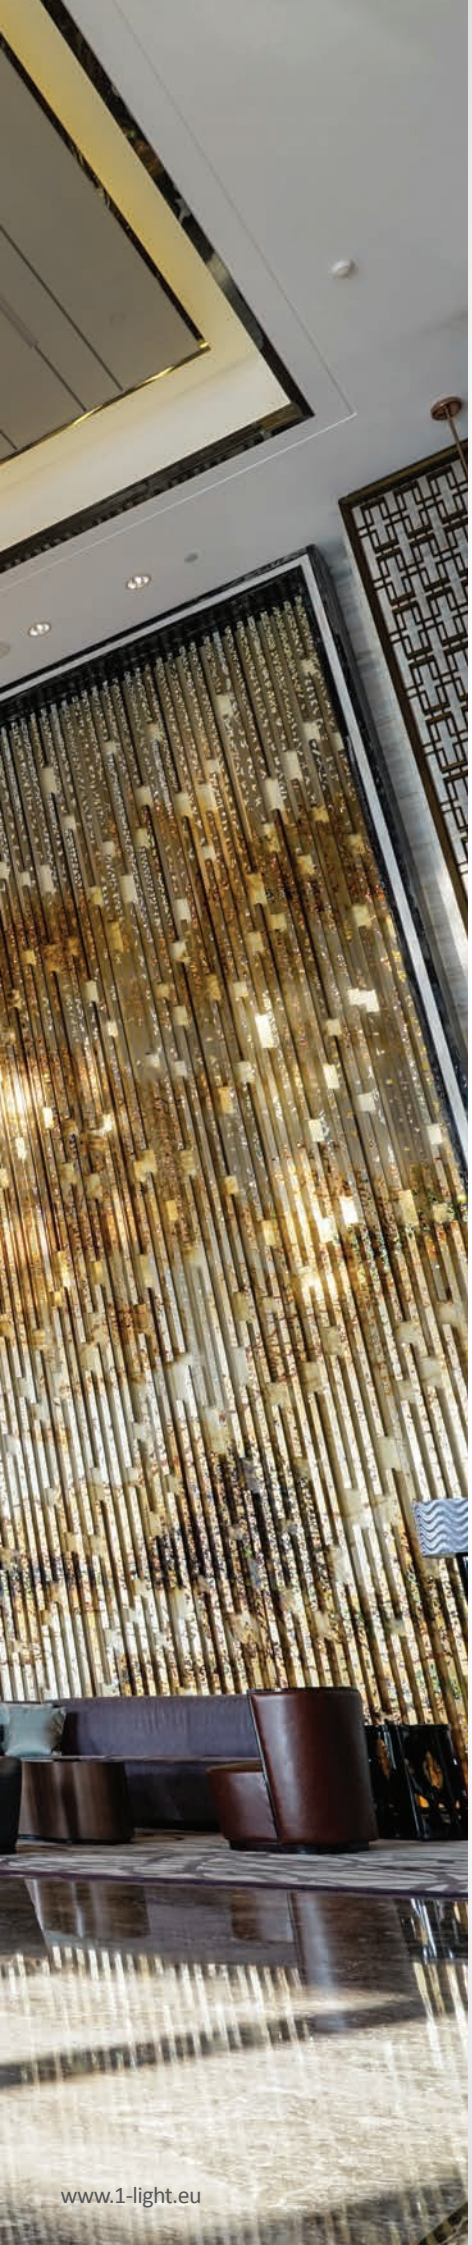

02

Recessed Spots Fixed LED

Pages 45-90

COB LED | SMD LED

Die cast | Aluminium | Plastic | Gypsum | Cement | Steel | Acrylic | Trimless

IP20 IP44 IP54 IP65

DIMMABLE DARK LIGHT QUICK FIX FIRE RATED 80 CRI 85 CRI 90 CRI 2 YEAR 3 YEAR 5 YEAR





The Super Mini Series

10101L | 1W | LED | Aluminium

Driver can not pass through the cutout hole.



10101L/W/W

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · IP44 · CE · 3 YEAR



10101L/B/W



10101L | 1W | LED | Aluminium

Driver can not pass through the cutout hole.



10101L/W/BL

LED BUILT IN · DIMMABLE · QUICK FIX · CE · IP44 · 3 YEAR





10101LA | 2W | COB LED | Die cast



LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · IP44 · CE · 3 YEAR



Suitable for 89004A driver.



10101D | 1W | LED | Die cast

Driver can not pass through the cutout hole.



LED BUILT IN · 80 CRI · DIMMABLE · QUICK FIX · DARK LIGHT · IP20 · CE · 3 YEAR



Removable head.

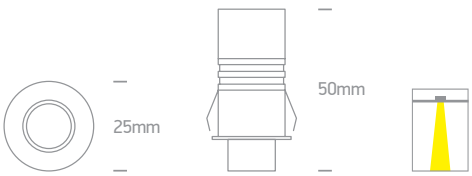

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10101L/W/W	White	Warm white	3000K	1W	95lm	-	350mA		100cm	12mm	30mm	100	Requires 350mA driver
10101L/W/BL	White	Blue	-	1W	-	-	350mA		100cm	12mm	30mm	100	Requires 350mA driver
10101L/B/W	Black	Warm white	3000K	1W	95lm	-	350mA		100cm	12mm	30mm	100	Requires 350mA driver
10101LA/W/W	White	Warm white	3000K	2W	190lm	36°	700mA		200cm	27mm	55mm	100	Requires 700mA driver
10101D/B/W	Black	Warm white	3000K	1W	60lm	-	350mA		40cm	20mm	45mm	100	Requires 350mA driver



The 1W/3W LED Dark Light



10103DL/W/BS/W

10103DL | 1W/3W | COB LED | Aluminium — 1W@350mA / 3W@700mA

LED BUILT IN · 80 CRI · DIMMABLE · QUICK FIX · DARK LIGHT · IP20 · CE · 2 YEAR







10103DL/B/B/W

10103DL | 1W/3W | COB LED | Aluminium — 1W@350mA / 3W@700mA

LED BUILT IN · 80 CRI · DIMMABLE · QUICK FIX · DARK LIGHT · IP20 · CE · 2 YEAR







10103DL/B/BS/W

10103DL | 1W/3W | COB LED | Aluminium — 1W@350mA / 3W@700mA

LED BUILT IN · 80 CRI · DIMMABLE · QUICK FIX · DARK LIGHT · IP20 · CE · 2 YEAR







10103DE | 1W/3W | COB LED | Aluminium — 1W@350mA / 3W@700mA

LED BUILT IN · 80 CRI · DIMMABLE · QUICK FIX · DARK LIGHT · IP20 · CE · 2 YEAR





Order Code	Colour	Reflector	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10103DL/W/BS/W	White	Brass	Warm white	3000K	1W/3W	200lm@3W	36°	350mA/700mA	III	40cm	40mm	70mm	50	Requires 350mA/700mA driver
10103DL/B/B/W	Black	Black	Warm white	3000K	1W/3W	200lm@3W	36°	350mA/700mA	III	40cm	40mm	70mm	50	Requires 350mA/700mA driver
10103DL/B/BS/W	Black	Brass	Warm white	3000K	1W/3W	200lm@3W	36°	350mA/700mA	III	40cm	40mm	70mm	50	Requires 350mA/700mA driver
10103DE/B/W	Black	-	Warm white	3000K	1W/3W	200lm@3W	38°	350mA/700mA	III	40cm	38mm	60mm	50	Requires 350mA/700mA driver

The 1W/2W LED Spots
Aluminium



10103B/W/W



10103B/B/W



10103B/AL/W

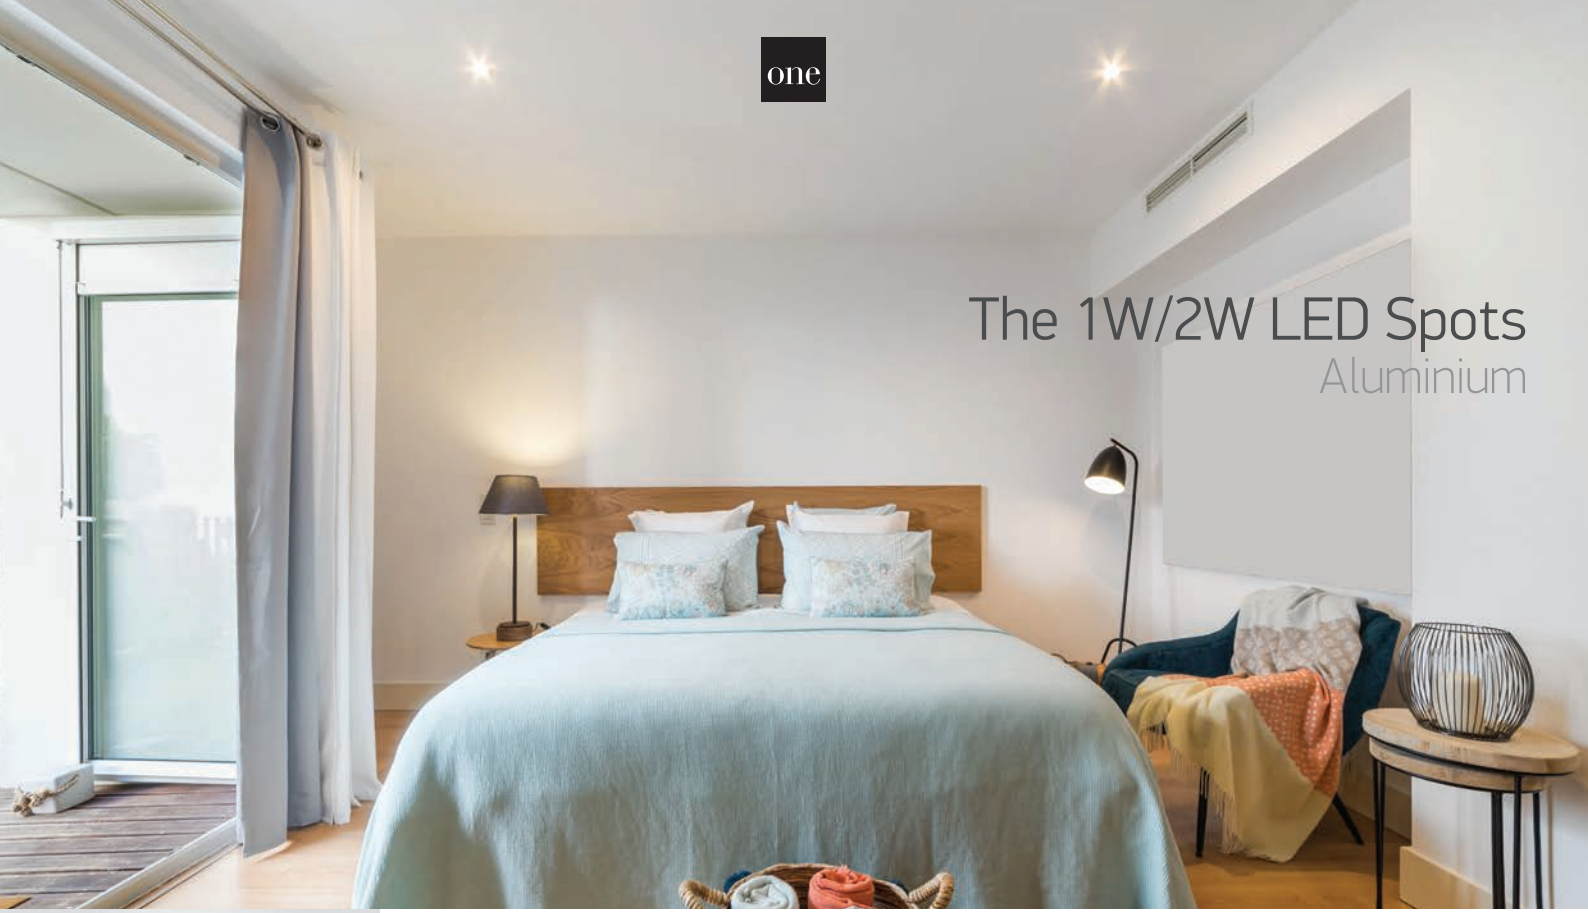

The 1W/2W LED Spots
Aluminium



10103B/W/C

10103B | 1W/2W | COB LED | Aluminium — 1W@350mA / 2W@700mA





10103B/W/W





10103B/B/C

10103B | 1W/2W | COB LED | Aluminium — 1W@350mA / 2W@700mA





10103B/B/W





10103B/AL/W

10103B | 1W/2W | COB LED | Aluminium — 1W@350mA / 2W@700mA







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	S				Notes
10103B/W/C	White	Cool white	4000K	1W/2W	200lm@2W	40°	350mA/700mA		40cm	35mm	50mm	100	Requires 350mA/700mA driver
10103B/W/W	White	Warm white	3000K	1W/2W	200lm@2W	40°	350mA/700mA		40cm	35mm	50mm	100	Requires 350mA/700mA driver
10103B/B/C	Black	Cool white	4000K	1W/2W	200lm@2W	40°	350mA/700mA		40cm	35mm	50mm	100	Requires 350mA/700mA driver
10103B/B/W	Black	Warm white	3000K	1W/2W	200lm@2W	40°	350mA/700mA		40cm	35mm	50mm	100	Requires 350mA/700mA driver
10103B/AL/W	Aluminium	Warm white	3000K	1W/2W	200lm@2W	40°	350mA/700mA		40cm	35mm	50mm	100	Requires 350mA/700mA driver

The 3W Dark Light Range
Aluminium



10103E/W/W/W



10103E/W/BS/W



10103E/B/B/W

The 3W Dark Light Range
Aluminium



10103E/B/BS/W

10103E/W/B/W

10103E/W/BS/W



10103E/W/B/W

10103E | 3W | COB LED | Aluminium

new
DARK LIGHT
IP20
LED BUILT IN
90 CRI
DIMMABLE
QUICK FIX
5 YEAR





Suitable for 89004 driver.





10103E/B/BS/W

10103E | 3W | COB LED | Aluminium

new
DARK LIGHT
IP20
LED BUILT IN
90 CRI
DIMMABLE
QUICK FIX
5 YEAR





Suitable for 89004 driver.



Order Code	Colour	Reflector	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10103E/W/W/W	White	White	Warm white	3000K	3W	240lm	36°	350mA		40cm	44mm	60mm	50	Requires 350mA driver
10103E/W/B/W	White	Black	Warm white	3000K	3W	240lm	36°	350mA		40cm	44mm	60mm	50	Requires 350mA driver
10103E/W/BS/W	White	Brass	Warm white	3000K	3W	240lm	36°	350mA		40cm	44mm	60mm	50	Requires 350mA driver
10103E/B/B/W	Black	Black	Warm white	3000K	3W	240lm	36°	350mA		40cm	44mm	60mm	50	Requires 350mA driver
10103E/B/BS/W	Black	Brass	Warm white	3000K	3W	240lm	36°	350mA		40cm	44mm	60mm	50	Requires 350mA driver



Fixed Spots



10103L | 3x1W | LED | Natural aluminium

LED BUILT IN
DIMMABLE
QUICK FIX
IP20
offer
2 YEAR



Suitable for 89004 driver.





50103L | 3x1W | LED | Natural aluminium

LED BUILT IN
DIMMABLE
QUICK FIX
IP20
offer
2 YEAR



Suitable for 89004 driver.





50401L | 4x1W | LED | Natural aluminium

LED BUILT IN
DIMMABLE
QUICK FIX
IP20
offer
2 YEAR







50601L | 6x1W | LED | Natural aluminium

LED BUILT IN
DIMMABLE
QUICK FIX
IP20
offer
2 YEAR





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10103L/D/35	Aluminium	Daylight	6000K	3x1W	180lm	35°	350mA		40cm	60mm	40mm	100	Requires 350mA driver
10103L/W/35	Aluminium	Warm white	3000K	3x1W	135lm	35°	350mA		40cm	60mm	40mm	100	Requires 350mA driver
50103L/D/35	Aluminium	Daylight	6000K	3x1W	180lm	35°	350mA		40cm	60mm	40mm	100	Requires 350mA driver
50103L/W/35	Aluminium	Warm white	3000K	3x1W	135lm	35°	350mA		40cm	60mm	40mm	100	Requires 350mA driver
50401L/D/35	Aluminium	Daylight	6000K	4x1W	240lm	35°	350mA		40cm	80x80mm	40mm	50	Requires 350mA driver
50401L/W/35	Aluminium	Warm white	3000K	4x1W	180lm	35°	350mA		40cm	80x80mm	40mm	50	Requires 350mA driver
50601L/D/35	Aluminium	Daylight	6000K	6x1W	360lm	35°	350mA		40cm	118x80mm	40mm	50	Requires 350mA driver
50601L/W/35	Aluminium	Warm white	3000K	6x1W	270lm	35°	350mA		40cm	118x80mm	40mm	50	Requires 350mA driver





10103N/W/D/35

10103N | 3x1W | LED | Aluminium

IP20 offer

LED BUILT IN

DIMMABLE

QUICK FIX

2 YEAR





Suitable for 89004 driver.





10103N/B/W/35

10103N | 3x1W | LED | Aluminium

IP20 offer

LED BUILT IN

DIMMABLE

QUICK FIX

2 YEAR





Suitable for 89004 driver.





10103N/AL/W/35

10103N | 3x1W | LED | Aluminium

IP20 offer

LED BUILT IN

DIMMABLE

QUICK FIX

2 YEAR





Suitable for 89004 driver.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10103N/W/D/35	White	Daylight	6000K	3x1W	180lm	35°	350mA	III	40cm	60mm	45mm	100	Requires 350mA driver
10103N/B/D/35	Black	Daylight	6000K	3x1W	180lm	35°	350mA	III	40cm	60mm	45mm	100	Requires 350mA driver
10103N/B/W/35	Black	Warm white	3000K	3x1W	135lm	35°	350mA	III	40cm	60mm	45mm	100	Requires 350mA driver
10103N/AL/D/35	Aluminium	Daylight	6000K	3X1W	180lm	35°	350mA	III	40cm	60mm	45mm	100	Requires 350mA driver
10103N/AL/W/35	Aluminium	Warm white	3000K	3x1W	135lm	35°	350mA	III	40cm	60mm	45mm	100	Requires 350mA driver



The 8W Range



10108D/W/W

10108D | 8W | COB LED | Die cast

LED BUILT IN · 80 CRI · CE · 3 YEAR · DARK LIGHT · IP20







10108D/B/W

10108D | 8W | COB LED | Die cast

LED BUILT IN · 80 CRI · CE · 3 YEAR · DARK LIGHT · IP20







10108D/BS/W

10108D | 8W | COB LED | Die cast

LED BUILT IN · 80 CRI · CE · 3 YEAR · DARK LIGHT · IP20







10108R/W/W

10108R | 8W | COB LED | Die cast

LED BUILT IN · 80 CRI · CE · 3 YEAR · IP20



10108R/B/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10108D/W/W	White	Warm white	3000K	8W	600lm	36°	230V	☐	73mm	90mm	50	Complete with 300mA driver
10108D/B/W	Black	Warm white	3000K	8W	600lm	36°	230V	☐	73mm	90mm	50	Complete with 300mA driver
10108D/BS/W	Brass	Warm white	3000K	8W	600lm	36°	230V	☐	73mm	90mm	50	Complete with 300mA driver
10108R/W/W	White	Warm white	3000K	8W	750lm	60°	230V	☐	68mm	50mm	50	Complete with 350mA driver
10108R/B/W	Black	Warm white	3000K	8W	750lm	60°	230V	☐	68mm	50mm	50	Complete with 350mA driver



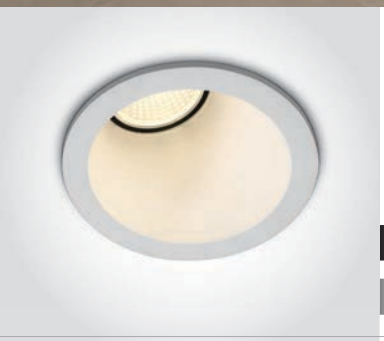

10108A | 8W | COB LED | Die cast | Asymmetric reflector

LED BUILT IN
80 CRI
CE
3 YEAR
DARK LIGHT
IP20







50108A | 8W | COB LED | Die cast | Asymmetric reflector

LED BUILT IN
80 CRI
CE
3 YEAR
DARK LIGHT
IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10108A/W/W	White	Warm white	3000K	8W	560lm	50°	230V		68mm	85mm	20	Complete with 350mA driver
50108A/W/W	White	Warm white	3000K	8W	560lm	50°	230V		73x73mm	85mm	50	Complete with 350mA driver



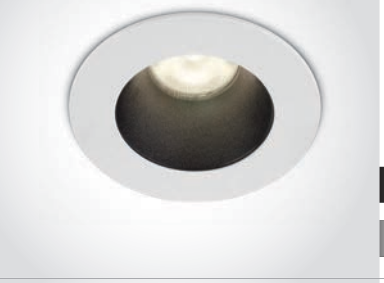

10108D1 | 8W | COB LED | Die cast

LED BUILT IN
80 CRI
CE
3 YEAR
DARK LIGHT
IP20





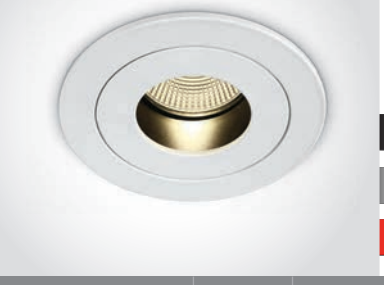

10112H | 12W | COB LED | Aluminium

LED BUILT IN
80 CRI
DIMMABLE
QUICK FIX
CE
2 YEAR
DARK LIGHT
IP20
offer





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	S				Notes
10108D1/W/W	White	Warm white	3000K	8W	560lm	36°	230V		-	73mm	105mm	50	Complete with 300mA driver
10112H/W/W	White	Warm white	3000K	12W	850lm	40°	700mA		40cm	87mm	100mm	50	Requires 700mA driver
10112H/W/EW	White	Extra warm white	2700K	12W	850lm	40°	700mA		40cm	87mm	100mm	50	Requires 700mA driver

Floating Ring Range



10112R/B/W + 050162/DC

10112R/B/W + 050162/GL

10112R/B/W + 050162/B



10112R | 12W | COB LED | Aluminium

Ring must be ordered separately.

LED BUILT IN

80 CRI

DIMMABLE

QUICK FIX

DARK LIGHT

IP20

3 YEAR



10112R/B/W + 050162/W





050162/W White



050162/B Black



050162/DC Dark chrome



050162/GL Gold

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10112R/B/W	Black	Warm white	3000K	12W	1100lm	50°	700mA		40cm	68mm	90mm	50	Requires 700mA driver





10107DC/W/W

10107DC | 7W | COB LED | Die cast

LED BUILT IN

80 CRI

CE

2 YEAR

DARK LIGHT

IP20







10107DC/B/W

10107DC | 7W | COB LED | Die cast

LED BUILT IN

80 CRI

CE

2 YEAR

DARK LIGHT

IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10107DC/W/W	White	Warm white	3000K	7W	560lm	50°	230V	⧈	15cm	55mm	110mm	50	Complete with 300mA driver
10107DC/B/W	Black	Warm white	3000K	7W	560lm	50°	230V	⧈	15cm	55mm	110mm	50	Complete with 300mA driver



10107DC/W/W

10112TD/W/C

The 12W Dark Light Range
Die cast



10112TD/W/W

10112TD | 12W | COB LED | Die cast

LED BUILT IN

80 CRI

CE

3 YEAR

DARK LIGHT

IP20







10112TD/B/W

10112TD | 12W | COB LED | Die cast

LED BUILT IN

80 CRI

CE

3 YEAR

DARK LIGHT

IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10112TD/W/C	White	Cool white	4000K	12W	960lm	20°	230V	☐	82mm	100mm	50	Complete with 300mA driver
10112TD/W/W	White	Warm white	3000K	12W	960lm	20°	230V	☐	82mm	100mm	50	Complete with 300mA driver
10112TD/B/C	Black	Cool white	4000K	12W	960lm	20°	230V	☐	82mm	100mm	50	Complete with 300mA driver
10112TD/B/W	Black	Warm white	3000K	12W	960lm	20°	230V	☐	82mm	100mm	50	Complete with 300mA driver

The Dark Light Pro Range
Aluminium



10105FD/B/W



10110FD/B/W



10115FD/B/W



The Dark Light Pro Range
Aluminium


10105FD/B/W

10105FD | 5W | COB LED | Aluminium

LED BUILT IN · 80 CRI · CE · 2 YEAR · DARK LIGHT · IP20


10105FD/W/W






10110FD/B/W

10110FD | 10W | COB LED | Aluminium

LED BUILT IN · 80 CRI · CE · 2 YEAR · DARK LIGHT · IP20


10110FD/W/W






10115FD/B/W

10115FD | 15W | COB LED | Aluminium

LED BUILT IN · 80 CRI · CE · 2 YEAR · DARK LIGHT · IP20


10115FD/W/W





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10105FD/W/W	White	Warm white	3000K	5W	300lm	24°	230V	☐	50mm	120mm	50	Complete with 300mA driver
10105FD/B/W	Black	Warm white	3000K	5W	300lm	24°	230V	☐	50mm	120mm	50	Complete with 300mA driver
10110FD/W/W	White	Warm white	3000K	10W	800lm	24°	230V	☐	68mm	130mm	50	Complete with 300mA driver
10110FD/B/W	Black	Warm white	3000K	10W	800lm	24°	230V	☐	68mm	130mm	50	Complete with 300mA driver
10115FD/W/W	White	Warm white	3000K	15W	1275lm	24°	230V	☐	82mm	150mm	20	Complete with 350mA driver
10115FD/B/W	Black	Warm white	3000K	15W	1275lm	24°	230V	☐	82mm	150mm	20	Complete with 350mA driver

The Retro Dark Light Range



10107Z/B/W



10112Z/W/W



10120Z/B/W

The Retro Dark Light Range





10107Z/W/W

10107Z | 7W | COB LED | Die cast + plastic

LED BUILT IN · 80 CRI · CE · 3 YEAR · DARK LIGHT · IP20



10107Z/B/W



Complete with Black & Brass reflectors.





10112Z/W/W

10112Z | 12W | COB LED | Die cast + plastic

LED BUILT IN · 80 CRI · CE · 3 YEAR · DARK LIGHT · IP20



10112Z/B/W



Complete with Black & Brass reflectors.





10120Z/W/W

10120Z | 20W | COB LED | Die cast + plastic

LED BUILT IN · 80 CRI · CE · 3 YEAR · DARK LIGHT · IP20



10120Z/B/W



Complete with Black & Brass reflectors.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10107Z/W/W	White	Warm white	3000K	7W	560lm	45°	230V	☐	65mm	80mm	40	Complete with 160mA driver
10107Z/B/W	Black	Warm white	3000K	7W	560lm	45°	230V	☐	65mm	80mm	40	Complete with 160mA driver
10112Z/W/W	White	Warm white	3000K	12W	960lm	45°	230V	☐	82mm	88mm	30	Complete with 300mA driver
10112Z/B/W	Black	Warm white	3000K	12W	960lm	45°	230V	☐	82mm	88mm	30	Complete with 300mA driver
10120Z/W/W	White	Warm white	3000K	20W	1600lm	45°	230V	☐	105mm	105mm	20	Complete with 500mA driver
10120Z/B/W	Black	Warm white	3000K	20W	1600lm	45°	230V	☐	105mm	105mm	20	Complete with 500mA driver

The COB LED Dark Light Range



10106DC/B/W



10112DC/B/W



10118DC/B/W



The COB LED Dark Light Range



10106DC/B/W

10106DC | 6W | COB LED | Die cast





10106DC/W/W



Suitable for 89008 driver.





10112DC/B/W

10112DC | 12W | COB LED | Die cast





10112DC/W/W



Suitable for 89015A driver.





10118DC/B/W

10118DC | 18W | COB LED | Die cast





10118DC/W/W



Suitable for 89030C driver.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10106DC/W/W	White	Warm white	3000K	6W	570lm	36°	350mA	III	40cm	55mm	75mm	50	Requires 350mA driver
10106DC/B/W	Black	Warm white	3000K	6W	570lm	36°	350mA	III	40cm	55mm	75mm	50	Requires 350mA driver
10112DC/W/W	White	Warm white	3000K	12W	1100lm	36°	700mA	III	40cm	75mm	90mm	50	Requires 700mA driver
10112DC/B/W	Black	Warm white	3000K	12W	1100lm	36°	700mA	III	40cm	75mm	90mm	50	Requires 700mA driver
10118DC/W/W	White	Warm white	3000K	18W	1750lm	36°	500mA	III	40cm	94mm	100mm	30	Requires 500mA driver
10118DC/B/W	Black	Warm white	3000K	18W	1750lm	36°	500mA	III	40cm	94mm	100mm	30	Requires 500mA driver

one

The COB Dark Light Range

Interchangeable Reflector





10107K/W/W + 050104/B

10107K | 7W | COB LED | Aluminium

Ring must be ordered separately.

LED BUILT IN · 80 CRI · DIMMABLE · QUICK FIX · DARK LIGHT · IP20 · CE · 3 YEAR



10107K/B/W + 050104/BS





050104/W White



050104/B Black



050104/C Chrome



050104/BS Brass



050104/CU Copper



10112L/B/W+10112LR/BS

10112L | 12W | COB LED | Aluminium

Reflector must be ordered separately.

LED BUILT IN · 80 CRI · DIMMABLE · QUICK FIX · DARK LIGHT · IP20 · CE · 3 YEAR



10112L/B/W+10112LR/CU





10112LR/B Black



10112LR/G Matt chrome



10112LR/C Chrome



10112LR/BS Brass



10112LR/CU Copper

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10107K/W/W	White	Warm white	3000K	7W	550lm	35°	700mA	III	40cm	76mm	100mm	30	Requires 700mA driver
10107K/B/W	Black	Warm white	3000K	7W	550lm	35°	700mA	III	40cm	76mm	100mm	30	Requires 700mA driver
10112L/B/W	Black	Warm white	3000K	12W	1100lm	40°	700mA	III	40cm	75mm	100mm	50	Requires 700mA driver

The Honeycomb Dark Light Range





10106DH | 6W | COB LED | Die cast

Complete with honeycomb.

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · CE · 5 YEAR · DARK LIGHT · IP20





Suitable for 89008 driver.





10112DH | 12W | COB LED | Die cast

Complete with honeycomb.

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · CE · 5 YEAR · DARK LIGHT · IP20





Suitable for 89015A driver.





10118DH | 18W | COB LED | Die cast

Complete with honeycomb.

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · CE · 5 YEAR · DARK LIGHT · IP20





Suitable for 89030C driver.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10106DH/W/W	White	Warm white	3000K	6W	500lm	36°	350mA	III	40cm	63mm	60mm	50	Requires 350mA driver
10112DH/W/W	White	Warm white	3000K	12W	1000lm	36°	700mA	III	40cm	72mm	60mm	50	Requires 700mA driver
10118DH/W/W	White	Warm white	3000K	18W	1500lm	36°	500mA	III	40cm	91mm	70mm	30	Requires 500mA driver



50106B/B/W

50306B/W/W

Mirror Square Boxes
Die cast

50106B | 6W | COB LED | Die cast



50106B/W/W

LED BUILT IN · 90 CRI · CE · 3 YEAR · IP20



50106B/B/W



50306B | 12W | COB LED | Die cast



50306B/W/W

LED BUILT IN · 90 CRI · CE · 3 YEAR · IP20



50306B/B/W



50406B | 16W | COB LED | Die cast

Adjustable version page 150.



50406B/W/W

LED BUILT IN · 90 CRI · CE · 3 YEAR · IP20



50406B/B/W



50906B | 36W | COB LED | Die cast



50906B/W/W

LED BUILT IN · 90 CRI · CE · 3 YEAR · IP20



50906B/B/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
50106B/W/W	White	Warm white	3000K	6W	480lm	38°	230V	□	50x45mm	70mm	50	Complete with 135mA driver
50106B/B/W	Black	Warm white	3000K	6W	480lm	38°	230V	□	50x45mm	70mm	50	Complete with 135mA driver
50306B/W/W	White	Warm white	3000K	12W	960lm	38°	230V	□	124x45mm	70mm	48	Complete with 300mA driver
50306B/B/W	Black	Warm white	3000K	12W	960lm	38°	230V	□	124x45mm	70mm	48	Complete with 300mA driver
50406B/W/W	White	Warm white	3000K	16W	1280lm	38°	230V	□	85x85mm	70mm	36	Complete with 400mA driver
50406B/B/W	Black	Warm white	3000K	16W	1280lm	38°	230V	□	85x85mm	70mm	36	Complete with 400mA driver
50906B/W/W	White	Warm white	3000K	36W	2880lm	38°	230V	□	125x125mm	70mm	18	Complete with 850mA driver
50906B/B/W	Black	Warm white	3000K	36W	2880lm	38°	230V	□	125x125mm	70mm	18	Complete with 850mA driver



Mirror Square Boxes
Die cast

50506B | 20W | COB LED | Die cast

Adjustable version page 150.



50506B/W/W

LED BUILT IN

90 CRI

CE

3 YEAR

IP20



50506B/B/W



50006B | 40W | COB LED | Die cast



50006B/W/W

LED BUILT IN

90 CRI

CE

3 YEAR

IP20



50006B/B/W

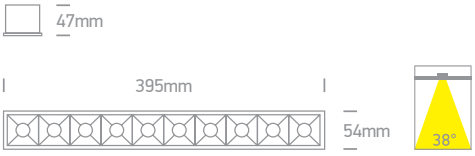

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
50506B/W/W	White	Warm white	3000K	20W	1600lm	38°	230V	☐	200x45mm	70mm	20	Complete with 500mA driver
50506B/B/W	Black	Warm white	3000K	20W	1600lm	38°	230V	☐	200x45mm	70mm	20	Complete with 500mA driver
50006B/W/W	White	Warm white	3000K	40W	3200lm	38°	230V	☐	386x45mm	70mm	15	Complete with 1000mA driver
50006B/B/W	Black	Warm white	3000K	40W	3200lm	38°	230V	☐	386x45mm	70mm	15	Complete with 1000mA driver



Mini Shop Square Boxes
Die cast



50102B/W/W

50102B | 2W | LED | Die cast

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · IP20 · CE · 3 YEAR







50102B/B/W

50102B | 2W | LED | Die cast

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · IP20 · CE · 3 YEAR







50202B/W/W

50202B | 2x2W | LED | Die cast

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · IP20 · CE · 3 YEAR







50202B/B/W

50202B | 2x2W | LED | Die cast

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · IP20 · CE · 3 YEAR





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
50102B/W/W	White	Warm white	3000K	2W	160lm	30°	700mA	III	30cm	36x36mm	60mm	100	Use 89004A driver
50102B/B/W	Black	Warm white	3000K	2W	160lm	30°	700mA	III	30cm	36x36mm	60mm	100	Use 89004A driver
50202B/W/W	White	Warm white	3000K	2x2W	2x160lm	30°	700mA	III	30cm	66x36mm	60mm	60	Use 89006PA driver
50202B/B/W	Black	Warm white	3000K	2x2W	2x160lm	30°	700mA	III	30cm	66x36mm	60mm	60	Use 89006PA driver

Mini Shop Square Boxes

Die cast



50302B | 3x2W | LED | Die cast



50302B/W/W

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · IP20 · CE · 3 YEAR



50302B/B/W



50502B | 5x2W | LED | Die cast



50502B/W/W

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · IP20 · CE · 3 YEAR



50502B/B/W



50902B | 10x2W | LED | Die cast



50902B/W/W

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · IP20 · CE · 3 YEAR



50902B/B/W

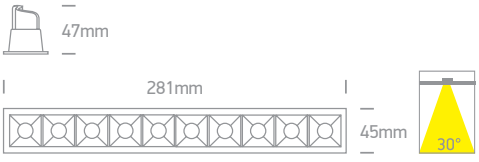

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
50302B/W/W	White	Warm white	3000K	3x2W	3x160lm	30°	700mA	III	30cm	97x36mm	60mm	50	Use 89008A driver
50302B/B/W	Black	Warm white	3000K	3x2W	3x160lm	30°	700mA	III	30cm	97x36mm	60mm	50	Use 89008A driver
50502B/W/W	White	Warm white	3000K	5x2W	5x160lm	30°	700mA	III	30cm	137x36mm	60mm	30	Use 89015A driver
50502B/B/W	Black	Warm white	3000K	5x2W	5x160lm	30°	700mA	III	30cm	137x36mm	60mm	30	Use 89015A driver
50902B/W/W	White	Warm white	3000K	10x2W	10x160lm	30°	700mA	III	30cm	272x36mm	60mm	20	Use 89030A driver
50902B/B/W	Black	Warm white	3000K	10x2W	10x160lm	30°	700mA	III	30cm	272x36mm	60mm	20	Use 89030A driver



Medium Shop Square Boxes



50107B | 6,5W | COB LED | Aluminium + steel

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · IP20 · CE · 3 YEAR







50207B | 2x6,5W | COB LED | Aluminium + steel

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · IP20 · CE · 3 YEAR







50307B | 3x6,5W | COB LED | Aluminium + steel

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · IP20 · CE · 3 YEAR







50507B | 5x6,5W | COB LED | Aluminium + steel

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · IP20 · CE · 3 YEAR





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
50107B/W/W	White	Warm white	3000K	6,5W	550lm	36°	350mA		40cm	57x57mm	90mm	60	Use 89008 driver
50207B/W/W	White	Warm white	3000K	2x6,5W	2x550lm	36°	350mA		40cm	108x57mm	90mm	36	Use 89015 driver
50307B/W/W	White	Warm white	3000K	3x6,5W	3x550lm	36°	350mA		40cm	150x57mm	90mm	24	Use 89020 driver
50507B/W/W	White	Warm white	3000K	5x6,5W	5x550lm	36°	350mA		40cm	240x57mm	90mm	16	Use 1x89015 & 1x89020 drivers





50406C/W/W

50406C | 10W | SMD 3535 | Die cast

LED BUILT IN

85 CRI

CE

3 YEAR

DARK LIGHT

IP20



50406C/B/W







50906C/W/W

50906C | 22W | SMD 3535 | Die cast

LED BUILT IN

85 CRI

CE

3 YEAR

DARK LIGHT

IP20



50906C/B/W





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
50406C/W/W	White	Warm white	3000K	10W	800lm	25°	230V		68x68mm	70mm	30	Complete with 700mA driver
50406C/B/W	Black	Warm white	3000K	10W	800lm	25°	230V		68x68mm	70mm	30	Complete with 700mA driver
50906C/W/W	White	Warm white	3000K	22W	1760lm	25°	230V		96x96mm	70mm	18	Complete with 700mA driver
50906C/B/W	Black	Warm white	3000K	22W	1760lm	25°	230V		96x96mm	70mm	18	Complete with 700mA driver

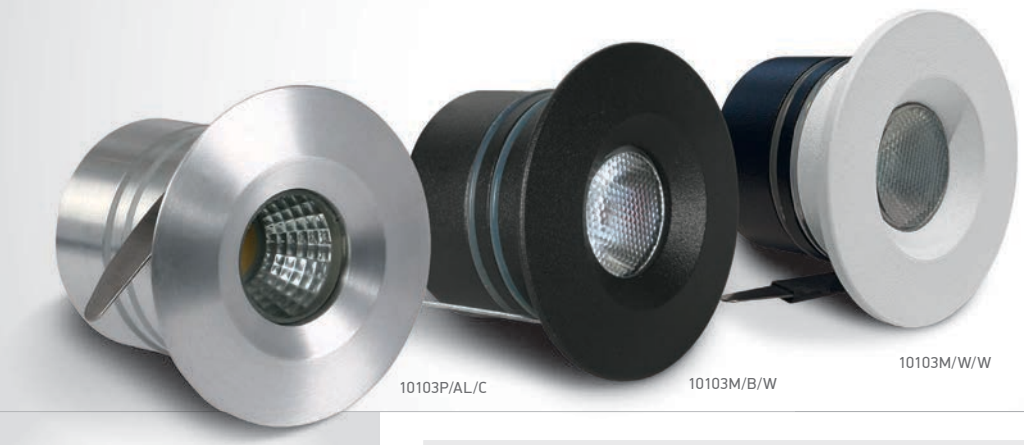

The IP65 Mini Range



10103M/W/C

10103M | 3W | SMD 3535 | Aluminium

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · IP65 · CE · 5 YEAR



10103M/W/W



Suitable for 89004A driver.





10103M/B/W

10103M | 3W | SMD 3535 | Aluminium

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · IP65 · CE · 5 YEAR



10103M/B/W



Suitable for 89004A driver.





10103M/AL/W

10103M | 3W | SMD 3535 | Aluminium

new · LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · IP65 · CE · 5 YEAR





Suitable for 89004A driver.





10103P/AL/D

10103P | 1W/3W | COB LED | Aluminium

1W@350mA / 3W@700mA

LED BUILT IN · 80 CRI · DIMMABLE · QUICK FIX · IP65 · CE · 3 YEAR



10103P/AL/C



Suitable for 89004 driver.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10103M/W/C	White	Cool white	4000K	3W	270lm	30°	700mA		60cm	38mm	55mm	50	Requires 700mA driver
10103M/W/W	White	Warm white	3000K	3W	270lm	30°	700mA		60cm	38mm	55mm	50	Requires 700mA driver
10103M/B/W	Black	Warm white	3000K	3W	270lm	30°	700mA		60cm	38mm	55mm	50	Requires 700mA driver
10103M/AL/W	Aluminium	Warm white	3000K	3W	270lm	30°	700mA		60cm	38mm	55mm	50	Requires 700mA driver
10103P/AL/D	Aluminium	Daylight	6000K	1W/3W	210lm@3W	30°	350mA/700mA		60cm	37mm	60mm	100	Requires 350mA/700mA driver
10103P/AL/C	Aluminium	Cool white	4000K	1W/3W	200lm@3W	30°	350mA/700mA		60cm	37mm	60mm	100	Requires 350mA/700mA driver



The IP65 Project Range
Aluminium



10102H/W/W

10102H | 2W | LED | Aluminium

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · DARK LIGHT · IP65 · CE · 5 YEAR



10102H/B/W





10107DL | 7W | COB LED | Aluminium

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · DARK LIGHT · IP65 · CE · 5 YEAR



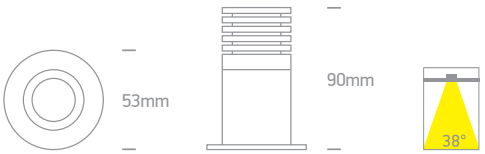

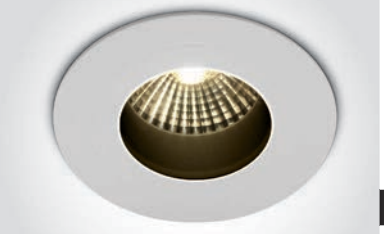

10107H/W/W

10107H | 7W | COB LED | Aluminium

LED BUILT IN · 90 CRI · DIMMABLE · CE · DARK LIGHT · IP65 · 5 YEAR



10107H/W/C



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10102H/W/C	White	Cool white	4000K	2W	160lm	30°	700mA	III	100cm	30mm	50mm	100	Requires 700mA driver
10102H/W/W	White	Warm white	3000K	2W	160lm	30°	700mA	III	100cm	30mm	50mm	100	Requires 700mA driver
10102H/B/W	Black	Warm white	3000K	2W	160lm	30°	700mA	III	100cm	30mm	50mm	100	Requires 700mA driver
10107DL/W/W	White	Warm white	3000K	7W	550lm	38°	700mA	III	40cm	42mm	100mm	50	Requires 700mA driver
10107H/W/C	White	Cool white	4000K	7W	600lm	36°	700mA	III	40cm	60mm	90mm	60	Requires 700mA driver
10107H/W/W	White	Warm white	3000K	7W	600lm	36°	700mA	III	40cm	60mm	90mm	60	Requires 700mA driver





10107WD | 7W | COB LED | Die cast

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · DARK LIGHT · IP54 · CE · 5 YEAR







10107M | 7W | COB LED | Die cast

new · LED BUILT IN · 80 CRI · CE · 3 YEAR · DARK LIGHT · IP54







10113P | 15W | COB LED | Natural aluminium

LED BUILT IN · 80 CRI · CE · 3 YEAR · IP54 · offer





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10107WD/W/C	White	Cool white	4000K	7W	600lm	36°	700mA	III	40cm	75mm	110mm	50	Requires 700mA driver
10107WD/W/W	White	Warm white	3000K	7W	600lm	36°	700mA	III	40cm	75mm	110mm	50	Requires 700mA driver
10107M/W/W	White	Warm white	3000K	7W	490lm	40°	300mA	II	-	68mm	80mm	50	Complete with 300mA driver
10113P/AL/W	Aluminium	Warm white	3000K	15W	1000lm	50°	100-240V	II	-	75mm	120mm	30	Complete with 700mA driver

The COB IP54 Dark Light Range

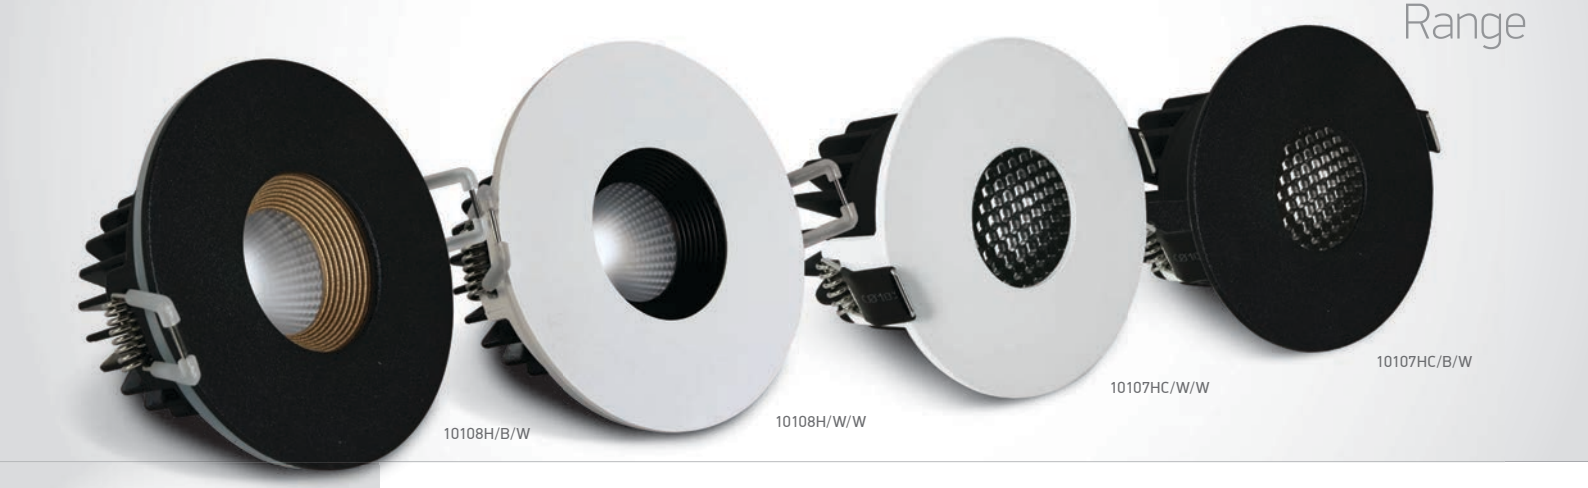



10107HC/W/W

10107HC | 7W | COB LED | Die cast

Complete with honeycomb.

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · CE · 3 YEAR · DARK LIGHT · IP54







10107HC/B/W

10107HC | 7W | COB LED | Die cast

Complete with honeycomb.

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · CE · 3 YEAR · DARK LIGHT · IP54







10108H/W/W

10108H | 8W | COB LED | Die cast

LED BUILT IN · 90 CRI · CE · 5 YEAR · DARK LIGHT · IP54







10108H/B/W

10108H | 8W | COB LED | Die cast

LED BUILT IN · 90 CRI · CE · 5 YEAR · DARK LIGHT · IP54





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10107HC/W/W	White	Warm white	3000K	7W	460lm	36°	700mA	III	40cm	68mm	75mm	60	Requires 700mA driver
10107HC/B/W	Black	Warm white	3000K	7W	460lm	36°	700mA	III	40cm	68mm	75mm	60	Requires 700mA driver
10108H/W/W	White	Warm white	3000K	8W	625lm	36°	230V	II	-	75mm	70mm	50	Complete with 200mA driver
10108H/B/W	Black	Warm white	3000K	8W	625lm	36°	230V	II	-	75mm	70mm	50	Complete with 200mA driver



The 7W COB IP65 Range



10107P | 7W | COB LED | Die cast

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · DARK LIGHT · IP65 · CE · 5 YEAR







10107DB | 7W | COB LED | Aluminium

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · DARK LIGHT · IP65 · CE · 5 YEAR







10107WP/W/W

10107WP | 7W | COB LED | Die cast

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · DARK LIGHT · IP65 · CE · 5 YEAR



10107WP/B/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10107P/W/W	White	Warm white	3000K	7W	630lm	40°	700mA	III	40cm	68mm	105mm	50	Requires 700mA driver
10107DB/W/W	White	Warm white	3000K	7W	500lm	36°	700mA	III	40cm	60mm	80mm	50	Requires 700mA driver
10107WP/W/W	White	Warm white	3000K	7W	550lm	38°	700mA	III	40cm	56mm	90mm	50	Requires 700mA driver
10107WP/B/W	Black	Warm white	3000K	7W	550lm	38°	700mA	III	40cm	56mm	90mm	50	Requires 700mA driver

The 12W COB IP65 Range





10112P/W/W

10112P | 12W | COB LED | Die cast

LED BUILT IN
90 CRI
DIMMABLE
QUICK FIX
DARK LIGHT
IP65
5 YEAR







10112P/B/W

10112P | 12W | COB LED | Die cast

LED BUILT IN
90 CRI
DIMMABLE
QUICK FIX
DARK LIGHT
IP65
5 YEAR







10112P/AL/W

10112P | 12W | COB LED | Natural aluminium

LED BUILT IN
80 CRI
DIMMABLE
QUICK FIX
DARK LIGHT
IP64
3 YEAR







10112P/MC/W

10112P | 12W | COB LED | Natural aluminium

LED BUILT IN
80 CRI
DIMMABLE
QUICK FIX
DARK LIGHT
IP64
3 YEAR





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10112P/W/C	White	Cool white	4000K	12W	1100lm	40°	700mA		40cm	68mm	105mm	50	Requires 700mA driver
10112P/W/W	White	Warm white	3000K	12W	1100lm	40°	700mA		40cm	68mm	105mm	50	Requires 700mA driver
10112P/B/W	Black	Warm white	3000K	12W	1100lm	40°	700mA		40cm	68mm	105mm	50	Requires 700mA driver
10112P/AL/W	Aluminium	Warm white	3000K	12W	1100lm	40°	700mA		40cm	68mm	105mm	50	Requires 700mA driver
10112P/MC/W	Brushed chrome	Warm white	3000K	12W	1100lm	40°	700mA		40cm	68mm	105mm	50	Requires 700mA driver



The 12W COB IP65



10112C | 12W | COB LED | Die cast

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · DARK LIGHT · IP65 · CE · 5 YEAR







10112TP/W/W

10112TP | 12W | COB LED | Die cast

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · DARK LIGHT · IP65 · CE · 5 YEAR





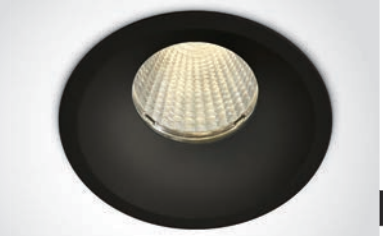

10112TP/B/W

10112TP | 12W | COB LED | Die cast

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · DARK LIGHT · IP65 · CE · 5 YEAR







10110P | 12W | COB LED | Die cast

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · DARK LIGHT · IP65 · CE · 5 YEAR





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10112C/W/W	White	Warm white	3000K	12W	1100lm	40°	700mA		40cm	75mm	120mm	50	Requires 700mA driver
10112TP/W/C	White	Cool white	4000K	12W	1100lm	38°	700mA		40cm	75mm	110mm	50	Requires 700mA driver
10112TP/W/W	White	Warm white	3000K	12W	1100lm	38°	700mA		40cm	75mm	110mm	50	Requires 700mA driver
10112TP/W/EW	White	Extra warm white	2700K	12W	1100lm	38°	700mA		40cm	75mm	110mm	50	Requires 700mA driver
10112TP/B/W	Black	Warm white	3000K	12W	1100lm	38°	700mA		40cm	75mm	110mm	50	Requires 700mA driver
10110P/W/C	White	Cool white	4000K	12W	1100lm	38°	700mA		40cm	75mm	110mm	48	Requires 700mA driver
10110P/W/W	White	Warm white	3000K	12W	1100lm	38°	700mA		40cm	75mm	110mm	48	Requires 700mA driver



The IP65 Range

10106V | 6W | COB LED | Die cast + glass



10106V/W/W

LED BUILT IN · 80 CRI · IK08 · CE · 3 YEAR · IP65



10106V/B/W





10103NP | 3x1W | LED | Natural aluminium



10103NP/AL/W/35

LED BUILT IN · DIMMABLE · QUICK FIX · CE · 2 YEAR · IP65 · offer

offer



10103NP/AL/D/35



Suitable for 89004 driver.



10106P | 6W | SMD 2835 | Plastic



10106P/W/W

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP65



10106P/W/C





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10106V/W/W	White	Warm white	3000K	6W	460lm	25°	100-240V		-	94mm	100mm	12	Complete with 500mA driver
10106V/B/W	Black	Warm white	3000K	6W	460lm	25°	100-240V		-	94mm	100mm	12	Complete with 500mA driver
10103NP/AL/D/35	Aluminium	Daylight	6000K	3x1W	180lm	35°	350mA		200cm	70mm	70mm	50	Requires 350mA driver
10103NP/AL/W/35	Aluminium	Warm white	3000K	3x1W	135lm	35°	350mA		200cm	70mm	70mm	50	Requires 350mA driver
10106P/W/C	White	Cool white	4000K	6W	440lm	100°	230V		-	68mm	80mm	48	Complete with driver
10106P/W/W	White	Warm white	3000K	6W	415lm	100°	230V		-	68mm	80mm	48	Complete with driver



The Fire Rated IP65 Range



10106PF | 6W | COB LED | Fire Rated | Die cast

Ring must be ordered separately.

LED BUILT IN

80 CRI

DIMMABLE

QUICK FIX

IP65

FIRE RATED

3 YEAR



Dimensions are complete with the ring.





050042/W White



050042/B Black



050042/C Chrome



050042A/C Chrome

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10106PF/W	Warm white	3000K	6W	500lm	40°	350mA		40cm	68mm	90mm	20	Requires 350mA driver

The Fire Rated IP65 Range



10106PF/W + 050042/C

10107DF/W + 050178/B



10107DF | 7W | SMD LED | Fire Rated | Metal + plastic

Complete with white ring.

LED BUILT IN · 80 CRI · TRIAC DIMMABLE · FIRE RATED · IP65 · CE · 3 YEAR





Optional rings.
Order code 050178/B Black
050178/C Chrome





10107DFV | 7W | SMD LED | Fire Rated | 3 Step Adjustable CCT | Metal + plastic

Complete with white ring.

LED BUILT IN · 80 CRI · TRIAC DIMMABLE · FIRE RATED · IP65 · CE · 3 YEAR





Optional rings.
Order code 050178/B Black
050178/C Chrome.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10107DF/W	White	Warm white	3000K	7W	500lm	60°	230V		65mm	80mm	36	Complete with dimmable driver
10107DFV/W	White	Extra warm white-Warm white-Cool white	2700K-3000K-4000K	7W	500lm	60°	230V		65mm	80mm	36	Complete with dimmable driver



10101C/C/D



50101/AL/D

LED Spots



10101C | 1W | LED | Cabinet light | Steel

LED BUILT IN

CE 2 YEAR

IP20 offer







50101/AL/D

50101 | 9x0,2W | LED | Natural aluminium

LED BUILT IN

CE 2 YEAR

IP20 offer







50101/AL/BL

50101 | 9x0,2W | LED | Natural aluminium

LED BUILT IN

CE 2 YEAR

IP20 offer





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10101C/C/D	Chrome	Daylight	6000K	1W	50lm	90°	12V AC		30cm	50mm	25mm	100	Requires 12V AC transformer
50101/AL/D	Aluminium	Daylight	6000K	9x0,2W	60lm	90°	230V		-	60mm	40mm	50	Complete with driver
50101/AL/BL	Aluminium	Blue	-	9x0,2W	-	90°	230V		-	60mm	40mm	50	Complete with driver



The LED Glass Range



10101G | 1W | LED | Acrylic

IP20

offer

LED BUILT IN

DIMMABLE

QUICK FIX

CE

3 YEAR





Suitable for 89004 driver.



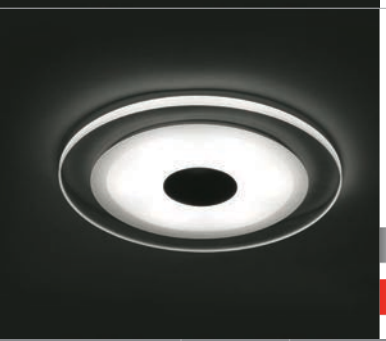

10106G | 6W | LED | Acrylic

IP20

offer

LED BUILT IN

DIMMABLE

QUICK FIX

CE

3 YEAR





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class					Notes
10101G/D	Clear	Daylight	6000K	1W	60lm	350mA		40cm	40mm	45mm	80	Requires 350mA driver
10106G/D	Clear	Daylight	6000K	6W	295lm	350mA		40cm	100mm	60mm	32	Requires 350mA driver
10106G/W	Clear	Warm white	3000K	6W	205lm	350mA		40cm	100mm	60mm	32	Requires 350mA driver

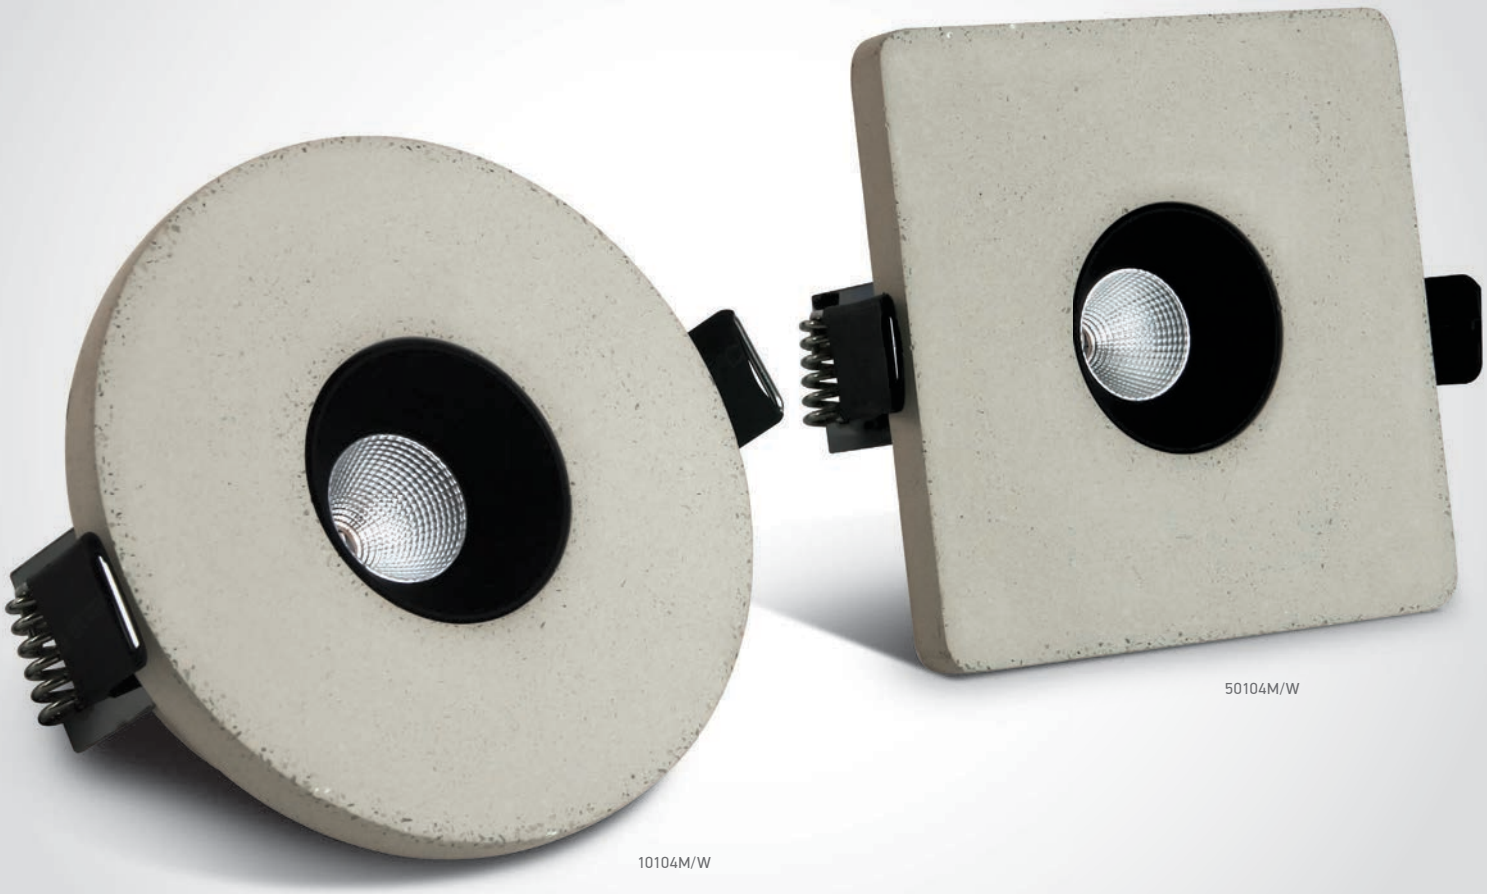

The Cement Look Recessed
Black Reflector



10104M | 4,5W | COB LED | Cement + black reflector

DARK LIGHT
IP20
offer

LED BUILT IN
90 CRI
CE
3 YEAR







50104M | 4,5W | COB LED | Cement + black reflector

DARK LIGHT
IP20
offer

LED BUILT IN
90 CRI
CE
3 YEAR





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10104M/W	Cement	Warm white	3000K	4,5W	350lm	40°	100-240V	☐	72mm	70mm	18	Complete with 350mA driver
50104M/W	Cement	Warm white	3000K	4,5W	350lm	40°	100-240V	☐	72mm	70mm	18	Complete with 350mA driver



The LED Decorative Range



10103GL | 3x1W | LED | Aluminium + acrylic

LED BUILT IN

DIMMABLE QUICK FIX CE

IP20

offer

2 YEAR



Suitable for 89004 driver.





Warm white + Daylight

10103A | 3x1W + 18 SMD LED Ring | LED | Natural aluminium + PC

Colours can be switched separately.

LED BUILT IN

DIMMABLE QUICK FIX CE

IP42

offer

2 YEAR

offer



Daylight + Blue



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class					Notes
10103GL/D	Frost	Daylight	6000K	3x1W	180lm	350mA		40cm	55mm	50mm	36	Requires 350mA driver
10103GL/W	Frost	Warm white	3000K	3x1W	135lm	350mA		40cm	55mm	50mm	36	Requires 350mA driver
10103A/D/BL	Aluminium	Daylight+Blue	6000K	3/1,8W	-	350mA		40cm	77mm	50mm	100	Requires 2x350mA drivers
10103A/W/D	Aluminium	Warm white+Daylight	3000K+6000K	3/1,8W	-	350mA		40cm	77mm	50mm	100	Requires 2x350mA drivers



The Trimless Mini Range
Aluminium



10103BTR/W/W

10103BTR | 3W | COB LED | Aluminium





2-Step reflector.



Suitable for 89004 driver.





10103BTR/B/W

10103BTR | 3W | COB LED | Aluminium





2-Step reflector.



Suitable for 89004 driver.



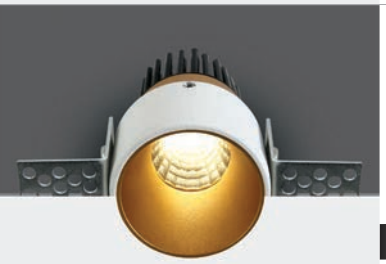

10103BTR/BS/W

10103BTR | 3W | COB LED | Aluminium





2-Step reflector.



Suitable for 89004 driver.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10103BTR/W/W	White	Warm white	3000K	3W	240lm	36°	350mA	III	40cm	42mm	80mm	100	Requires 350mA driver
10103BTR/B/W	Black	Warm white	3000K	3W	240lm	36°	350mA	III	40cm	42mm	80mm	100	Requires 350mA driver
10103BTR/BS/W	Brass	Warm white	3000K	3W	240lm	36°	350mA	III	40cm	42mm	80mm	100	Requires 350mA driver

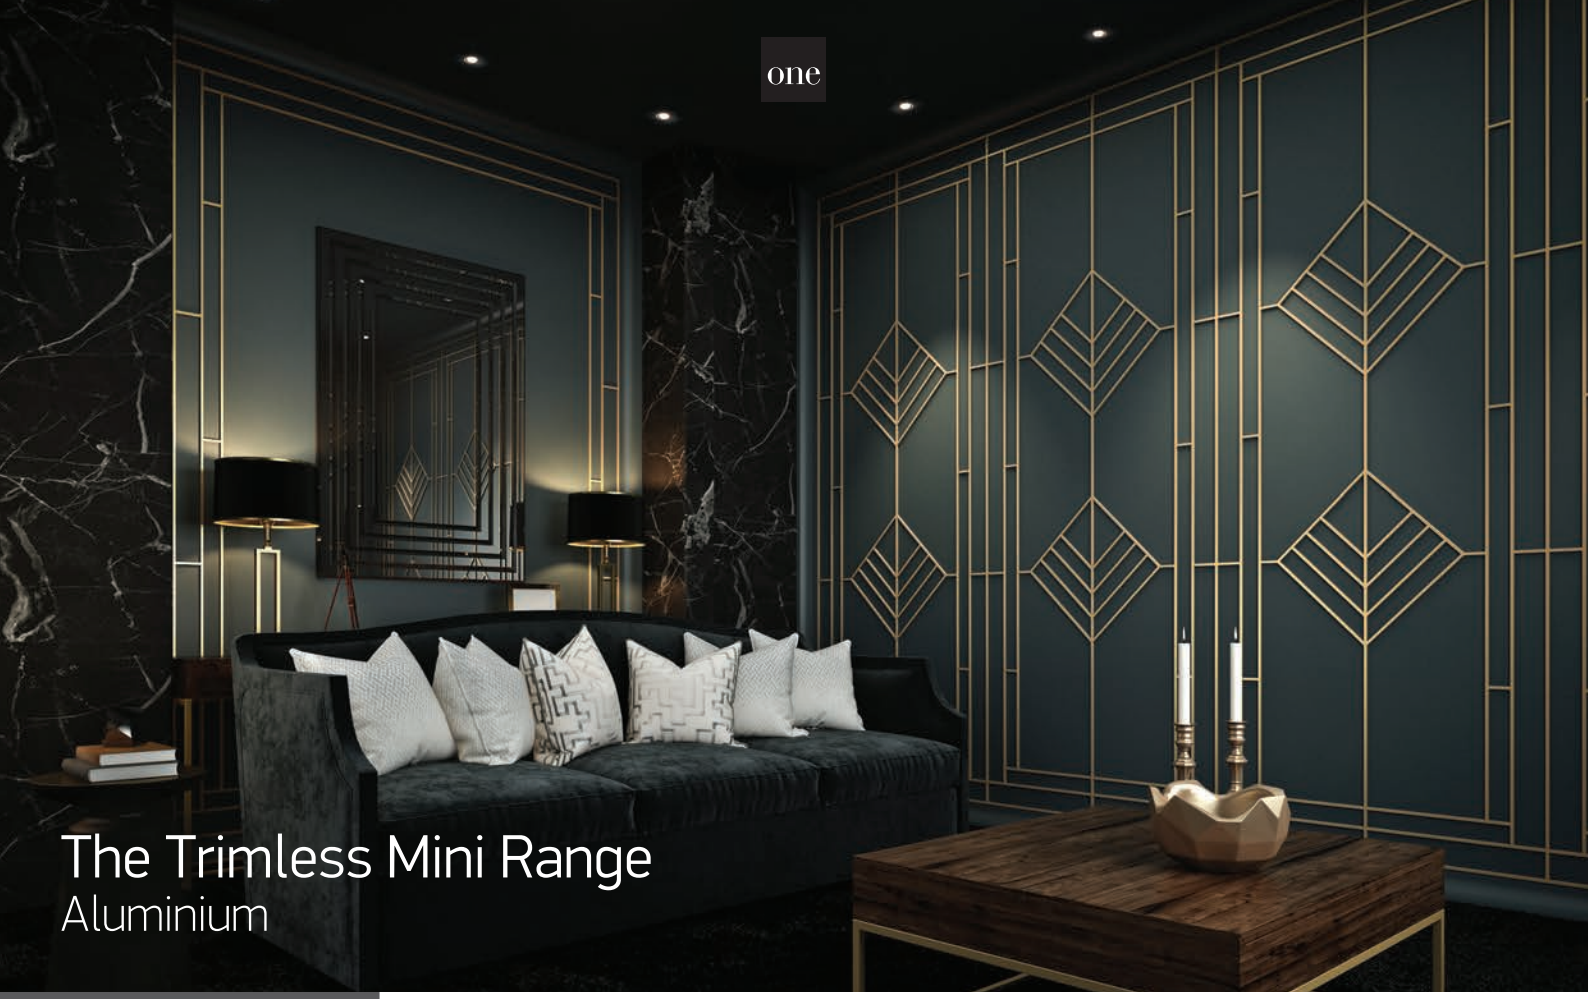

The Trimless Mini Range
Aluminium



10112BTR/W/W

10112BTR | 12W | COB LED | Aluminium

new





2-Step reflector.







10112BTR/B/W

10112BTR | 12W | COB LED | Aluminium

new





2-Step reflector.







10112BTR/BS/W

10112BTR | 12W | COB LED | Aluminium

new





2-Step reflector.





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10112BTR/W/W	White	Warm white	3000K	12W	1100lm	40°	700mA	III	40cm	70mm	110mm	48	Requires 700mA driver
10112BTR/B/W	Black	Warm white	3000K	12W	1100lm	40°	700mA	III	40cm	70mm	110mm	48	Requires 700mA driver
10112BTR/BS/W	Brass	Warm white	3000K	12W	1100lm	40°	700mA	III	40cm	70mm	110mm	48	Requires 700mA driver



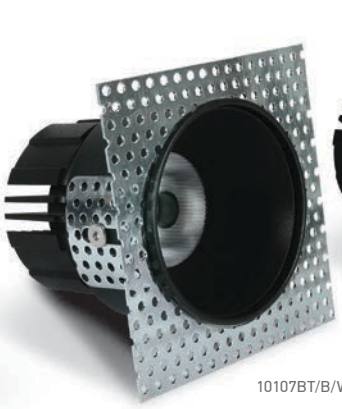



10107BT/W/W

10107BT/B/W

50103GT4/W

The Trimless Range



10101TR | 1W | COB LED | Trimless | Aluminium

Driver can not pass through the cutout hole.

LED BUILT IN · 85 CRI · DIMMABLE · QUICK FIX · CE · 3 YEAR · DARK LIGHT · IP44





Suitable for 89004 driver.





10107BT/W/W

10107BT | 7W | COB LED | Trimless | Die cast

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · CE · 5 YEAR · DARK LIGHT · IP54







10107BT/B/W

10107BT | 7W | COB LED | Trimless | Die cast

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · CE · 5 YEAR · DARK LIGHT · IP54







50103GT4 | 2,5W | SMD LED | Trimless | Gypsum

LED BUILT IN · 80 CRI · CE · 2 YEAR · DARK LIGHT · IP44 · offer





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10101TR/W/W	White	Warm white	3000K	1W	90lm	45°	350mA	III	200cm	40mm	50mm	40	Requires 350mA driver
10107BT/W/W	White	Warm white	3000K	7W	500lm	38°	700mA	III	40cm	83mm	100mm	30	Requires 700mA driver
10107BT/B/W	Black	Warm white	3000K	7W	500lm	38°	700mA	III	40cm	83mm	100mm	30	Requires 700mA driver
50103GT4/W	White	Warm white	3000K	2,5W	15lm	-	100-240V		-	121x121mm	70mm	24	Complete with 700mA driver

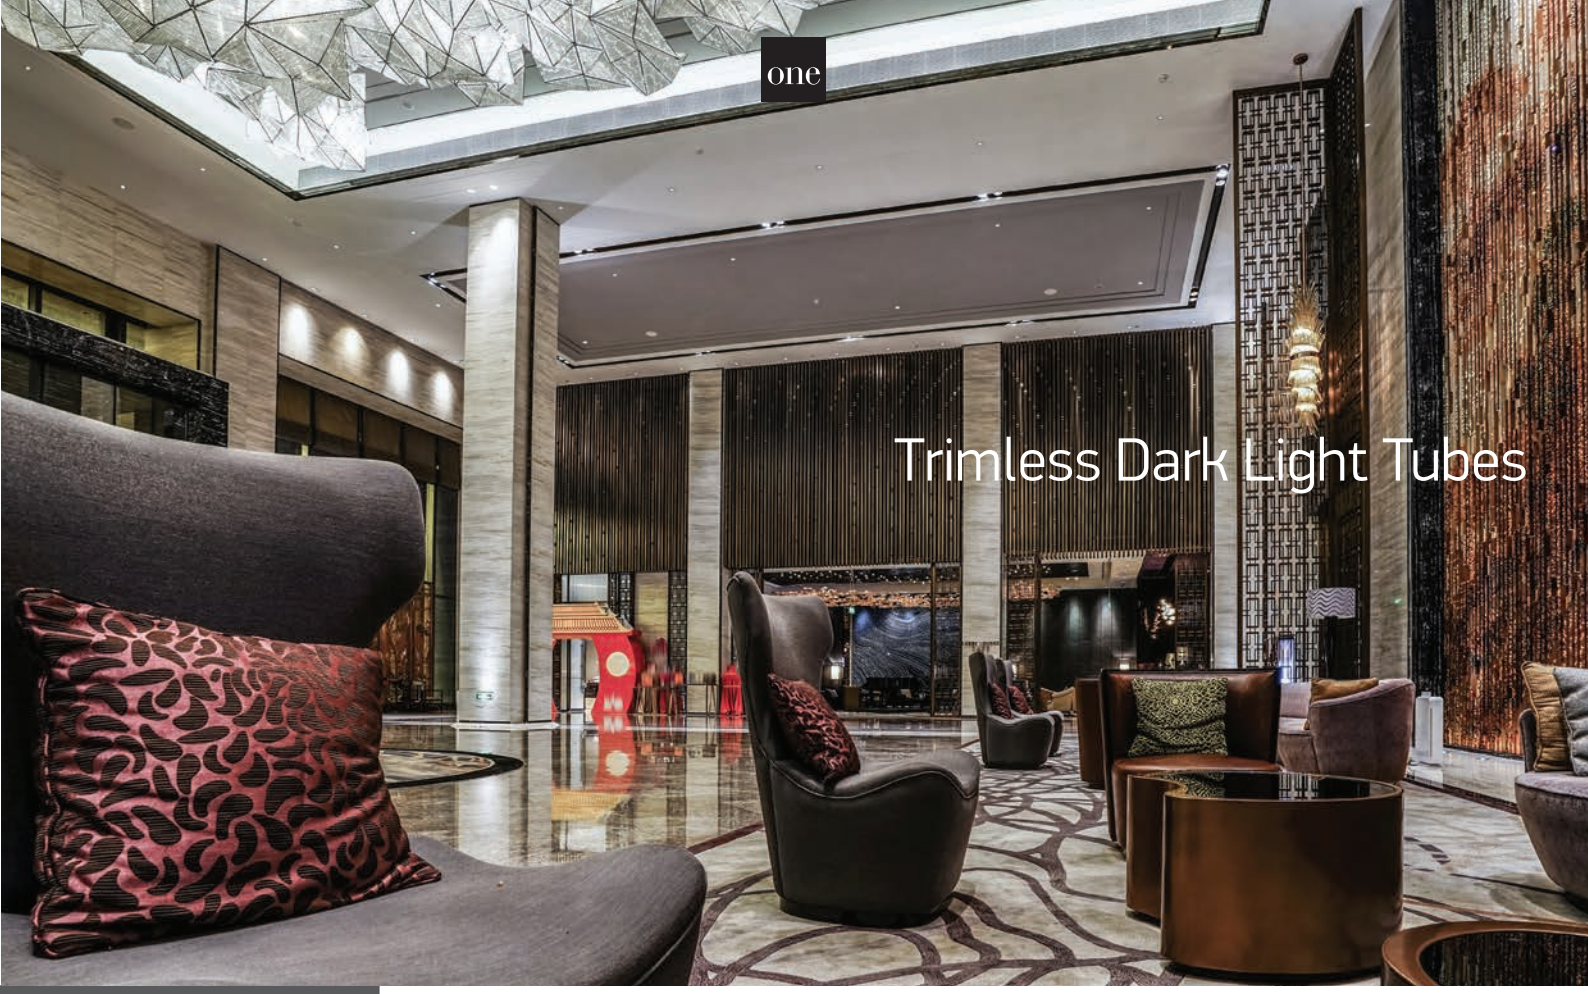

Trimless Dark Light Tubes



50103ATR | 3W | SMD 3535 | Trimless | Die cast

LED BUILT IN · 85 CRI · CE · 3 YEAR · DARK LIGHT · IP20



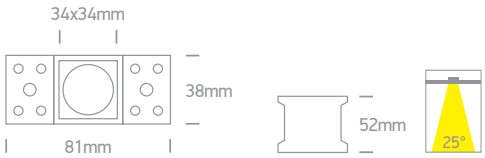



50203ATR | 6W | SMD 3535 | Trimless | Die cast

LED BUILT IN · 85 CRI · CE · 3 YEAR · DARK LIGHT · IP20



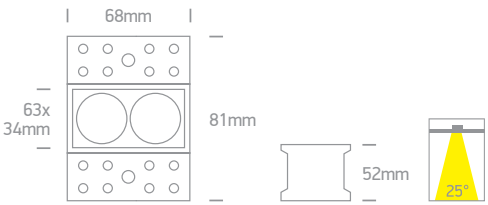



50403ATR | 10W | SMD 3535 | Trimless | Die cast

LED BUILT IN · 85 CRI · CE · 3 YEAR · DARK LIGHT · IP20



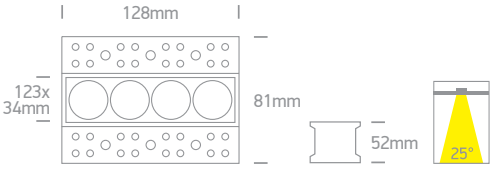

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
50103ATR/B/W	Black	Warm white	3000K	3W	200lm	25°	230V	⧈	50x38mm	70mm	50	Complete with 700mA driver
50203ATR/B/W	Black	Warm white	3000K	6W	480lm	25°	230V	⧈	68x50mm	70mm	50	Complete with 700mA driver
50403ATR/B/W	Black	Warm white	3000K	10W	800lm	25°	230V	⧈	128x50mm	70mm	20	Complete with 700mA driver





03

Recessed Spots Adjustable

Pages 93-120

MR11 | MR16 | GU4 | GU5,3 | GU10

Die cast | Natural aluminium | Metal | Gypsum | Trimless

IP20

ADJUSTABLE ADJUSTABLE DARK LIGHT CE 5 YEAR

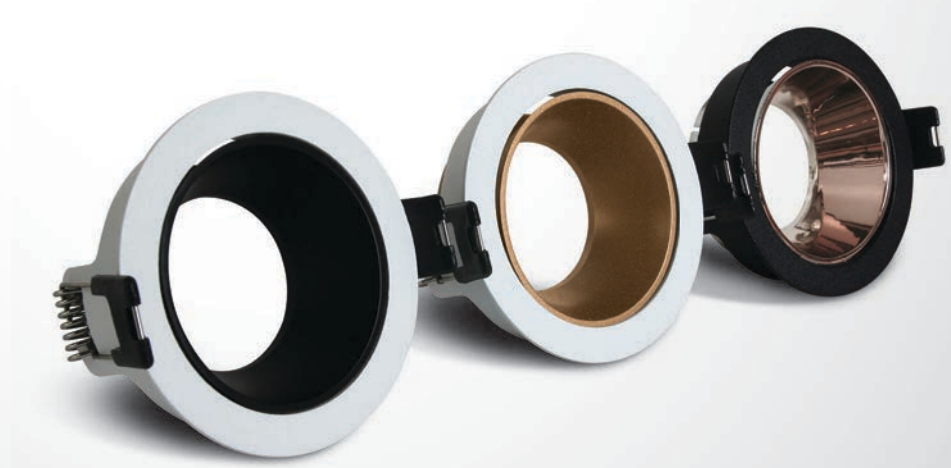



The Classic Adjustable MR11



11103A | 35W | MR11 | GU4 | Die cast

ADJUSTABLE

IP20

5 YEAR

offer



Suitable for MR11 LED lamp.





11103C | 35W | MR11 | GU4 | Die cast

ADJUSTABLE

IP20

5 YEAR

offer



Suitable for MR11 LED lamp.



Order Code	Colour	Watts	Input	Class					Notes
11103A/MC	Brushed chrome	35W	12V	III	40cm	57mm	35mm	100	-
11103C/C	Chrome	35W	12V	III	40cm	63mm	40mm	100	-

The Classic Adjustable MR16



11105 | 50W | MR16 | GU5,3 | Die cast

ADJUSTABLE

IP20

5 YEAR

offer





Order Code	Colour	Watts	Input	Class					Notes
11105/C	Chrome	50W	12V	III	40cm	75mm	55mm	100	-





11105GU/W

11105GU | 10W | MR16 | GU10 | Die cast





IP20



Complete with 0950G.





11105GU/B

offer



11105GU/C



11105GU/MC

Order Code	Colour	Watts	Input	Class					Notes
11105GU/W	White	10W	100-240V		15cm	75mm	95mm	100	-
11105GU/B	Black	10W	100-240V		15cm	75mm	95mm	100	-
11105GU/C	Chrome	10W	100-240V		15cm	75mm	95mm	100	-
11105GU/MC	Brushed chrome	10W	100-240V		15cm	75mm	95mm	100	-



The Lock Ring Range
Die cast



11105C/W

11105C | 50W | MR16 | GU5,3 | Die cast

ADJUSTABLE

5 YEAR

IP20







11105C/MC

11105C | 50W | MR16 | GU5,3 | Die cast

ADJUSTABLE

5 YEAR

IP20







11105C/ABS

11105C | 50W | MR16 | GU5,3 | Die cast

ADJUSTABLE

5 YEAR

IP20

offer







11105C/N

11105C | 50W | MR16 | GU5,3 | Die cast

ADJUSTABLE

5 YEAR

IP20

offer





Order Code	Colour	Watts	Input	Class					Notes
11105C/W	White	50W	12V	III	40cm	82mm	60mm	100	-
11105C/MC	Brushed chrome	50W	12V	III	40cm	82mm	60mm	100	-
11105C/ABS	Antique brass	50W	12V	III	40cm	82mm	60mm	100	-
11105C/N	Natural	50W	12V	III	40cm	82mm	60mm	100	-



The Lock Ring GU10 Range

Die cast



11105CGU/W

11105CGU | 10W | MR16 | GU10 | Die cast



IP20



Complete with 0950G.





11105CGU/C



11105CGU/MC

offer



11105CGU/G



51105CGU/W

51105CGU | 10W | MR16 | GU10 | Die cast



IP20



51105CGU/MC



Complete with 0950G.



Order Code	Colour	Watts	Input	Class					Notes
11105CGU/W	White	10W	100-240V		15cm	82mm	95mm	100	-
11105CGU/G	Grey	10W	100-240V		15cm	82mm	95mm	100	-
11105CGU/C	Chrome	10W	100-240V		15cm	82mm	95mm	100	-
11105CGU/MC	Brushed chrome	10W	100-240V		15cm	82mm	95mm	100	-
51105CGU/W	White	10W	100-240V		15cm	78mm	100mm	100	-
51105CGU/MC	Brushed chrome	10W	100-240V		15cm	78mm	100mm	100	-





11105CF/W

11105CF | 10W | MR16 | GU10 | Firehood | Die cast

ADJUSTABLE

IP20

5 YEAR

offer







11105CF/MC

11105CF | 10W | MR16 | GU10 | Firehood | Die cast

ADJUSTABLE

IP20

5 YEAR

offer





Order Code	Colour	Watts	Input	Class				Notes
11105CF/W	White	10W	100-240V		87mm	180mm	50	-
11105CF/MC	Brushed chrome	10W	100-240V		87mm	180mm	50	-

The Lock Ring Dark Light



51105CD | 50W | MR16 | GU5,3 | Die cast



DARK LIGHT

IP20

offer

ADJUSTABLE

5 YEAR





Order Code	Colour	Watts	Input	Class					Notes
51105CD/MC	Brushed chrome	50W	12V	III	40cm	85mm	100mm	50	-

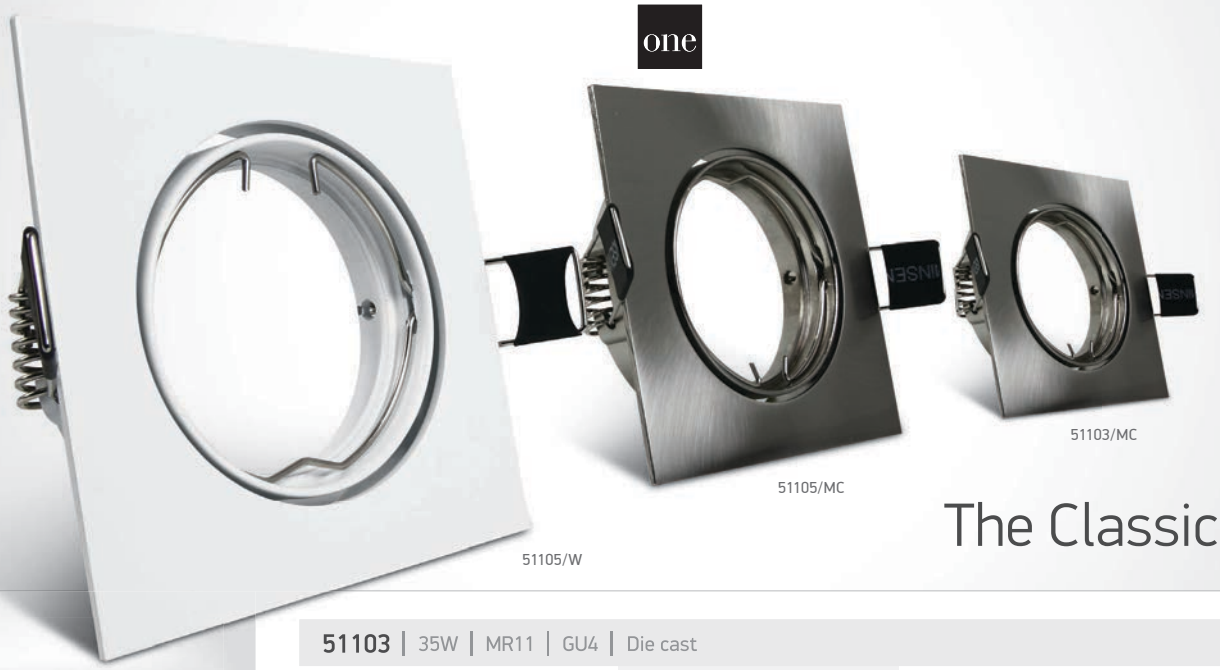

The Classic Square



51103 | 35W | MR11 | GU4 | Die cast

ADJUSTABLE

CE 5 YEAR

IP20 offer



Suitable for MR11 LED lamp.





51105/W

51105 | 50W | MR16 | GU5,3 | Die cast

ADJUSTABLE

CE 5 YEAR

IP20 offer







51105/C

51105 | 50W | MR16 | GU5,3 | Die cast

ADJUSTABLE

CE 5 YEAR

IP20 offer







51105/MC

51105 | 50W | MR16 | GU5,3 | Die cast

ADJUSTABLE

CE 5 YEAR

IP20 offer





Order Code	Colour	Watts	Input	Class					Notes
51103/MC	Brushed chrome	35W	12V		40cm	56mm	45mm	100	-
51105/W	White	50W	12V		40cm	75mm	65mm	100	-
51105/C	Chrome	50W	12V		40cm	75mm	65mm	100	-
51105/MC	Brushed chrome	50W	12V		40cm	75mm	65mm	100	-





51105GA/W

51105GA/MC





The Classic Square GU10
Halogen Lamp Included



51105GA/W

51105GA | 50W | MR16 | GU10 | Die cast

ADJUSTABLE

IP20

5 YEAR

offer



Supplied with GU10 50W halogen lamp.





51105GA/MC

51105GA | 50W | MR16 | GU10 | Die cast

ADJUSTABLE

IP20

5 YEAR

offer



Supplied with GU10 50W halogen lamp.



Order Code	Colour	Watts	Input	Class					Notes
51105GA/W	White	50W	230V		15cm	73mm	100mm	50	Supplied with GU10 lamp
51105GA/MC	Brushed chrome	50W	230V		15cm	73mm	100mm	50	Supplied with GU10 lamp



The Dual Ring Range
Square



51103AB | 35W | MR11 | GU4 | Natural aluminium

ADJUSTABLE

5 YEAR

IP20

offer



Suitable for MR11 LED lamp.





51105AB | 50W | MR16 | GU5,3 | Aluminium

ADJUSTABLE

5 YEAR

IP20

offer





Order Code	Colour	Watts	Input	Class					Notes
51103AB/AL	Aluminium	35W	12V	III	40cm	60mm	60mm	50	-
51105AB/AL	Aluminium	50W	12V	III	40cm	80mm	75mm	50	-

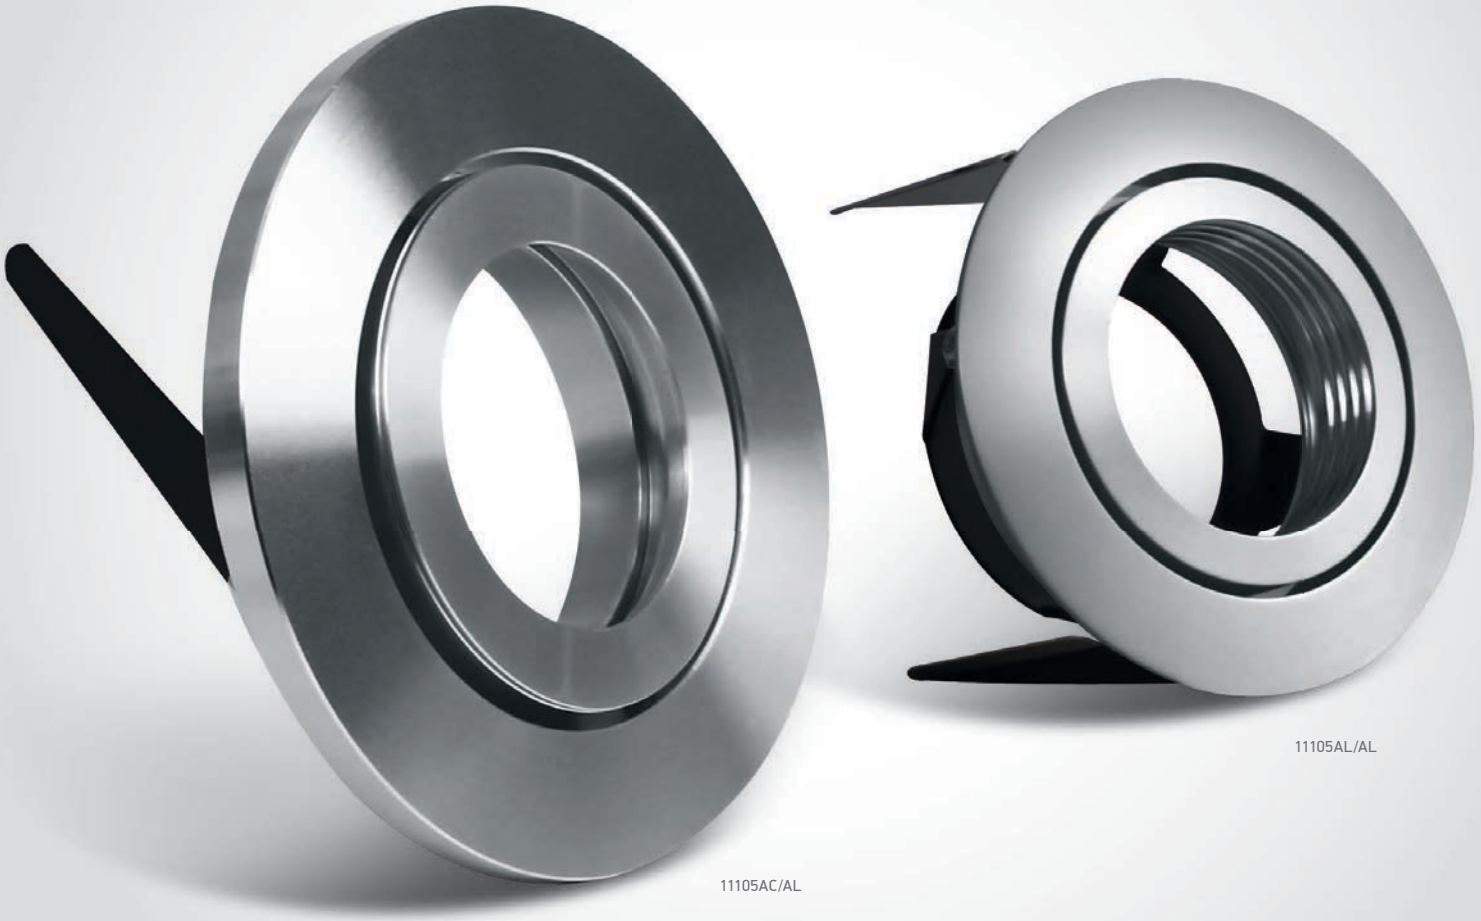

11105AL/AL

11105AC/AL

The Dual Ring Range
Round



11105AL | 50W | MR16 | GU5,3 | Natural aluminium

ADJUSTABLE

IP20

offer

CE 5 YEAR



Leaf springs.





11105AC | 50W | MR16 | GU5,3 | Natural aluminium

ADJUSTABLE

IP20

offer

CE 5 YEAR





Order Code	Colour	Watts	Input	Class					Notes
11105AL/AL	Aluminium	50W	12V	III	40cm	68mm	70mm	50	-
11105AC/AL	Aluminium	50W	12V	III	40cm	75mm	60mm	50	-



The Natural Aluminium
Square



51105B | 50W | MR16 | GU5,3 | Natural aluminium

ADJUSTABLE

CE 5 YEAR

IP20 offer







51205B | 2x50W | MR16 | GU5,3 | Natural aluminium

ADJUSTABLE

CE 5 YEAR

IP20 offer







51305B | 3x50W | MR16 | GU5,3 | Natural aluminium

ADJUSTABLE

CE 5 YEAR

IP20 offer



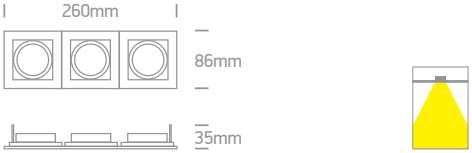

Order Code	Colour	Watts	Input	Class					Notes
51105B/AL	Aluminium	50W	12V	III	40cm	77x77mm	70mm	50	-
51205B/AL	Aluminium	2x50W	12V	III	40cm	167x77mm	70mm	25	-
51305B/AL	Aluminium	3x50W	12V	III	40cm	252x77mm	70mm	15	-



The Round Retro GU10
Aluminium

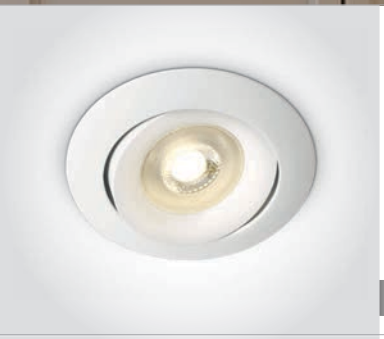

11105U | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

5 YEAR

IP20







11105UA | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

5 YEAR

IP20







11105UB | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

5 YEAR

IP20





Order Code	Colour	Watts	Input	Class					Notes
11105U/W	White	10W	100-240V		15cm	72mm	120mm	50	-
11105UA/W	White	10W	100-240V		15cm	72mm	120mm	50	-
11105UB/W	White	10W	100-240V		15cm	72mm	120mm	50	-



The Dual Ring Range
Aluminium



11105ABGL/W

11105ABGL | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

CE 5 YEAR

IP20



Leaf springs.



Complete with 0950G.





11105ABGL/B

11105ABGL | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

CE 5 YEAR

IP20



Leaf springs.



Complete with 0950G.



Order Code	Colour	Watts	Input	Class					Notes
11105ABGL/W	White	10W	100-240V		15cm	80mm	100mm	50	-
11105ABGL/B	Black	10W	100-240V		15cm	80mm	100mm	50	-



The Dual Ring Range
Aluminium


11105ABG/W

11105ABG | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE · 5 YEAR · IP20


11105ABG/AL


Complete with 0950GB.




51105ABG/W

51105ABG | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE · 5 YEAR · IP20


51105ABG/AL


Complete with 0950GB.





51205ABG | 2x10W | MR16 | GU10 | Aluminium

ADJUSTABLE · 5 YEAR · IP20




Complete with 0950GB.



Order Code	Colour	Watts	Input	Class					Notes
11105ABG/W	White	10W	100-240V		15cm	80mm	100mm	50	-
11105ABG/AL	Aluminium	10W	100-240V		15cm	80mm	100mm	50	-
51105ABG/W	White	10W	100-240V		15cm	80mm	100mm	50	-
51105ABG/AL	Aluminium	10W	100-240V		15cm	80mm	100mm	50	-
51205ABG/W	White	2x10W	100-240V		15cm	162x82mm	100mm	20	-



The Chill Out Range



11105M/W/W

11105M | 10W | MR16 | GU10 | Aluminium body + plastic reflector

ADJUSTABLE

5 YEAR

DARK LIGHT

IP20



Complete with 0950GB.





11105M/W/B

11105M | 10W | MR16 | GU10 | Aluminium body + plastic reflector

ADJUSTABLE

5 YEAR

DARK LIGHT

IP20



Complete with 0950GB.





11105M/W/BS

11105M | 10W | MR16 | GU10 | Aluminium body + plastic reflector

ADJUSTABLE

5 YEAR

DARK LIGHT

IP20



Complete with 0950GB.





11105M/W/CU

11105M | 10W | MR16 | GU10 | Aluminium body + plastic reflector

ADJUSTABLE

5 YEAR

DARK LIGHT

IP20



Complete with 0950GB.



Order Code	Colour	Reflector	Watts	Input	Class					Notes
11105M/W/W	White	White	10W	100-240V		15cm	70mm	120mm	50	-
11105M/W/B	White	Black	10W	100-240V		15cm	70mm	120mm	50	-
11105M/W/BS	White	Brass	10W	100-240V		15cm	70mm	120mm	50	-
11105M/W/CU	White	Copper	10W	100-240V		15cm	70mm	120mm	50	-





11105M/B/B

11105M | 10W | MR16 | GU10 | Aluminium body + plastic reflector

ADJUSTABLE

5 YEAR

DARK LIGHT

IP20



Complete with 0950GB.





11105M/B/BS

11105M | 10W | MR16 | GU10 | Aluminium body + plastic reflector

ADJUSTABLE

5 YEAR

DARK LIGHT

IP20



Complete with 0950GB.





11105M/B/CU

11105M | 10W | MR16 | GU10 | Aluminium body + plastic reflector

ADJUSTABLE

5 YEAR

DARK LIGHT

IP20



Complete with 0950GB.



Order Code	Colour	Reflector	Watts	Input	Class					Notes
11105M/B/B	Black	Black	10W	100-240V		15cm	70mm	120mm	50	-
11105M/B/BS	Black	Brass	10W	100-240V		15cm	70mm	120mm	50	-
11105M/B/CU	Black	Copper	10W	100-240V		15cm	70mm	120mm	50	-

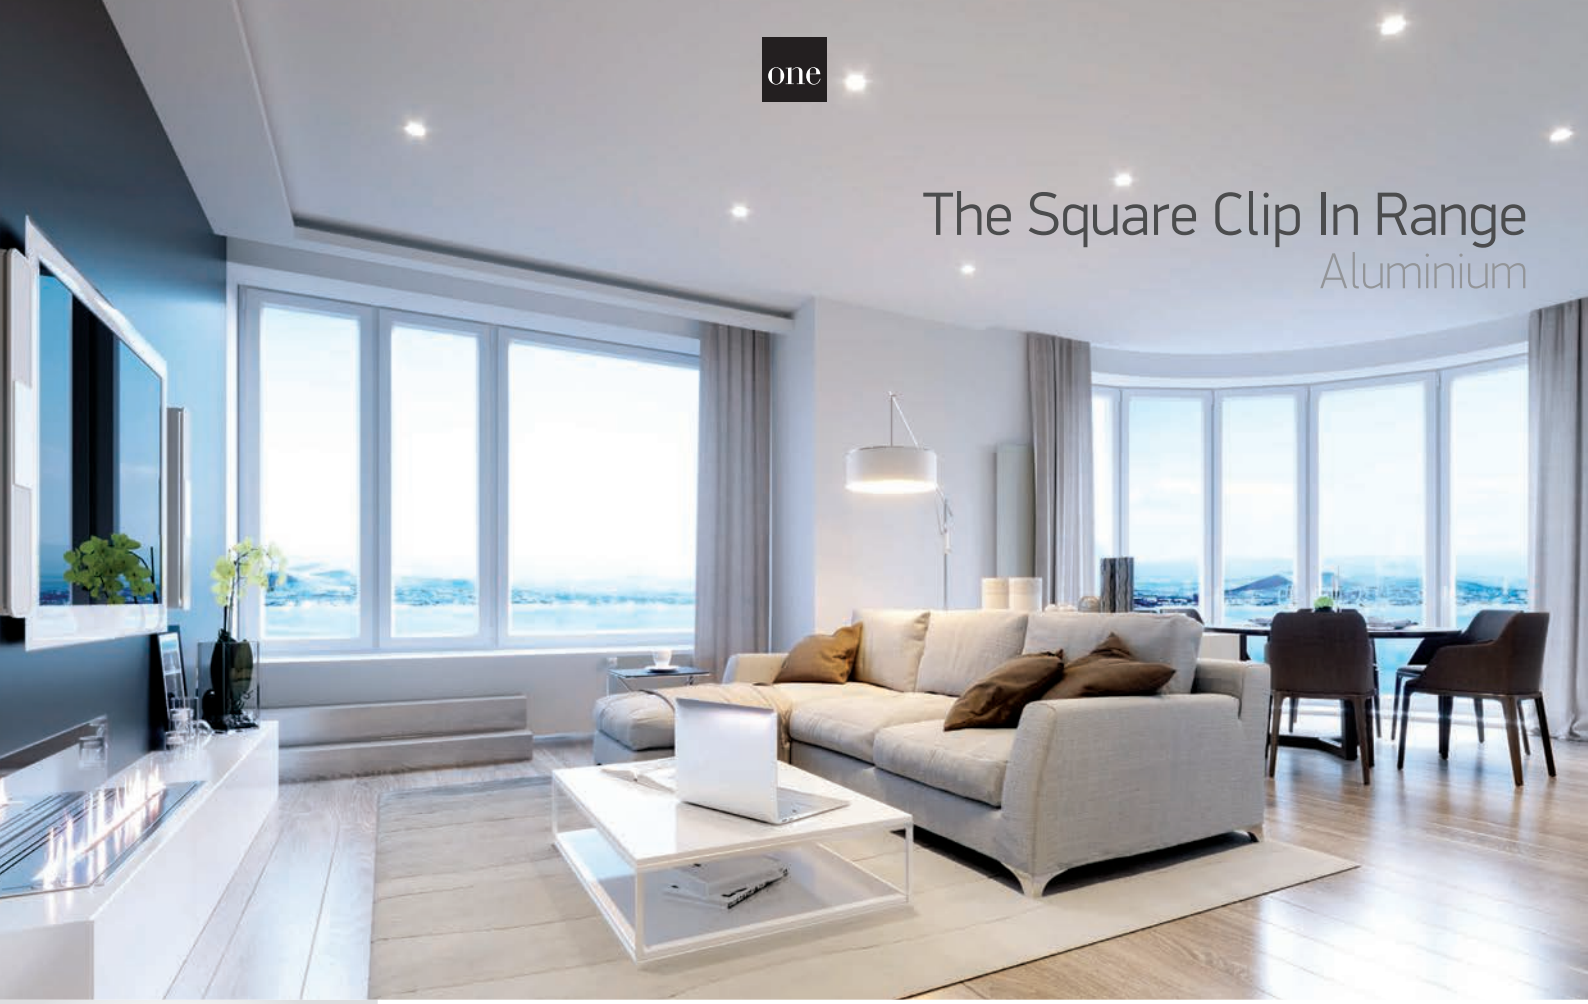

The Square Clip In Range
Aluminium



51105B1/W

51105B1 | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

5 YEAR

IP20

offer





Complete with 0950G.





51105B1/AL

51105B1 | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

5 YEAR

IP20

offer





Complete with 0950G.





51105D7 | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

5 YEAR

IP20





Complete with 0950G.



Order Code	Colour	Watts	Input	Class					Notes
51105B1/W	White	10W	100-240V		15cm	72mm	120mm	50	-
51105B1/AL	Aluminium	10W	100-240V		15cm	72mm	120mm	50	-
51105D7/W	White	10W	100-240V		15cm	82mm	130mm	50	-



The Round Clip In Range

11105A1 | 10W | MR16 | GU10 | Aluminium


11105A1/W

ADJUSTABLE
5 YEAR
IP20


11105A1/B


Complete with 0950G.



11105A1 | 10W | MR16 | GU10 | Aluminium


11105A1/BBS

ADJUSTABLE
5 YEAR
IP20


11105A1/AL


Complete with 0950G.



11105B1 | 10W | MR16 | GU10 | Aluminium


11105B1/W

ADJUSTABLE
5 YEAR
IP20


11105B1/AL


Complete with 0950G.



11105D7 | 10W | MR16 | GU10 | Aluminium



ADJUSTABLE
5 YEAR
IP20
offer




Complete with 0950G.



Order Code	Colour	Watts	Input	Class					Notes
11105A1/W	White	10W	100-240V		15cm	68mm	120mm	100	-
11105A1/B	Black	10W	100-240V		15cm	68mm	120mm	100	-
11105A1/AL	Aluminium	10W	100-240V		15cm	68mm	120mm	100	-
11105A1/BBS	Brushed brass	10W	100-240V		15cm	68mm	120mm	100	-
11105B1/W	White	10W	100-240V		15cm	72mm	120mm	100	-
11105B1/AL	Aluminium	10W	100-240V		15cm	72mm	120mm	100	-
11105D7/W	White	10W	100-240V		15cm	82mm	130mm	50	-



The Dark Light Spots
Square

51105TG | 10W | MR16 | GU10 | Die cast



ADJUSTABLE

5 YEAR

DARK LIGHT

IP20



Complete with 0950G.

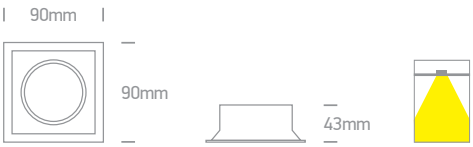

51105DG | 10W | MR16 | GU10 | Die cast



ADJUSTABLE

5 YEAR

DARK LIGHT

IP20



Complete with 0950G.



51105D | 50W | MR16 | GU5,3 | Die cast



ADJUSTABLE

5 YEAR

DARK LIGHT

IP20

offer





Order Code	Colour	Watts	Input	Class					Notes
51105TG/W	White	10W	100-240V		15cm	80x80mm	110mm	50	-
51105DG/W	White	10W	100-240V		15cm	80x80mm	85mm	50	-
51105D/G	Grey	50W	12V		40cm	80x80mm	85mm	50	-

The Dark Light Spots
Round





11105D4 | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

5 YEAR

DARK LIGHT

IP20



Complete with 0950G.





11105DT | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

5 YEAR

DARK LIGHT

IP20



Complete with 0950G.





11105TG | 10W | MR16 | GU10 | Die cast

ADJUSTABLE

5 YEAR

DARK LIGHT

IP20



Complete with 0950G.





11105CDG | 10W | MR16 | GU10 | Die cast

ADJUSTABLE

5 YEAR

DARK LIGHT

IP20



Complete with 0950G.



Order Code	Colour	Watts	Input	Class					Notes
11105D4/W	White	10W	100-240V	⏚	15cm	75mm	140mm	50	-
11105DT/W	White	10W	100-240V	⏚	15cm	95mm	140mm	50	-
11105TG/W	White	10W	100-240V	⏚	15cm	85mm	110mm	50	-
11105CDG/W	White	10W	100-240V	⏚	15cm	90mm	110mm	50	-

The Semi Dark Light GU10 Range

Die cast





51105N | 10W | MR16 | GU10 | Die cast

ADJUSTABLE

5 YEAR

IP20



Complete with 0950G.





51205N | 2x10W | MR16 | GU10 | Die cast

ADJUSTABLE

5 YEAR

IP20



Complete with 0950G.



Order Code	Colour	Watts	Input	Class					Notes
51105N/W	White	10W	100-240V	⏚	15cm	97x97mm	130mm	50	-
51205N/W	White	2x10W	100-240V	⏚	15cm	187x97mm	130mm	25	-

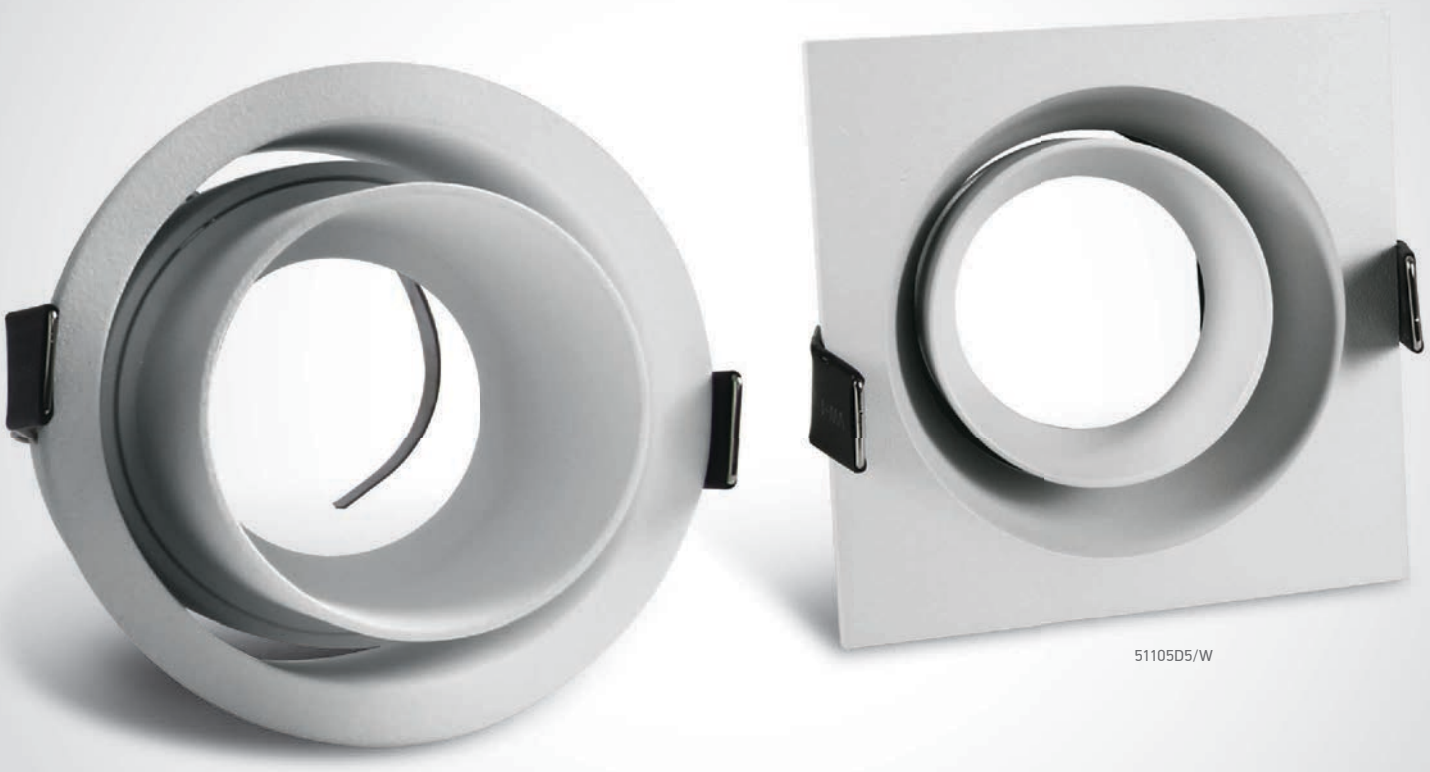

11105D8/W

51105D5/W

The Dark Light Tube Range
Aluminium



11105D8 | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

5 YEAR

DARK LIGHT

IP20



Complete with 0950G.







51105D5 | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

5 YEAR

DARK LIGHT

IP20



Complete with 0950G.





Order Code	Colour	Watts	Input	Class					Notes
11105D8/W	White	10W	100-240V		15cm	76mm	130mm	60	-
51105D5/W	White	10W	100-240V		15cm	75mm	130mm	50	-

The Hotel Dark Light Range



11105E | 10W | MR16 | GU10 | Die cast

DARK LIGHT
IP20
offer

ADJUSTABLE

5 YEAR



Complete with 0950G.



Order Code	Colour	Watts	Input	Class					Notes
11105E/W	White	10W	100-240V		15cm	75mm	120mm	100	-



The Dark Light Range
Metal



11105TA | 10W | MR16 | GU10 | Metal

ADJUSTABLE

CE 5 YEAR

DARK LIGHT

IP20



Complete with 0950G.





51105TA/W

51105TA | 10W | MR16 | GU10 | Metal

ADJUSTABLE

CE 5 YEAR

DARK LIGHT

IP20



Complete with 0950G.





51105TA/B

51105TA | 10W | MR16 | GU10 | Metal

ADJUSTABLE

CE 5 YEAR

DARK LIGHT

IP20



Complete with 0950G.



Order Code	Colour	Watts	Input	Class					Notes
11105TA/W	White	10W	100-240V		15cm	80mm	130mm	36	-
51105TA/W	White	10W	100-240V		15cm	80x80mm	150mm	36	-
51105TA/B	Black	10W	100-240V		15cm	80x80mm	150mm	36	-



The Trimless GU10 Range
Round

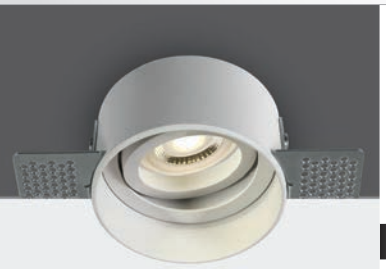

11105TR/W

11105TR | 10W | MR16 | GU10 | Trimless | Die cast

ADJUSTABLE

5 YEAR

DARK LIGHT

IP20



Complete with 0950G.



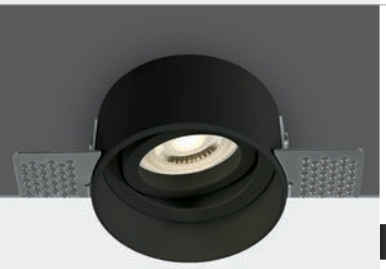

11105TR/B

11105TR | 10W | MR16 | GU10 | Trimless | Die cast

ADJUSTABLE

5 YEAR

DARK LIGHT

IP20



Complete with 0950G.

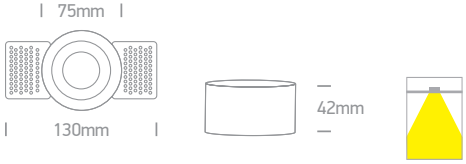

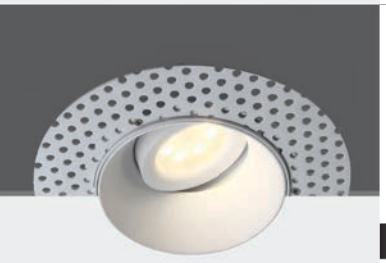

11105UTR | 10W | MR16 | GU10 | Trimless | Die cast

ADJUSTABLE

5 YEAR

DARK LIGHT

IP20







11105DTR | 10W | MR16 | GU10 | Trimless | Aluminium

ADJUSTABLE

5 YEAR

DARK LIGHT

IP20





Order Code	Colour	Watts	Input	Class					Notes
11105TR/W	White	10W	100-240V		15cm	84mm	120mm	50	-
11105TR/B	Black	10W	100-240V		15cm	84mm	120mm	50	-
11105UTR/W	White	10W	100-240V		20cm	105mm	120mm	20	-
11105DTR/W	White	10W	100-240V		15cm	90mm	120mm	36	-



The Trimless GU10 Range
Square



51105TR | 10W | MR16 | GU10 | Trimless | Die cast

ADJUSTABLE

5 YEAR

DARK LIGHT

IP20



Complete with 0950G.





51010TR | 10W | MR16 | GU10 | Trimless | Die cast

ADJUSTABLE

5 YEAR

IP20





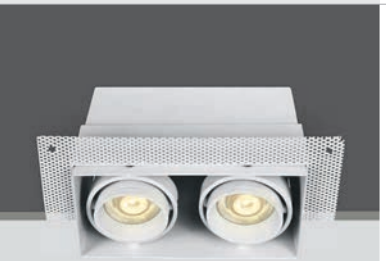

51020TR | 2x10W | MR16 | GU10 | Trimless | Die cast

ADJUSTABLE

5 YEAR

IP20





Order Code	Colour	Watts	Input	Class					Notes
51105TR/W	White	10W	100-240V		15cm	83x83mm	120mm	50	-
51010TR/W	White	10W	100-240V		-	97,5x97,5mm	150mm	16	-
51020TR/W	White	2x10W	100-240V		-	181x97,5mm	150mm	12	-



The Gypsum Trimless GU10 Range



11105GT5 | 10W | MR16 | GU10 | Trimless | Gypsum

ADJUSTABLE

5 YEAR

DARK LIGHT

IP20







11105GT4 | 10W | MR16 | GU10 | Trimless | Gypsum

ADJUSTABLE

5 YEAR

DARK LIGHT

IP20







51105GT4 | 10W | MR16 | GU10 | Trimless | Gypsum

ADJUSTABLE

5 YEAR

DARK LIGHT

IP20





Order Code	Colour	Watts	Input	Class					Notes
11105GT5	White	10W	100-240V		15cm	207x207mm	160mm	12	-
11105GT4	White	10W	100-240V		15cm	156mm	140mm	12	-
51105GT4	White	10W	100-240V		15cm	156x156mm	140mm	12	-



The Fire Rated GU10 Range



11109FA | 10W | MR16 | GU10 | Fire Rated | Die cast

new
DARK LIGHT
IP20

FIRE RATED
ADJUSTABLE
CE
5 YEAR







11105F | 10W | MR16 | GU10 | Fire Rated | Trimless | Die cast

new
DARK LIGHT
IP20

FIRE RATED
ADJUSTABLE
CE
5 YEAR





Order Code	Colour	Watts	Input	Class				Notes
11109FA/W	White	10W	100-240V		85mm	160mm	30	-
11105F/W	White	10W	100-240V		85mm	170mm	30	-





04

Recessed Spots Adjustable LED

Pages 123-156

COB LED | LED

Die cast | Natural aluminium | Plastic | Trimless

IP20 IP44 IP54

ADJUSTABLE ADJUSTABLE DIMMABLE DARK LIGHT QUICK FIX FIRE RATED 80 CRI 85 CRI 90 CRI 2 YEAR 3 YEAR





The 1W/2W Mini Series
Aluminium



11103B/W/W

11103B | 1W/2W | COB LED | Aluminium — 1W@350mA / 2W@700mA

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · IP20 · ADJUSTABLE · CE · 5 YEAR



Suitable for 89004A driver.





11103B/B/W

11103B | 1W/2W | COB LED | Aluminium — 1W@350mA / 2W@700mA

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · IP20 · ADJUSTABLE · CE · 5 YEAR



Suitable for 89004A driver.





11103B/AL/W

11103B | 1W/2W | COB LED | Aluminium — 1W@350mA / 2W@700mA

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · IP20 · ADJUSTABLE · CE · 5 YEAR



Suitable for 89004A driver.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11103B/W/W	White	Warm white	3000K	1W/2W	200lm@2W	40°	350mA/700mA		40cm	45mm	60mm	100	Requires 350mA/700mA driver
11103B/B/W	Black	Warm white	3000K	1W/2W	200lm@2W	40°	350mA/700mA		40cm	45mm	60mm	100	Requires 350mA/700mA driver
11103B/AL/W	Aluminium	Warm white	3000K	1W/2W	200lm@2W	40°	350mA/700mA		40cm	45mm	60mm	100	Requires 350mA/700mA driver



The 3W Mini Lighter
Aluminium



11103K/W/W

11103K | 3W | COB LED | Aluminium

new
DARK LIGHT
IP20
LED BUILT IN
90 CRI
DIMMABLE
QUICK FIX
ADJUSTABLE
5 YEAR



Suitable for 89004 driver.





11103K/B/W

11103K | 3W | COB LED | Aluminium

new
DARK LIGHT
IP20
LED BUILT IN
90 CRI
DIMMABLE
QUICK FIX
ADJUSTABLE
5 YEAR



Suitable for 89004 driver.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
11103K/W/W	White	Warm white	3000K	3W	240lm	30°	350mA	III	40cm	42mm	60mm	100	Requires 350mA driver
11103K/B/W	Black	Warm white	3000K	3W	240lm	30°	350mA	III	40cm	42mm	60mm	100	Requires 350mA driver



The 1W Mini Series
Aluminium



11101B | 1W | LED | Aluminium

LED BUILT IN · DIMMABLE · QUICK FIX · ADJUSTABLE · IP20 · offer · CE · 2 YEAR





Suitable for 89004 driver.





51101W | 1W | LED | Aluminium

LED BUILT IN · DIMMABLE · QUICK FIX · ADJUSTABLE · IP20 · offer · CE · 2 YEAR





Suitable for 89004 driver.





51101B | 1W | LED | Aluminium

LED BUILT IN · DIMMABLE · QUICK FIX · ADJUSTABLE · IP20 · offer · CE · 2 YEAR





Suitable for 89004 driver.





51101AL | 1W | LED | Aluminium

LED BUILT IN · DIMMABLE · QUICK FIX · ADJUSTABLE · IP20 · offer · CE · 2 YEAR





Suitable for 89004 driver.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11101B/D/15	Black	Daylight	6000K	1W	60lm	15°	350mA		40cm	45mm	40mm	100	Requires 350mA driver
11101B/D/35	Black	Daylight	6000K	1W	60lm	35°	350mA		40cm	45mm	40mm	100	Requires 350mA driver
51101W/D/35	White	Daylight	6000K	1W	60lm	35°	350mA		40cm	53mm	40mm	100	Requires 350mA driver
51101B/D/35	Black	Daylight	6000K	1W	60lm	35°	350mA		40cm	53mm	40mm	100	Requires 350mA driver
51101AL/D/15	Aluminium	Daylight	6000K	1W	60lm	15°	350mA		40cm	53mm	40mm	100	Requires 350mA driver
51101AL/BL/15	Aluminium	Blue	-	1W	-	15°	350mA		40cm	53mm	40mm	100	Requires 350mA driver



The 1W Mini Square
Natural Aluminium



51201AL | 2x1W | LED | Natural aluminium

LED BUILT IN · DIMMABLE · QUICK FIX · ADJUSTABLE · IP20 · offer · CE · 2 YEAR







51301AL | 3x1W | LED | Natural aluminium

LED BUILT IN · DIMMABLE · QUICK FIX · ADJUSTABLE · IP20 · offer · CE · 2 YEAR



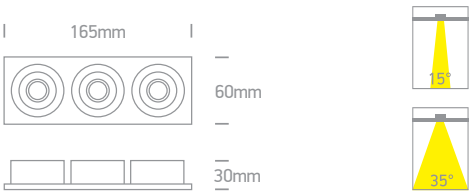



51401AL | 4x1W | LED | Natural aluminium

LED BUILT IN · DIMMABLE · QUICK FIX · ADJUSTABLE · IP20 · offer · CE · 2 YEAR





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
51201AL/D/15	Aluminium	Daylight	6000K	2x1W	2x60lm	15°	350mA		40cm	105x53mm	40mm	50	Requires 350mA driver
51201AL/D/35	Aluminium	Daylight	6000K	2x1W	2x60lm	35°	350mA		40cm	105x53mm	40mm	50	Requires 350mA driver
51301AL/D/15	Aluminium	Daylight	6000K	3x1W	3x60lm	15°	350mA		40cm	155x53mm	40mm	50	Requires 350mA driver
51301AL/D/35	Aluminium	Daylight	6000K	3x1W	3x60lm	35°	350mA		40cm	155x53mm	40mm	50	Requires 350mA driver
51301AL/W/15	Aluminium	Warm white	3000K	3x1W	3x45lm	15°	350mA		40cm	155x53mm	40mm	50	Requires 350mA driver
51301AL/W/35	Aluminium	Warm white	3000K	3x1W	3x45lm	35°	350mA		40cm	155x53mm	40mm	50	Requires 350mA driver
51401AL/D/15	Aluminium	Daylight	6000K	4x1W	4x60lm	15°	350mA		40cm	105x105mm	40mm	50	Requires 350mA driver
51401AL/D/35	Aluminium	Daylight	6000K	4x1W	4x60lm	35°	350mA		40cm	105x105mm	40mm	50	Requires 350mA driver
51401AL/W/15	Aluminium	Warm white	3000K	4x1W	4x45lm	15°	350mA		40cm	105x105mm	40mm	50	Requires 350mA driver
51401AL/W/35	Aluminium	Warm white	3000K	4x1W	4x45lm	35°	350mA		40cm	105x105mm	40mm	50	Requires 350mA driver

The 3W Mini Series
Aluminium



11103LC | 3W | LED | Aluminium







Suitable for 89004A driver.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11103LC/B/D/15	Black	Daylight	6000K	3W	120lm	15°	700mA	III	40cm	45mm	56mm	100	Requires 700mA driver
11103LC/B/D/35	Black	Daylight	6000K	3W	120lm	35°	700mA	III	40cm	45mm	56mm	100	Requires 700mA driver



11103N/B/D/35

11103N/W/D/35

11103N/AL/D/35

The 3x1W Glass Lens Spots



11103N/W/D/35

11103N | 3x1W | LED | Natural aluminium

LED BUILT IN · DIMMABLE · QUICK FIX · ADJUSTABLE · IP20 offer · CE · 2 YEAR





Suitable for 89004 driver.





11103N/B/D/35

11103N | 3x1W | LED | Natural aluminium

LED BUILT IN · DIMMABLE · QUICK FIX · ADJUSTABLE · IP20 offer · CE · 2 YEAR





Suitable for 89004 driver.





11103N/AL/D/35

11103N | 3x1W | LED | Natural aluminium

LED BUILT IN · DIMMABLE · QUICK FIX · ADJUSTABLE · IP20 offer · CE · 2 YEAR





Suitable for 89004 driver.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
									40cm	70mm	50mm	100	
11103N/W/D/35	White	Daylight	6000K	3x1W	180lm	35°	350mA	III	40cm	70mm	50mm	100	Requires 350mA driver
11103N/B/D/35	Black	Daylight	6000K	3x1W	180lm	35°	350mA	III	40cm	70mm	50mm	100	Requires 350mA driver
11103N/B/W/35	Black	Warm white	3000K	3x1W	135lm	35°	350mA	III	40cm	70mm	50mm	100	Requires 350mA driver
11103N/AL/D/35	Aluminium	Daylight	6000K	3x1W	180lm	35°	350mA	III	40cm	70mm	50mm	100	Requires 350mA driver
11103N/AL/W/35	Aluminium	Warm white	3000K	3x1W	135lm	35°	350mA	III	40cm	70mm	50mm	100	Requires 350mA driver



The 3xLED Round Spots
Aluminium



11103L | 3x1W | LED | Natural aluminium

LED BUILT IN · DIMMABLE · QUICK FIX · ADJUSTABLE · IP20 · CE · 2 YEAR · offer



Suitable for 89004 driver.





11103LW | 3x1W | LED | Natural aluminium

LED BUILT IN · DIMMABLE · QUICK FIX · ADJUSTABLE · IP20 · CE · 2 YEAR · offer



Suitable for 89004 driver.





11103LB | 3x1W | LED | Aluminium

LED BUILT IN · DIMMABLE · QUICK FIX · ADJUSTABLE · IP20 · CE · 2 YEAR · offer



Suitable for 89004 driver.





11303L | 3x3W | LED | Natural aluminium

LED BUILT IN · DIMMABLE · QUICK FIX · ADJUSTABLE · IP20 · CE · 2 YEAR · offer





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11103L/D/15	Aluminium	Daylight	6000K	3x1W	180lm	15°	350mA	III	40cm	70mm	50mm	100	Requires 350mA driver
11103L/W/15	Aluminium	Warm white	3000K	3x1W	135lm	15°	350mA	III	40cm	70mm	50mm	100	Requires 350mA driver
11103LW/D/35	White	Daylight	6000K	3x1W	180lm	35°	350mA	III	40cm	70mm	50mm	100	Requires 350mA driver
11103LB/D/35	Black	Daylight	6000K	3x1W	180lm	35°	350mA	III	40cm	70mm	50mm	100	Requires 350mA driver
11103LB/W/35	Black	Warm white	3000K	3x1W	135lm	35°	350mA	III	40cm	70mm	50mm	100	Requires 350mA driver
11303L/AL/D/35	Aluminium	Daylight	6000K	3x3W	360lm	35°	700mA	III	40cm	70mm	100mm	30	Requires 700mA driver



The 3x1W Square Spots
Aluminium



51103L/D/15

51103L | 3x1W | LED | Natural aluminium

LED BUILT IN
DIMMABLE
QUICK FIX
ADJUSTABLE
IP20
offer
CE
2 YEAR

offer



51103L/W/15



Suitable for 89004 driver.





51103LW | 3x1W | LED | Natural aluminium

LED BUILT IN
DIMMABLE
QUICK FIX
ADJUSTABLE
IP20
offer
CE
2 YEAR





Suitable for 89004 driver.





51103LB/D/35

51103LB | 3x1W | LED | Natural aluminium

LED BUILT IN
DIMMABLE
QUICK FIX
ADJUSTABLE
IP20
offer
CE
2 YEAR

offer



51103LB/W/35



Suitable for 89004 driver.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
51103L/D/15	Aluminium	Daylight	6000K	3x1W	180lm	15°	350mA	III	40cm	70mm	50mm	60	Requires 350mA driver
51103L/D/35	Aluminium	Daylight	6000K	3x1W	180lm	35°	350mA	III	40cm	70mm	50mm	60	Requires 350mA driver
51103L/W/15	Aluminium	Warm white	3000K	3x1W	135lm	15°	350mA	III	40cm	70mm	50mm	60	Requires 350mA driver
51103LW/D/35	White	Daylight	6000K	3x1W	180lm	35°	350mA	III	40cm	70mm	50mm	60	Requires 350mA driver
51103LB/D/35	Black	Daylight	6000K	3x1W	180lm	35°	350mA	III	40cm	70mm	50mm	60	Requires 350mA driver
51103LB/W/35	Black	Warm white	3000K	3x1W	135lm	35°	350mA	III	40cm	70mm	50mm	60	Requires 350mA driver

The Reflector Spots



11106K | 6W | LED | Plastic

LED BUILT IN

IP20

80 CRI

ADJUSTABLE

CE

2 YEAR

offer



Complete with White/Black/Grey rings.







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
11106K/W	White/Black/Grey	Warm white	3000K	6W	345lm	38°	100-240V		67mm	90mm	48	Complete with driver

one

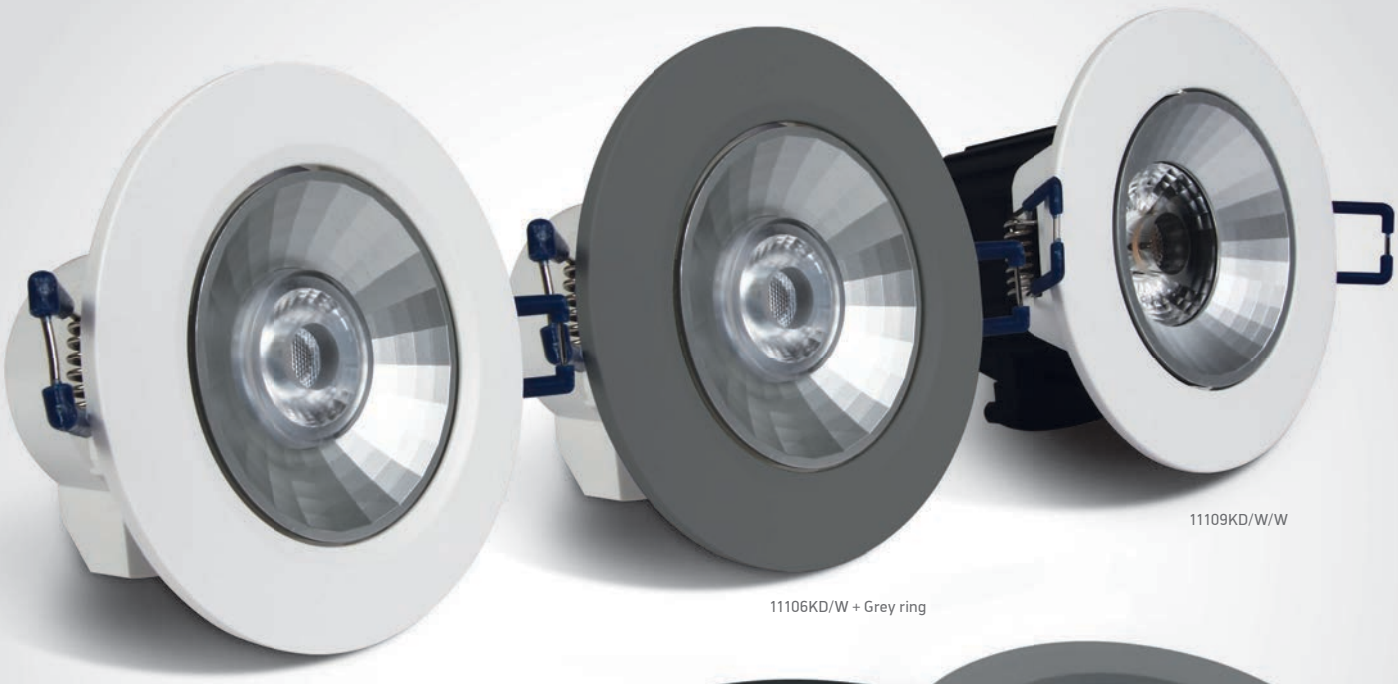

11109KD/W/W

11106KD/W + Grey ring

11106KD/W + White ring

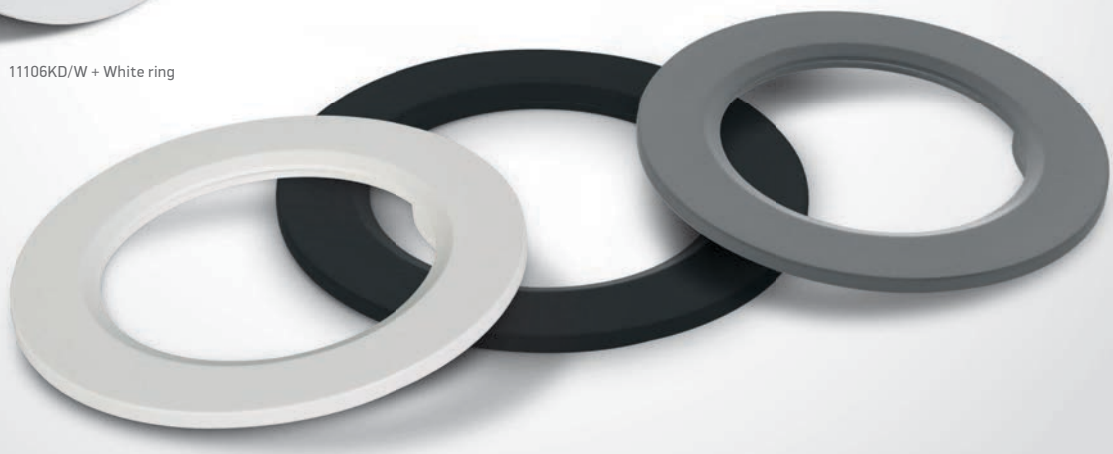

The Dimmable Reflector Spots



11106KD | 6,3W | LED | Plastic





Complete with White/Black/Grey rings.





11109KD | 9,2W | COB LED | Aluminium







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
11106KD/W	White/Black/Grey	Warm white	3000K	6,3W	345lm	38°	230V	⧈	67mm	90mm	48	Complete with dimmable driver
11109KD/W/W	White	Warm white	3000K	9,2W	620lm	38°	230V	⧈	67mm	90mm	48	Complete with dimmable driver



The Super Narrow Beam



11102DB | 2W | COB LED | Super narrow beam | Die cast

LED BUILT IN · 80 CRI · DIMMABLE · QUICK FIX · IP20 · ADJUSTABLE · CE · 3 YEAR



Suitable for 89004A driver.





11106DB/W/W

11106DB | 6W | COB LED | Super narrow beam | Die cast

LED BUILT IN · 80 CRI · DIMMABLE · QUICK FIX · DARK LIGHT · IP20 · ADJUSTABLE · CE · 3 YEAR



Suitable for 89006PC driver.





11106DB/B/W

11106DB | 6W | COB LED | Super narrow beam | Die cast

LED BUILT IN · 80 CRI · DIMMABLE · QUICK FIX · DARK LIGHT · IP20 · ADJUSTABLE · CE · 3 YEAR



Suitable for 89006PC driver.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
11102DB/W/W	White	Warm white	3000K	2W	140lm	3°	700mA	III	40cm	52mm	65mm	100	Requires 700mA driver
11106DB/W/W	White	Warm white	3000K	6W	540lm	4°	500mA	III	20cm	68mm	110mm	30	Requires 500mA driver
11106DB/B/W	Black	Warm white	3000K	6W	540lm	4°	500mA	III	20cm	68mm	110mm	30	Requires 500mA driver

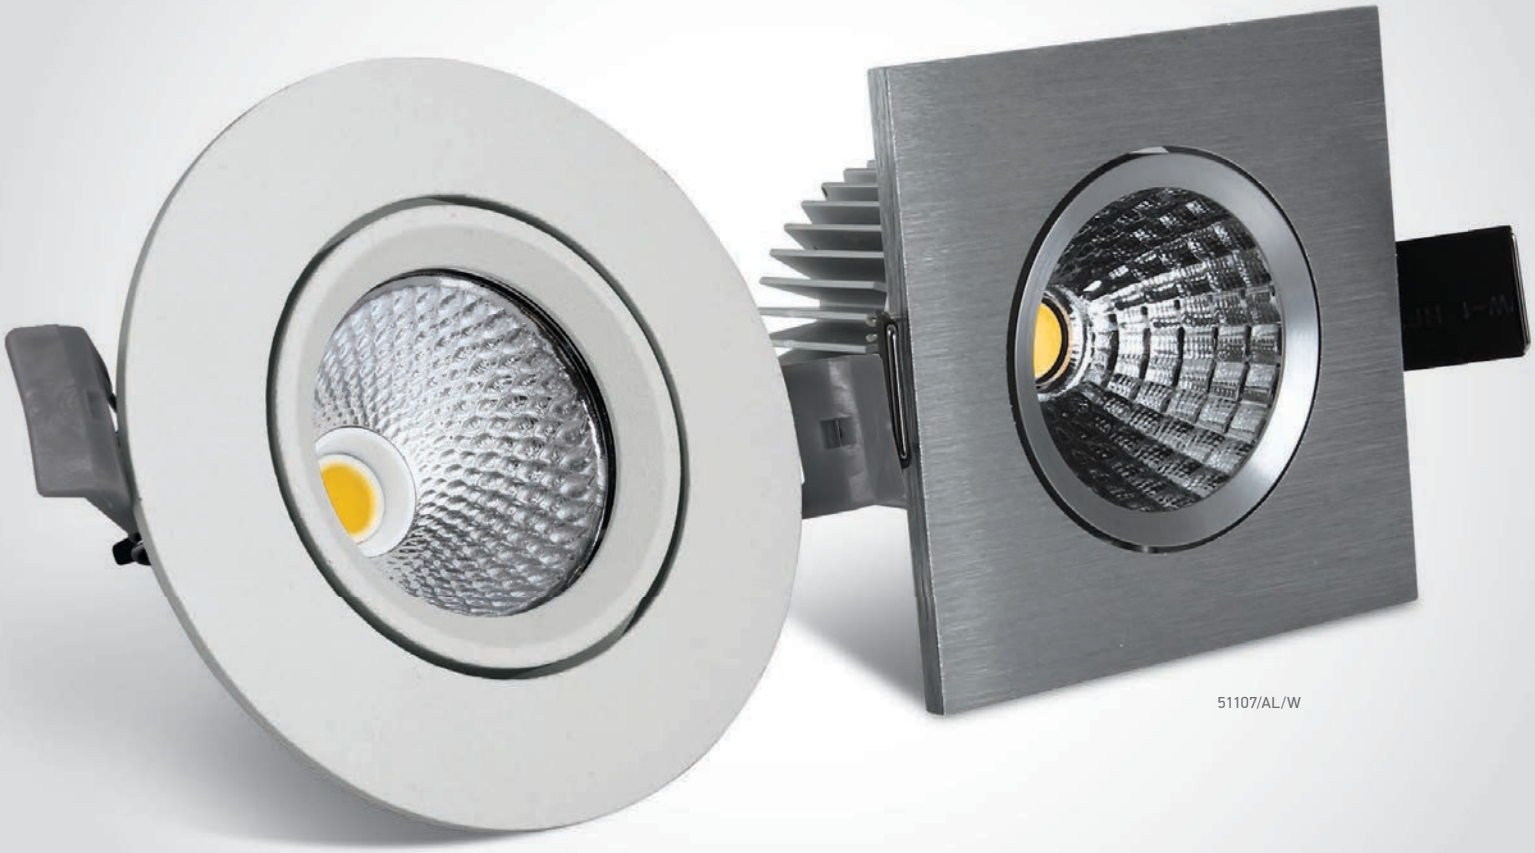

11107B/W/W

51107/AL/W

The 7W COB Range



11107B/W/C

11107B | 7W | COB LED | Die cast

new

IP20

LED BUILT IN

80 CRI

ADJUSTABLE

3 YEAR



11107B/W/W





51107 | 7W | COB LED | Aluminium

IP20

offer

LED BUILT IN

80 CRI

DIMMABLE

QUICK FIX

ADJUSTABLE

2 YEAR





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11107B/W/C	White	Cool white	4000K	7W	560lm	60°	230V		-	75mm	75mm	50	Complete with 300mA driver
11107B/W/W	White	Warm white	3000K	7W	560lm	60°	230V		-	75mm	75mm	50	Complete with 300mA driver
51107/AL/W	Aluminium	Warm white	3000K	7W	513lm	30°	700mA		40cm	70mm	90mm	30	Requires 700mA driver



The COB Adjustable Spots
Aluminium



11106A | 6W | LED | Aluminium

LED BUILT IN
80 CRI
QUICK FIX
ADJUSTABLE
IP20
offer
CE
2 YEAR







51106A | 6W | LED | Aluminium

LED BUILT IN
80 CRI
QUICK FIX
ADJUSTABLE
IP20
offer
CE
2 YEAR







51110A | 10W | LED | Aluminium

LED BUILT IN
80 CRI
QUICK FIX
ADJUSTABLE
IP20
offer
CE
2 YEAR





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
11106A/AL/W	Aluminium	Warm white	3000K	6W	475lm	36°	100-240V	☐	80mm	80mm	20	Complete with 500mA driver
51106A/AL/W	Aluminium	Warm white	3000K	6W	475lm	36°	100-240V	☐	80mm	80mm	20	Complete with 500mA driver
51110A/AL/C	Aluminium	Cool white	4000K	10W	840lm	36°	100-240V	☐	100mm	100mm	20	Complete with 250mA driver

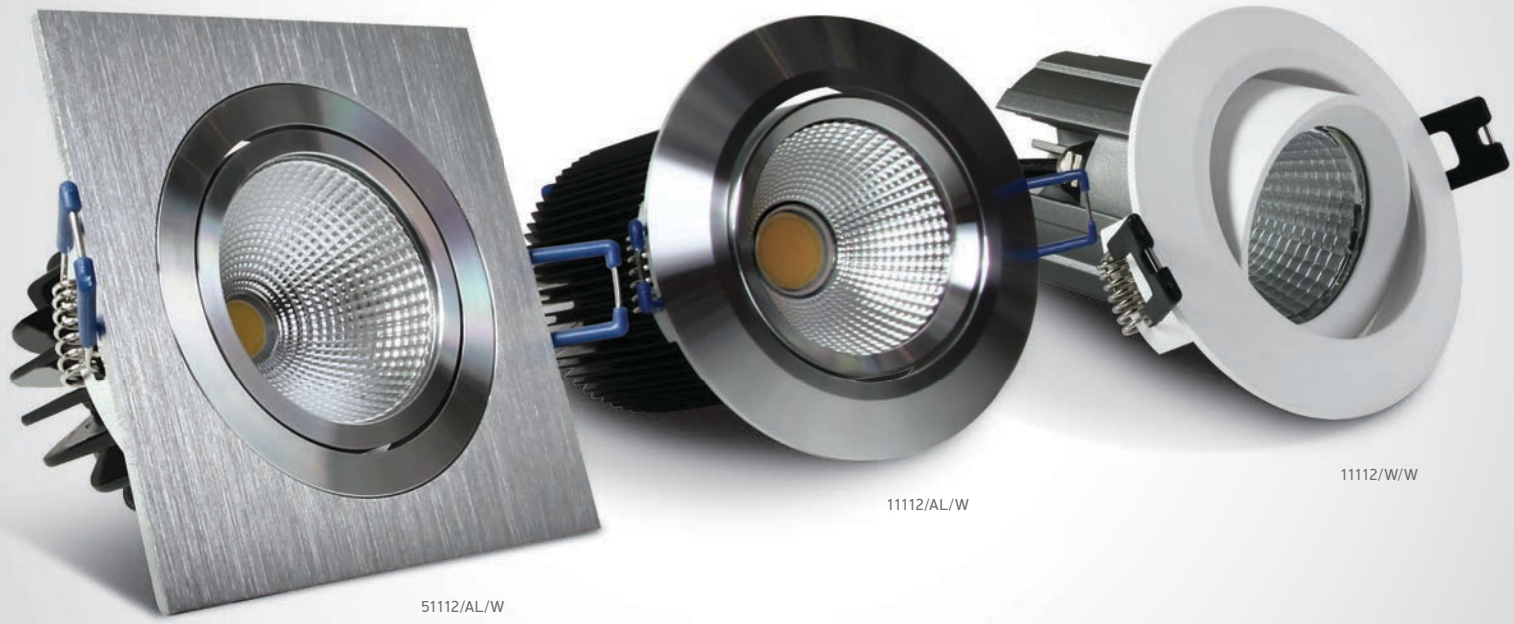

The 12W COB Range



11112/W/W

11112 | 12W | COB LED | Die cast

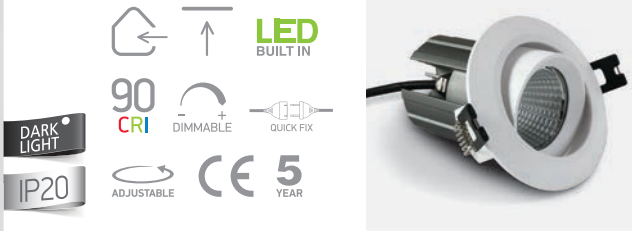





11112/AL/W

11112 | 12W | COB LED | Natural aluminium

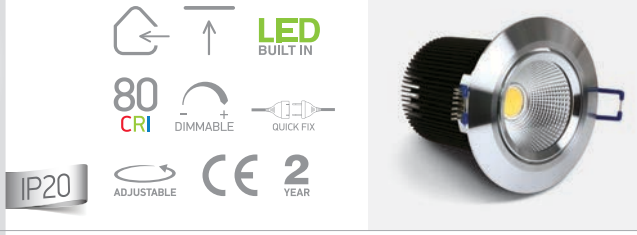





51112 | 12W | COB LED | Aluminium

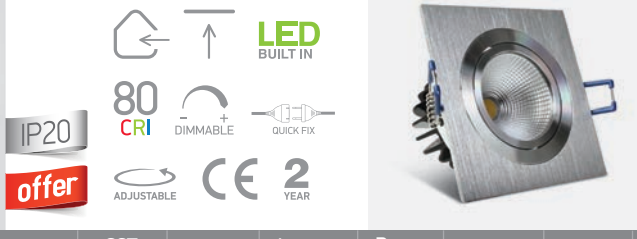



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11112/W/W	White	Warm white	3000K	12W	1100lm	38°	700mA		40cm	76mm	90mm	50	Requires 700mA driver
11112/AL/W	Aluminium	Warm white	3000K	12W	1100lm	38°	700mA		40cm	78mm	90mm	50	Requires 700mA driver
51112/AL/W	Aluminium	Warm white	3000K	12W	1100lm	38°	700mA		40cm	80mm	90mm	50	Requires 700mA driver

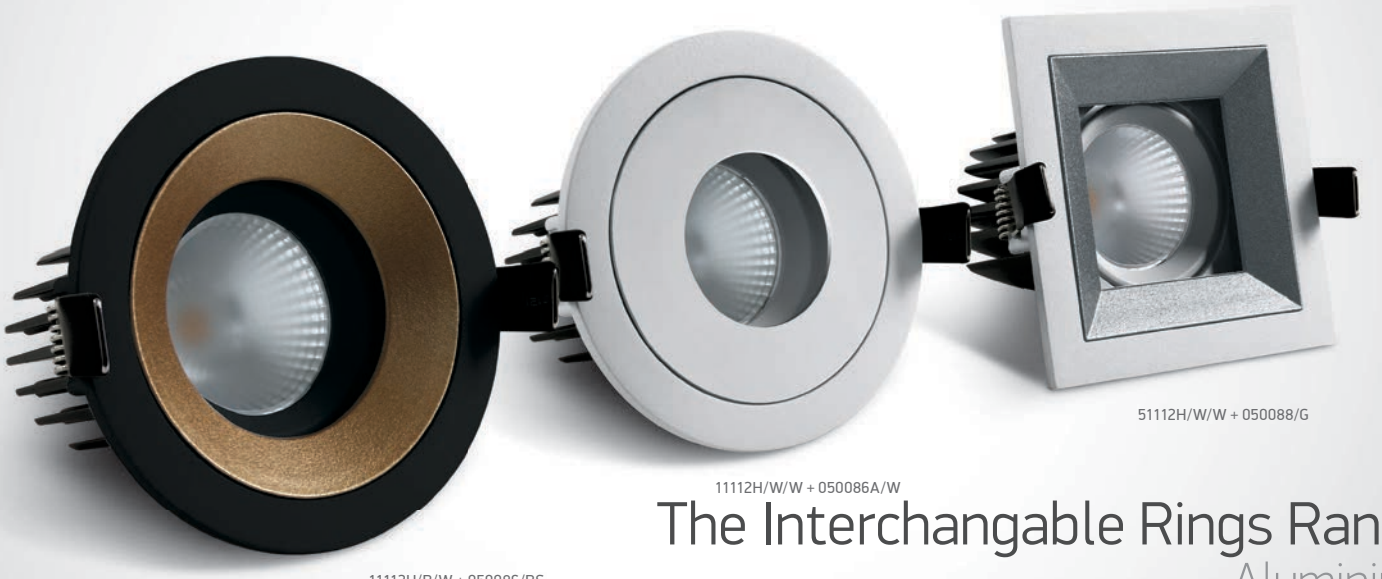

11112H/B/W + 050086/BS

11112H/W/W + 050086A/W

51112H/W/W + 050088/G

The Interchangable Rings Range

Aluminium



11112H/W/W+050086/B

11112H | 12W | COB LED | Aluminium

Ring must be ordered separately.

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · IP20 · 3 YEAR



11112H/B/W+050086/W





050086/W White



050086/B Black



050086/G Grey



050086/BS Brass



050086A/W White



51112H/W/W+050088/B

51112H | 12W | COB LED | Aluminium

Ring must be ordered separately.

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · IP20 · 3 YEAR



51112H/B/W+050088/BS





050088/W White



050088/B Black



050088/G Grey



050088/BS Brass



050088A/W White

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
11112H/W/W	White	Warm white	3000K	12W	940lm	60°	230V	⧈	90mm	120mm	30	Complete with 300mA driver
11112H/B/W	Black	Warm white	3000K	12W	940lm	60°	230V	⧈	90mm	120mm	30	Complete with 300mA driver
51112H/W/W	White	Warm white	3000K	12W	940lm	60°	230V	⧈	95x95mm	120mm	30	Complete with 300mA driver
51112H/B/W	Black	Warm white	3000K	12W	940lm	60°	230V	⧈	95x95mm	120mm	30	Complete with 300mA driver



11104K/B/W + 050100/B

11104K/W/W + 050100/BS

11107K/B/W + 050102/CU

The Interchangable Rings Range
Aluminium



11104K/W/W + 050100/B

11104K | 3W/5W | COB LED | Aluminium

3W@350mA/5W@500mA | Ring must be ordered separately.

LED BUILT IN · 80 CRI · DIMMABLE · QUICK FIX · DARK LIGHT · IP20 · ADJUSTABLE · CE · 3 YEAR



11104K/B/W + 050100/BS





050100/W White



050100/B Black



050100/C Chrome



050100/BS Brass



050100/CU Copper



11107K/W/W + 050102/B

11107K | 7W | COB LED | Aluminium

Ring must be ordered separately.

LED BUILT IN · 80 CRI · DIMMABLE · QUICK FIX · DARK LIGHT · IP20 · ADJUSTABLE · CE · 3 YEAR



11107K/B/W + 050102/BS





050102/W White



050102/B Black



050102/C Chrome



050102/BS Brass



050102/CU Copper

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11104K/W/W	White	Warm white	3000K	3W/5W	400lm@5W	35°	350mA/500mA	III	40cm	60mm	80mm	50	Requires 350mA/500mA driver
11104K/B/W	Black	Warm white	3000K	3W/5W	400lm@5W	35°	350mA/500mA	III	40cm	60mm	80mm	50	Requires 350mA/500mA driver
11107K/W/W	White	Warm white	3000K	7W	550lm	35°	700mA	III	40cm	76mm	100mm	30	Requires 700mA driver
11107K/B/W	Black	Warm white	3000K	7W	550lm	35°	700mA	III	40cm	76mm	100mm	30	Requires 700mA driver

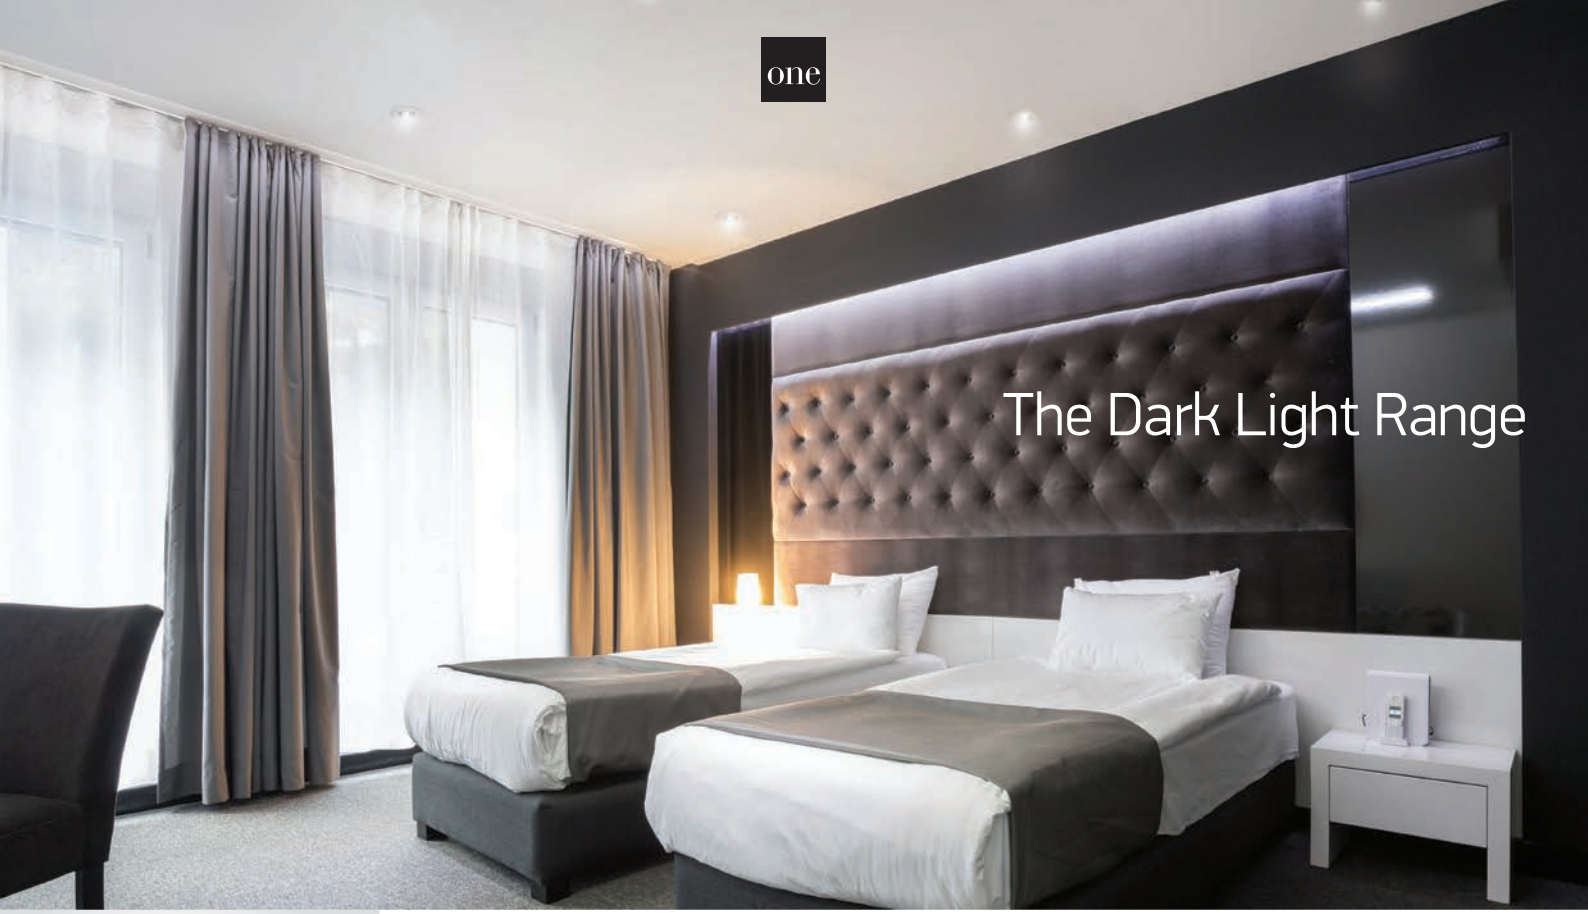

The Dark Light Range



11103E | 3W | COB LED | Aluminium

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · DARK LIGHT · IP20 · ADJUSTABLE · CE · 3 YEAR







11112D | 12W | COB LED | Aluminium

LED BUILT IN · 80 CRI · DIMMABLE · QUICK FIX · DARK LIGHT · IP20 · offer · ADJUSTABLE · CE · 2 YEAR







11103D/W/C

11103D | 3x1W | LED | Semi trimless | Aluminium

LED BUILT IN · DARK LIGHT · IP20 · offer · DIMMABLE · QUICK FIX · ADJUSTABLE · CE · 2 YEAR

offer



11103D/G/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11103E/W/W	White	Warm white	3000K	3W	250lm	24°	350mA	III	40cm	40mm	60mm	100	Requires 350mA driver
11112D/W/W	White	Warm white	3000K	12W	650lm	38°	700mA	III	40cm	79mm	110mm	24	Requires 700mA driver
11103D/W/C	White	Cool white	4000K	3x1W	160lm	45°	350mA	III	40cm	90mm	90mm	50	Requires 350mA driver
11103D/G/C	Grey	Cool white	4000K	3x1W	160lm	45°	350mA	III	40cm	90mm	90mm	50	Requires 350mA driver
11103D/G/W	Grey	Warm white	3000K	3x1W	135lm	45°	350mA	III	40cm	90mm	90mm	50	Requires 350mA driver



11107DA/B/W



11107FD/W/C



11107FD/B/W

The 7W COB Dark Light



11107FD/W/W

11107FD | 7W | COB LED | Die cast

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · DARK LIGHT · IP20 · 2 YEAR



11107FD/B/W





11107DL | 7W | COB LED | Aluminium

LED BUILT IN · 80 CRI · DIMMABLE · QUICK FIX · ADJUSTABLE · CE · 3 YEAR · DARK LIGHT · IP20







11107DA | 7W | COB LED | Aluminium

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · 3 YEAR · DARK LIGHT · IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	S				Notes
11107FD/W/C	White	Cool white	4000K	7W	560lm	60°	230V	□	-	80mm	110mm	50	Complete with 300mA driver
11107FD/W/W	White	Warm white	3000K	7W	560lm	60°	230V	□	-	80mm	110mm	50	Complete with 300mA driver
11107FD/W/EW	White	Extra warm white	2700K	7W	560lm	60°	230V	□	-	80mm	110mm	50	Complete with 300mA driver
11107FD/B/W	Black	Warm white	3000K	7W	560lm	60°	230V	□	-	80mm	110mm	50	Complete with 300mA driver
11107DL/B/W	Black	Warm white	3000K	7W	450lm	38°	700mA	◇	40cm	60mm	100mm	50	Requires 700mA driver
11107DA/B/W	Black	Warm white	3000K	7W	600lm	36°	230V	□	-	70mm	80mm	50	Complete with 500mA driver

The 12W COB Dark Light





11112TA | 12W | COB LED | Die cast







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11112TA/W/W	White	Warm white	3000K	12W	1100lm	40°	700mA	III	40cm	92mm	115mm	50	Requires 700mA driver



The COB Shop & Hotel Range



11112E/W/W

11112E | 12W | COB LED | Die cast

LED BUILT IN · 80 CRI · DIMMABLE · QUICK FIX · DARK LIGHT · IP20 · ADJUSTABLE · CE · 5 YEAR

offer



11112E/W/EW





51112E/W/W

51112E | 12W | COB LED | Die cast

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · DARK LIGHT · IP44 · ADJUSTABLE · CE · 5 YEAR







51112E/W/EW

51112E | 12W | COB LED | Die cast

LED BUILT IN · 80 CRI · DIMMABLE · QUICK FIX · DARK LIGHT · IP20 · ADJUSTABLE · CE · 5 YEAR







51212E | 2x12W | COB LED | Die cast

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · DARK LIGHT · IP44 · ADJUSTABLE · CE · 5 YEAR





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11112E/W/W	White	Warm white	3000K	12W	1100lm	40°	700mA		40cm	87mm	105mm	50	Requires 700mA driver
11112E/W/EW	White	Extra warm white	2700K	12W	1100lm	40°	700mA		40cm	87mm	95mm	50	Requires 700mA driver
51112E/W/W	White	Warm white	3000K	12W	1100lm	40°	700mA		40cm	90x90mm	105mm	50	Requires 700mA driver
51112E/W/EW	White	Extra warm white	2700K	12W	1100lm	40°	700mA		40cm	90x90mm	105mm	50	Requires 700mA driver
51212E/W/C	White	Cool white	4000K	2x12W	2x1100lm	40°	700mA		40cm	175x90mm	105mm	24	Requires 700mA drivers
51212E/W/W	White	Warm white	3000K	2x12W	2x1100lm	40°	700mA		40cm	175x90mm	105mm	24	Requires 700mA drivers



Extractable 12W Range



11113E | 12W | COB LED | Aluminium







51113E | 12W | COB LED | Aluminium

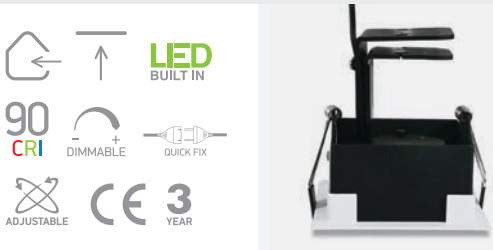



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11113E/W/W	White	Warm white	3000K	12W	1100lm	36°	350mA	III	40cm	80mm	120mm	36	Requires 350mA driver
51113E/W/W	White	Warm white	3000K	12W	1100lm	36°	350mA	III	40cm	80x80mm	120mm	36	Requires 350mA driver





11108LA/W/W

11108LA | 8W | COB LED | Die cast

LED BUILT IN
80 CRI
ADJUSTABLE
CE
IP20
3 YEAR









11108LA/B/W

11108LA | 8W | COB LED | Die cast

LED BUILT IN
80 CRI
ADJUSTABLE
CE
IP20
3 YEAR







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
11108LA/W/W	White	Warm white	3000K	8W	600lm	25°	230V		68mm	50mm	24	Complete with 200mA driver
11108LA/B/W	Black	Warm white	3000K	8W	600lm	25°	230V		68mm	50mm	24	Complete with 200mA driver

Moving Inner Cylinder Range





11103M | 3W | COB LED | Aluminium











11106M | 6W | COB LED | Die cast





Suitable for 89008 driver.

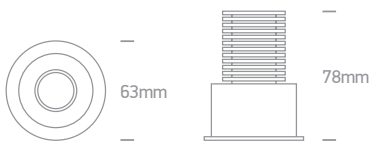



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11103M/W/W	White	Warm white	3000K	3W	280lm	36°	350mA	III	40cm	44mm	35mm	100	Requires 350mA driver
11106M/W/W	White	Warm white	3000K	6W	540lm	24°	350mA	III	40cm	55mm	95mm	60	Requires 350mA driver



Moving Inner Cylinder Range



51106M | 6W | COB LED | Die cast

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · ADJUSTABLE · CE · 3 YEAR · IP20



Suitable for 89008 driver.





51206M | 2x6W | COB LED | Die cast

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · ADJUSTABLE · CE · 3 YEAR · IP20



Suitable for 2x89008 driver.





51306M | 3x6W | COB LED | Die cast

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · ADJUSTABLE · CE · 3 YEAR · IP20



Suitable for 3x89008 driver.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
51106M/W/W	White	Warm white	3000K	6W	540lm	24°	350mA	III	40cm	58x58mm	95mm	60	Requires 350mA driver
51206M/W/W	White	Warm white	3000K	2x6W	2x540lm	24°	350mA	III	40cm	108x58mm	95mm	36	Requires 2x350mA drivers
51306M/W/W	White	Warm white	3000K	3x6W	3x540lm	24°	350mA	III	40cm	150x58mm	95mm	24	Requires 3x350mA drivers



The IP54 COB Outdoor/Bathroom Range



11107WD | 7W | COB LED | Die cast

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · DARK LIGHT · IP54 · ADJUSTABLE · CE · 5 YEAR







11207WD | 2x7W | COB LED | Die cast

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · DARK LIGHT · IP54 · ADJUSTABLE · CE · 5 YEAR





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	S				Notes
11107WD/W/W	White	Warm white	3000K	7W	600lm	36°	700mA	III	40cm	83mm	100mm	36	Requires 700mA driver
11207WD/W/W	White	Warm white	3000K	2x7W	2x600lm	36°	700mA	III	40cm	160x83mm	100mm	16	Requires 700mA drivers



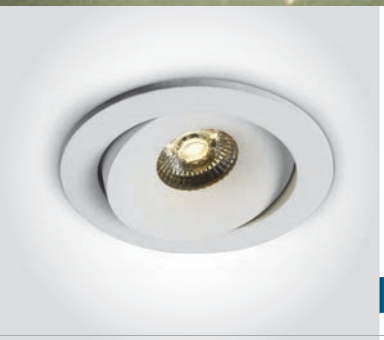

11107P | 7W | COB LED | Die cast

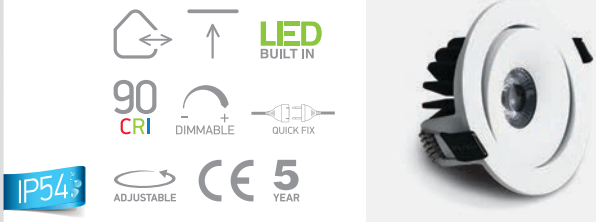





11107D | 7W | COB LED | Die cast

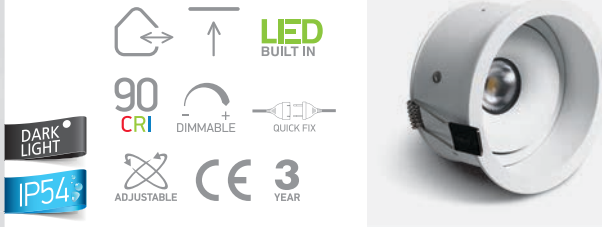





11113D | 13W | COB LED | Die cast

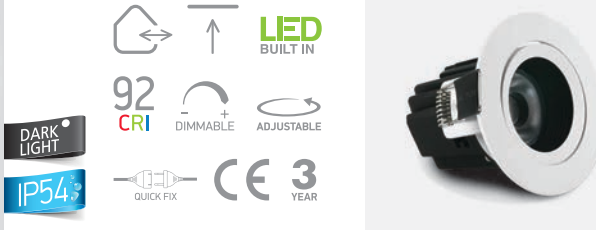



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11107P/W/W	White	Warm white	3000K	7W	600lm	36°	700mA	III	40cm	70mm	80mm	60	Requires 700mA driver
11107D/W/W	White	Warm white	3000K	7W	500lm	36°	700mA	III	40cm	92mm	90mm	30	Requires 700mA driver
11113D/W/W	White	Warm white	3000K	13W	1100lm	38°	350mA	III	40cm	80mm	110mm	36	Requires 350mA driver





11112P/W/W

11112P | 12W | COB LED | Aluminium

new
DARK LIGHT
IP65

LED BUILT IN
90 CRI
DIMMABLE
QUICK FIX
ADJUSTABLE
5 YEAR







11112P/B/W

11112P | 12W | COB LED | Aluminium

new
DARK LIGHT
IP65

LED BUILT IN
90 CRI
DIMMABLE
QUICK FIX
ADJUSTABLE
5 YEAR





Order Code	Colour	Reflector	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11112P/W/W	White	Black	Warm white	3000K	12W	1100lm	40°	700mA	III	40cm	72mm	100mm	48	Requires 700mA driver
11112P/B/W	Black	Brass	Warm white	3000K	12W	1100lm	40°	700mA	III	40cm	72mm	100mm	48	Requires 700mA driver



Mirror Adjustable Boxes



51406B/W/W

51406B | 16W | COB LED | Die cast

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · IP20 · 3 YEAR









51406B/B/W

51406B | 16W | COB LED | Die cast

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · IP20 · 3 YEAR









51506B/W/W

51506B | 20W | COB LED | Die cast

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · IP20 · 3 YEAR







51506B/B/W

51506B | 20W | COB LED | Die cast

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · IP20 · 3 YEAR





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
51406B/W/W	White	Warm white	3000K	16W	1280lm	38°	230V	⧈	100x100mm	100mm	30	Complete with 400mA driver
51406B/B/W	Black	Warm white	3000K	16W	1280lm	38°	230V	⧈	100x100mm	100mm	30	Complete with 400mA driver
51506B/W/W	White	Warm white	3000K	20W	1600lm	38°	230V	⧈	212x55mm	70mm	30	Complete with 500mA driver
51506B/B/W	Black	Warm white	3000K	20W	1600lm	38°	230V	⧈	212x55mm	70mm	30	Complete with 500mA driver

The COB Cylinders



11112RA/B/W

11107RA/W/W



11107RA/W/W

11107RA | 7W | COB LED | Aluminium





11107RA/B/W







11112RA/W/W

11112RA | 12W | COB LED | Aluminium





11112RA/B/W





Order Code	Colour	Reflector	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11107RA/W/W	White	Black	Warm white	3000K	7W	500lm	36°	700mA	III	40cm	45mm	40mm	36	Requires 700mA driver
11107RA/B/W	Black	Brass	Warm white	3000K	7W	500lm	36°	700mA	III	40cm	45mm	40mm	36	Requires 700mA driver
11112RA/W/W	White	Black	Warm white	3000K	12W	1020lm	36°	350mA	III	40cm	55mm	50mm	20	Requires 350mA driver
11112RA/B/W	Black	Brass	Warm white	3000K	12W	1020lm	36°	350mA	III	40cm	55mm	50mm	20	Requires 350mA driver



The COB Cylinders



11112RB/W/W

11112RB | 12W | COB LED | Aluminium







11112RB/B/W

11112RB | 12W | COB LED | Aluminium





Order Code	Colour	Reflector	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11112RB/W/W	White	Black	Warm white	3000K	12W	1020lm	36°	350mA	III	40cm	55mm	50mm	18	Requires 350mA driver
11112RB/B/W	Black	Brass	Warm white	3000K	12W	1020lm	36°	350mA	III	40cm	55mm	50mm	18	Requires 350mA driver



The COB Recessed Cylinders
Die cast


11111C/W/W

11111C | 11W | COB LED | Die cast

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · DARK LIGHT · IP20 · 5 YEAR


11111C/B/W


Complete with Black & Brass reflectors.




51111C/W/W

51111C | 11W | COB LED | Die cast

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · DARK LIGHT · IP20 · 5 YEAR


51111C/B/W


Complete with Black & Brass reflectors.




51211C/W/W

51211C | 2x11W | COB LED | Die cast

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · DARK LIGHT · IP20 · 5 YEAR


51211C/B/W


Complete with Black & Brass reflectors.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
11111C/W/W	White	Warm white	3000K	11W	820lm	38°	230V		85mm	110mm	20	Complete with 250mA driver
11111C/B/W	Black	Warm white	3000K	11W	820lm	38°	230V		85mm	110mm	20	Complete with 250mA driver
51111C/W/W	White	Warm white	3000K	11W	820lm	38°	230V		85x85mm	110mm	20	Complete with 250mA driver
51111C/B/W	Black	Warm white	3000K	11W	820lm	38°	230V		85x85mm	110mm	20	Complete with 250mA driver
51211C/W/W	White	Warm white	3000K	2x11W	2x820lm	38°	230V		165x85mm	110mm	20	Complete with 250mA drivers
51211C/B/W	Black	Warm white	3000K	2x11W	2x820lm	38°	230V		165x85mm	110mm	20	Complete with 250mA drivers



The COB Recessed Cylinders



11109B | 9W | COB LED | Aluminium

new · DARK LIGHT · IP20 · LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · ADJUSTABLE · CE · 5 YEAR



Complete with Black & Brass reflectors.







11107C/W/W

11107C | 7W | COB LED | Die cast

DARK LIGHT · IP20 · LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · ADJUSTABLE · CE · 5 YEAR



11107C/B/W







11207C/W/W

11207C | 2x7W | COB LED | Die cast

DARK LIGHT · IP20 · LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · ADJUSTABLE · CE · 5 YEAR



11207C/B/W





Order Code	Colour	Reflector	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	S				Notes
11109B/W/W	White	-	Warm white	3000K	9W	675lm	40°	500mA	III	40cm	120mm	90mm	12	Requires 500mA driver
11109B/B/W	Black	-	Warm white	3000K	9W	675lm	40°	500mA	III	40cm	120mm	90mm	12	Requires 500mA driver
11107C/W/W	White	Black	Warm white	3000K	7W	550lm	36°	700mA	III	40cm	83mm	80mm	36	Requires 700mA driver
11107C/B/W	Black	Brass	Warm white	3000K	7W	550lm	36°	700mA	III	40cm	83mm	80mm	36	Requires 700mA driver
11207C/W/W	White	Black	Warm white	3000K	2x7W	2x550lm	36°	700mA	III	40cm	2x83mm	90mm	24	Requires 700mA drivers
11207C/B/W	Black	Brass	Warm white	3000K	2x7W	2x550lm	36°	700mA	III	40cm	2x83mm	90mm	24	Requires 700mA drivers



11106PF/C + 05044/MC



050044/B



050044/C



050044/MC

The COB Fire Rated Range



11106PF | 6W | COB LED | Fire rated | Die cast

Ring must be ordered separately.

LED BUILT IN · FIRE RATED · 80 CRI · DIMMABLE · QUICK FIX · IP20 · ADJUSTABLE · CE · 3 YEAR



Dimensions are complete with the ring.





050044/B Black



050044/C Chrome



050044/MC Brushed chrome

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11106PF/C	-	Cool white	4000K	6W	530lm	40°	350mA	III	40cm	75mm	90mm	20	Requires 350mA driver
11106PF/W	-	Warm white	3000K	6W	500lm	40°	350mA	III	40cm	75mm	90mm	20	Requires 350mA driver



The Trimless COB Spot
Die cast



11107BT | 7W | COB LED | Trimless | Die cast

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · ADJUSTABLE · CE · 5 YEAR · DARK LIGHT · IP54







11112T | 12W | COB LED | Trimless | Die cast

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · ADJUSTABLE · CE · 5 YEAR · DARK LIGHT · IP20



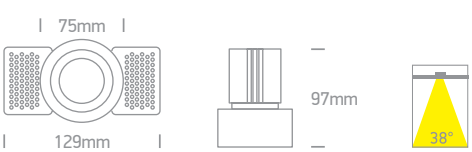

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11107BT/W/W	White	Warm white	3000K	7W	500lm	38°	700mA	III	40cm	96mm	105mm	30	Requires 700mA driver
11112T/W/W	White	Warm white	3000K	12W	1100lm	38°	700mA	III	40cm	75mm	110mm	40	Requires 700mA driver





05

Downlights

Pages 159-170

GX53 | E27

Die cast | Natural aluminium | Steel | Metal | Gypsum | Trimless

IP20

CE 5 YEAR



The GX53 Downlights



10004 | 9W | GX53 | Natural aluminium

5 YEAR

IP20

offer



Suitable for GX53 LED lamp.





10007/W

10007 | 9W | GX53 | Steel

5 YEAR

IP20

offer



Suitable for GX53 LED lamp.





10007/MC

10007 | 9W | GX53 | Steel

5 YEAR

IP20

offer



Suitable for GX53 LED lamp.



Order Code	Colour	Watts	Input	Class				Notes
10004/AL	Aluminium	9W	100-240V		86mm	35mm	50	-
10007/W	White	9W	100-240V		110mm	60mm	50	-
10007/MC	Brushed chrome	9W	100-240V		110mm	60mm	50	-



Adjustable R111 Shop Range
Aluminium



11110N | 75W | R111 | GU10 | Aluminium

ADJUSTABLE

5 YEAR

IP20



Suitable for R111 LED lamp.





51110N | 75W | R111 | GU10 | Aluminium

ADJUSTABLE

5 YEAR

IP20



Suitable for R111 LED lamp.





51210N | 2x75W | R111 | GU10 | Aluminium

ADJUSTABLE

5 YEAR

IP20



Suitable for R111 LED lamp.

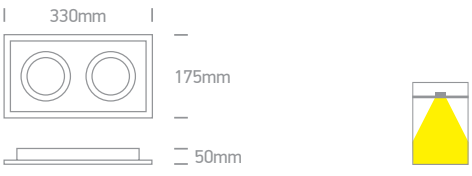



51310N | 3x75W | R111 | GU10 | Aluminium

ADJUSTABLE

5 YEAR

IP20



Suitable for R111 LED lamp.

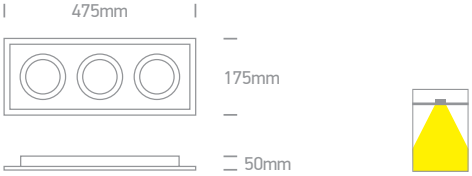

Order Code	Colour	Watts	Input	Class					Notes
11110N/W	White	75W	100-240V		15cm	165mm	160mm	30	-
51110N/W	White	75W	100-240V		15cm	165x165mm	160mm	30	-
51210N/W	White	2x75W	100-240V		15cm	315x165mm	160mm	15	-
51310N/W	White	3x75W	100-240V		15cm	460x165mm	160mm	10	-



Round Adjustable R111 Range

11110U | 75W | R111 | G53 | Die cast



IP20 offer

ADJUSTABLE

5 YEAR





11110AB | 75W | R111 | G53 | Aluminium



11110AB/B

IP20 offer

ADJUSTABLE

5 YEAR



Suitable for R111 LED lamp.



11110AB | 75W | R111 | G53 | Aluminium



11110AB/AL

IP20

ADJUSTABLE

5 YEAR



Suitable for R111 LED lamp.



11070RD | 75W | PAR30 | E27 | Die cast



IP20 offer

ADJUSTABLE

QUICK FIX

5 YEAR



Suitable for PAR30 LED lamp.





Order Code	Colour	Watts	Input	Class					Notes
11110U/G	Grey	75W	12V	III	30cm	152mm	180mm	18	-
11110AB/B	Black	75W	12V	III	40cm	150mm	75mm	20	-
11110AB/AL	Aluminium	75W	12V	III	40cm	150mm	75mm	20	-
11070RD/G	Grey	75W	100-240V	I	30cm	155mm	180mm	12	-

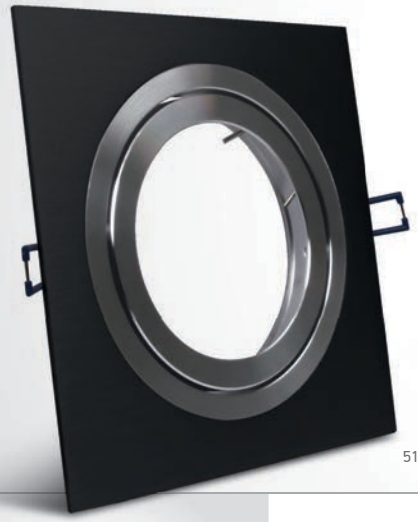

51110AB/B



51310AB/AL

Square Adjustable R111 Range



51110 | 50W | R111 | G53 | Die cast

ADJUSTABLE

CE 5 YEAR

IP20

offer



Suitable for R111 LED lamp.





51110AB/W

51110AB | 75W | R111 | G53 | Aluminium

ADJUSTABLE

CE 5 YEAR

IP20



Suitable for R111 LED lamp.





51110AB/B

51110AB | 75W | R111 | G53 | Aluminium

ADJUSTABLE

CE 5 YEAR

IP20



Suitable for R111 LED lamp.





51310AB | 3x75W | R111 | G53 | Aluminium

ADJUSTABLE

CE 5 YEAR

IP20

offer



Suitable for R111 LED lamp.

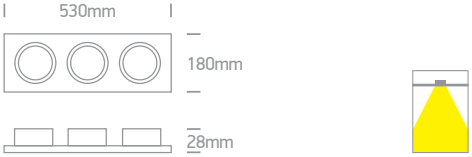

Order Code	Colour	Watts	Input	Class					Notes
51110/G	Grey	50W	12V	III	15cm	180x180mm	120mm	8	-
51110AB/W	White	75W	12V	III	40cm	150mm	75mm	20	-
51110AB/B	Black	75W	12V	III	40cm	150mm	75mm	20	-
51310AB/AL	Aluminium	3x75W	12V	III	40cm	495x150mm	75mm	10	-



The R111 Dark Light Shop Range
Die cast



11110AD | 75W | R111 | GU10 | Die cast

ADJUSTABLE

5 YEAR

DARK LIGHT

IP20







51110AD | 75W | R111 | GU10 | Die cast

ADJUSTABLE

5 YEAR

DARK LIGHT

IP20





Order Code	Colour	Watts	Input	Class					Notes
11110AD/B	Black	75W	100-240V	⏚	20cm	155mm	150mm	20	-
51110AD/B	Black	75W	100-240V	⏚	20cm	155x155mm	150mm	20	-

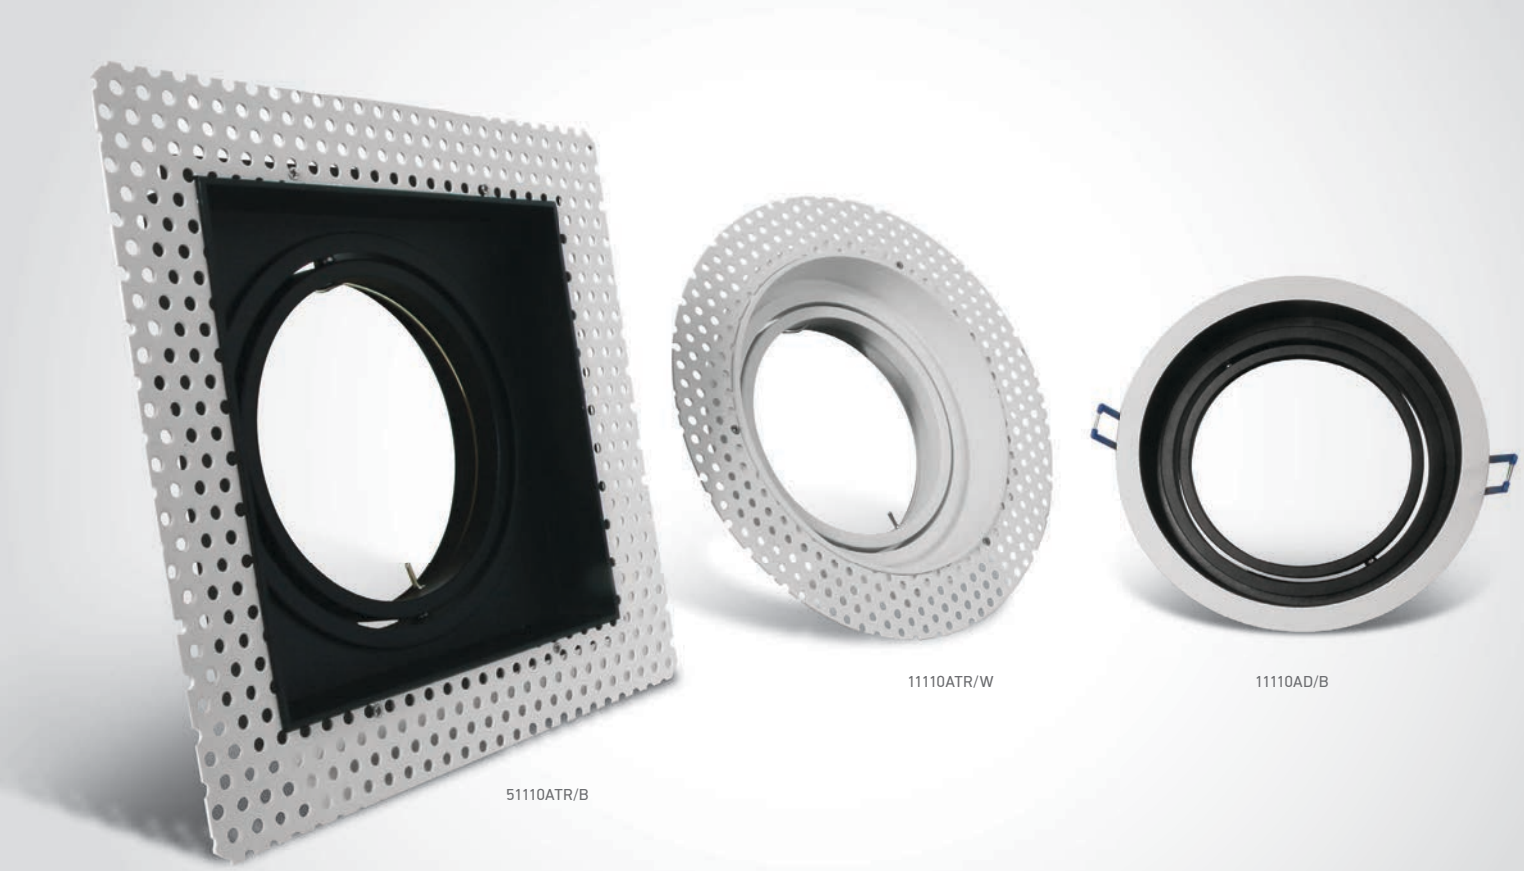

The R111 Trimless Shop Range
Die cast

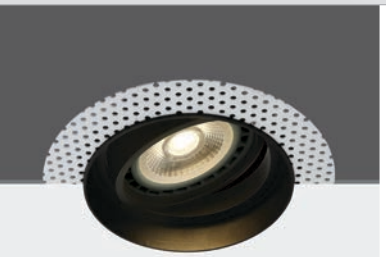

11110ATR/B

11110ATR | 75W | R111 | GU10 | Trimless | Die cast

ADJUSTABLE

5 YEAR

IP20



11110ATR/W



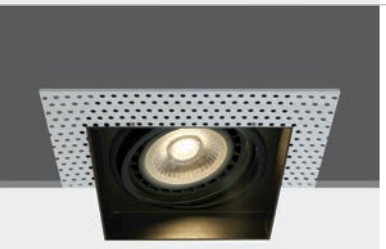

51110ATR/B

51110ATR | 75W | R111 | GU10 | Trimless | Die cast

ADJUSTABLE

5 YEAR

IP20



51110ATR/W

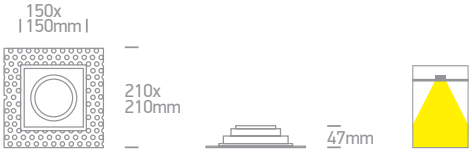

Order Code	Colour	Watts	Input	Class					Notes
11110ATR/W	White	75W	100-240V		20cm	170mm	150mm	10	-
11110ATR/B	Black	75W	100-240V		20cm	170mm	150mm	10	-
51110ATR/W	White	75W	100-240V		20cm	170x170mm	150mm	10	-
51110ATR/B	Black	75W	100-240V		20cm	170x170mm	150mm	10	-

Gypsum R111



11110GT1 | 75W | R111 | G53 | Gypsum

ADJUSTABLE

5 YEAR

IP20



Suitable for R111 LED lamp.



Order Code	Colour	Watts	Input	Class					Notes
11110GT1	White	75W	12V	III	25cm	212mm	170mm	6	-

Extractable R111
Die cast



11110H | 75W | R111 | GU10 | Die cast

ADJUSTABLE

CE 5 YEAR

IP20

offer



Suitable for R111 LED lamp.



Order Code	Colour	Watts	Input	Class					Notes
11110H/W	White	75W	100-240V		20cm	185mm	110mm	8	-



Multi System Metal Bases

For Modules on page 168



11100R/G | Metal

5 YEAR

IP20

offer

24

150mm

181mm

55mm



51200R/W | Metal

5 YEAR

IP20

offer

20

330x
150mm

361mm

181mm

55mm



51200AR/W | Metal

5 YEAR

IP20

offer

20

330x
150mm

361mm

181mm

55mm

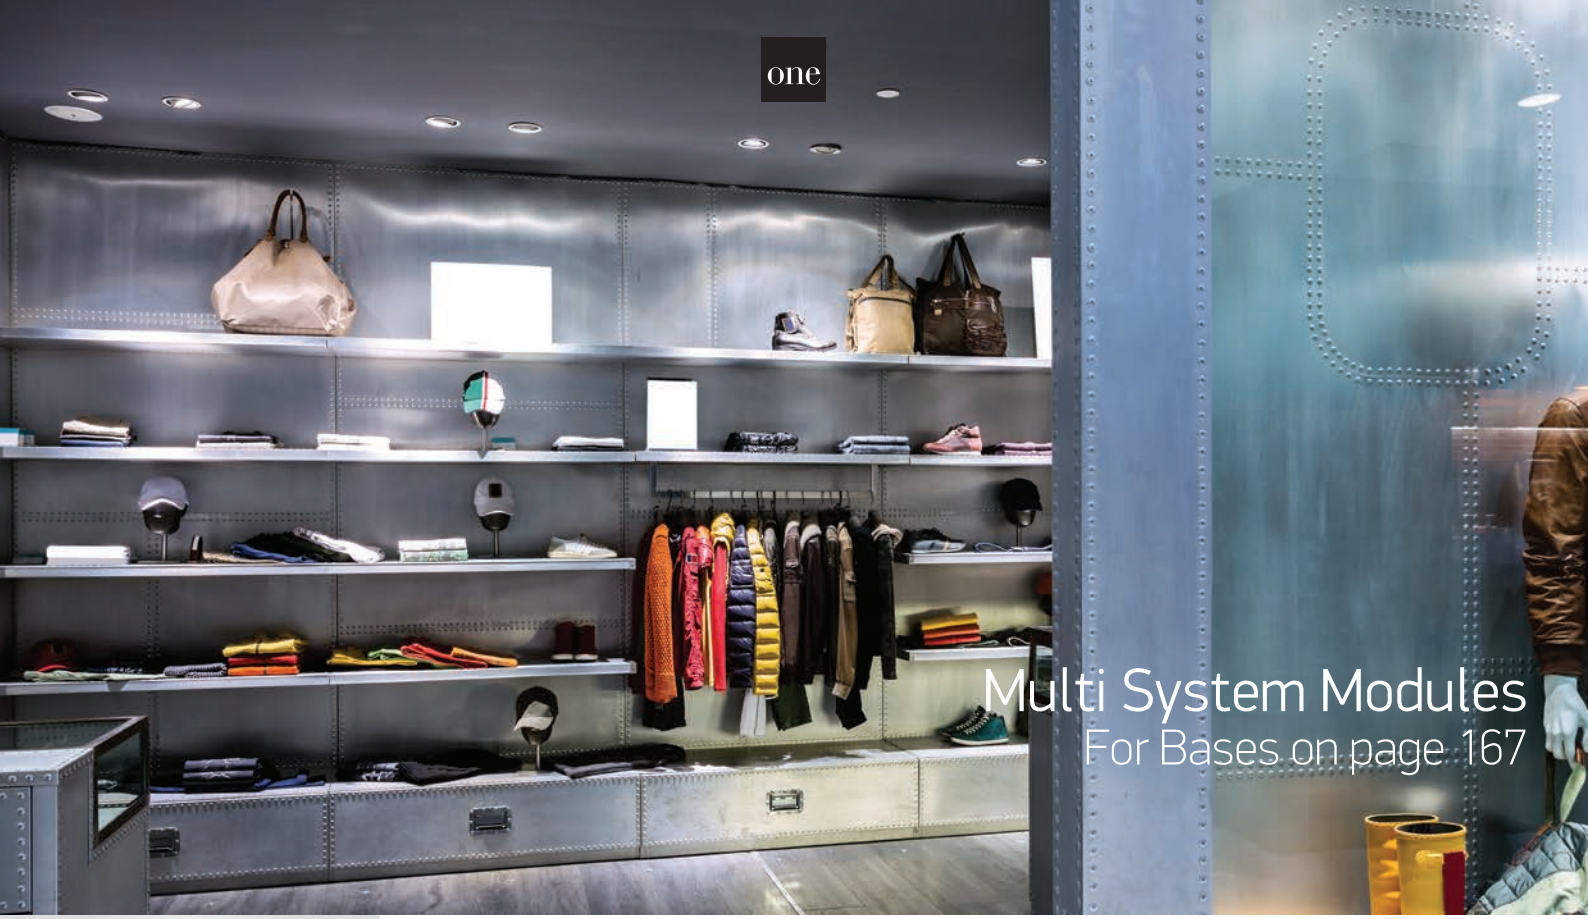

Multi System Modules

For Bases on page 167

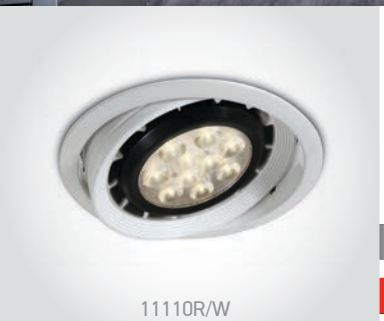

11110R/W

11110R | 75W | R111 | G53 | Die cast

Base must be ordered separately on page 167.



offer



11110R/G





11070R | 70W | PAR30 | E27 | Die cast

Base must be ordered separately on page 167.





Suitable for PAR30 LED lamp.





11106R/W/1

11106R | 20W | E27 | Die cast

Base must be ordered separately on page 167.



offer



11106R/G/1



Suitable for E27 LED lamp.



Order Code	Colour	Watts	Input	Class				Notes
11110R/W	White	75W	12V		25cm	80mm	45	-
11110R/G	Grey	75W	12V		25cm	80mm	45	-
11070R/G	Grey	70W	100-240V		40cm	160mm	20	-
11106R/W/1	White	20W	100-240V		-	180mm	20	Use E27 LED lamp
11106R/G/1	Grey	20W	100-240V		-	180mm	20	Use E27 LED lamp



Trimless Multi System Boxes

For Modules on page 170

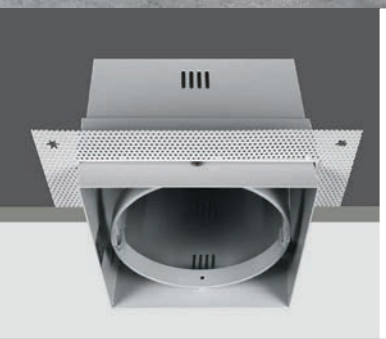

51100TR | Trimless box | Metal

5 YEAR



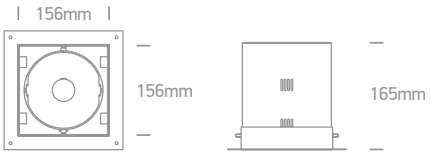



51100TR | Trimless box | Metal

5 YEAR



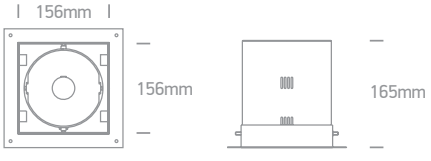

Order Code	Colour	Watts	Input	Class				Notes
51100TR/W	White	-	-	-	164x164mm	200mm	8	-
51100TR/B	Black	-	-	-	164x164mm	200mm	8	-

Trimless Multi System Modules

For Bases on page 169



51100TR/B + 11110TR/B



11110TR/B



11110TR/W

11110TR | 75W | R111 | GU10 | Die cast

Base must be ordered separately on page 169.

ADJUSTABLE · CE · 5 YEAR · IP20



Suitable for R111 LED lamp.





11110TR/B

11110TR | 75W | R111 | GU10 | Die cast

Base must be ordered separately on page 169

ADJUSTABLE · CE · 5 YEAR · IP20



Suitable for R111 LED lamp.





11070TR | 70W | PAR30 E27 | Die cast

Base must be ordered separately on page 169.

ADJUSTABLE · QUICK FIX · CE · 5 YEAR · IP20 · offer



Suitable for PAR30 LED lamp.



Order Code	Colour	Watts	Input	Class	S		Notes
11110TR/W	White	75W	100-240V	⏚	10cm	2	-
11110TR/B	Black	75W	100-240V	⏚	10cm	2	-
11070TR/W	White	70W	100-240V	⏚	30cm	36	-





06

Downlights Fixed LED

Pages 173-218

COB LED | SMD LED | LED

Die cast | Aluminium

IP20 IP40 IP44 IP54 IP65

DIMMABLE DARK LIGHT QUICK FIX UGR17 UGR19 80 CRI 90 CRI 2 YEAR 3 YEAR 5 YEAR



The 3-12W Round Recessed Panels
Die cast



10103FA | 3W | SMD LED | Die cast

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP40







10108FA/W/W

10108FA | 8W | SMD LED | Die cast

Optional dimmable driver code 89008UT.

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP40



10108FA/B/W





10112F | 12W | SMD LED | Die cast

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP40 · offer







10112FA/W/W

10112FA | 12W | SMD LED | Die cast

Optional dimmable driver code 89016UT.

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP40



10112FA/B/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10103FA/W/D	White	Daylight	6000K	3W	210lm	120°	230V		70mm	50mm	60	Complete with 300mA driver
10103FA/W/C	White	Cool white	4000K	3W	210lm	120°	230V		70mm	50mm	60	Complete with 300mA driver
10103FA/W/W	White	Warm white	3000K	3W	180lm	120°	230V		70mm	50mm	60	Complete with 300mA driver
10108FA/W/C	White	Cool white	4000K	8W	560lm	120°	230V		108mm	50mm	40	Complete with 300mA driver
10108FA/W/W	White	Warm white	3000K	8W	480lm	120°	230V		108mm	50mm	40	Complete with 300mA driver
10108FA/B/C	Black	Cool white	4000K	8W	560lm	120°	230V		108mm	50mm	40	Complete with 300mA driver
10108FA/B/W	Black	Warm white	3000K	8W	480lm	120°	230V		108mm	50mm	40	Complete with 300mA driver
10112F/W/EW	White	Extra warm white	2700K	12W	745lm	120°	100-240V		165mm	40mm	20	Complete with 500mA driver
10112FA/W/C	White	Cool white	4000K	12W	840lm	120°	230V		155mm	50mm	30	Complete with 250mA driver
10112FA/W/W	White	Warm white	3000K	12W	720lm	120°	230V		155mm	50mm	30	Complete with 250mA driver
10112FA/B/C	Black	Cool white	4000K	12W	840lm	120°	230V		155mm	50mm	30	Complete with 250mA driver
10112FA/B/W	Black	Warm white	3000K	12W	720lm	120°	230V		155mm	50mm	30	Complete with 250mA driver

one

The 18-30W Round Recessed Panels

Die cast



10118FA/W/W

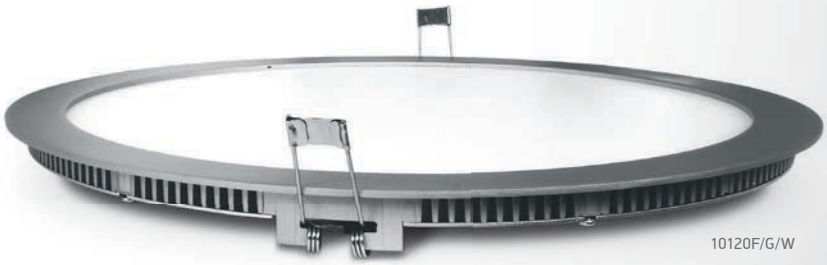

10120F/G/W

10118FA | 18W | SMD LED | Die cast

Optional dimmable driver code 89024UT.



10118FA/W/W

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP40



10118FA/B/W



10118FA/G/W



10120F | 30W | SMD LED | Die cast

Optional dimmable driver code 040060.



LED BUILT IN · 80 CRI · CE · 2 YEAR · IP40 · offer





10130FA | 30W | SMD LED | Die cast

Optional dimmable driver code 89030UT.



10130FA/W/C

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP40



10130FA/W/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10118FA/W/D	White	Daylight	6000K	18W	1260lm	120°	230V	☐	210mm	50mm	20	Complete with 450mA driver
10118FA/W/C	White	Cool white	4000K	18W	1260lm	120°	230V	☐	210mm	50mm	20	Complete with 450mA driver
10118FA/W/W	White	Warm white	3000K	18W	1080lm	120°	230V	☐	210mm	50mm	20	Complete with 450mA driver
10118FA/B/C	Black	Cool white	4000K	18W	1260lm	120°	230V	☐	210mm	50mm	20	Complete with 450mA driver
10118FA/B/W	Black	Warm white	3000K	18W	1080lm	120°	230V	☐	210mm	50mm	20	Complete with 450mA driver
10118FA/G/W	Grey	Warm white	3000K	18W	1080lm	120°	230V	☐	210mm	50mm	20	Complete with 450mA driver
10120F/G/D	Grey	Daylight	6000K	30W	1997lm	120°	100-240V	☐	285mm	40mm	10	Complete with 1000mA driver
10120F/G/W	Grey	Warm white	3000K	30W	1797lm	120°	100-240V	☐	285mm	40mm	10	Complete with 1000mA driver
10130FA/W/D	White	Daylight	6000K	30W	2100lm	120°	230V	☐	285mm	50mm	15	Complete with 700mA driver
10130FA/W/C	White	Cool white	4000K	30W	2100lm	120°	230V	☐	285mm	50mm	15	Complete with 700mA driver
10130FA/W/W	White	Warm white	3000K	30W	1800lm	120°	230V	☐	285mm	50mm	15	Complete with 700mA driver



The 8-16W Square Recessed Panels
Die cast



50108F | 8W | SMD LED | Die cast

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP40 · offer







50108FA/W/W

50108FA | 8W | SMD LED | Die cast

Optional dimmable driver code 89008UT.

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP40



50108FA/G/W





50116FA/W/W

50116FA | 16W | SMD LED | Die cast

Optional dimmable driver code 89016UT.

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP40



50116FA/G/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
50108F/G/D	Grey	Daylight	6000K	8W	461lm	120°	100-240V	☐	96x96mm	40mm	40	Complete with 500mA driver
50108FA/W/C	White	Cool white	4000K	8W	560lm	120°	230V	☐	105x105mm	50mm	40	Complete with 300mA driver
50108FA/W/W	White	Warm white	3000K	8W	480lm	120°	230V	☐	105x105mm	50mm	40	Complete with 300mA driver
50108FA/G/W	Grey	Warm white	3000K	8W	480lm	120°	230V	☐	105x105mm	50mm	40	Complete with 300mA driver
50116FA/W/C	White	Cool white	4000K	16W	1120lm	120°	230V	☐	155x155mm	50mm	30	Complete with 350mA driver
50116FA/W/W	White	Warm white	3000K	16W	960lm	120°	230V	☐	155x155mm	50mm	30	Complete with 350mA driver
50116FA/G/W	Grey	Warm white	3000K	16W	960lm	120°	230V	☐	155x155mm	50mm	30	Complete with 350mA driver



The 22-30W Square Recessed Panels
Die cast

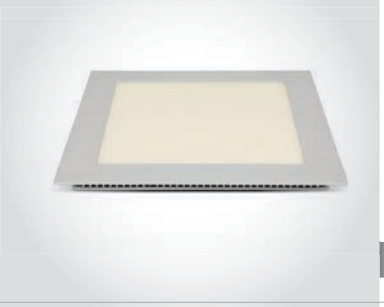

50122FA | 22W | SMD LED | Die cast

Optional dimmable driver code 89024UT.

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP40





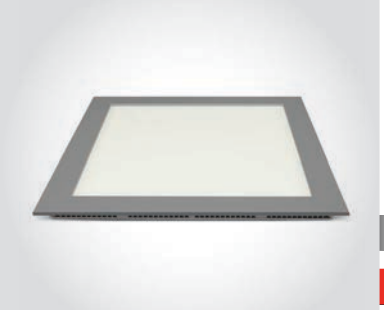

50130F | 30W | SMD LED | Die cast

Optional dimmable driver code 040060.

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP40 · offer







50130FA/W/W

50130FA | 30W | SMD LED | Die cast

Optional dimmable driver code 89030UT.

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP40



50130FA/G/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
50122FA/W/C	White	Cool white	4000K	22W	1540lm	120°	230V		210x210mm	50mm	20	Complete with 500mA driver
50122FA/W/W	White	Warm white	3000K	22W	1320lm	120°	230V		210x210mm	50mm	20	Complete with 500mA driver
50130F/G/C	Grey	Cool white	4000K	30W	2174lm	120°	100-240V		284x284mm	40mm	10	Complete with 1000mA driver
50130FA/W/D	White	Daylight	6000K	30W	2100lm	120°	230V		280x280mm	50mm	15	Complete with 700mA driver
50130FA/W/C	White	Cool white	4000K	30W	2100lm	120°	230V		280x280mm	50mm	15	Complete with 700mA driver
50130FA/W/W	White	Warm white	3000K	30W	1800lm	120°	230V		280x280mm	50mm	15	Complete with 700mA driver
50130FA/G/D	Grey	Daylight	6000K	30W	2100lm	120°	230V		280x280mm	50mm	15	Complete with 700mA driver
50130FA/G/W	Grey	Warm white	3000K	30W	1800lm	120°	230V		280x280mm	50mm	15	Complete with 700mA driver



The 40-48W Round Recessed Panels
Die cast



10140F | 40W | SMD LED | Die cast

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP40









10148PE | 48W | SMD 2835 | 600mm | Die cast

Driver must be ordered separately.

LED BUILT IN · 80 CRI · DIMMABLE · CE · 2 YEAR · IP20



Optional non-dimmable driver. Order code 89048.



Optional TRIAC dimmable driver. Order code 89048T.



Optional DALI, Triac & Push to DIM & 1-10V driver. Order code 89050TLD.





10148P | 48W | SMD 2835 | Die cast

LED BUILT IN · TRIAC · 80 CRI · DIMMABLE · CE · 2 YEAR · IP20 · offer







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10140F/W/D	White	Daylight	6000K	40W	3400lm	120°	230V	⊡	408mm	40mm	5	Complete with 1000mA driver
10140F/W/C	White	Cool white	4000K	40W	3400lm	120°	230V	⊡	408mm	40mm	5	Complete with 1000mA driver
10140F/W/W	White	Warm white	3000K	40W	3400lm	120°	230V	⊡	408mm	40mm	5	Complete with 1000mA driver
10148PE/W/C	White	Cool white	4000K	48W	4000lm	120°	1200mA	III	585mm	80mm	4	Requires 1200mA driver
10148PE/W/W	White	Warm white	3000K	48W	3500lm	120°	1200mA	III	585mm	80mm	4	Requires 1200mA driver
10148P/W/D	White	Daylight	6000K	48W	3200lm	120°	230V	⊡	585mm	80mm	2	Complete with 1200mA driver



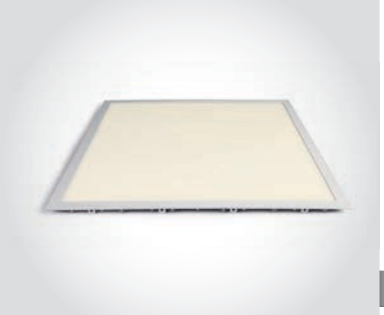

50148PE | 48W | SMD 2835 | 600x600mm | Die cast

Driver must be ordered separately.

LED BUILT IN

80 CRI

DIMMABLE

CE

IP20

2 YEAR





Optional non-dimmable driver. Order code 89048.



Optional TRIAC dimmable driver. Order code 89048T.



Optional DALI, Triac & Push to DIM & 1-10V driver. Order code 89050TLD.

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class				Notes
50148PE/W/W	White	Warm white	3000K	48W	3900lm	1200mA	III	585x585mm	80mm	4	Requires 1200mA driver

The 40W Backlit Panel
600x600mm



50140B | 40W | SMD 2835 | 595x595mm | Aluminium + Steel — Backlit

LED BUILT IN

80 CRI

CE

2 YEAR

new

IP20



Optional suspension kit. Order code 050017.



Optional recessed kit (4pcs). Order code 050108.



Optional DALI & Push to DIM driver. Order code 89042L.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
50140B/W/D	White	Daylight	6000K	40W	4000lm	230V		50mm	4	Complete with 850mA driver
50140B/W/C	White	Cool white	4000K	40W	4000lm	230V		50mm	4	Complete with 850mA driver
50140B/W/W	White	Warm white	3000K	40W	4000lm	230V		50mm	4	Complete with 850mA driver



The 48W Square Panels
600x600mm

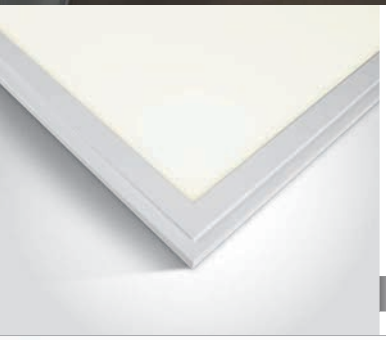

50148E | 48W | SMD 4014 | 595x595mm | Aluminium

Driver must be ordered separately.

LED BUILT IN · 80 CRI · DIMMABLE · CE · IP20 · 2 YEAR



Optional suspension kit. Order code 050017.



Optional recessed kit (4pcs). Order code 050108.



Optional non-dimmable driver. Order code 89048.



Optional TRIAC dimmable driver. Order code 89048T.



Optional DALI, Triac & Push to DIM & 1-10V driver. Order code 89050TLD.



50148U | 48W | SMD 2835 | 595x595mm | Aluminium

Driver must be ordered separately.

LED BUILT IN · 80 CRI · DIMMABLE · CE · IP20 · 2 YEAR · UGR19



Optional suspension kit. Order code 050017.



Optional recessed kit (4pcs). Order code 050108.



Optional non-dimmable driver. Order code 89048.



Optional TRIAC dimmable driver. Order code 89048T.



Optional DALI, Triac & Push to DIM & 1-10V driver. Order code 89050TLD.



50143F | 48W | SMD 2835 | 595x595mm | Aluminium

Complete with driver.

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP40 · offer



Optional suspension kit. Order code 050017.



Optional recessed kit (4pcs). Order code 050108.



Optional TRIAC dimmable driver. Order code 89048T.



Optional DALI, Triac & Push to DIM & 1-10V driver. Order code 89050TLD.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
50148E/W/W	White	Warm white	3000K	48W	4000lm	1200mA		50mm	6	Requires 1200mA driver
50148U/W/D	White	Daylight	6000K	48W	4100lm	1200mA		55mm	4	Requires 1200mA driver
50143F/W/D	White	Daylight	6000K	48W	3800lm	230V		50mm	4	Complete with 1200mA driver



Panels For Germany/Austria
620x620mm



Germany / Austria

D A

50140AE | 40W | SMD 4014 | 620x620mm | Aluminium

LED BUILT IN · 80 CRI · DIMMABLE · CE · IP20 · 2 YEAR offer



Optional suspension kit. Order code 050017.



Optional recessed kit (4pcs). Order code 050108.



Optional DALI, Triac & Push to DIM & 1-10V driver. Order code 89050TLD.





Germany / Austria

D A

50140AU | 40W | SMD 4014 | Aluminium

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP20 · UGR17 offer



Optional suspension kit. Order code 050017.



Optional DALI, Triac & Push to DIM & 1-10V driver. Order code 89050TLD.





Germany / Austria

D A

50148AU | 48W | SMD 2835 | 620x620mm | Aluminium

Driver must be ordered separately.

LED BUILT IN · 80 CRI · DIMMABLE · CE · IP20 · 2 YEAR · UGR19 offer



Optional suspension kit. Order code 050017.



Optional recessed kit (4pcs). Order code 050108.



Optional non-dimmable driver. Order code 89048.



Optional TRIAC dimmable driver. Order code 89048T.



Optional DALI, Triac & Push to DIM & 1-10V driver. Order code 89050TLD.

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
50140AE/W/C	White	Cool white	4000K	40W	3400lm	230V		50mm	6	Complete with 1000mA driver
50140AU/W/W	White	Warm white	3000K	40W	3100lm	230V		55mm	6	Complete with 1000mA driver
50148AU/W/W	White	Warm white	3000K	48W	4000lm	1200mA		55mm	4	Requires 1200mA driver



The Rectangular Panels
Aluminium



50148RE | 48W | SMD 4014 | 1195x295mm | Aluminium

Driver must be ordered separately.

LED BUILT IN | 80 CRI | DIMMABLE | CE | IP20 | 2 YEAR



Optional suspension kit. Order code 050017.

Requires 2 sets.



Optional recessed kit (4pcs). Order code 050108.



Optional non-dimmable driver. Order code 89048.



Optional TRIAC dimmable driver. Order code 89048T.



Optional DALI, Triac & Push to DIM & 1-10V driver. Order code 89050TLD.



50160E | 60W | SMD 4014 | 1195x595mm | Aluminium

Driver must be ordered separately.

LED BUILT IN | 80 CRI | DIMMABLE | CE | IP20 | offer | 2 YEAR



Optional suspension kit. Order code 050017.

Requires 2 sets.



Optional recessed kit (4pcs). Order code 050108.



Optional non-dimmable driver. Order code 89060.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
50148RE/W/D	White	Daylight	6000K	48W	4100lm	1200mA	III	50mm	4	Requires 1200mA driver
50148RE/W/C	White	Cool white	4000K	48W	4100lm	1200mA	III	50mm	4	Requires 1200mA driver
50148RE/W/W	White	Warm white	3000K	48W	3900lm	1200mA	III	50mm	4	Requires 1200mA driver
50160E/W/D	White	Daylight	6000K	60W	4900lm	1300mA	III	50mm	4	Requires 1300mA driver
50160E/W/W	White	Warm white	3000K	60W	5100lm	1300mA	III	50mm	4	Requires 1300mA driver



Square UGR19 Pro Panel



50136P | 36W | SMD 2835 | Metal

LED BUILT IN

80 CRI

CE

3 YEAR

IP40

UGR19



Optional recessed kit (4pcs).
Order code 050108A.



Optional DALI, Triac &
Push to DIM & 1-10V driver.
Order code 89050TLD.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
50136P/W/C	White	Cool white	4000K	36W	4320lm	230V		60mm	4	Complete with 900mA driver

Rectangular UGR19 Panel



50136RP | 36W | SMD 4014 | 1200x145mm | Aluminium

LED BUILT IN

80 CRI

CE

2 YEAR

IP40

UGR19



Optional suspension kit.
Order code 050150.



Optional recessed kit (4pcs).
Order code 050108B.



Optional DALI, Triac &
Push to DIM & 1-10V driver.
Order code 89050TLD.

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class				Notes
50136RP/W/C	White	Cool white	4000K	36W	2900lm	230V	⧈	1100x125mm	50mm	4	Complete with 900mA driver
50136RP/W/W	White	Warm white	3000K	36W	2900lm	230V	⧈	1100x125mm	50mm	4	Complete with 900mA driver



Surface/Recessed Panels
Adjustable Cut Out Hole



62116F | 16W | SMD 2835 | Surface / Recessed Mounted | Plastic

LED BUILT IN

80 CRI

CE

2 YEAR

IP20



Adjustable cutout hole.





62116FA | 16W | SMD 2835 | Surface / Recessed Mounted | Plastic

LED BUILT IN

80 CRI

CE

2 YEAR

IP20



Adjustable cutout hole.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class				Notes
62116F/W/C	White	Cool white	4000K	16W	1500lm	230V		70-175mm	50mm	20	Complete with 210mA driver
62116F/W/W	White	Warm white	3000K	16W	1500lm	100-240V		70-175mm	50mm	20	Complete with 210mA driver
62116FA/W/C	White	Cool white	4000K	16W	1500lm	100-240V		70-190mm	50mm	20	Complete with 230mA driver
62116FA/W/W	White	Warm white	3000K	16W	1500lm	100-240V		70-190mm	50mm	20	Complete with 230mA driver

The Chrome Bezel Range
Aluminium





10115 | 15W | SMD 2835 | Aluminium

LED BUILT IN
80 CRI
CE
2 YEAR
IP44
offer







10124/G/C

10124 | 24W | SMD 2835 | Aluminium

LED BUILT IN
80 CRI
CE
2 YEAR
IP44
offer
offer



10124/G/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10115/W/C	White	Cool white	4000K	15W	1050lm	120°	230V		160mm	150mm	8	Complete with 300mA driver
10124/G/C	Grey	Cool white	4000K	24W	1550lm	120°	230V		210mm	160mm	8	Complete with 600mA driver
10124/G/W	Grey	Warm white	3000K	24W	1450lm	120°	230V		210mm	160mm	8	Complete with 600mA driver



The Budget Downlight Range
Aluminium



10103T | 3W | SMD 2835 | Aluminium

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP20







10107T | 7W | SMD 2835 | Aluminium

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP20







10115T | 15W | SMD 2835 | Aluminium

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10103T/W/C	White	Cool white	4000K	3W	220lm	120°	230V	☐	68mm	50mm	100	Complete with 250mA driver
10103T/W/W	White	Warm white	3000K	3W	210lm	120°	230V	☐	68mm	50mm	100	Complete with 250mA driver
10107T/W/C	White	Cool white	4000K	7W	520lm	120°	230V	☐	85mm	60mm	60	Complete with 280mA driver
10107T/W/W	White	Warm white	3000K	7W	490lm	120°	230V	☐	85mm	60mm	60	Complete with 280mA driver
10115T/W/C	White	Cool white	4000K	15W	1100lm	120°	230V	☐	130mm	60mm	30	Complete with 300mA driver
10115T/W/W	White	Warm white	3000K	15W	1050lm	120°	230V	☐	130mm	60mm	30	Complete with 300mA driver

The Budget Downlight Range
Aluminium





10124T | 24W | SMD 2835 | Aluminium

LED BUILT IN
80 CRI
CE
2 YEAR
IP20







10130T | 30W | SMD 2835 | Aluminium

LED BUILT IN
80 CRI
CE
2 YEAR
IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10124T/W/C	White	Cool white	4000K	24W	1800lm	120°	230V	☐	210mm	75mm	20	Complete with 600mA driver
10124T/W/W	White	Warm white	3000K	24W	1700lm	120°	230V	☐	210mm	75mm	20	Complete with 600mA driver
10130T/W/C	White	Cool white	4000K	30W	2250lm	120°	230V	☐	210mm	75mm	20	Complete with 700mA driver
10130T/W/W	White	Warm white	3000K	30W	2100lm	120°	230V	☐	210mm	75mm	20	Complete with 700mA driver



10110U | 10W | SMD 2835 | Die cast



10110U/W/C

LED BUILT IN · 80 CRI · CE · 3 YEAR · IP44 · UGR19



10110U/W/W





10124U | 24W | SMD 2835 | Die cast



10124U/W/C

LED BUILT IN · 80 CRI · CE · 3 YEAR · IP44 · UGR19



10124U/W/W





10130U | 30W | SMD 2835 | Die cast



10130U/W/C

LED BUILT IN · 80 CRI · CE · 3 YEAR · IP44 · UGR19



10130U/B/C





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class				Notes
10110U/W/C	White	Cool white	4000K	10W	750lm	230V		86mm	55mm	40	Complete with 200mA driver
10110U/W/W	White	Warm white	3000K	10W	750lm	230V		86mm	55mm	40	Complete with 200mA driver
10124U/W/C	White	Cool white	4000K	24W	1800lm	230V		160mm	55mm	20	Complete with 500mA driver
10124U/W/W	White	Warm white	3000K	24W	1800lm	230V		160mm	55mm	20	Complete with 500mA driver
10130U/W/C	White	Cool white	4000K	30W	2250lm	230V		205mm	65mm	10	Complete with 750mA driver
10130U/W/W	White	Warm white	3000K	30W	2250lm	230V		205mm	65mm	10	Complete with 750mA driver
10130U/B/C	Black	Cool white	4000K	30W	2250lm	230V		205mm	65mm	10	Complete with 750mA driver
10130U/B/W	Black	Warm white	3000K	30W	2250lm	230V		205mm	65mm	10	Complete with 750mA driver



UGR19 Adjustable CCT Range



10107UV | 7W | SMD 2835 | Die cast

Adjustable colour temperature.

LED BUILT IN · 80 CRI · CE · 3 YEAR · UGR19 · IP44



CCT Adjustable
6000K-4000K-3000K







10113UV | 13W | SMD 2835 | Die cast

Adjustable colour temperature.

LED BUILT IN · 80 CRI · CE · 3 YEAR · UGR19 · IP44



CCT Adjustable
6000K-4000K-3000K







10120UV | 20W | SMD 2835 | Die cast

Adjustable colour temperature.

LED BUILT IN · 80 CRI · CE · 3 YEAR · UGR19 · IP44



CCT Adjustable
6000K-4000K-3000K







10130UV | 30W | SMD 2835 | Die cast

Adjustable colour temperature.

LED BUILT IN · 80 CRI · CE · 3 YEAR · UGR19 · IP44



CCT Adjustable
6000K-4000K-3000K





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class				Notes
10107UV/W	White	Daylight-Cool white-Warm white	6000K-4000K-3000K	7W	525lm	230V		70mm	60mm	40	Complete with 180mA driver
10113UV/W	White	Daylight-Cool white-Warm white	6000K-4000K-3000K	13W	975lm	230V		120mm	70mm	20	Complete with 300mA driver
10120UV/W	White	Daylight-Cool white-Warm white	6000K-4000K-3000K	20W	1500lm	230V		170mm	75mm	20	Complete with 550mA driver
10130UV/W	White	Daylight-Cool white-Warm white	6000K-4000K-3000K	30W	2250lm	230V		210mm	80mm	20	Complete with 700mA driver

Floating Panels Range

Adjustable Cut Out Hole



10110CE/C



10114CE/C



10120CE/C

Floating Panels Range
Adjustable Cut Out Hole





10110CE/W

10110CE | 10W | SMD 4014 | Aluminium + PC

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP20



Adjustable cutout hole.





10114CE/W

10114CE | 14W | SMD 4014 | Aluminium + PC

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP20



Adjustable cutout hole.





10120CE/W

10120CE | 20W | SMD 4014 | Aluminium + PC

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP20



Adjustable cutout hole.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class				Notes
10110CE/C	White	Cool white	4000K	10W	1100lm	230V		60-100mm	40mm	40	Complete with 250mA driver
10110CE/W	White	Warm white	3000K	10W	1100lm	230V		60-100mm	40mm	40	Complete with 250mA driver
10114CE/C	White	Cool white	4000K	14W	1550lm	230V		60-140mm	40mm	40	Complete with 300mA driver
10114CE/W	White	Warm white	3000K	14W	1550lm	230V		60-140mm	40mm	40	Complete with 300mA driver
10120CE/C	White	Cool white	4000K	20W	2200lm	230V		70-180mm	40mm	40	Complete with 700mA driver
10120CE/W	White	Warm white	3000K	20W	2200lm	230V		70-180mm	40mm	40	Complete with 700mA driver



The Semi Dark Light COB Pro Range



10107CD | 7W | COB LED | Die cast

IP20 offer

LED BUILT IN · 80 CRI · CE · 2 YEAR







10115CD | 15W | COB LED | Die cast

IP20 offer

LED BUILT IN · 80 CRI · CE · 2 YEAR







10140CD | 40W | COB LED | Die cast

IP20 offer

LED BUILT IN · 80 CRI · CE · 2 YEAR





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10107CD/W/C	White	Cool white	4000K	7W	560lm	120°	230V	⧈	100mm	70mm	30	Complete with 300mA driver
10107CD/W/W	White	Warm white	3000K	7W	511lm	120°	230V	⧈	100mm	70mm	30	Complete with 300mA driver
10115CD/W/C	White	Cool white	4000K	15W	1200lm	120°	230V	⧈	160mm	90mm	18	Complete with 400mA driver
10115CD/W/W	White	Warm white	3000K	15W	1095lm	120°	230V	⧈	160mm	90mm	18	Complete with 400mA driver
10140CD/W/W	White	Warm white	3000K	40W	2920lm	120°	230V	⧈	245mm	100mm	6	Complete with 1000mA driver

The COB Downlight Range
Aluminium



10110C | 10W | COB LED | Aluminium



IP20 offer

LED BUILT IN · 80 CRI · CE · 2 YEAR





10120C | 20W | COB LED | Aluminium



10120C/W/W

IP20 offer

LED BUILT IN · 80 CRI · CE · 2 YEAR

offer



10120C/G/C



10130C | 30W | COB LED | Aluminium



10130C/G/W

IP20 offer

LED BUILT IN · 80 CRI · CE · 2 YEAR

offer



10130C/G/C



10130CR | 30W | COB LED | Aluminium

90CRI.



IP20 offer

LED BUILT IN · 90 CRI · CE · 2 YEAR





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10110C/G/W	Grey	Warm white	3000K	10W	700lm	80°	230V	☐	95mm	90mm	40	Complete with 260mA driver
10120C/W/W	White	Warm white	3000K	20W	1400lm	80°	230V	☐	160mm	100mm	18	Complete with 500mA driver
10120C/G/C	Grey	Cool white	4000K	20W	1400lm	80°	230V	☐	160mm	100mm	18	Complete with 500mA driver
10130C/G/C	Grey	Cool white	4000K	30W	2200lm	80°	230V	☐	210mm	120mm	9	Complete with 850mA driver
10130C/G/W	Grey	Warm white	3000K	30W	2200lm	80°	230V	☐	210mm	120mm	9	Complete with 850mA driver
10130CR/W/W	White	Warm white	3000K	30W	2200lm	80°	230V	☐	210mm	120mm	9	Complete with 850mA driver



The COB Downlight Range
Die cast



10107CA | 7W | COB LED | Die cast

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP20







10110CA | 10W | COB LED | Die cast

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP20







10115CA | 15W | COB LED | Die cast

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10107CA/W/C	White	Cool white	4000K	7W	560lm	60°	230V	☐	75mm	70mm	50	Complete with 300mA driver
10107CA/W/W	White	Warm white	3000K	7W	560lm	60°	230V	☐	75mm	70mm	50	Complete with 300mA driver
10110CA/W/C	White	Cool white	4000K	10W	850lm	60°	230V	☐	95mm	100mm	50	Complete with 300mA driver
10110CA/W/W	White	Warm white	3000K	10W	850lm	60°	230V	☐	95mm	100mm	50	Complete with 300mA driver
10115CA/W/C	White	Cool white	4000K	15W	1275lm	60°	230V	☐	125mm	100mm	30	Complete with 350mA driver
10115CA/W/W	White	Warm white	3000K	15W	1275lm	60°	230V	☐	125mm	100mm	30	Complete with 350mA driver



The COB Downlight Range
Die cast



10120CA | 20W | COB LED | Die cast

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP20







10130CA | 30W | COB LED | Die cast

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP20







10160CA | 60W | COB LED | Die cast

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10120CA/W/C	White	Cool white	4000K	20W	1800lm	60°	230V	☐	145mm	100mm	20	Complete with 500mA driver
10120CA/W/W	White	Warm white	3000K	20W	1800lm	60°	230V	☐	145mm	100mm	20	Complete with 500mA driver
10130CA/W/C	White	Cool white	4000K	30W	2700lm	60°	230V	☐	210mm	140mm	10	Complete with 750mA driver
10130CA/W/W	White	Warm white	3000K	30W	2700lm	60°	230V	☐	210mm	140mm	10	Complete with 750mA driver
10160CA/W/C	White	Cool white	4000K	60W	5400lm	60°	230V	☐	210mm	160mm	10	Complete with 1500mA driver
10160CA/W/W	White	Warm white	3000K	60W	5400lm	60°	230V	☐	210mm	160mm	10	Complete with 1500mA driver

The Dark Light Project Range



10110TD/W/C



10118TD/W/C

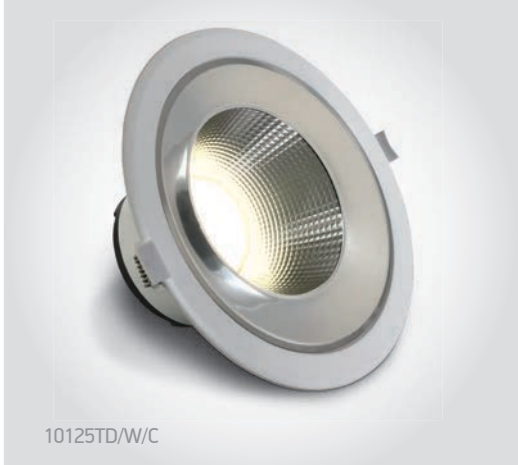

10125TD/W/C



The Dark Light Project Range



10110TD/W/W

10110TD | 10W | SMD 2835 | Aluminium

new DARK LIGHT IP54

LED BUILT IN · 80 CRI · CE · 2 YEAR







10118TD/W/W

10118TD | 18W | SMD 2835 | Aluminium

new DARK LIGHT IP54

LED BUILT IN · 80 CRI · CE · 2 YEAR







10125TD/W/W

10125TD | 25W | SMD 2835 | Aluminium

new DARK LIGHT IP54

LED BUILT IN · 80 CRI · CE · 2 YEAR





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10110TD/W/C	White	Cool white	4000K	10W	950lm	60°	230V	☐	95mm	110mm	30	Complete with 250mA driver
10110TD/W/W	White	Warm white	3000K	10W	950lm	60°	230V	☐	95mm	110mm	30	Complete with 250mA driver
10118TD/W/C	White	Cool white	4000K	18W	1710lm	60°	230V	☐	150mm	120mm	24	Complete with 450mA driver
10118TD/W/W	White	Warm white	3000K	18W	1710lm	60°	230V	☐	150mm	120mm	24	Complete with 450mA driver
10125TD/W/C	White	Cool white	4000K	25W	2400lm	60°	230V	☐	210mm	140mm	12	Complete with 600mA driver
10125TD/W/W	White	Warm white	3000K	25W	2400lm	60°	230V	☐	210mm	140mm	12	Complete with 600mA driver

Dark Light Pro Range
Aluminium



10108ED/W/B/W



10112ED/W/B/W



10130ED/W/B/W

Dark Light Pro Range
Aluminium

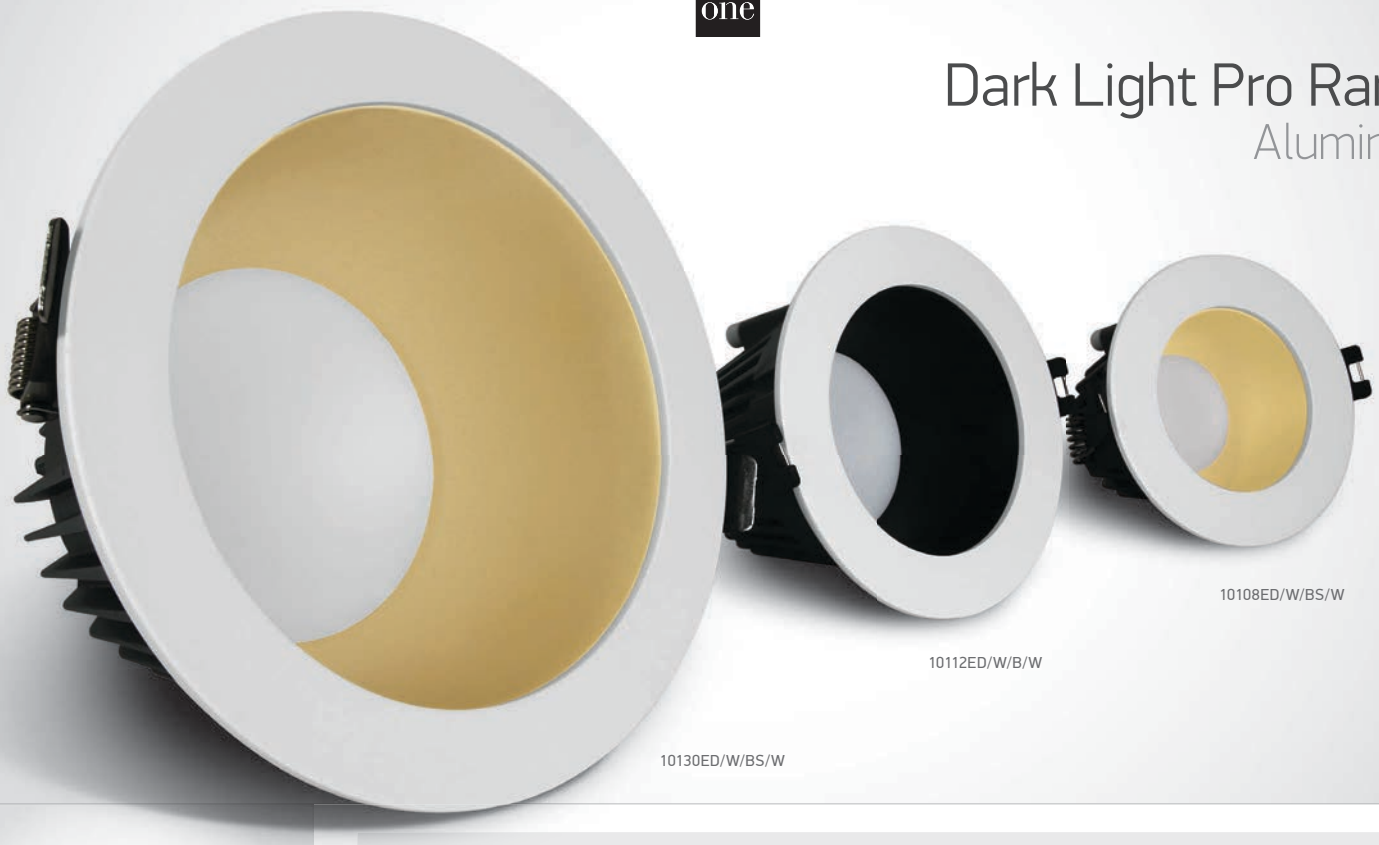

10108ED | 8W | SMD 2835 | Aluminium


10108ED/W/BS/W

DARK LIGHT IP20 | LED BUILT IN | 80 CRI | CE | 2 YEAR


10108ED/W/B/W





10112ED | 12W | SMD 2835 | Aluminium


10112ED/W/BS/W

DARK LIGHT IP20 | LED BUILT IN | 80 CRI | CE | 2 YEAR


10112ED/W/B/W





10130ED | 30W | SMD 2835 | Aluminium


10130ED/W/BS/W

DARK LIGHT IP20 | LED BUILT IN | 80 CRI | CE | 2 YEAR


10130ED/W/B/W





Order Code	Colour	Reflector	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10108ED/W/B/W	White	Black	Warm white	3000K	8W	480lm	60°	230V	☐	75mm	80mm	50	Complete with 300mA driver
10108ED/W/BS/W	White	Brass	Warm white	3000K	8W	560lm	60°	230V	☐	75mm	80mm	50	Complete with 300mA driver
10112ED/W/B/W	White	Black	Warm white	3000K	12W	720lm	60°	230V	☐	92mm	95mm	50	Complete with 300mA driver
10112ED/W/BS/W	White	Brass	Warm white	3000K	12W	840lm	60°	230V	☐	92mm	95mm	50	Complete with 300mA driver
10130ED/W/B/W	White	Black	Warm white	3000K	30W	1800lm	60°	230V	☐	145mm	130mm	20	Complete with 750mA driver
10130ED/W/BS/W	White	Brass	Warm white	3000K	30W	2100lm	60°	230V	☐	145mm	130mm	20	Complete with 750mA driver



The Dark Light Dome Reflector

Die cast



10116FD/W/BS

10116FD | 16W | SMD 2835 | Die cast

LED BUILT IN

80 CRI

CE

3 YEAR

DARK LIGHT

IP20





170mm



50mm





10116FD/B/BS

10116FD | 16W | SMD 2835 | Die cast

LED BUILT IN

80 CRI

CE

3 YEAR

DARK LIGHT

IP20





170mm



50mm



Order Code	Colour	Reflector	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class				Notes
10116FD/W/BS	White	Brass	Warm white	3000K	16W	800lm	230V	⧈	155mm	80mm	20	Complete with 300mA driver
10116FD/B/BS	Black	Brass	Warm white	3000K	16W	800lm	230V	⧈	155mm	80mm	20	Complete with 300mA driver



10122FD/W/C



10116FD/W/C



10108FD/W/W

The Dark Light Dome Reflector
Die cast



10108FD | 8W | SMD 2835 | Die cast

LED BUILT IN
80 CRI
CE
3 YEAR
DARK LIGHT
IP20







10116FD | 16W | SMD 2835 | Die cast

LED BUILT IN
80 CRI
CE
3 YEAR
DARK LIGHT
IP20







10122FD | 22W | SMD 2835 | Die cast

LED BUILT IN
80 CRI
CE
3 YEAR
DARK LIGHT
IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class				Notes
10108FD/W/W	White	Warm white	3000K	8W	560lm	230V		94mm	60mm	45	Complete with 300mA driver
10116FD/W/C	White	Cool white	4000K	16W	1150lm	230V		155mm	80mm	20	Complete with 300mA driver
10116FD/W/W	White	Warm white	3000K	16W	1150lm	230V		155mm	80mm	20	Complete with 300mA driver
10122FD/W/C	White	Cool white	4000K	22W	1550lm	230V		210mm	90mm	20	Complete with 600mA driver
10122FD/W/W	White	Warm white	3000K	22W	1550lm	230V		210mm	90mm	20	Complete with 600mA driver

The Dark Light Downlights
Aluminium



10105E | 5W | LED | Natural aluminium



DARK LIGHT · IP40 · offer

LED BUILT IN · DIMMABLE · QUICK FIX · CE · 3 YEAR





10115E | 15W | LED | Semi trimless | Natural aluminium



DARK LIGHT · IP40 · offer

LED BUILT IN · DIMMABLE · QUICK FIX · CE · 3 YEAR





10130A | 30W | SMD LED | Aluminium



10130A/AL/W

DARK LIGHT · IP20 · offer

LED BUILT IN · 80 CRI · CE · 2 YEAR

offer



10130A/W/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	S				Notes
10105E/AL/C	Aluminium	Cool white	4000K	5W	375lm	-	500mA	III	40cm	85mm	110mm	20	Requires 500mA driver
10105E/AL/W	Aluminium	Warm white	3000K	5W	360lm	-	500mA	III	40cm	85mm	110mm	20	Requires 500mA driver
10115E/AL/C	Aluminium	Cool white	4000K	15W	1125lm	-	700mA	III	40cm	125mm	150mm	20	Requires 700mA driver
10115E/AL/W	Aluminium	Warm white	3000K	15W	1050lm	-	700mA	III	40cm	125mm	150mm	20	Requires 700mA driver
10130A/W/W	White	Warm white	3000K	30W	2300lm	80°	100-240V	□	-	210mm	170mm	5	Complete with 350mA driver
10130A/AL/W	Aluminium	Warm white	3000K	30W	2300lm	80°	100-240V	□	-	210mm	170mm	5	Complete with 350mA driver

The Dark Light Downlights



10113A/W/W

10112KD/W/C



10112KD | 12W | SMD LED | Plastic

DARK LIGHT
IP20
offer

LED BUILT IN
80 CRI
DIMMABLE
QUICK FIX
2 YEAR







10113A | 15W | COB LED | Aluminium

DARK LIGHT
IP20
offer

LED BUILT IN
80 CRI
3 YEAR





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10112KD/W/C	White	Cool white	4000K	12W	900lm	100°	350mA	III	30cm	168mm	160mm	12	Requires 350mA driver
10113A/W/W	White	Warm white	3000K	15W	1000lm	50°	100-240V		-	95mm	130mm	20	Complete with 350mA driver



10112/G/D



10128/G/D

Architectural Downlights
Die cast



10112/G/D | 9W | LED | Die cast

LED BUILT IN | 80 CRI | CE | 2 YEAR | IP20 | offer







10112/G/W | 12W | LED | Die cast

LED BUILT IN | 80 CRI | CE | 2 YEAR | IP20 | offer







10128 | 28W | LED | Die cast

LED BUILT IN | 80 CRI | CE | 2 YEAR | IP20 | offer





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10112/G/D	Grey	Daylight	6000K	9W	400lm	90°	230V	⧈	89mm	110mm	10	Complete with driver
10112/G/W	Grey	Warm white	3000K	12W	400lm	90°	230V	⧈	89mm	110mm	10	Complete with driver
10128/G/D	Grey	Daylight	6000K	28W	1400lm	90°	230V	⧈	169mm	110mm	10	Complete with driver
10128/G/W	Grey	Warm white	3000K	28W	1150lm	90°	230V	⧈	169mm	110mm	10	Complete with driver





10120/W+10100/W

10120 | 20W | LED | Aluminium

Ring must be ordered separately.

offer

IP44

offer

LED BUILT IN

75 CRI

CE

2 YEAR



10120/W+10100/AL





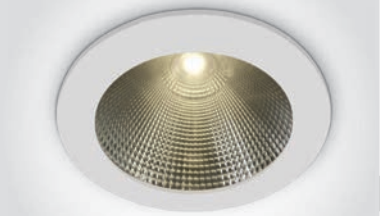

10142/W+10100/W

10142 | 42W | COB LED | Aluminium

Ring must be ordered separately.

offer

IP20

offer

LED BUILT IN

80 CRI

CE

2 YEAR



10142/W+10100/AL







10100 | Rings for 10120 & 10142

offer

CE

10100/AL Aluminium
10100/W White
10100/G Grey

50





10140P | 40W | COB LED | Aluminium

DARK LIGHT

IP20

LED BUILT IN

80 CRI

CE

2 YEAR



Optional black ring.
Order code 050097/B.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10120/C	-	Cool white	4000K	20W	1800lm	110°	230V	☐	180mm	70mm	10	Complete with 320mA driver
10120/W	-	Warm white	3000K	20W	1800lm	110°	230V	☐	180mm	70mm	10	Complete with 500mA driver
10142/W	-	Warm white	3000K	42W	3225lm	60°	100-240V	☐	180mm	170mm	4	Complete with 1000mA driver
10140P/W/W	White	Warm white	3000K	40W	3200lm	60°	230V	☐	190mm	150mm	12	Complete with 1000mA driver



The COB Project Round Range

10105K | 5W | COB LED | Die cast



10105K/W/W

LED BUILT IN

80 CRI

2 YEAR

IP53

offer

offer



10105K/G/W





10110K | 10W | COB LED | Die cast



10110K/W/W

LED BUILT IN

80 CRI

TRIAC DIMMABLE

2 YEAR

IP53

offer

offer



10110K/G/W





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10105K/W/C	White	Cool white	4000K	5W	410lm	100°	230V		107mm	130mm	24	Complete with 120mA dimmable driver
10105K/W/W	White	Warm white	3000K	5W	350lm	100°	230V		107mm	130mm	24	Complete with 120mA dimmable driver
10105K/G/C	Grey	Cool white	4000K	5W	410lm	100°	230V		107mm	130mm	24	Complete with 120mA dimmable driver
10105K/G/W	Grey	Warm white	3000K	5W	350lm	100°	230V		107mm	130mm	24	Complete with 400mA driver
10110K/W/W	White	Warm white	3000K	10W	600lm	100°	230V		122mm	150mm	24	Complete with 250mA dimmable driver
10110K/G/W	Grey	Warm white	3000K	10W	600lm	100°	230V		122mm	150mm	24	Complete with 250mA dimmable driver



The COB Project Round Range
Dimmable



10120K | 20W | COB LED | Die cast

LED BUILT IN · 80 CRI · TRIAC DIMMABLE · CE · 2 YEAR · IP53 offer







10130K | 30W | COB LED | Die cast

LED BUILT IN · 80 CRI · TRIAC DIMMABLE · CE · 2 YEAR · IP53 offer







10130KA/G/W

10130KA | 30W | COB LED | Die cast

LED BUILT IN · 80 CRI · TRIAC DIMMABLE · CE · 2 YEAR · IP53 offer

offer



10130KA/W/W





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10120K/G/W	Grey	Warm white	3000K	20W	1500lm	100°	230V	☐	150mm	170mm	24	Complete with 500mA dimmable driver
10130K/G/W	Grey	Warm white	3000K	30W	2000lm	100°	230V	☐	175mm	195mm	12	Complete with 700mA dimmable driver
10130KA/W/W	White	Warm white	3000K	30W	2000lm	100°	230V	☐	210mm	210mm	12	Complete with 700mA dimmable driver
10130KA/G/W	Grey	Warm white	3000K	30W	2000lm	100°	230V	☐	210mm	210mm	12	Complete with 700mA dimmable driver



The COB Project Square Range

Die cast



50105K/W/W

50105K | 5W | COB LED | Die cast

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP53 offer







50105K/G/C

50105K | 5W | COB LED | Die cast

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP53 offer







50130K | 30W | COB LED | Die cast

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP53 offer





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
50105K/W/W	White	Warm white	3000K	5W	240lm	100°	230V	⧈	85x85mm	115mm	24	Complete with 400mA driver
50105K/G/C	Grey	Cool white	4000K	5W	310lm	100°	230V	⧈	85x85mm	115mm	24	Complete with 400mA driver
50130K/G/W	Grey	Warm white	3000K	30W	1350lm	100°	230V	⧈	147x147mm	160mm	12	Complete with 1100mA driver



Shop Square Boxes

50120B | 20W | COB LED | Aluminium + metal


50120B/W/C

LED BUILT IN
80 CRI
CE
3 YEAR
IP20


50120B/B/W



50220B | 2x20W | COB LED | Aluminium + metal


50220B/W/C

LED BUILT IN
80 CRI
CE
3 YEAR
IP20


50220B/B/W



50130B | 30W | COB LED | Aluminium + metal


50130B/W/C

LED BUILT IN
80 CRI
CE
3 YEAR
IP20


50130B/B/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
50120B/W/C	White	Cool white	4000K	20W	1800lm	30°	230V		105x105mm	120mm	20	Complete with 500mA driver
50120B/W/W	White	Warm white	3000K	20W	1700lm	30°	230V		105x105mm	120mm	20	Complete with 500mA driver
50120B/B/W	Black	Warm white	3000K	20W	1700lm	30°	230V		105x105mm	120mm	20	Complete with 500mA driver
50220B/W/C	White	Cool white	4000K	2x20W	2x1800lm	30°	230V		190x110mm	120mm	10	Complete with 500mA drivers
50220B/W/W	White	Warm white	3000K	2x20W	2x1700lm	30°	230V		190x110mm	120mm	10	Complete with 500mA drivers
50220B/B/W	Black	Warm white	3000K	2x20W	2x1700lm	30°	230V		190x110mm	120mm	10	Complete with 500mA drivers
50130B/W/C	White	Cool white	4000K	30W	2700lm	30°	230V		130x130mm	120mm	16	Complete with 750mA driver
50130B/W/W	White	Warm white	3000K	30W	2600lm	30°	230V		130x130mm	120mm	16	Complete with 750mA driver
50130B/B/W	Black	Warm white	3000K	30W	2600lm	30°	230V		130x130mm	120mm	16	Complete with 750mA driver



The SMD Dark Light Range

10109D | 9W | SMD 2835 | Die cast



10109D/W/W

LED BUILT IN · 80 CRI · CE · 2 YEAR · DARK LIGHT · IP20



10109D/B/W



10122D | 22W | SMD 2835 | Die cast



10122D/W/W

LED BUILT IN · 80 CRI · CE · 2 YEAR · DARK LIGHT · IP20



10122D/B/W



50122D | 22W | SMD 2835 | Die cast



50122D/W/W

LED BUILT IN · 80 CRI · CE · 2 YEAR · DARK LIGHT · IP20



50122D/W/C



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10109D/W/C	White	Cool white	4000K	9W	765lm	100°	230V		110mm	70mm	50	Complete with 300mA driver
10109D/W/W	White	Warm white	3000K	9W	765lm	100°	230V		110mm	70mm	50	Complete with 300mA driver
10109D/B/C	Black	Cool white	4000K	9W	765lm	100°	230V		110mm	70mm	50	Complete with 300mA driver
10109D/B/W	Black	Warm white	3000K	9W	765lm	100°	230V		110mm	70mm	50	Complete with 300mA driver
10122D/W/C	White	Cool white	4000K	22W	1870lm	100°	230V		165mm	75mm	20	Complete with 500mA driver
10122D/W/W	White	Warm white	3000K	22W	1870lm	100°	230V		165mm	75mm	20	Complete with 500mA driver
10122D/B/C	Black	Cool white	4000K	22W	1870lm	100°	230V		165mm	75mm	20	Complete with 500mA driver
10122D/B/W	Black	Warm white	3000K	22W	1870lm	100°	230V		165mm	75mm	20	Complete with 500mA driver
50122D/W/C	White	Cool white	4000K	22W	1870lm	100°	230V		160x160mm	75mm	20	Complete with 500mA driver
50122D/W/W	White	Warm white	3000K	22W	1870lm	100°	230V		160x160mm	75mm	20	Complete with 500mA driver



The IP54 Dark Light Bathroom Downlights
Die cast



10109FD | 9W | SMD 2835 | Die cast

LED BUILT IN · 80 CRI · CE · 3 YEAR · DARK LIGHT · IP54







10120FD | 20W | SMD 2835 | Die cast

LED BUILT IN · 80 CRI · CE · 3 YEAR · DARK LIGHT · IP54





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10109FD/W/C	White	Cool white	4000K	9W	765lm	100°	230V	⧈	111mm	70mm	40	Complete with 300mA driver
10109FD/W/W	White	Warm white	3000K	9W	765lm	100°	230V	⧈	111mm	70mm	40	Complete with 300mA driver
10120FD/W/C	White	Cool white	4000K	20W	1700lm	100°	230V	⧈	166mm	70mm	20	Complete with 300mA driver
10120FD/W/W	White	Warm white	3000K	20W	1700lm	100°	230V	⧈	166mm	70mm	20	Complete with 300mA driver



The IP54 Bathroom Downlights



10107B | 7W | SMD 2835 | Die cast

LED BUILT IN

80 CRI

CE

2 YEAR

IP54







10113B | 13W | SMD 2835 | Die cast

LED BUILT IN

80 CRI

CE

2 YEAR

IP54





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10107B/W/C	White	Cool white	4000K	7W	540lm	90°	230V	☐	65mm	70mm	50	Complete with 180mA driver
10107B/W/W	White	Warm white	3000K	7W	500lm	90°	230V	☐	65mm	70mm	50	Complete with 180mA driver
10113B/W/C	White	Cool white	4000K	13W	950lm	90°	230V	☐	95mm	70mm	24	Complete with 380mA driver
10113B/W/W	White	Warm white	3000K	13W	925lm	90°	230V	☐	95mm	70mm	24	Complete with 300mA driver

The IP54 Bathroom Downlights





10118B | 18W | SMD 2835 | Die cast

LED BUILT IN
80 CRI
CE
2 YEAR
IP54







10125B | 25W | SMD 2835 | Die cast

LED BUILT IN
80 CRI
CE
2 YEAR
IP54





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10118B/W/C	White	Cool white	4000K	18W	1400lm	90°	230V		140mm	70mm	30	Complete with 500mA driver
10118B/W/W	White	Warm white	3000K	18W	1300lm	90°	230V		140mm	70mm	30	Complete with 500mA driver
10125B/W/C	White	Cool white	4000K	25W	2000lm	90°	230V		210mm	80mm	10	Complete with 720mA driver
10125B/W/W	White	Warm white	3000K	25W	1875lm	90°	230V		210mm	80mm	10	Complete with 720mA driver



The Outdoor/Bathroom IP65 Range

Die cast



10110G | 10W | COB LED | Die cast

LED BUILT IN

80 CRI

CE

3 YEAR

IP65







10115G | 15W | COB LED | Die cast

LED BUILT IN

80 CRI

CE

3 YEAR

IP65





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10110G/W/C	White	Cool white	4000K	10W	800lm	60°	230V	⧈	200cm	82mm	90mm	30	Complete with 250mA driver
10110G/W/W	White	Warm white	3000K	10W	750lm	60°	230V	⧈	200cm	82mm	90mm	30	Complete with 250mA driver
10115G/W/C	White	Cool white	4000K	15W	1200lm	60°	230V	⧈	200cm	100mm	95mm	20	Complete with 350mA driver



The Outdoor/Bathroom IP65 Range

Die cast



10120G | 20W | COB LED | Die cast

LED BUILT IN · 80 CRI · CE · 3 YEAR · IP65







10130G | 30W | COB LED | Die cast

LED BUILT IN · 80 CRI · CE · 3 YEAR · IP65







10150G | 50W | COB LED | Die cast

LED BUILT IN · 80 CRI · CE · 3 YEAR · IP65





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10120G/W/C	White	Cool white	4000K	20W	1880lm	60°	230V	⧈	200cm	120mm	105mm	10	Complete with 500mA driver
10120G/W/W	White	Warm white	3000K	20W	1880lm	60°	230V	⧈	200cm	120mm	105mm	10	Complete with 500mA driver
10130G/W/W	White	Warm white	3000K	30W	2500lm	60°	230V	⧈	200cm	160mm	120mm	8	Complete with 700mA driver
10150G/W/C	White	Cool white	4000K	50W	4100lm	60°	230V	⧈	200cm	210mm	140mm	4	Complete with 1200mA driver
10150G/W/W	White	Warm white	3000K	50W	4000lm	60°	230V	⧈	200cm	210mm	140mm	4	Complete with 1200mA driver



The Frameless IP65 Range

Die cast + PC

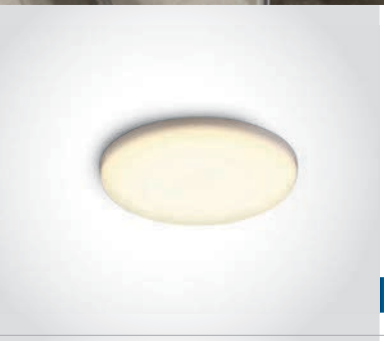

10106CF | 6W | SMD 4014 | Die cast + PC

LED BUILT IN · 80 CRI · IK08 · CE · IP65 · 2 YEAR



Frameless





10108CF | 8W | SMD 4014 | Die cast + PC

LED BUILT IN · 80 CRI · IK08 · CE · IP65 · 2 YEAR



Frameless



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10106CF/C	White	Cool white	4000K	6W	400lm	120°	230V	☐	55mm	40mm	40	Complete with 250mA driver
10106CF/W	White	Warm white	3000K	6W	400lm	120°	230V	☐	55mm	40mm	40	Complete with 250mA driver
10108CF/C	White	Cool white	4000K	8W	550lm	120°	230V	☐	80mm	50mm	40	Complete with 500mA driver
10108CF/W	White	Warm white	3000K	8W	550lm	120°	230V	☐	80mm	50mm	40	Complete with 500mA driver



The Frameless IP65 Range

10115CF | 15W | SMD 4014 | Die cast + PC



LED BUILT IN · 80 CRI · IK08 · CE · 2 YEAR · IP65



Frameless



050146 | Surface base for 10115CF | Die cast



050146/W White

5 YEAR · CE · IP40



050146/B Black

20



10130CF | 30W | SMD 4014 | Die cast + PC



LED BUILT IN · 80 CRI · IK08 · CE · 2 YEAR · IP65



Frameless



050148 | Surface base for 10130CF | Die cast



050148/W White

5 YEAR · CE · IP40



050148/B Black

20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10115CF/C	White	Cool white	4000K	15W	1200lm	120°	230V	⧈	135mm	50mm	20	Complete with 500mA driver
10115CF/W	White	Warm white	3000K	15W	1200lm	120°	230V	⧈	135mm	50mm	20	Complete with 500mA driver
10130CF/C	White	Cool white	4000K	30W	2400lm	120°	230V	⧈	195mm	50mm	20	Complete with 700mA driver
10130CF/W	White	Warm white	3000K	30W	2400lm	120°	230V	⧈	195mm	50mm	20	Complete with 700mA driver





07

Downlights Adjustable LED

Pages 221-234

COB LED | SMD LED | LED

Die cast | Natural aluminium | Trimless

IP20

ADJUSTABLE ADJUSTABLE DIMMABLE DARK LIGHT QUICK FIX CE 80 CRI 85 CRI 2 YEAR 3 YEAR



The COB Trimless LED
Aluminium



11130BT | 30W | COB LED | Trimlesss | Aluminium







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11130BT/W/C	White	Cool white	4000K	30W	2200lm	38°	700mA	III	40cm	110mm	160mm	12	Requires 700mA driver
11130BT/W/W	White	Warm white	3000K	30W	2200lm	38°	700mA	III	40cm	110mm	160mm	12	Requires 700mA driver



Adjustable Multi LED
Aluminium



11106LB | 6x1W | LED | Aluminium

IP20 offer

LED BUILT IN · DIMMABLE · QUICK FIX · ADJUSTABLE · CE · 2 YEAR







11109L | 9x1W | LED | Natural aluminium

IP20 offer

LED BUILT IN · DIMMABLE · QUICK FIX · ADJUSTABLE · CE · 2 YEAR







11112L | 12x1W | LED | Natural aluminium

IP20 offer

LED BUILT IN · DIMMABLE · QUICK FIX · ADJUSTABLE · CE · 2 YEAR



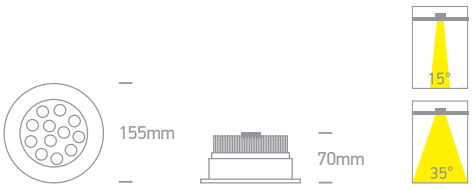



11118L | 18x1W | LED | Natural aluminium

IP20 offer

LED BUILT IN · DIMMABLE · QUICK FIX · ADJUSTABLE · CE · 2 YEAR





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11106LB/D/35	Black	Daylight	6000K	6x1W	360lm	35°	350mA		40cm	90mm	50mm	50	Requires 350mA driver
11106LB/W/35	Black	Warm white	3000K	6x1W	270lm	35°	350mA		40cm	90mm	50mm	50	Requires 350mA driver
11109L/D/35	Aluminium	Daylight	6000K	9x1W	540lm	35°	350mA		40cm	110mm	80mm	30	Requires 350mA driver
11109L/W/35	Aluminium	Warm white	3000K	9x1W	405lm	35°	350mA		40cm	110mm	80mm	30	Requires 350mA driver
11112L/D/15	Aluminium	Daylight	6000K	12x1W	720lm	15°	350mA		40cm	140mm	80mm	30	Requires 350mA driver
11112L/D/35	Aluminium	Daylight	6000K	12x1W	720lm	35°	350mA		40cm	140mm	80mm	30	Requires 350mA driver
11112L/W/15	Aluminium	Warm white	3000K	12x1W	540lm	15°	350mA		40cm	140mm	80mm	30	Requires 350mA driver
11112L/W/35	Aluminium	Warm white	3000K	12x1W	540lm	35°	350mA		40cm	140mm	80mm	30	Requires 350mA driver
11118L/W/35	Aluminium	Warm white	3000K	18x1W	810lm	35°	350mA		40cm	155mm	90mm	30	Requires 350mA driver



The Box Type Shop Range



51125 | 25W | COB LED | Die cast

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · IP20 · 2 YEAR · offer







51138/W/C

51138 | 38W | COB LED | Die cast

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · IP20 · 2 YEAR · offer



51138/G/C





51140/B/C

51140 | 40W | COB LED | Aluminium

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · IP20 · 3 YEAR



51140/B/W

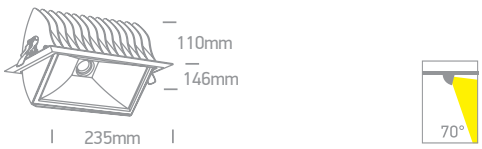



51145 | 45W | SMD LED | Die cast

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · IP20 · 3 YEAR





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
51125/G/C	Grey	Cool white	4000K	25W	1750lm	38°	100-240V	□	130x130mm	160mm	12	Complete with 600mA driver
51138/W/C	White	Cool white	4000K	38W	2450lm	38°	100-240V	□	170x170mm	200mm	8	Complete with 900mA driver
51138/G/C	Grey	Cool white	4000K	38W	2450lm	38°	100-240V	□	170x170mm	200mm	8	Complete with 900mA driver
51140/B/C	Black	Cool white	4000K	40W	3500lm	70°	230V	□	220x130mm	140mm	9	Complete with 1050mA driver
51140/B/W	Black	Warm white	3000K	40W	3400lm	70°	230V	□	220x130mm	140mm	9	Complete with 1050mA driver
51145/W/W	White	Warm white	3000K	45W	3500lm	95°	230V	□	210x130mm	150mm	4	Complete with 1200mA driver



The COB Box Type Shop Range


51120/W/W

51120 | 20W | COB LED | Aluminium

LED BUILT IN
80 CRI
ADJUSTABLE
2 YEAR
IP20
offer


51120/G/W




51130/W/W

51130 | 30W | COB LED | Aluminium + metal

LED BUILT IN
90 CRI
ADJUSTABLE
2 YEAR
IP20


51130/B/W




51230/W/W

51230 | 2x30W | COB LED | Aluminium + metal

LED BUILT IN
90 CRI
ADJUSTABLE
2 YEAR
IP20


51230/B/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
51120/W/W	White	Warm white	3000K	20W	1400lm	36°	230V	☐	165x165mm	140mm	12	Complete with 500mA driver
51120/G/W	Grey	Warm white	3000K	20W	1400lm	36°	230V	☐	165x165mm	140mm	12	Complete with 500mA driver
51130/W/C	White	Cool white	4000K	30W	2700lm	38°	230V	☐	160x160mm	125mm	12	Complete with 750mA driver
51130/W/W	White	Warm white	3000K	30W	2700lm	38°	230V	☐	160x160mm	125mm	12	Complete with 750mA driver
51130/B/C	Black	Cool white	4000K	30W	2700lm	38°	230V	☐	160x160mm	125mm	12	Complete with 750mA driver
51130/B/W	Black	Warm white	3000K	30W	2700lm	38°	230V	☐	160x160mm	125mm	12	Complete with 750mA driver
51230/W/W	White	Warm white	3000K	2x30W	2x2700lm	38°	230V	☐	320x160mm	125mm	6	Complete with 750mA drivers
51230/B/C	Black	Cool white	4000K	2x30W	2x2700lm	38°	230V	☐	320x160mm	125mm	6	Complete with 750mA drivers
51230/B/W	Black	Warm white	3000K	2x30W	2x2700lm	38°	230V	☐	320x160mm	125mm	6	Complete with 750mA drivers



Dark Mirror Reflector Range

11110E | 10W | COB LED | Die cast



11110E/W/W

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · DARK LIGHT · IP20 · 3 YEAR



11110E/B/W



11120E | 20W | COB LED | Die cast



11120E/W/W

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · DARK LIGHT · IP20 · 3 YEAR



11120E/B/W



11130E | 30W | COB LED | Die cast



11130E/W/W

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · DARK LIGHT · IP20 · 3 YEAR



11130E/B/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
11110E/W/W	White	Warm white	3000K	10W	850lm	30°	230V		85mm	80mm	40	Complete with 250mA driver
11110E/B/W	Black	Warm white	3000K	10W	850lm	30°	230V		85mm	80mm	40	Complete with 250mA driver
11120E/W/W	White	Warm white	3000K	20W	1700lm	30°	230V		140mm	110mm	20	Complete with 500mA driver
11120E/B/W	Black	Warm white	3000K	20W	1700lm	30°	230V		140mm	110mm	20	Complete with 500mA driver
11130E/W/W	White	Warm white	3000K	30W	2550lm	30°	230V		200mm	95mm	10	Complete with 750mA driver
11130E/B/W	Black	Warm white	3000K	30W	2550lm	30°	230V		200mm	95mm	10	Complete with 750mA driver



The COB Shop Downlights Pro
Die cast



11150A | 50W | COB LED | Die cast

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · IP20 · 2 YEAR offer







51125A | 25W | COB LED | Die cast

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · IP20 · 2 YEAR offer







11125B | 25W | COB LED | Die cast

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · IP20 · 2 YEAR offer





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
11150A/W/C	White	Cool white	4000K	50W	4450lm	40°	100-240V	☐	165mm	160mm	8	Complete with 1200mA driver
11150A/W/W	White	Warm white	3000K	50W	3950lm	40°	100-240V	☐	165mm	160mm	8	Complete with 1200mA driver
51125A/W/W	White	Warm white	3000K	25W	2300lm	40°	100-240V	☐	165x165mm	130mm	8	Complete with 700mA driver
11125B/W/C	White	Cool white	4000K	25W	2450lm	35°	100-240V	☐	190mm	120mm	8	Complete with 700mA driver



The COB Square Downlights
Die cast

51109B | 10W | COB LED | Die cast



LED BUILT IN · 80 CRI · ADJUSTABLE · CE · 3 YEAR · IP20





51120B | 20W | COB LED | Die cast



LED BUILT IN · 80 CRI · ADJUSTABLE · CE · 3 YEAR · IP20





51140B | 40W | COB LED | Die cast



LED BUILT IN · 80 CRI · ADJUSTABLE · CE · 3 YEAR · IP20





51240B | 2x40W | COB LED | Die cast



LED BUILT IN · 80 CRI · ADJUSTABLE · CE · 3 YEAR · IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
51109B/W/W	White	Warm white	3000K	10W	700lm	36°	230V		90x90mm	120mm	27	Complete with 200mA driver
51120B/W/C	White	Cool white	4000K	20W	1600lm	36°	230V		125x125mm	160mm	12	Complete with 500mA driver
51120B/W/W	White	Warm white	3000K	20W	1500lm	36°	230V		125x125mm	160mm	12	Complete with 500mA driver
51140B/W/C	White	Cool white	4000K	40W	3300lm	36°	230V		170x170mm	160mm	8	Complete with 1000mA driver
51140B/W/W	White	Warm white	3000K	40W	3200lm	36°	230V		170x170mm	160mm	8	Complete with 1000mA driver
51240B/W/W	White	Warm white	3000K	2x40W	2x3200lm	36°	230V		320x165mm	170mm	4	Complete with 1000mA drivers



The COB Round Downlights
Die cast



11140B | 40W | COB LED | Die cast

LED BUILT IN
80 CRI
ADJUSTABLE
CE
IP20
3 YEAR







11150B | 50W | COB LED | Die cast

LED BUILT IN
80 CRI
ADJUSTABLE
CE
IP20
3 YEAR





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
11140B/W/C	White	Cool white	4000K	40W	3300lm	36°	230V	☐	180mm	165mm	8	Complete with 1000mA driver
11150B/W/C	White	Cool white	4000K	50W	3850lm	40°	230V	☐	120mm	250mm	12	Complete with 1200mA driver
11150B/W/W	White	Warm white	3000K	50W	3750lm	40°	230V	☐	120mm	250mm	12	Complete with 1200mA driver





11118TR/G/C

11118TR | 18W | COB LED | Aluminium | Semi trimless







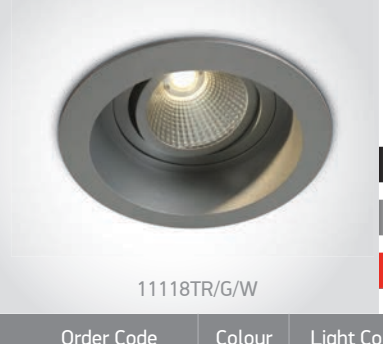

11118TR/G/W

11118TR | 18W | COB LED | Aluminium | Semi trimless







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
11118TR/G/C	Grey	Cool white	4000K	18W	1300lm	35°	100-240V		135mm	200mm	20	Complete with 450mA driver
11118TR/G/W	Grey	Warm white	3000K	18W	1120lm	35°	100-240V		135mm	200mm	20	Complete with 450mA driver





51120TR | 20W | COB LED | Die cast

LED BUILT IN
80 CRI
ADJUSTABLE
CE
IP20
3 YEAR







51140TR | 40W | COB LED | Die cast

LED BUILT IN
80 CRI
ADJUSTABLE
CE
IP20
3 YEAR





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
51120TR/W/W	White	Warm white	3000K	20W	1500lm	36°	230V		120x120mm	150mm	12	Complete with 700mA driver
51140TR/W/W	White	Warm white	3000K	40W	3200lm	36°	230V		160x160mm	180mm	8	Complete with 1000mA driver



11115E/W/W

The COB Pop Up Range
Die cast



11115E | 15W | COB LED | Die cast

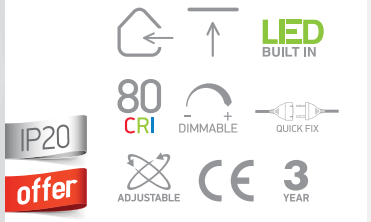







11126F | 26W | COB LED | Die cast

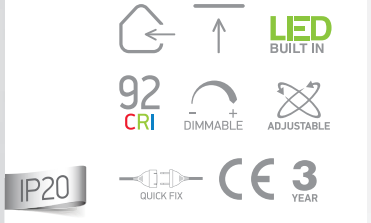





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11115E/W/W	White	Warm white	3000K	15W	1114lm	38°	350mA	III	30cm	135mm	65mm	25	Requires 350mA driver
11126F/W/W	White	Warm white	3000K	26W	2210lm	36°	700mA	III	-	116mm	150mm	18	Requires 700mA driver



The COB Pop Out Range
Aluminium



11118H | 18W | COB LED | Aluminium

IP20 offer

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · 2 YEAR







11114R | 14W | COB LED | Aluminium

IP20 offer

LED BUILT IN · 80 CRI · DIMMABLE · QUICK FIX · ADJUSTABLE · CE · 3 YEAR







11125R | 25W | COB LED | Aluminium

IP20

LED BUILT IN · 80 CRI · DIMMABLE · QUICK FIX · ADJUSTABLE · CE · 3 YEAR





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	S				Notes
11118H/G/C	Grey	Cool white	4000K	18W	1300lm	35°	100-240V		-	120mm	110mm	20	Complete with 450mA driver
11114R/W/C	White	Cool white	4000K	14W	1100lm	36°	700mA		40cm	130mm	85mm	12	Requires 700mA driver
11125R/W/C	White	Cool white	4000K	25W	2200lm	40°	700mA		40cm	160mm	85mm	8	Requires 700mA driver
11125R/W/W	White	Warm white	3000K	25W	2070lm	40°	700mA		40cm	160mm	85mm	8	Requires 700mA driver



The COB Extractable Range



11110F | 10W | COB LED | Die cast

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · IP20 · 3 YEAR







11120F | 20W | COB LED | Die cast

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · IP20 · 3 YEAR





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
11110F/W/C	White	Cool white	4000K	10W	800lm	36°	230V	⧈	90mm	105mm	36	Complete with 200mA driver
11110F/W/W	White	Warm white	3000K	10W	770lm	36°	230V	⧈	90mm	105mm	36	Complete with 200mA driver
11120F/W/W	White	Warm white	3000K	20W	1500lm	36°	230V	⧈	125mm	130mm	18	Complete with 500mA driver



The COB Recessed Range

Die cast



11125RA | 25W | COB LED | Die cast

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · 3 YEAR · DARK LIGHT · IP20









11135L | 35W | COB LED | Die cast

Matching design with 65624T.

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · 3 YEAR · IP20 · offer









11140L | 40W | COB LED | Die cast

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · 3 YEAR · IP20







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
11125RA/W/C	White	Cool white	4000K	25W	1900lm	36°	230V		120mm	80mm	12	Complete with 700mA driver
11135L/W/C	White	Cool white	4000K	35W	3050lm	45°	230V		145mm	110mm	18	Complete with 900mA driver
11140L/W/W	White	Warm white	3000K	40W	3100lm	36°	230V		100mm	70mm	12	Complete with 1000mA driver





08

Strips & Profiles

Pages 237-288

COB LED | SMD LED | LED

12V DC | 24V DC

IP20 IP54 IP65 IP67 IP68

DIMMABLE QUICK FIX 75 CRI 80 CRI 90 CRI 97 CRI 2 YEAR 3 YEAR 5 YEAR



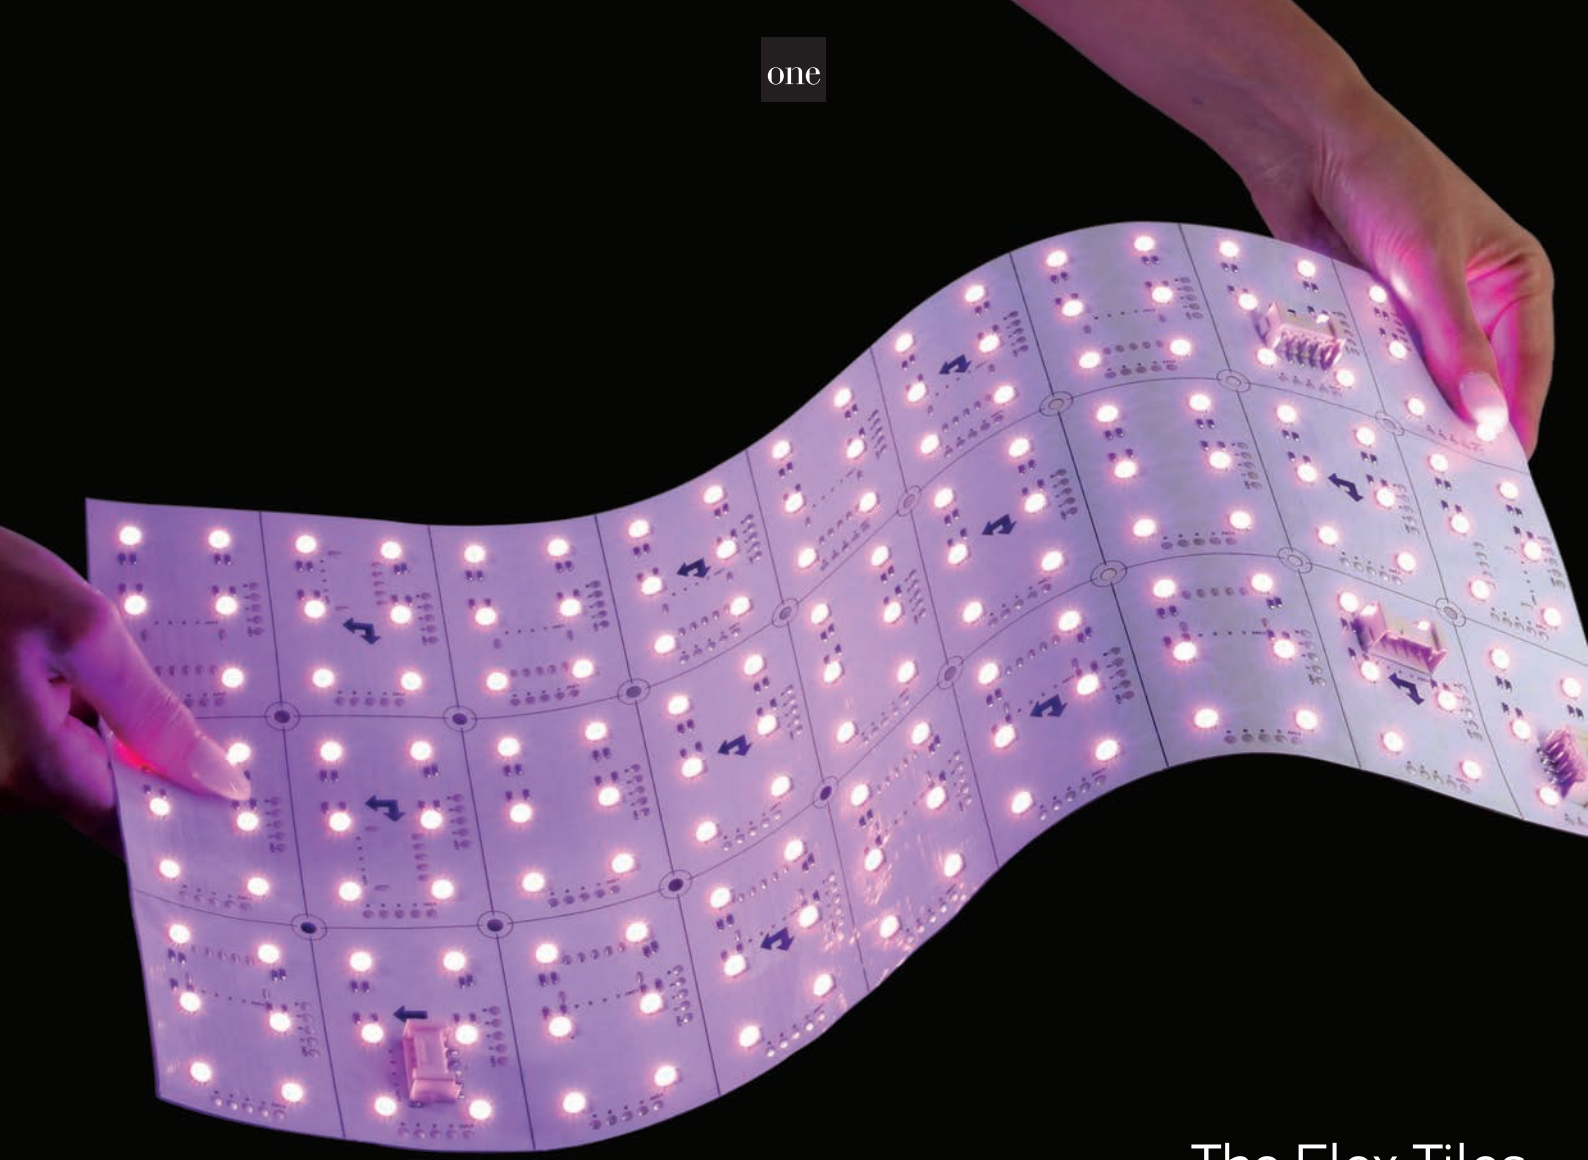

The Flex Tiles



7848 | 10W | SMD 2835 | 288LEDs/pc | Flex tile

3M Double face adhesive.

new

IP20

LED BUILT IN | 90 CRI | DIMMABLE | CE | 5 YEAR



Connect up to 10pcs.



Complete with 2pcs power supply & 2pcs connectors.



Dimming remote control. Order code 20030.





7848/RGBW | 24W | SMD 5050 | 162LEDs/pc | Flex tile

3M Double face adhesive.

new

IP20

LED BUILT IN | 80 CRI | DIMMABLE | CE | 5 YEAR



Connect up to 10pcs.



Complete with 2pcs power supply & 2pcs connectors.



Dimming remote control. Order code 20036.



Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7848/C	Cool white	4000K	10W	900lm	24V DC	III	2	Requires 24V DC driver
7848/W	Warm white	3000K	10W	850lm	24V DC	III	2	Requires 24V DC driver
7848/RGBW	RGB + Warm white	RGB + 3000K	RGB 18W + WW 6W	480lm (3000K)	24V DC	III	2	Requires 24V DC driver



The Ultra Slim Range 24V



7823 | 9,6W/m | SMD 2216 | 140LEDs/m | Ultra slim

3M Double face adhesive.

IP20 · LED BUILT IN · 90 CRI · DIMMABLE · 5 YEAR



Supplied in 5m roll.



Dimming remote control.
Order code 20030.





7833 | 14,4W/m | SMD 2110 | 196LEDs/m

3M Double face adhesive.

IP20 · LED BUILT IN · 90 CRI · DIMMABLE · 5 YEAR



Supplied in 5m roll.



Dimming remote control.
Order code 20030.



Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7823/C	Cool white	4000K	9,6W/m	970lm/m	24V DC	III	40	Requires 24V DC driver
7823/W	Warm white	3000K	9,6W/m	864lm/m	24V DC	III	40	Requires 24V DC driver
7823/EW	Extra warm white	2700K	9,6W/m	768lm/m	24V DC	III	40	Requires 24V DC driver
7833/C	Cool white	4000K	14,4W/m	1300lm/m	24V DC	III	40	Requires 24V DC driver
7833/W	Warm white	3000K	14,4W/m	1200lm/m	24V DC	III	40	Requires 24V DC driver
7833/EW	Extra warm white	2700K	14,4W/m	1160lm/m	24V DC	III	40	Requires 24V DC driver



The 4,8W/m Indoor 24V



7820 | 4,8W/m | SMD 2216 | 70LEDs/m

3M Double face adhesive.

LED BUILT IN · 90 CRI · DIMMABLE · CE · 5 YEAR



Supplied in 5m roll.



Dimming remote control.
Order code 20030.





Accessories for 7820

50cm

CE

7824 Power supply cable
7822 Connector

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7820/D	Daylight	6000K	4,8W/m	490lm/m	24V DC	III	40	Requires 24V DC driver
7820/C	Cool white	4000K	4,8W/m	490lm/m	24V DC	III	40	Requires 24V DC driver
7820/W	Warm white	3000K	4,8W/m	432lm/m	24V DC	III	40	Requires 24V DC driver
7820/EW	Extra warm white	2700K	4,8W/m	384lm/m	24V DC	III	40	Requires 24V DC driver
7820/UW	Ultra warm white	2200K	4,8W/m	384lm/m	24V DC	III	40	Requires 24V DC driver

The 4,8W/m Outdoor 24V



7820W | 4,8W/m | SMD 2216 | 70LEDs/m | Silicone

3M Double face adhesive.

LED BUILT IN · 90 CRI · DIMMABLE · 3 YEAR



Supplied in 5m roll.



Dimming remote control.
Order code 20030.





Accessories for 7820W

7826 Mounting clip
7828 End cup

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7820W/D	Daylight	6000K	4,8W/m	432lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight
7820W/C	Cool white	4000K	4,8W/m	432lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight
7820W/W	Warm white	3000K	4,8W/m	390lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight
7820W/EW	Extra warm white	2700K	4,8W/m	375lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight

The 9,6W/m 24V
SMD 2216 140LEDs/m



7829 | 9,6W/m | SMD 2216 | 140LEDs/m

3M Double face adhesive.



Supplied in 5m roll.



Dimming remote control.
Order code 20030.



Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7829/C	Cool white	4000K	9,6W/m	970lm/m	24V DC	III	40	Requires 24V DC driver
7829/W	Warm white	3000K	9,6W/m	864lm/m	24V DC	III	40	Requires 24V DC driver
7829/EW	Extra warm white	2700K	9,6W/m	768lm/m	24V DC	III	40	Requires 24V DC driver



The 14,4W/m CRI97 Indoor 24V
Full spectrum



7835C | 14,4W/m | SMD 2835 | 80LEDs/m

3M Double face adhesive.

LED BUILT IN · 97 CRI · DIMMABLE · 5 YEAR



Supplied in 5m roll.



Dimming remote control.
Order code 20030.





Accessories for 7835C

III · 50cm

7835P Power supply cable
7837 Connector

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7835C/W	Warm white	3000K	14,4W/m	1512lm/m	24V DC	III	40	Requires 24V DC driver



The 14,4W/m Indoor 24V



7835 | 14,4W/m | SMD 2835 | 70LEDs/m

3M Double face adhesive.



Supplied in 5m roll.



Dimming remote control.
Order code 20030.



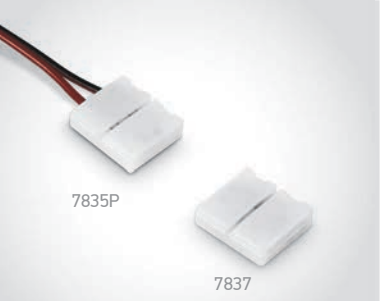

Accessories for 7835

50cm

7835P Power supply cable
7837 Connector

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7835/D	Daylight	6000K	14,4W/m	1300lm/m	24V DC	III	40	Requires 24V DC driver
7835/C	Cool white	4000K	14,4W/m	1300lm/m	24V DC	III	40	Requires 24V DC driver
7835/W	Warm white	3000K	14,4W/m	1200lm/m	24V DC	III	40	Requires 24V DC driver
7835/EW	Extra warm white	2700K	14,4W/m	1125lm/m	24V DC	III	40	Requires 24V DC driver
7835/UW	Ultra warm white	2200K	14,4W/m	1125lm/m	24V DC	III	40	Requires 24V DC driver

The 14,4W/m Outdoor 24V



7835W | 14,4W/m | SMD 2835 | 70LEDs/m | Silicone

3M Double face adhesive.



Supplied in 5m roll.



Dimming remote control.
Order code 20030.





7827 | Mounting clip for 7835W

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7835W/D	Daylight	6000K	14,4W/m	1170lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight
7835W/C	Cool white	4000K	14,4W/m	1170lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight
7835W/W	Warm white	3000K	14,4W/m	1050lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight
7835W/EW	Extra warm white	2700K	14,4W/m	1050lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight



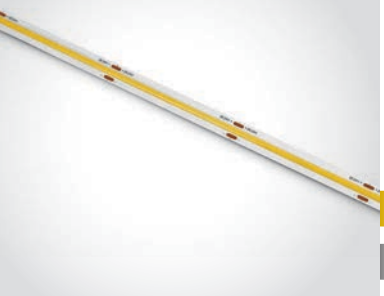

7846 | 14W/m | COB LED

3M Double face adhesive.

LED BUILT IN · 90 CRI · DIMMABLE · CE · 5 YEAR



Supplied in 5m roll.



Dimming remote control.
Order code 20030.





7846B Corner connector



7846C Connector



7846P Power supply

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7846/C	Cool white	4000K	14W/m	1470lm/m	24V DC	III	50	Requires 24V DC driver
7846/W	Warm white	3000K	14W/m	1420lm/m	24V DC	III	50	Requires 24V DC driver
7846/EW	Extra warm white	2700K	14W/m	1200lm/m	24V DC	III	50	Requires 24V DC driver

The IP67 COB Strip



new

IP67

7846W | 14W/m | COB LED | Silicone

3M Double face adhesive.

LED BUILT IN · 90 CRI · DIMMABLE · 3 YEAR



Supplied in 5m roll.



Dimming remote control.
Order code 20030.





new

7827A | Mounting clip for 7846W

CE

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7846W/C	Cool white	4000K	14W/m	1350lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight
7846W/W	Warm white	3000K	14W/m	1220lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight



Connect In One Length Range 24V



7813L | 3W/m | SMD 2835 | 60LEDs/m

Can be connected in 30m full length / 3M Double face adhesive.

LED BUILT IN · 80 CRI · DIMMABLE · CE · 5 YEAR · IP20



Supplied in 30m roll.







7820L | 4,8W/m | SMD 2216 | 60LEDs/m

Can be connected in 15m full length / 3M Double face adhesive.

LED BUILT IN · 90 CRI · DIMMABLE · CE · 5 YEAR · IP20



Supplied in 15m roll.



Dimming remote control.
Order code 20030.





7820WL | 4,8W/m | SMD 2216 | 60LEDs/m | Silicone

Can be connected in 15m full length / 3M Double face adhesive.

LED BUILT IN · 90 CRI · DIMMABLE · CE · 3 YEAR · IP68



Supplied in 15m roll.



Dimming remote control.
Order code 20030.





Accessories for 7820WL

CE

7826 Mounting clip
7828 End cup

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7813L/W	Warm white	3000K	3W/m	240lm/m	24V DC	III	20	Requires 24V DC driver
7820L/C	Cool white	4000K	4,8W/m	384lm/m	24V DC	III	40	Requires 24V DC driver
7820L/W	Warm white	3000K	4,8W/m	375lm/m	24V DC	III	40	Requires 24V DC driver
7820L/EW	Extra warm white	2700K	4,8W/m	312lm/m	24V DC	III	40	Requires 24V DC driver
7820WL/W	Warm white	3000K	4,8W/m	302lm/m	24V DC	III	20	Requires 24V DC driver / Avoid direct sunlight



The Vertical Light Range 24V



7820V | 4,8W/m | SMD 3014 | 60LEDs/m | Vertical light

3M Double face adhesive.

LED BUILT IN · 90 CRI · DIMMABLE · IP20 · CE · 5 YEAR



Supplied in 5m roll.



Dimming remote control.
Order code 20030.





7835V | 14,4W/m | SMD 3014 | 120LEDs/m | Vertical light

3M Double face adhesive.

LED BUILT IN · 90 CRI · DIMMABLE · IP20 · CE · 5 YEAR



Supplied in 5m roll.



Dimming remote control.
Order code 20030.



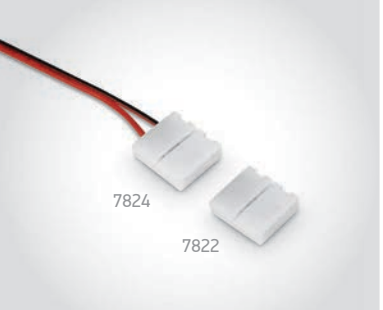

Accessories for 7820V & 7835V

III · 50cm · CE

7824 Power supply cable
7822 Connector

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7820V/C	Cool white	4000K	4,8W/m	500lm/m	24V DC	III	40	Requires 24V DC driver
7820V/W	Warm white	3000K	4,8W/m	450lm/m	24V DC	III	40	Requires 24V DC driver
7835V/W	Warm white	3000K	14,4W/m	1152lm/m	24V DC	III	40	Requires 24V DC driver

The 19,2W/m Indoor 24V





7825 | 19,2W/m | SMD 2835 | 140LEDs/m

3M Double face adhesive.

IP20 | LED BUILT IN | 90 CRI | DIMMABLE | CE | 5 YEAR



Supplied in 5m roll.



Accessories
7835P Power supply cable & 7837 Connector.





7870 | 19,2W/m | SMD 2216 | 238LEDs/m

3M Double face adhesive.

IP20 | LED BUILT IN | 90 CRI | DIMMABLE | CE | 5 YEAR



Supplied in 5m roll.



Accessories
7835P Power supply cable & 7837 Connector.





7875/D | 19,2W/m | SMD 3528 | 240LEDs/m

3M Double face adhesive.

IP20 | LED BUILT IN | 80 CRI | DIMMABLE | CE | 5 YEAR



Supplied in 5m roll.





7875 | 19,2W/m | SMD 2216 | 240LEDs/m

3M Double face adhesive.

IP20 | LED BUILT IN | 90 CRI | DIMMABLE | CE | 5 YEAR



Supplied in 5m roll.



Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7825/C	Cool white	4000K	19,2W/m	1728lm/m	24V DC		40	Requires 24V DC driver
7825/W	Warm white	3000K	19,2W/m	1536lm/m	24V DC		40	Requires 24V DC driver
7825/EW	Extra warm white	2700K	19,2W/m	1344lm/m	24V DC		40	Requires 24V DC driver
7870/D	Daylight	6000K	19,2W/m	1940lm/m	24V DC		40	Requires 24V DC driver
7870/C	Cool white	4000K	19,2W/m	1940lm/m	24V DC		40	Requires 24V DC driver
7870/W	Warm white	3000K	19,2W/m	1728lm/m	24V DC		40	Requires 24V DC driver
7875/D	Daylight	6000K	19,2W/m	1400lm/m	24V DC		40	Requires 24V DC driver
7875/C	Cool white	4000K	19,2W/m	1750lm/m	24V DC		40	Requires 24V DC driver
7875/W	Warm white	3000K	19,2W/m	1700lm/m	24V DC		40	Requires 24V DC driver





7845 | 24W/m | SMD 2216 | 280LEDs/m

3M Double face adhesive.

LED BUILT IN · 90 CRI · DIMMABLE · CE · 5 YEAR · IP20



Supplied in 5m roll.

Cut every 2,5cm
(7-LED segment)

10mm



7845/EW | 24W/m | SMD 2216 | 300LEDs/m

3M Double face adhesive.

LED BUILT IN · 90 CRI · DIMMABLE · CE · 5 YEAR · IP20



Supplied in 5m roll.

Cut every 2cm
(6-LED segment)

10mm



7887 | 24W/m | SMD 2110 | 700LEDs/m

3M Double face adhesive.

LED BUILT IN · 90 CRI · DIMMABLE · CE · 5 YEAR · IP20



Supplied in 5m roll.

Cut every 1cm
(7-LED segment)

12mm

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7845/C	Cool white	4000K	24W/m	2450lm/m	24V DC	III	40	Requires 24V DC driver
7845/W	Warm white	3000K	24W/m	2200lm/m	24V DC	III	40	Requires 24V DC driver
7845/EW	Extra warm white	2700K	24W/m	1750lm/m	24V DC	III	40	Requires 24V DC driver
7887/W	Warm white	3000K	24W/m	2050lm/m	24V DC	III	40	Requires 24V DC driver

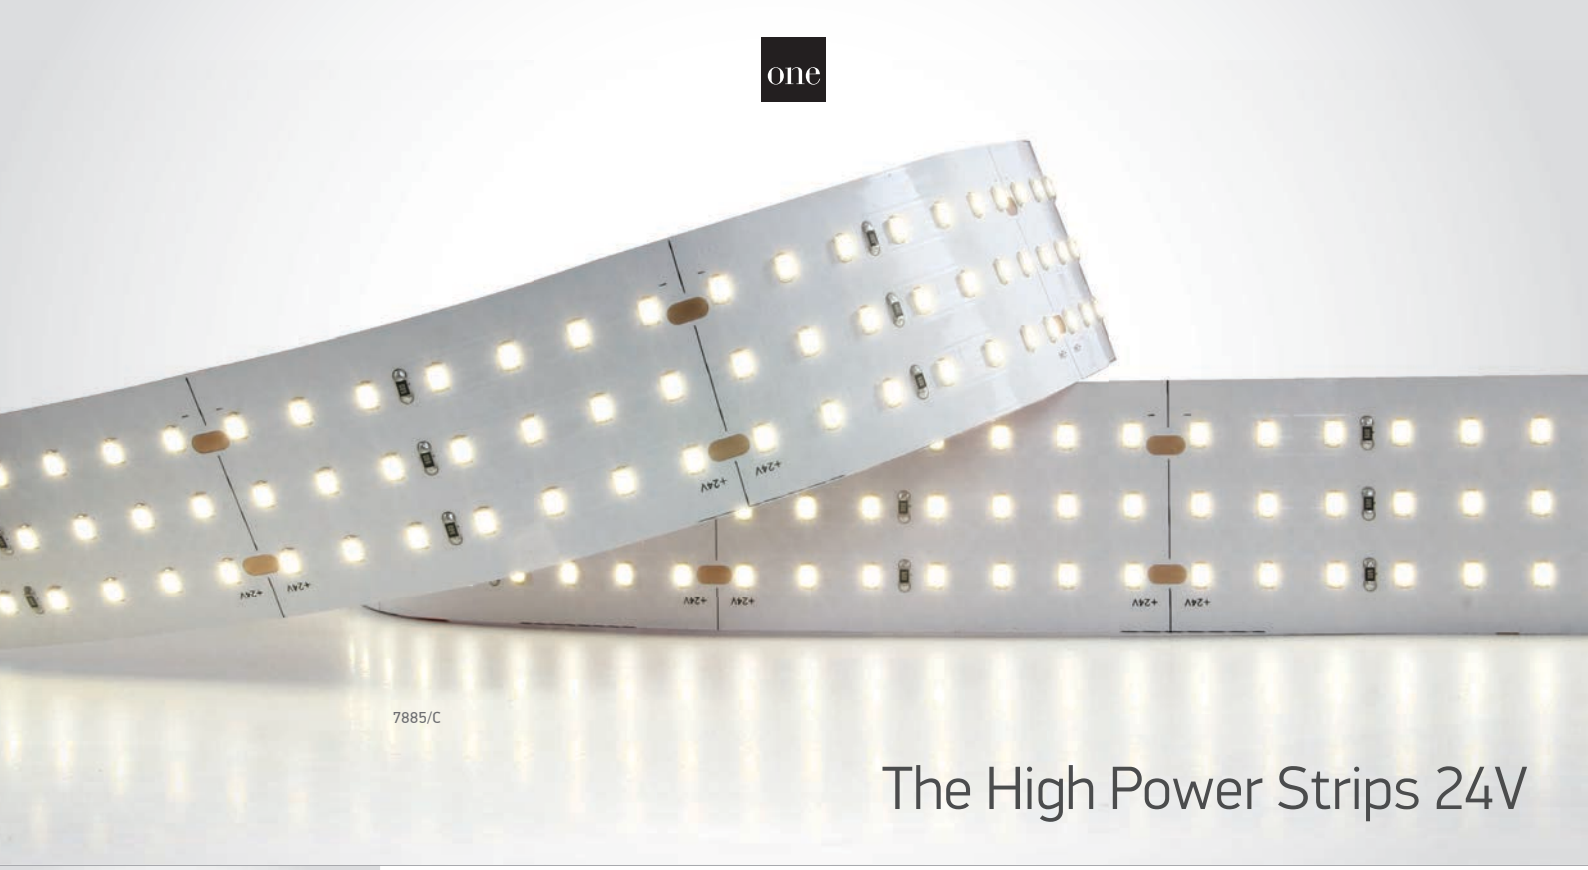

The High Power Strips 24V



7880 | 28,8W/m | SMD 2835 | 120LEDs/m

3M Double face adhesive.

IP20 | LED BUILT IN | 90 CRI | DIMMABLE | 5 YEAR



Supplied in 5m roll.

Cut every 10cm
(12-LED segment)

20mm



7882 | 42W/m | SMD 2835 | 240LEDs/m

3M Double face adhesive.

IP20 | LED BUILT IN | 90 CRI | DIMMABLE | 5 YEAR



Supplied in 2m roll.

Cut every 3,33cm
(8-LED segment)

12mm



7885 | 48W/m | SMD 2835 | 294LEDs/m

3M Double face adhesive.

IP20 | LED BUILT IN | 90 CRI | DIMMABLE | 5 YEAR



Supplied in 2m roll.

Cut every 7,14m
(21-LED segment)

39mm

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7880/D	Daylight	6000K	28,8W/m	2304lm/m	24V DC	III	40	Requires 24V DC driver
7880/C	Cool white	4000K	28,8W/m	2304lm/m	24V DC	III	40	Requires 24V DC driver
7880/W	Warm white	3000K	28,8W/m	2260lm/m	24V DC	III	40	Requires 24V DC driver
7882/W	Warm white	3000K	42W/m	6100lm/m	24V DC	III	40	Requires 24V DC driver
7885/C	Cool white	4000K	48W/m	4850lm/m	24V DC	III	20	Requires 24V DC driver
7885/W	Warm white	3000K	48W/m	4400lm/m	24V DC	III	20	Requires 24V DC driver





7835/DEW | 20W/m | SMD 2835 | 120LEDs/m

3M Double face adhesive.

LED BUILT IN · 90 CRI · DIMMABLE · CE · 5 YEAR



Supplied in 5m roll.



Variable colour temperature.





20032 | 12-24V DC | Variable colour temperature controller & dimmer | 2 channels x 3A

DIMMABLE · CE

Remote controller for changing colour temperature from extra warm white to daylight. Suitable for use with LED strips 7835/DEW. 50 meters range, includes dimmer control and programme mode.

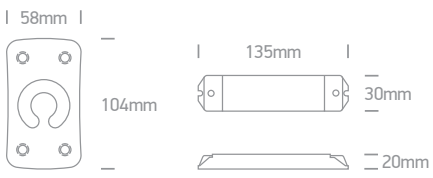

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7835/DEW	Extra warm white - Daylight	2700K - 6500K	20W/m	700lm/m (EW) + 900lm/m (D)	24V DC	III	40	Requires 12-24V DC driver



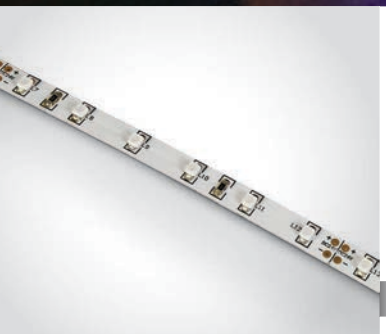

7820/BL | 4,8W/m | SMD 3528 | 60LEDs/m

3M Double face adhesive.

LED BUILT IN · DIMMABLE · CE · 5 YEAR



Supplied in 5m roll.



Dimming remote control.
Order code 20030.

Cut every 10cm
(6-LED segment)





7820W/BL | 4,8W/m | SMD 3528 | 60LEDs/m | Silicone

3M Double face adhesive.

LED BUILT IN · DIMMABLE · CE · 3 YEAR



Supplied in 5m roll.



Dimming remote control.
Order code 20030.

Cut every 10cm
(6-LED segment)



Order Code	Light Colour	Input	Input	Class		Notes
7820/BL	Blue	4,8W/m	24V DC	III	40	Requires 24V DC driver
7820W/BL	Blue	4,8W/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight

RGB Set





RGB

IP20

7820A/RGB | 2W/m/color | SMD 5050 | 30LEDs/m

LED BUILT IN

DIMMABLE

3 YEAR



Supplied in 5m roll.

10mm

Order Code	Light Colour	CCT (K)	Watts	Input	Class		Notes
7820A/RGB	RGB	-	2W/m/color	230V / 12V DC		10	Set of LED strip + remote



The RGB & RGBW Strips 24V



RGB

7830/RGB | 14,4W/m | SMD 5050 | 60LEDs/m

3M Double face adhesive.

LED BUILT IN · DIMMABLE · CE · 5 YEAR



Dimming remote control.
Order code 20034.



DALI & Push to DIM controller.
Order code 89100LP.



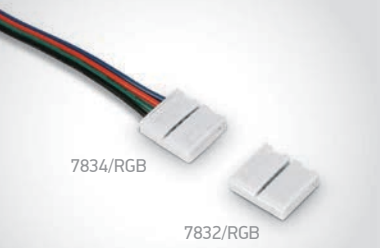

Accessories for 7830/RGB

III · 50cm · CE

7834/RGB Power supply cable
7832/RGB Connector



RGB+W

7830/RGBW | 19,2W/m | SMD 5050 | 60LEDs/m

3M Double face adhesive.

LED BUILT IN · DIMMABLE · CE · 5 YEAR



Dimming remote control.
Order code 20036.



DALI & Push to DIM controller.
Order code 89100LP.



Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7830/RGB	RGB	-	14,4W/m	-	24V DC	III	40	Requires 24V DC driver
7830/RGBW	RGB + Warm white	RGB + 3000K	RGB 14,4W/m + WW 4,8W/m	408lm/m (3000K)	24V DC	III	40	Requires 24V DC driver



The Outdoor RGB & RGBW Strip 24V



RGB

IP68

7830W/RGB | 14,4W/m | SMD 5050 | 60LEDs/m | Silicone

3M Double face adhesive.

LED BUILT IN · DIMMABLE · 3 YEAR



Dimming remote control.
Order code 20034.



DALI & Push to DIM controller.
Order code 89100LP.





7827 | Mounting clip for 7830W



RGBW

new

IP68

7830W/RGBW | 19,2W/m | SMD 5050 | 60LEDs/m | Silicone

Supplied in 5m roll / 3M Double face adhesive.

LED BUILT IN · DIMMABLE · 3 YEAR



Dimming remote control.
Order code 20036.



DALI & Push to DIM controller.
Order code 89100LP.





7827A | Mounting clip for 7830W/RGBW

new

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7830W/RGB	RGB	-	14,4W/m	-	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight
7830W/RGBW	RGB + Warm white	RGB + 3000K	RGB 14,4W/m + WW 4,8W/m	367lm/m (3000K)	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight



The Dark Light Profiles

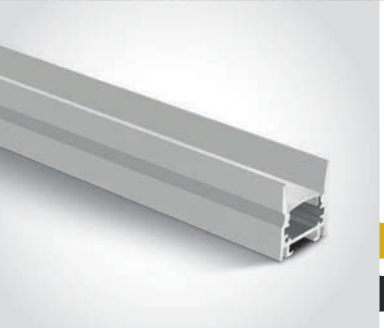

7903/W | 2m Surface profile + PC opal diffuser | Aluminium | Suitable for 7820, 7829 & 7843 LED Strips 12mm

new
DARK LIGHT

30

CE 5 YEAR



Complete with 2 pairs end cups & 6pcs fixing clips.



Optional black diffuser
Order code 030248/B.





7903/B | 2m Surface profile + PC opal diffuser | Aluminium | Suitable for 7820, 7829 & 7843 LED Strips 12mm

new
DARK LIGHT

30

CE 5 YEAR



Complete with 2 pairs end cups & 6pcs fixing clips.



Optional black diffuser
Order code 030248/B.



The Dark Light Profiles





7903R/W | 2m Recessed profile + PC opal diffuser | Aluminium | Suitable for 7820, 7829 & 7843 LED Strips 12mm

new DARK LIGHT

20

CE 5 YEAR



Complete with 2 pairs end cups & 6pcs fixing clips.



Optional black diffuser
Order code 030248/B.

24x2000mm

27mm





7903R/B | 2m Recessed profile + PC opal diffuser | Aluminium | Suitable for 7820, 7829 & 7843 LED Strips 12mm

new DARK LIGHT

20

CE 5 YEAR



Complete with 2 pairs end cups & 6pcs fixing clips.



Optional black diffuser
Order code 030248/B.

24x2000mm

27mm





7903TR/W | 2m Trimless profile + PC opal diffuser | Aluminium | Suitable for 7820, 7829 & 7843 LED Strips 12mm

new DARK LIGHT

16

CE 5 YEAR



Complete with 2 pairs end cups.



Optional black diffuser
Order code 030248/B.

24x2000mm

25mm



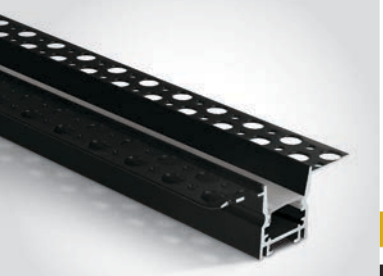

7903TR/B | 2m Trimless profile + PC opal diffuser | Aluminium | Suitable for 7820, 7829 & 7843 LED Strips 12mm

new DARK LIGHT

16

CE 5 YEAR



Complete with 2 pairs end cups.



Optional black diffuser
Order code 030248/B.

24x2000mm

25mm







7902/B/B | 2m Surface profile + PC black diffuser | Aluminium | Suitable for 7820 & 7843 LED Strip 12mm

25

5 YEAR

new



Complete with 2 pairs end cups & 6pcs fixing clips.





7904/B/B | 2m Surface profile + PC black diffuser | Aluminium
Suitable for 7820, 7829, 7835 & 7846 LED Strips 12mm

20

5 YEAR

new



Complete with 2 pairs end cups & 6pcs fixing clips.





7912/B/B | 2m Surface / Suspended profile + PC black diffuser | Aluminium
Suitable for 7835, 7845, 7846, 7875, 7880, 7882 & 7887 LED Strips 25mm

12

5 YEAR

new



Complete with 2 pairs end cups.



Optional Trimless kit (10pcs). Order code 7838M.



Optional suspension wire (1pc). Order code 7900P.



Optional 180° connector. Order code 7900C.



Optional 90° connector. Order code 7900R.





7912R/B/B

7901TR/B

The Black Profiles Series

7902R/B/B | 2m Recessed profile + PC black diffuser | Aluminium | Suitable for 7820 & 7843 LED Strip 12mm



25

5 YEAR

new



Complete with 2 pairs end cups.

18x2000mm

10mm



7910R/B/B | 2m Recessed profile + PC black diffuser | Aluminium
Suitable for 7835, 7845, 7846, 7875, 7880, 7882, 7884 & 7887 LED strips 30mm



12

5 YEAR

new



Complete with 2 pairs end cups & 4pcs fixing clips with screws.

40x2000mm

40mm



7912R/B/B | 2m Recessed profile + PC black diffuser | Aluminium
Suitable for 7835, 7845, 7846, 7875, 7880 & 7887 LED Strips 20mm



16

5 YEAR

new



Complete with 2 pairs end cups & 6pcs fixing clips.

25x2000mm

30mm



7901TR/B | 2m Trimless profile + PC black diffuser | Aluminium
Suitable for 7820, 7823, 7829 & 7843 LED Strips 10mm

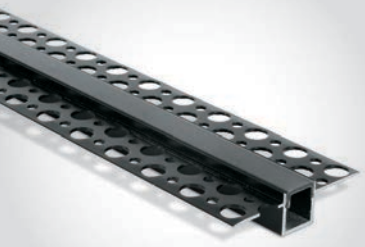

2

5 YEAR

new



Complete with 2 pairs end cups.

13x2000mm



7904TR/B | 2m Trimless profile + PC black diffuser | Aluminium
Suitable for 7820, 7829, 7835, 7846 & 7875 LED Strips 20mm



2

5 YEAR

new



Complete with 2 pairs end cups.

30x2000mm



Surface Slim Profiles



7900/AL | 2m Profile for heat dissipation | Aluminium | Suitable for LED Strips up to 12mm

200

5 YEAR

new





7901/AL | 2m Surface profile + PC opal diffuser | Aluminium | Suitable for 7823, 7833 & 7843 LED Strips 5mm

4

5 YEAR



Complete with 2 pairs end cups & 6pcs metal fixing clips.





7836/G | 2m Square profile | Aluminium | Suitable for 7820, 7829, 7835 & 7846 LED Strips 12mm

10

5 YEAR



2m Diffuser. Order code 7836A/P Opal.



Complete with 4 pairs end cups, 4 connectors & 6pcs fixing clips.





7902/W | 2m Surface profile + PC opal diffuser | Aluminium | Suitable for 7820 & 7843 LED Strip 12mm

25

5 YEAR



Complete with 2 pairs end cups & 6pcs fixing clips.





7902/B | 2m Surface profile + PC opal diffuser | Aluminium | Suitable for 7820 & 7843 LED Strip 12mm

25

5 YEAR



Complete with 2 pairs end cups & 6pcs fixing clips.





7902/AL | 2m Surface profile + PC opal diffuser | Aluminium | Suitable for 7820 & 7843 LED Strip 12mm

25

5 YEAR



Complete with 2 pairs end cups & 6pcs fixing clips.



Surface Profiles





7904/W

7904 | 2m Surface profile + PC opal diffuser | Aluminium | Suitable for 7820, 7829, 7835 & 7846 LED Strips 12mm

20

5 YEAR



7904/B



7904/AL



Complete with 2 pairs end cups & 6pcs fixing clips.





7905/W

7905 | 2m Surface profile + PC opal diffuser | Aluminium | Suitable for 7835, 7846 & 7875 LED Strips 16mm

80

5 YEAR



7905/B



7905/AL



Complete with 2 pairs end cups & 6pcs fixing clips.





Surface /Suspended Wide Profiles
External driver



7912/B | 2m Surface/Suspended profile + PC opal diffuser | Aluminium
Suitable for 7835, 7845, 7846, 7875, 7880, 7882 & 7887 LED Strips 25mm

12 | 5 YEAR


Complete with 2 pairs end cups.


Optional Trimless kit (10pcs). Order code 7838M.


Optional suspension wire (1pc). Order code 7900P.


Optional 180° connector. Order code 7900C.


Optional 90° connector. Order code 7900R.



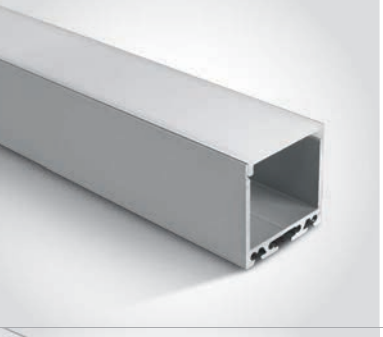

7912/AL | 2m Surface / Suspended profile + PC opal diffuser | Aluminium
Suitable for 7835, 7845, 7846, 7875, 7880, 7882 & 7887 LED Strips 25mm

12 | 5 YEAR


Complete with 2 pairs end cups.


Optional Trimless kit (10pcs). Order code 7838M.


Optional suspension wire (1pc). Order code 7900P.


Optional 180° connector. Order code 7900C.


Optional 90° connector. Order code 7900R.





7912A/AL | 2m Surface / Suspended profile + PC opal diffuser | Aluminium
Suitable for 7880, 7884 & 7885 LED Strips 40mm

6 | 5 YEAR


Complete with 2 pairs end cups.


Optional Trimless kit (10pcs). Order code 7838M.


Optional suspension wire (1pc). Order code 7900P.


Optional 180° connector. Order code 7900C.


Optional 90° connector. Order code 7900R.





050122 | Profile power supply base | With power cable | Aluminium

30 | 5 YEAR

IP20

050122/W White


050122/B Black


050122/G Grey



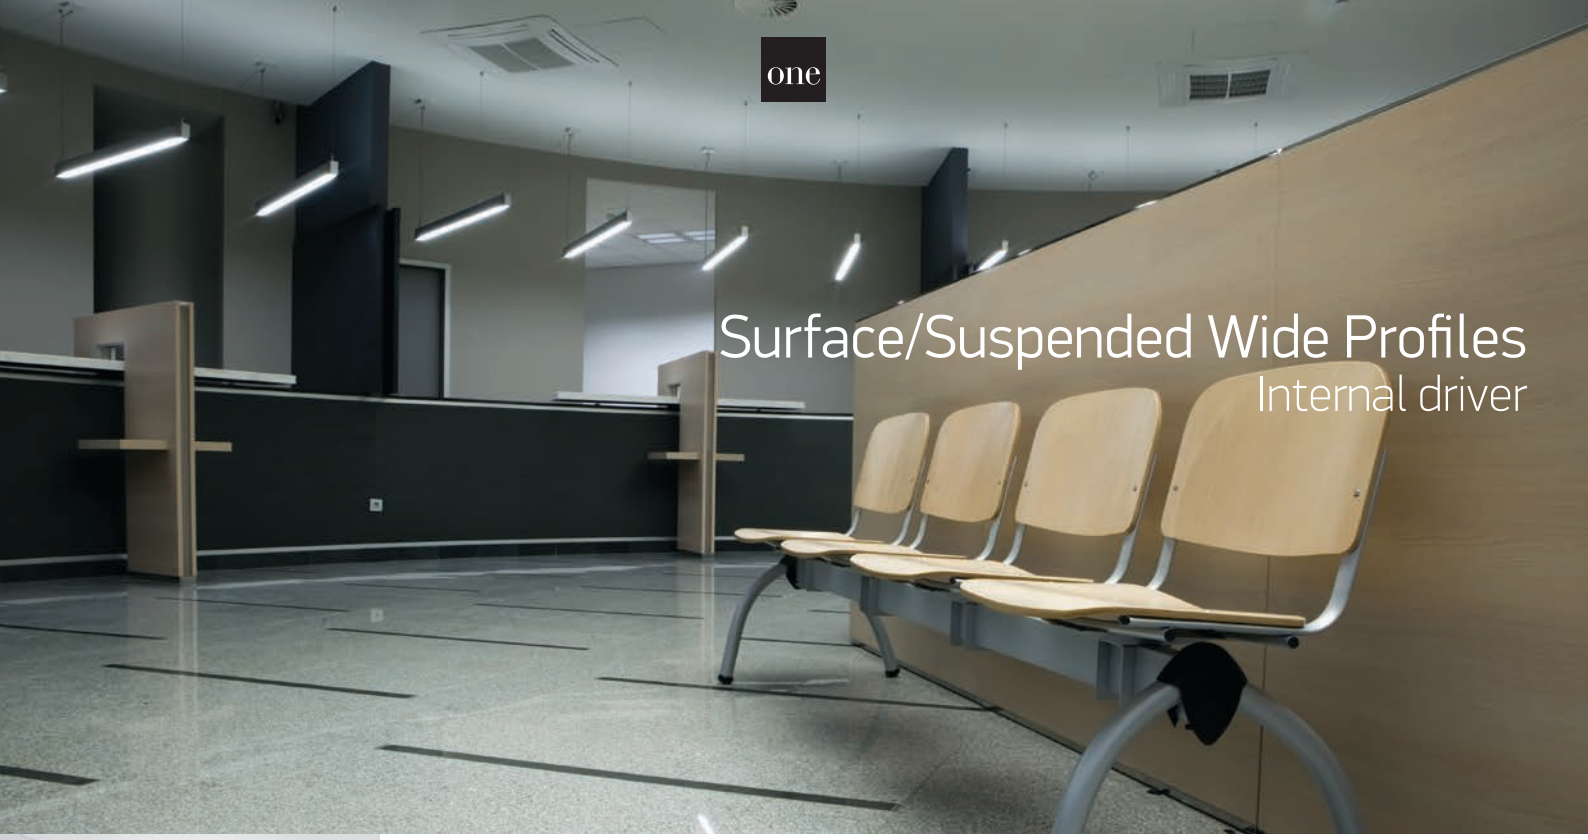

Surface/Suspended Wide Profiles
Internal driver

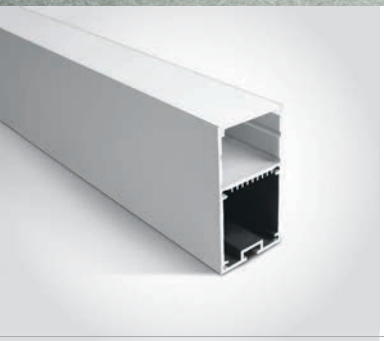

7910/AL | 2m Surface / Suspended profile + PC opal diffuser | Aluminium
Suitable for 7845, 7875, 7880, 7882,7884 & 7887 LED Strips 30mm | Use drivers on pages 745 & 746

8 | 5 YEAR


Complete with 2 pairs end cups.


Optional Trimless kit (10pcs). Order code 7838M.


Optional suspension wire (1pc). Order code 7900P.


Optional 180° connector. Order code 7900C.


Optional 90° connector. Order code 7900R.





7910A/B | 2m Surface / Suspended profile + PC opal diffuser | Aluminium
Suitable for 7884 & 7885 LED Strips 45mm | Use drivers on pages 745 & 746

6 | 5 YEAR


Complete with 2 pairs end cups.


Optional suspension wire (1pc). Order code 7900P.


Optional 180° connector. Order code 7900C.


Optional 90° connector. Order code 7900R.





7910A/AL | 2m Surface / Suspended profile + PC opal diffuser | Aluminium
Suitable for 7884 & 7885 LED Strips 45mm | Use drivers on pages 745 & 746

6 | 5 YEAR


Complete with 2 pairs end cups.


Optional suspension wire (1pc). Order code 7900P.


Optional 180° connector. Order code 7900C.


Optional 90° connector. Order code 7900R.




050122/W White

050122 | Profile power supply base | With power cable | Aluminium

30 | 5 YEAR

IP20


050122/B Black


050122/G Grey





Triangular Profiles



7908A/AL | 2m Triangle profile + PC opal diffuser | Aluminium
Suitable for 7820, 7829, 7835 & 7846 LED Strips 10mm

60

5 YEAR



Complete with 2 pairs end cups & 6pcs surface mounting clips.



Shelf illumination



7908/AL | 2m Triangle profile + PC opal diffuser | Aluminium | Suitable for 7820, 7829, 7835, 7846 & 7875 LED Strips 16mm

40

5 YEAR



Complete with 2 pairs end cups & 1pc 180° connector.



Shelf illumination



7937T/AL | 2m Surface profile + PC semi-opal diffuser | Aluminium
Suitable for 7820, 7829 & 7843 LED Strips 12mm

10

5 YEAR



Complete with 2 pairs end cups.



Shelf illumination

Side Light Surface & Suspended Profiles



7906/AL | 2m Surface profile + PMMA opal square diffuser | Aluminium
Suitable for 7820, 7825, 7829, 7835, 7846 & 7870 LED Strips 15mm

64

5 YEAR



Complete with 2 pairs end cups.





7906D/AL | 2m Surface / Suspended profile + PC opal diffuser | Aluminium
Suitable for 7880, 7884 & 7885 LED Strips 40mm | Use drivers on pages 745 & 746

6

5 YEAR



Complete with 2 pairs end cups.



Optional suspension wire (1pc). Order code 7900P.





Special Applications Profiles



7920/B | 2m Step profile + PC opal diffuser | Aluminium | Suitable for 7820 & 7843 LED Strips 8mm

10

5 YEAR



Complete with 4pcs end cups.

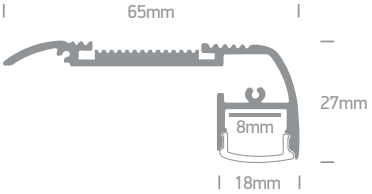



7916/AL | 2m Wall mounted profile + PC opal diffuser | Aluminium | Suitable for 7835, 7845, 7846, 7875, 7880 & 7887 LED Strips | Use drivers on pages 745 & 746

5 YEAR



Complete with 2 pairs end cups & 5pcs fixing clips.



Recessed Profiles



7901R/AL | 2m Recessed profile + PC opal diffuser | Aluminium | Suitable for 7823 & 7843 LED Strips 5mm

30

5 YEAR



Complete with 2 pairs end cups.

8x2000mm

13mm





7902R/W | 2m Recessed profile + PC opal diffuser | Aluminium | Suitable for 7820 & 7843 LED Strip 12mm

25

5 YEAR



Complete with 2 pairs end cups.

18x2000mm

10mm





7902R/B | 2m Recessed profile + PC opal diffuser | Aluminium | Suitable for 7820 & 7843 LED Strip 12mm

25

5 YEAR



Complete with 2 pairs end cups.

18x2000mm

10mm





7902R/AL | 2m Recessed profile + PC opal diffuser | Aluminium | Suitable for 7820 & 7843 LED Strip 12mm

25

5 YEAR



Complete with 2 pairs end cups.

18x2000mm

10mm





7904R/W | 2m Recessed profile + PC opal diffuser | Aluminium | Suitable for 7820, 7829, 7835 & 7846 LED Strips 12mm

80

5 YEAR



Complete with 2 pairs end cups.

18x2000mm

16mm





7904R/AL | 2m Recessed profile + PC opal diffuser | Aluminium | Suitable for 7820, 7829, 7835 & 7846 LED Strips 12mm

80

5 YEAR



Complete with 2 pairs end cups.

18x2000mm

16mm



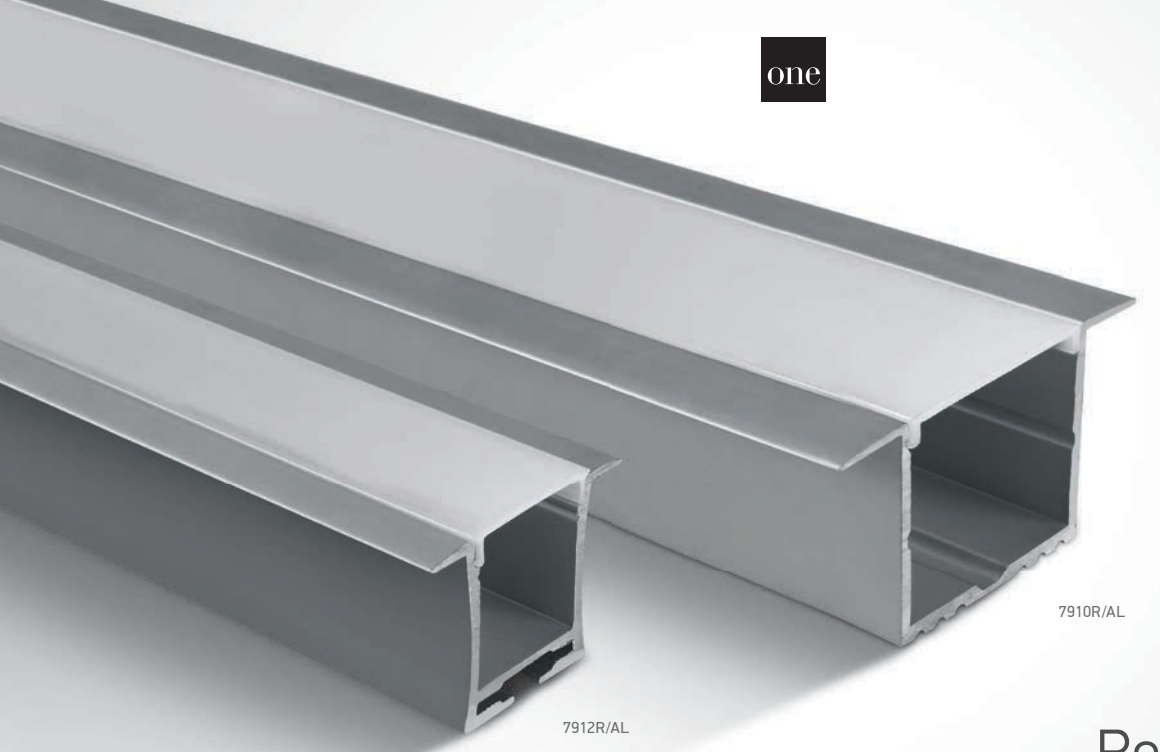

Recessed Profiles



7906R/W | 2m Recessed profile + PC opal diffuser | Aluminium
Suitable for 7820, 7829, 7835 & 7846 LED Strips 20mm

60

5 YEAR



Complete with 2 pairs end cups.

25x2000mm

12mm





7906R/AL | 2m Recessed profile + PC opal diffuser | Aluminium
Suitable for 7820, 7829, 7835 & 7846 LED Strips 20mm

60

5 YEAR



Complete with 2 pairs end cups.

25x2000mm

12mm





7912R/B | 2m Recessed profile + PC opal diffuser | Aluminium
Suitable for 7835, 7845, 7846, 7875, 7880 & 7887 LED Strips 20mm

16

5 YEAR



Complete with 2 pairs end cups & 6pcs fixing clips.

25x2000mm

30mm





7912R/AL | 2m Recessed profile + PC opal diffuser | Aluminium
Suitable for 7835, 7845, 7846, 7875, 7880 & 7887 LED Strips 20mm

16

5 YEAR



Complete with 2 pairs end cups & 6pcs fixing clips.

25x2000mm

30mm



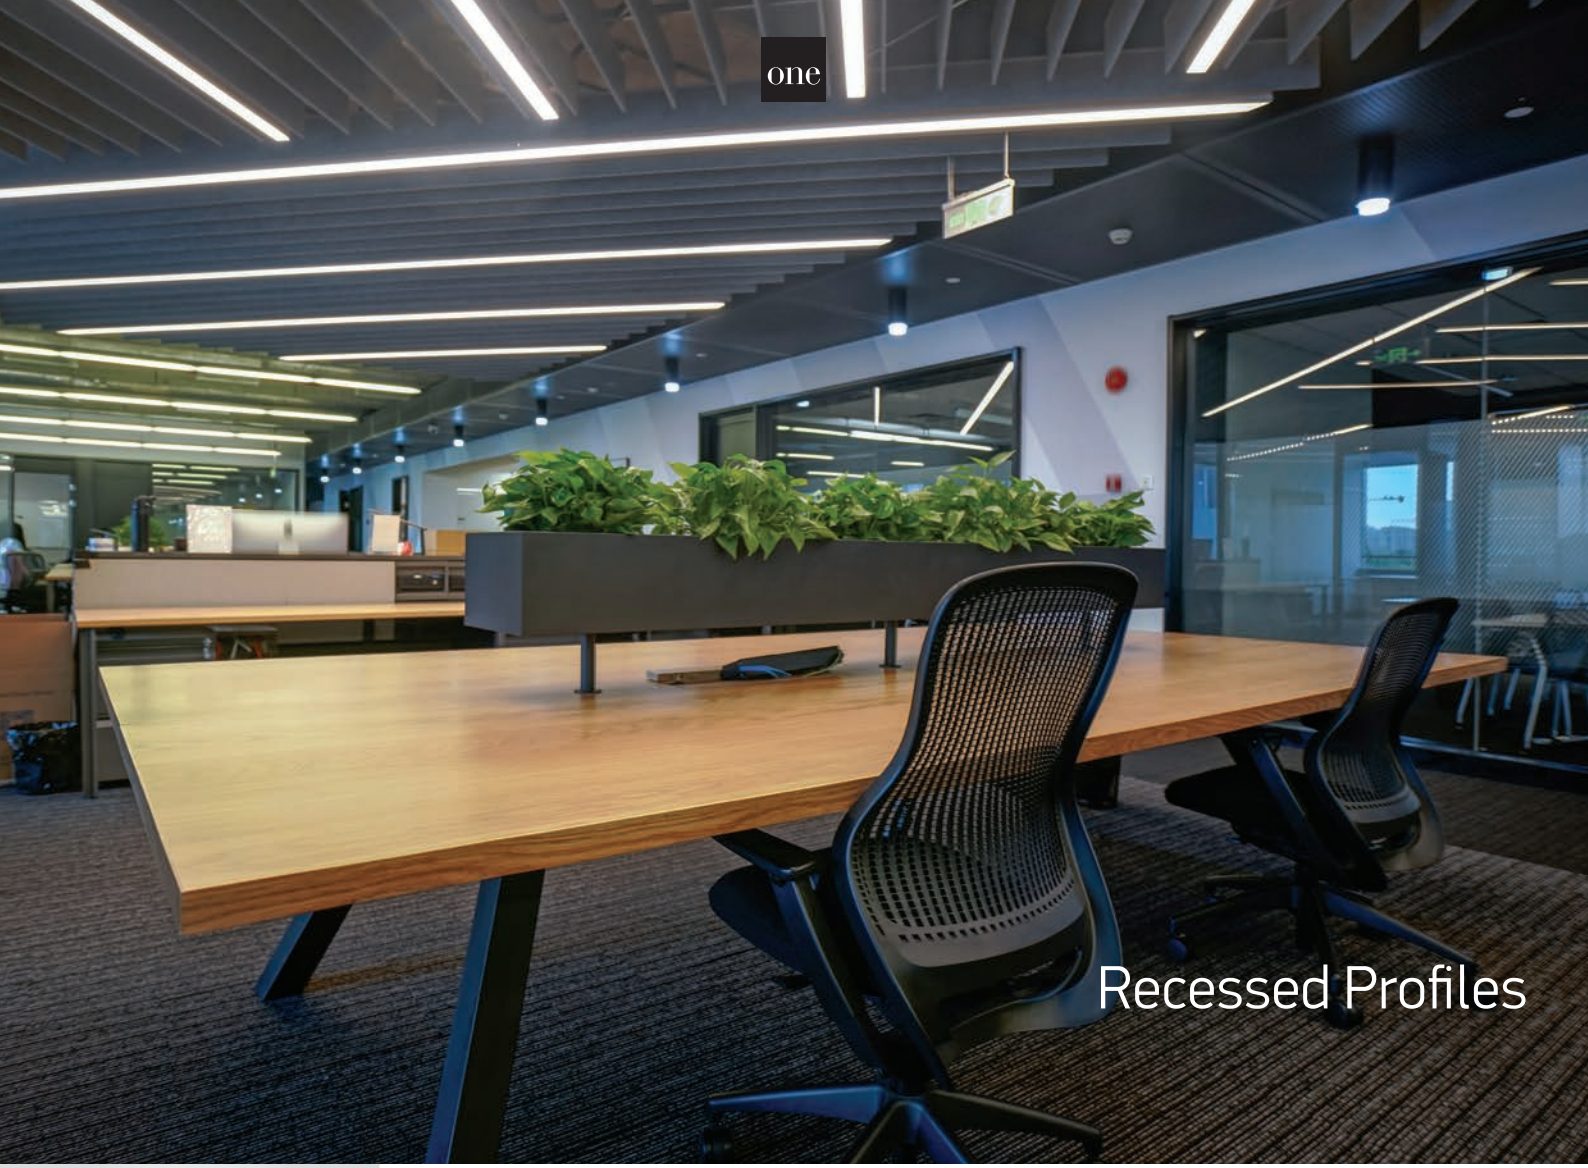

Recessed Profiles



7910R/B | 2m Recessed profile + PC opal diffuser | Aluminium | Suitable for 7835, 7845, 7846, 7875, 7880, 7882, 7884 & 7887 LED Strips 30mm

12

5 YEAR



Complete with 2 pairs end cups & 4pcs fixing clips with screws.

40x2000mm

40mm



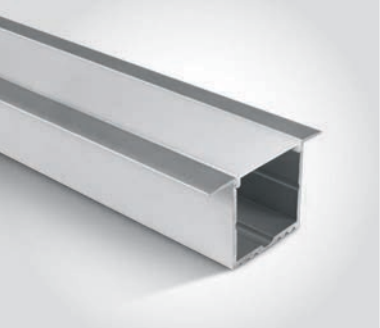

7910R/AL | 2m Recessed profile + PC opal diffuser | Aluminium | Suitable for 7835, 7845, 7846, 7875, 7880, 7882, 7884 & 7887 LED Strips 30mm

12

5 YEAR



Complete with 2 pairs end cups & 4pcs fixing clips with screws.

40x2000mm

40mm





7910AR/AL | 2m Recessed profile + PC opal diffuser | Aluminium | Suitable for 7875, 7880, 7884 & 7885 LED Strips 40mm

6

5 YEAR



Complete with 2 pairs end cups & 4pcs metal fixing clips.

52x2000mm

35mm





Trimless Recessed Profiles



7900TR/AL | 2m Trimless profile + PC opal diffuser | Aluminium
Suitable for 7823 & 7843 LED Strips 5mm

40

5 YEAR



Complete with 2 pairs end cups.

9x2000mm



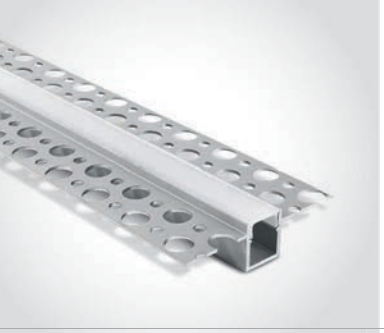

7901TR/AL | 2m Trimless profile + PC opal diffuser | Aluminium
Suitable for 7820, 7823, 7829 & 7843 LED Strips 10mm

2

5 YEAR



Complete with 2 pairs end cups.

13x2000mm





7904TR/AL | 2m Trimless profile + PC opal diffuser | Aluminium
Suitable for 7820, 7829, 7835, 7846 & 7875 LED Strips 20mm

2

5 YEAR



Complete with 2 pairs end cups.

30x2000mm





7906TR/AL | 2m Trimless profile + PC opal diffuser | Aluminium | Suitable for 7875 & 7880 LED Strips 37mm

12

5 YEAR



Complete with 2 pairs end cups.

50x2000mm





7904ATR/AL | 2m Trimless profile + PC opal diffuser | Aluminium | Suitable for 7820, 7829, 7835, 7845, 7846, 7875 & 7887 LED Strips 20mm

12

5 YEAR



Complete with 2 pairs end cups.

26x2000mm





IP67 & IP68 Profiles



7918/W | 2m White profile + PMMA opal diffuser | Plastic | Suitable for 7820 & 7829 LED Strips 8mm

100

5 YEAR

IP68



Complete with 2 pairs end cups & 6pcs fixing clips.





7914R/AL | 2m Inground profile + 3mm PC opal diffuser | Aluminium | Suitable for 7820, 7829 & 7843 LED Strips 8mm

20

5 YEAR

IP67



Complete with 2 pairs end cups.

23x2000mm

12mm





7915R/AL | 2m Inground profile + 3mm PC opal diffuser | Aluminium | Suitable for 7820, 7829 & 7843 LED Strips 10mm

80

5 YEAR

IP67



Complete with 2 pairs end cups.

22x2000mm

14mm





Modules For Signs



7840 | 0,72W (3LEDs x 0,24W)

Double face adhesive.

IP65 offer

LED BUILT IN · DIMMABLE · CE · 3 YEAR



Supplied in 10pcs chain.
Total length 1,7m.





7842 | 1,44W (4LEDs x 0,36W)

Double face adhesive.

IP65 offer

LED BUILT IN · DIMMABLE · CE · 3 YEAR



Supplied in 10pcs chain.
Total length 1,25m.



Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7840/Y	Yellow	-	0,72W	-	12V DC	III	100	Requires 12V DC driver
7842/D	Daylight	6000K	1,44W	64lm	12V DC	III	100	Requires 12V DC driver
7842/BL	Blue	-	1,44W	-	12V DC	III	100	Requires 12V DC driver
7842/GR	Green	-	1,44W	-	12V DC	III	100	Requires 12V DC driver
7842/Y	Yellow	-	1,44W	-	12V DC	III	100	Requires 12V DC driver



Modules for Signs & Backlit Applications



7840A | 0,5W | 2,5W/m | SMD 2835 | Plastic

Modules for signs.

LED BUILT IN · DIMMABLE · CE · IP65 · 3 YEAR



Supplied in 50pcs chain.
Total length 10m.





7840B | 2x0,5W | 5W/m | SMD 2835 | Plastic

Modules for signs.

LED BUILT IN · DIMMABLE · CE · IP65 · 3 YEAR



Supplied in 50pcs chain.
Total length 10m.



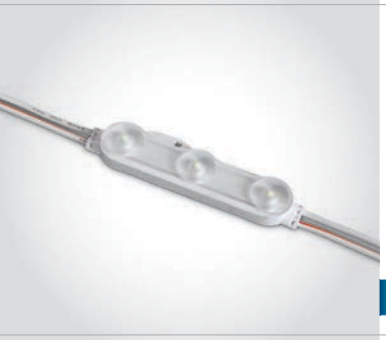

7840C | 3x0,5W | 7,5W/m | SMD 2835 | Plastic

Modules for signs.

LED BUILT IN · DIMMABLE · CE · IP65 · 3 YEAR



Supplied in 50pcs chain.
Total length 10m.



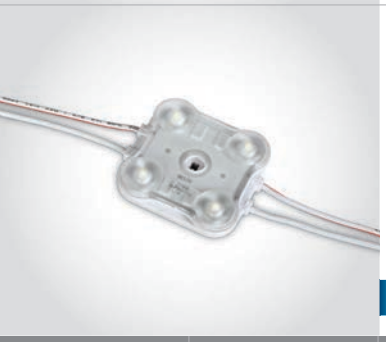

7840D | 4x0,5W | 10W/m | SMD 2835 | Plastic

Modules for signs.

LED BUILT IN · DIMMABLE · CE · IP65 · 3 YEAR



Supplied in 50pcs chain.
Total length 10m.

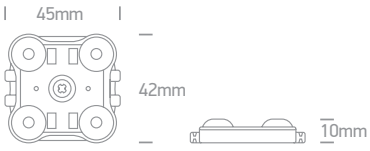

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7840A/D	Daylight	6000K	0,5W	45lm	12V DC	III	50	Requires 12V DC driver
7840B/D	Daylight	6000K	1W	90lm	12V DC	III	30	Requires 12V DC driver
7840C/D	Daylight	6000K	1,5W	135lm	12V DC	III	20	Requires 12V DC driver
7840D/D	Daylight	6000K	2W	180lm	12V DC	III	20	Requires 12V DC driver





38104L | 4W | LED | Aluminium + PC

Connect maximum 5pcs at 110V / Connect maximum 10pcs at 230V.

LED BUILT IN
75 CRI
QUICK FIX
CE
IP20
offer
2 YEAR







38115L | 15W | LED | Aluminium + PC

Connect maximum 5pcs at 110V / Connect maximum 10pcs at 230V.

LED BUILT IN
75 CRI
QUICK FIX
CE
IP20
offer
2 YEAR





Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38104L/D	Daylight	6000K	4W	305lm	100-240V		50	Includes power supply cable, corner cable, connector
38104L/W	Warm white	3000K	4W	280lm	100-240V		50	Includes power supply cable, corner cable, connector
38115L/C	Cool white	4000K	15W	1095lm	100-240V		30	Includes power supply cable, corner cable, connector



The 230V Solid Double LED Strip

Aluminium + PC



38207L | 7W | LED | Aluminium + PC

Connect maximum 5pcs at 110V / Connect maximum 10pcs at 230V.

IP20 offer LED BUILT IN 75 CRI QUICK FIX CE 2 YEAR



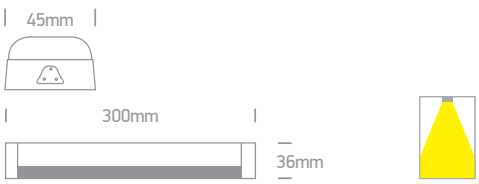



38215L | 15W | LED | Aluminium + PC

Connect maximum 5pcs at 110V / Connect maximum 10pcs at 230V.

IP20 offer LED BUILT IN 75 CRI QUICK FIX CE 2 YEAR







38230L | 30W | LED | Aluminium + PC

Connect maximum 5pcs at 110V / Connect maximum 10pcs at 230V.

IP20 offer LED BUILT IN 75 CRI QUICK FIX CE 2 YEAR



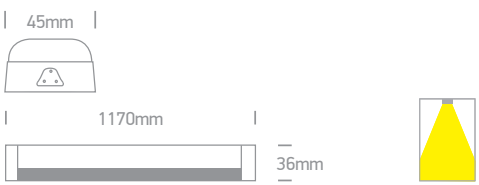

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38207L/D	Daylight	6000K	7W	530lm	100-240V		30	Includes power supply cable, corner cable, connector
38207L/C	Cool white	4000K	7W	510lm	100-240V		30	Includes power supply cable, corner cable, connector
38207L/W	Warm white	3000K	7W	490lm	100-240V		30	Includes power supply cable, corner cable, connector
38215L/D	Daylight	6000K	15W	1140lm	100-240V		25	Includes power supply cable, corner cable, connector
38215L/W	Warm white	3000K	15W	1050lm	100-240V		25	Includes power supply cable, corner cable, connector
38230L/D	Daylight	6000K	30W	2280lm	100-240V		20	Includes power supply cable, corner cable, connector
38230L/W	Warm white	3000K	30W	2100lm	100-240V		20	Includes power supply cable, corner cable, connector

24V Linkable Modules
Aluminium



38001A | 1W | LED | Aluminium

IP20 offer

LED BUILT IN · DIMMABLE · QUICK FIX · CE · 3 YEAR







38002A | 3W | LED | Aluminium

IP20 offer

LED BUILT IN · DIMMABLE · QUICK FIX · CE · 3 YEAR







38005A | 6W | LED | Aluminium

IP20 offer

LED BUILT IN · DIMMABLE · QUICK FIX · CE · 3 YEAR







38006 & 38007 | Power supply cable and corner cable for 38001A, 38002A & 38005A

III · QUICK FIX · CE

offer

Power supply cable
38006A For DL and WW
38006B For BL
38006C For RGB

Corner cable
38007A For DL and WW
38007B For BL
38007C For RGB



Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38001A/D	Daylight	6000K	1W	64lm	24V DC	III	100	Requires 24V DC driver
38001A/W	Warm white	3000K	1W	60lm	24V DC	III	100	Requires 24V DC driver
38001A/BL	Blue	-	1W	-	24V DC	III	100	Requires 24V DC driver
38001A/RGB	RGB	-	1W	-	24V DC	III	100	Requires 24V DC driver
38002A/D	Daylight	6000K	3W	144lm	24V DC	III	100	Requires 24V DC driver
38002A/W	Warm white	3000K	3W	135lm	24V DC	III	100	Requires 24V DC driver
38002A/BL	Blue	-	3W	-	24V DC	III	100	Requires 24V DC driver
38002A/RGB	RGB	-	3W	-	24V DC	III	100	Requires 24V DC driver
38005A/D	Daylight	6000K	6W	384lm	24V DC	III	100	Requires 24V DC driver
38005A/W	Warm white	3000K	6W	360lm	24V DC	III	100	Requires 24V DC driver
38005A/BL	Blue	-	6W	-	24V DC	III	100	Requires 24V DC driver

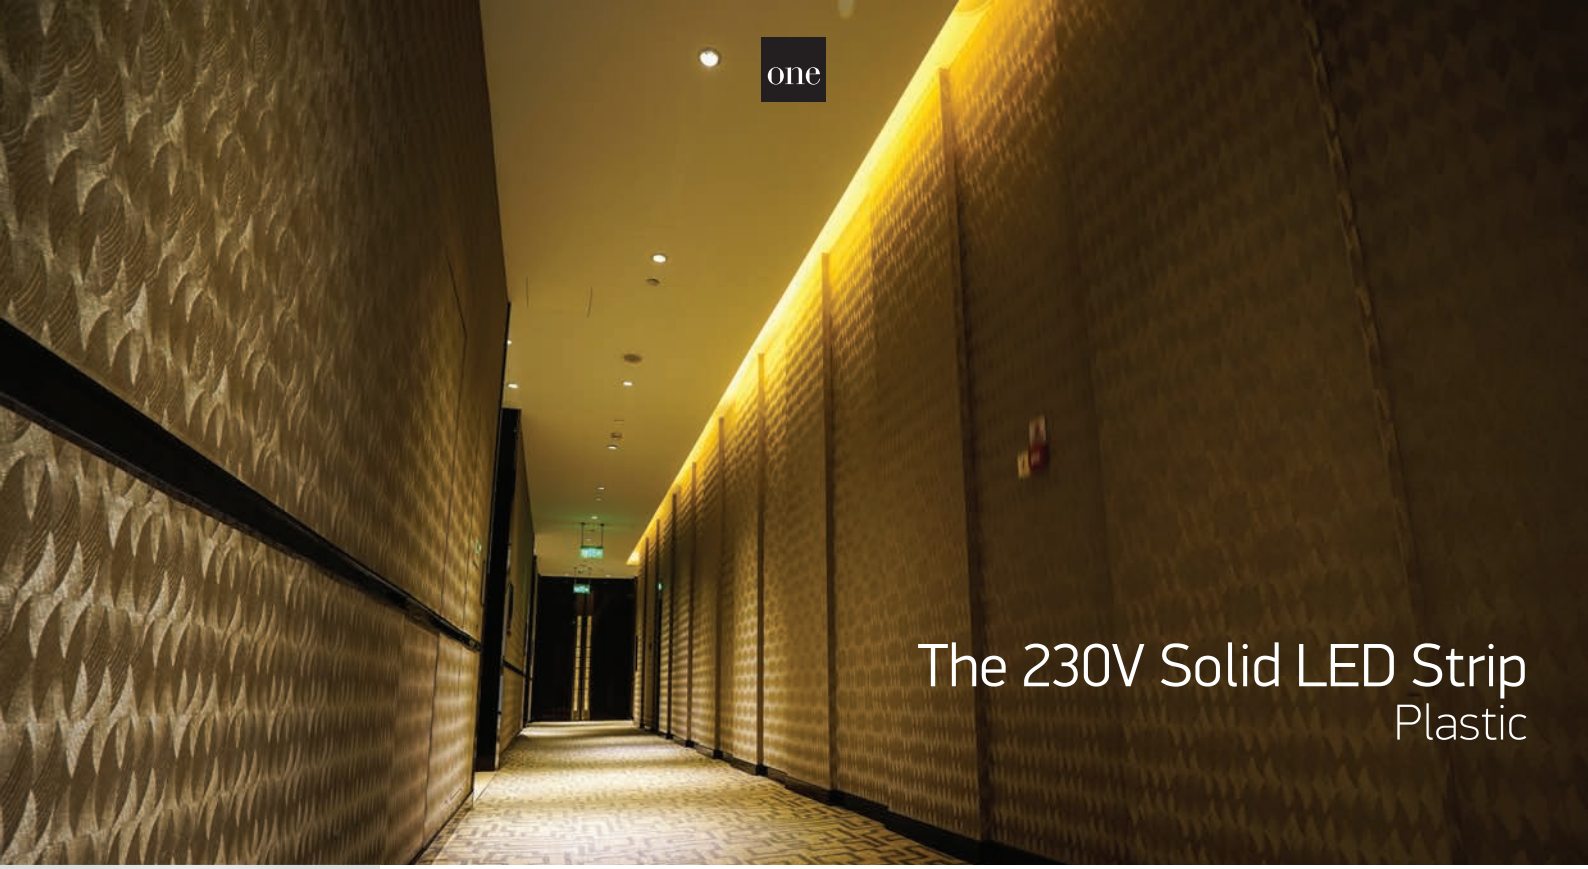

The 230V Solid LED Strip
Plastic



38104B | 4W | SMD 2835 | Plastic

Connect 25 fittings maximum.

LED BUILT IN · 80 CRI · QUICK FIX · CE · IP20 · 2 YEAR







38108B | 8W | SMD 2835 | Plastic

Connect 12 fittings maximum.

LED BUILT IN · 80 CRI · QUICK FIX · CE · IP20 · 2 YEAR







38114B | 14W | SMD 2835 | Plastic

Connect 7 fittings maximum.

LED BUILT IN · 80 CRI · QUICK FIX · CE · IP20 · 2 YEAR





Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38104B/C	Cool white	4000K	4W	440lm	230V	☐	30	Complete with driver
38104B/W	Warm white	3000K	4W	440lm	230V	☐	30	Complete with driver
38108B/C	Cool white	4000K	8W	880lm	230V	☐	30	Complete with driver
38108B/W	Warm white	3000K	8W	880lm	230V	☐	30	Complete with driver
38114B/C	Cool white	4000K	14W	1540lm	230V	☐	30	Complete with driver
38114B/W	Warm white	3000K	14W	1540lm	230V	☐	30	Complete with driver

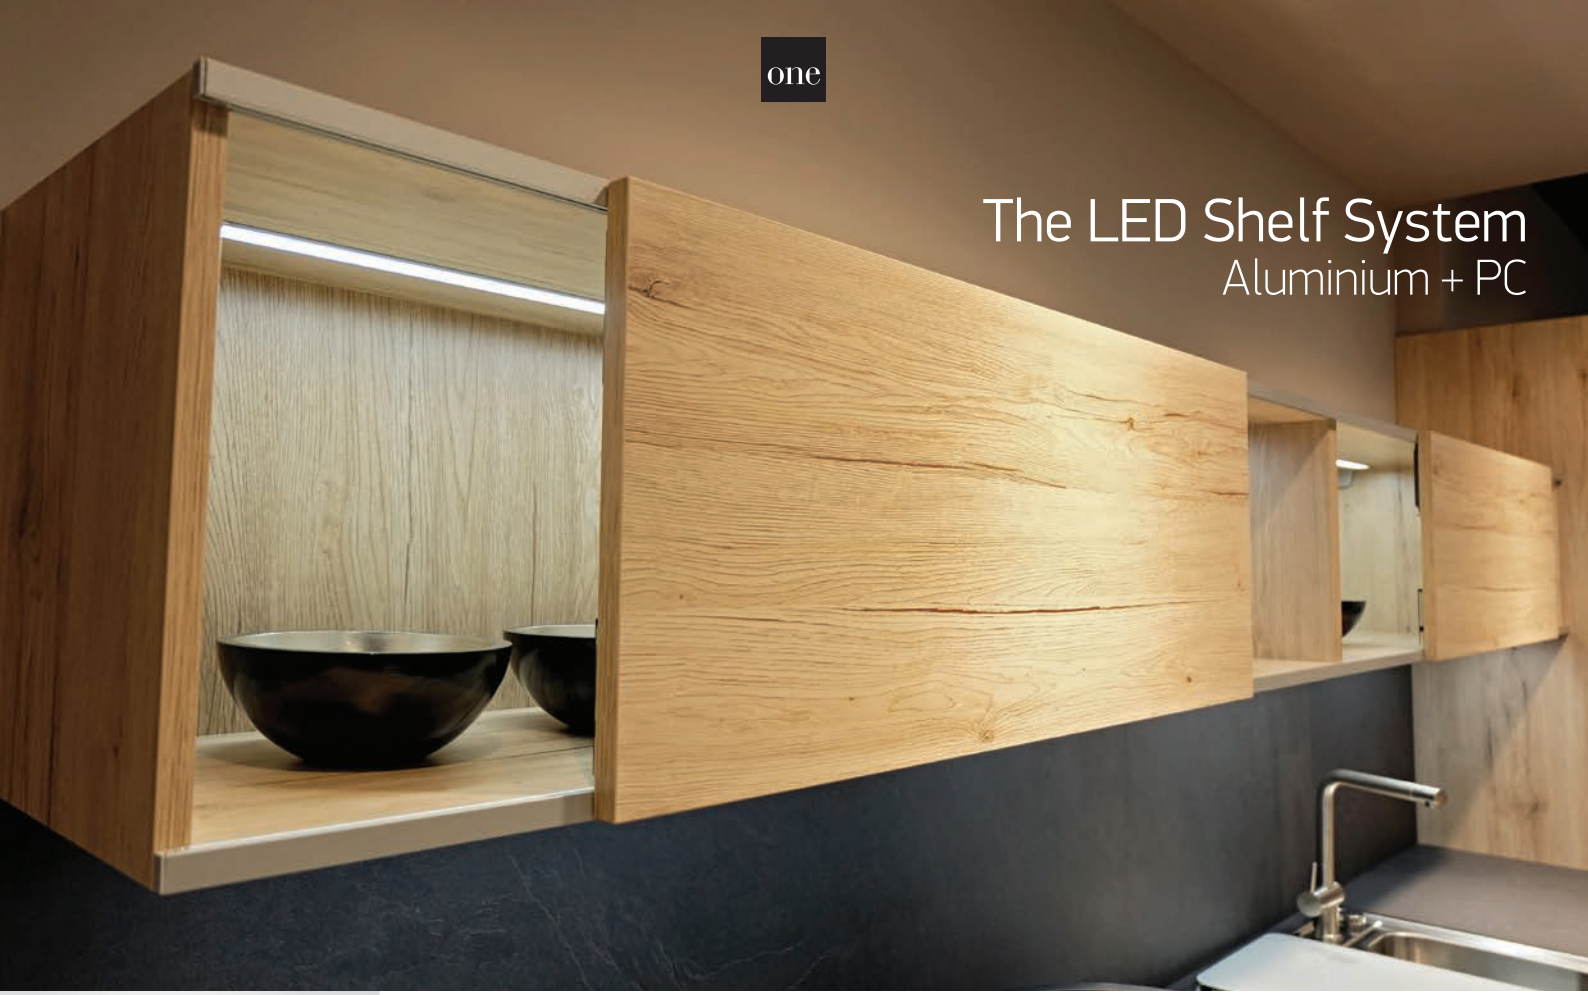

The LED Shelf System
Aluminium + PC



38103 | 3W | SMD 3014 | Aluminium + PC

LED BUILT IN · 80 CRI · DIMMABLE · QUICK FIX · IP20 · CE · 2 YEAR



2m maximum each line.





38105 | 5W | SMD 3014 | Aluminium + PC

LED BUILT IN · 80 CRI · DIMMABLE · QUICK FIX · IP20 · CE · 2 YEAR



2m maximum each line.





38110 | 10W | SMD 3014 | Aluminium + PC

LED BUILT IN · 80 CRI · DIMMABLE · QUICK FIX · IP20 · CE · 2 YEAR



2m maximum each line.



Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38103/W	Warm white	3000K	3W	225lm	24V DC	III	100	Requires 24V DC driver / Includes mounting clips (2pcs), screws (2pcs)
38105/W	Warm white	3000K	5W	375lm	24V DC	III	50	Requires 24V DC driver / Includes mounting clips (2pcs), screws (2pcs)
38110/W	Warm white	3000K	10W	750lm	24V DC	III	25	Requires 24V DC driver / Includes mounting clips (3pcs), screws (3pcs)

The LED Shelf System Accessories



38102A | Touch ON/OFF and dimmer | Max. 60W | 24V DC

2 YEAR

IP20



Touch ON/OFF



Hold to DIM





38102B | Wave hand | Door ON/OFF | Max. 60W | 24V DC

2 YEAR

IP20



Lights OFF



Lights ON





38102C | PIR Sensor | Max. 60W | 24V DC

Adjustable 1min / 5min.

2 YEAR

IP20



Move hand to switch ON/OFF the lights.





38101A | Connector for 38103, 38105 & 38110

IP20





38101B | Corner for 38103, 38105 & 38110

IP20

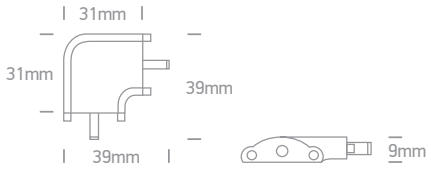



38101C | Power supply cable connector for 38103, 38105 & 38110

100cm



38101D | 8 - Way connection box | 24V DC

100cm

IP20





The 230V IP65 Range



7850 | 6W/m | SMD 2835 | 60LEDs/m | PVC

Cut every 1m.

LED BUILT IN · 80 CRI · TRIAC DIMMABLE · IP65 · CE · 2 YEAR



Supplied in 100m roll.





7850C Connector



7850P
230V Power supply
for 100m



7850F Fixing clip



7850L Corner connector



7850E End cup



7860R
Shrinking sleeve



7860 | 9W/m | SMD 5730 | 60LEDs/m | PVC

Cut every 1m.

LED BUILT IN · 80 CRI · TRIAC DIMMABLE · IP65 · CE · 2 YEAR



Supplied in 50m roll.





7860C Connector



7860P
230V Power supply
for 50m



7860F Fixing clip



7860L Corner connector



7860E End cup



7860R
Shrinking sleeve

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7850/D	Daylight	6000K	6W/m	320lm/m	230V	☐	100m roll	Requires 7850P power supply
7850/C	Cool white	4000K	6W/m	440lm/m	230V	☐	100m roll	Requires 7850P power supply
7850/W	Warm white	3000K	6W/m	440lm/m	230V	☐	100m roll	Requires 7850P power supply
7850/BL	Blue	-	6W/m	-	230V	☐	100m roll	Requires 7850P power supply
7860/D	Daylight	6000K	9W/m	750lm/m	230V	☐	50m roll	Requires 7860P power supply
7860/C	Cool white	4000K	9W/m	750lm/m	230V	☐	50m roll	Requires 7860P power supply
7860/W	Warm white	3000K	9W/m	750lm/m	230V	☐	50m roll	Requires 7860P power supply



The 230V IP65 Range



7862 | 13W/m | SMD 5730 | 120LEDs/m | PVC

Cut every 1m.

LED BUILT IN | 80 CRI | TRIAC DIMMABLE | IP65 | CE | 2 YEAR



Supplied in 30m roll.

18mm



7862C Connector



7862P
230V Power supply
for 30m



7862F Fixing clip



7862L Corner connector



7862E End cup



7862R
Shrinking sleeve

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7862/C	Cool white	4000K	13W/m	1050lm/m	230V	⧈	30m roll	Requires 7862P power supply
7862/W	Warm white	3000K	13W/m	1000lm/m	230V	⧈	30m roll	Requires 7862P power supply

Flex Lightline



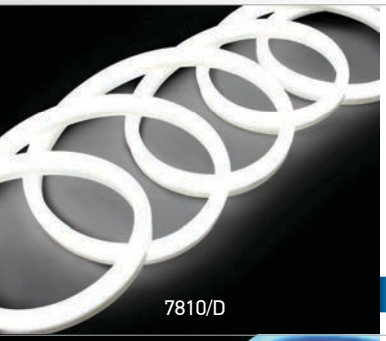

7810 | 4,8W/m | LED | Silicone

Supplied in 50m roll.

LED BUILT IN CE 2 YEAR

IP54





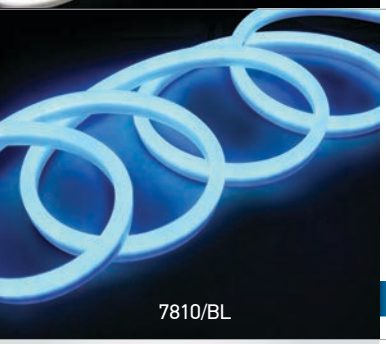

7810 | 4,8W/m | LED | Silicone

Supplied in 50m roll.

LED BUILT IN CE 2 YEAR

IP54







Accessories for 7810

CE

7814	230V Power supply
7812	Connector
7817	End cup



7815 | 2m Profile for 7810 | Aluminium

CE

offer

7815/W	White
7815/G	Grey

10





7815B | Housing box for 7814 & 7815

CE

offer

7815B/W	White
7815B/G	Grey



8



Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7810/D	Daylight	6000K	4,8W/m	180lm/m	230V		50m roll	Requires 7814 power supply
7810/BL	Blue	-	4,8W/m	-	230V		50m roll	Requires 7814 power supply
7810/P	Pink	-	4,8W/m	-	230V		50m roll	Requires 7814 power supply



The COB IP65 Lightline



7846WA | 10W/m | COB LED | Silicone

3M Double face adhesive.

new

IP68

LED BUILT IN | 90 CRI | DIMMABLE | CE | 3 YEAR



Supplied in 5m roll.



Dimming remote control.
Order code 20030.





new

7846WP 230V Power supply



new

7846WC Connector



new

7846WB Corner connector



new

7827A Mounting clip

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7846WA/C	Cool white	4000K	10W/m	700lm/m	24V DC	III	50	Requires 24V DC driver / Avoid direct sunlight
7846WA/W	Warm white	3000K	10W/m	650lm/m	24V DC	III	50	Requires 24V DC driver / Avoid direct sunlight

230V Flex Lightline





7864/C

7864 | 9W/m | SMD 2835 | 120LEDs | PVC

Cut every 1m.





7864/W





7864C
Connector + shrinking sleeve.



7864P
230V Power supply 50m max.



7864F Fixing clip.



7864E End cup.

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7864/C	Cool white	4000K	9W/m	270lm/m	230V	☐	50m roll	Requires 7864P power supply
7864/W	Warm white	3000K	9W/m	270lm/m	230V	☐	50m roll	Requires 7864P power supply



Flex Lightlines



7841 | 14,4W/m | SMD 2835 | 140LEDs | Silicone

LED BUILT IN · 90 CRI · DIMMABLE · IP66 · CE · 5 YEAR



Supplied in 5m roll.



Fixing clips.
Order code 7841F.





7901A/AL | 2m Surface profile | Aluminium | Suitable for 7841 LED Strip

100 · CE



Complete with 2 pairs end cups
& 6pcs metal fixing clips.





7901AR/AL | 2m Recessed profile | Aluminium | Suitable for 7841 LED Strip

100 · CE



Complete with
2 pairs end cups.







7811 | 10W/m | SMD 2216 | 192 LEDs | Silicone

LED BUILT IN · 90 CRI · DIMMABLE · IP67 · CE · 3 YEAR



Supplied in 5m roll.



7811F Fixing clip
7811E End cup



Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7841/C	Cool white	4000K	14,4W/m	360lm/m	24V DC	III	40	Requires 24V DC driver
7841/W	Warm white	3000K	14,4W/m	320lm/m	24V DC	III	40	Requires 24V DC driver
7811/W	Warm white	3000K	10W/m	550lm/m	24V DC	III	40	Requires 24V DC driver

Decorative Light Tubes



7868 | 3,4W/m | LED | 30LEDs/m | Festive lighting | PVC

Connect maximum 100m / Cut every 1m.

LED BUILT IN · CE · 2 YEAR

IP65



Supplied in 50m roll.



13mm





7868C
Connector + shrinking sleeve.



7868P
230V Power supply for 50m.



7868F Fixing clip.



7868E End cup.

Order Code	Light Colour	CCT (K)	Watts	Input	Class		Notes
7868/D	Daylight	6000K	3,4W/m	230V	⧈	50m roll	Complete with 7868P power supply
7868/EW	Extra warm white	2700K	3,4W/m	230V	⧈	50m roll	Complete with 7868P power supply



Decorative Light Stars

7866 | 7W | LED | 100LEDs | Festive lighting | PVC

Connect maximum 100m.



7866/D
Supplied in 10m roll.

IP54

LED BUILT IN CE 2 YEAR



7866/EW
Supplied in 10m roll.



7866/BL
Supplied in 10m roll.



Optional 5m waterproof extension cable.
Order code 7866E.

7866F | 7W | LED | 100LEDs | Flashing lights | Festive lighting | PVC

Connect maximum 100m.



7866F/D
Supplied in 10m roll.

IP54

LED BUILT IN CE 2 YEAR



7866F/EW
Supplied in 10m roll.



7866F/BL
Supplied in 10m roll.



Optional 5m waterproof extension cable.
Order code 7866E.

Order Code	Light Colour	CCT (K)	Watts	Input	Class		Notes
7866/D	Daylight	6000K	7W	230V	☐	10	Complete with power supply
7866/EW	Extra warm white	2700K	7W	230V	☐	10	Complete with power supply
7866/BL	Blue	-	7W	230V	☐	10	Complete with power supply
7866F/D	Daylight	6000K	7W	230V	☐	10	Complete with power supply
7866F/EW	Extra warm white	2700K	7W	230V	☐	10	Complete with power supply
7866F/BL	Blue	-	7W	230V	☐	10	Complete with power supply





09

Track Lights

Pages 291-326

COB LED | SMD LED | LED | GU10 | Rx7s | HQI | PAR30 | E27

Die cast | Natural aluminium

IP20

ADJUSTABLE DARK LIGHT 80 CRI 90 CRI 2 YEAR 3 YEAR 5 YEAR



The Cylindrical Track Light



65608T/G/D

65608T | 3x1W | LED | Die cast

IP20

offer

LED BUILT IN

ADJUSTABLE

CE

2 YEAR









65608T/G/W

65608T | 3x1W | LED | Die cast

IP20

offer

LED BUILT IN

ADJUSTABLE

CE

2 YEAR







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65608T/G/D	Grey	Daylight	6000K	3x1W	217lm	60°	230V	⏚	30	Complete with driver
65608T/G/W	Grey	Warm white	3000K	3x1W	205lm	60°	230V	⏚	30	Complete with driver



The COB Dark Light Range



65610AT/W/C

65610AT | 10W | COB LED | Aluminium

DARK LIGHT
IP20
offer

LED BUILT IN
80 CRI
ADJUSTABLE
CE
2 YEAR



65610AT/B/W







65620AT/W/C

65620AT | 20W | COB LED | Aluminium

DARK LIGHT
IP20
offer

LED BUILT IN
80 CRI
ADJUSTABLE
CE
2 YEAR



65620AT/B/W





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65610AT/W/C	White	Cool white	4000K	10W	800lm	38°	230V		20	Complete with 300mA driver
65610AT/W/W	White	Warm white	3000K	10W	800lm	38°	230V		20	Complete with 300mA driver
65610AT/B/W	Black	Warm white	3000K	10W	800lm	38°	230V		20	Complete with 300mA driver
65620AT/W/C	White	Cool white	4000K	20W	1500lm	38°	230V		10	Complete with 500mA driver
65620AT/W/W	White	Warm white	3000K	20W	1500lm	38°	230V		10	Complete with 500mA driver
65620AT/B/W	Black	Warm white	3000K	20W	1500lm	38°	230V		10	Complete with 500mA driver

The COB Dark Light Cylinder

Die cast



65640BT | 36W | COB LED | Die cast

LED BUILT IN

80 CRI

ADJUSTABLE

2 YEAR

DARK LIGHT

IP20



15° Reflector for 65640BT.
Order code 0740/15.





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65640BT/W/C	White	Cool white	4000K	36W	2500lm	36°	230V	⏚	16	Complete with 900mA driver
65640BT/W/W	White	Warm white	3000K	36W	2400lm	36°	230V	⏚	16	Complete with 900mA driver



65612T/W/W



65614T/W/W

The COB Track Light Range
Aluminium



65611T | 15W | COB LED | Aluminium

IP20 offer

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · 2 YEAR









65612T | 30W | COB LED | Aluminium

IP20 offer

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · 2 YEAR









65614T/W/W

65614T | 45W | COB LED | Aluminium

IP20 offer

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · 2 YEAR

offer



65614T/B/W







65616T | 50W | COB LED | Aluminium

IP20 offer

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · 2 YEAR







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65611T/G/W	Grey	Warm white	3000K	15W	1100lm	36°	230V		12	Complete with 350mA driver
65612T/W/W	White	Warm white	3000K	30W	2300lm	36°	230V		9	Complete with 700mA driver
65614T/W/W	White	Warm white	3000K	45W	3500lm	36°	230V		9	Complete with 1000mA driver
65614T/B/W	Black	Warm white	3000K	45W	3500lm	36°	230V		9	Complete with 1000mA driver
65616T/B/W	Black	Warm white	3000K	50W	4000lm	38°	230V		6	Complete with 1200mA driver





The COB Track Light Range
Aluminium



65611NT | 15W | COB LED | Aluminium

LED BUILT IN
80 CRI
ADJUSTABLE
CE
3 YEAR
IP20









65612NT | 30W | COB LED | Aluminium

LED BUILT IN
90 CRI
ADJUSTABLE
CE
3 YEAR
IP20









65614NT | 42W | COB LED | Aluminium

LED BUILT IN
90 CRI
ADJUSTABLE
CE
3 YEAR
IP20







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65611NT/W/C	White	Cool white	4000K	15W	1300lm	38°	230V		10	Complete with 400mA driver
65611NT/W/W	White	Warm white	3000K	15W	1200lm	38°	230V		10	Complete with 400mA driver
65612NT/W/C	White	Cool white	4000K	30W	2700lm	38°	230V		10	Complete with 750mA driver
65612NT/W/W	White	Warm white	3000K	30W	2700lm	38°	230V		10	Complete with 750mA driver
65614NT/W/C	White	Cool white	4000K	42W	3780lm	38°	230V		10	Complete with 1000mA driver
65614NT/W/W	White	Warm white	3000K	42W	3780lm	38°	230V		10	Complete with 1000mA driver



The COB Track Light Range
Aluminium

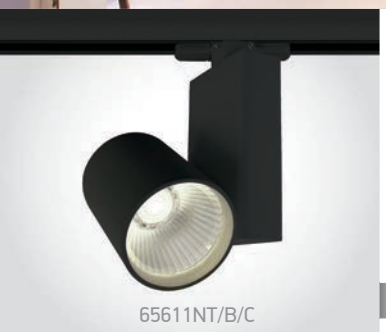

65611NT/B/C

65611NT | 15W | COB LED | Aluminium

LED BUILT IN
80 CRI
ADJUSTABLE
CE
3 YEAR
IP20



65611NT/B/W







65612NT/B/C

65612NT | 30W | COB LED | Aluminium

LED BUILT IN
90 CRI
ADJUSTABLE
CE
3 YEAR
IP20



65612NT/B/W







65614NT/B/C

65614NT | 42W | COB LED | Aluminium

LED BUILT IN
90 CRI
ADJUSTABLE
CE
3 YEAR
IP20



65614NT/B/W





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65611NT/B/C	Black	Cool white	4000K	15W	1300lm	38°	230V		10	Complete with 400mA driver
65611NT/B/W	Black	Warm white	3000K	15W	1200lm	38°	230V		10	Complete with 400mA driver
65612NT/B/C	Black	Cool white	4000K	30W	2700lm	38°	230V		10	Complete with 750mA driver
65612NT/B/W	Black	Warm white	3000K	30W	2700lm	38°	230V		10	Complete with 750mA driver
65614NT/B/C	Black	Cool white	4000K	42W	3780lm	38°	230V		10	Complete with 1000mA driver
65614NT/B/W	Black	Warm white	3000K	42W	3780lm	38°	230V		10	Complete with 1000mA driver

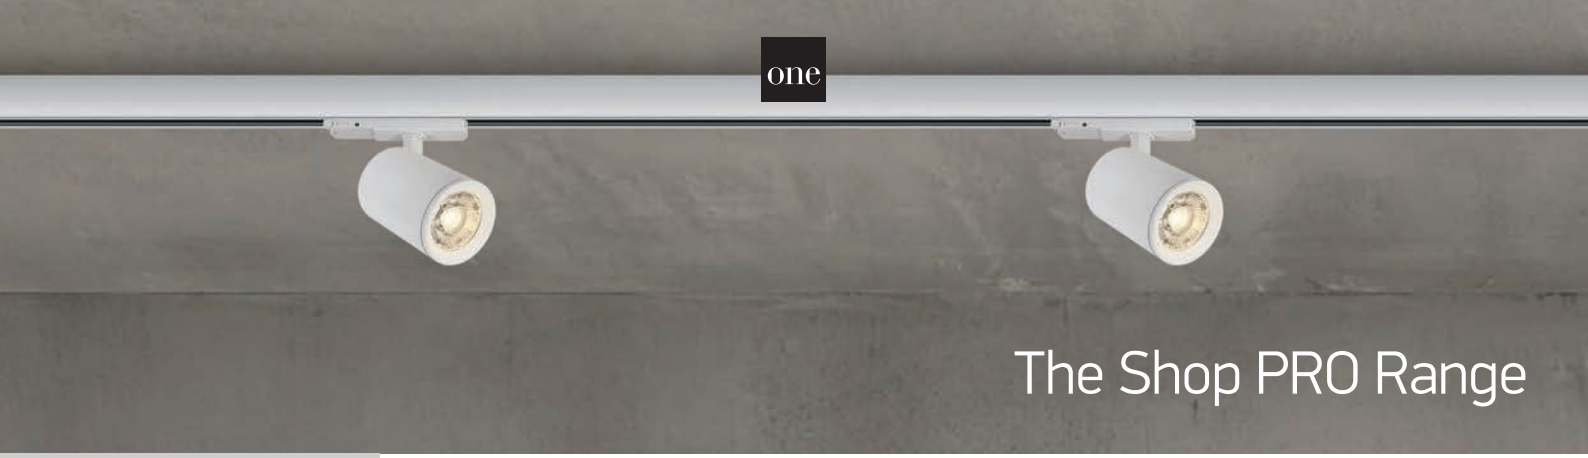

The Shop PRO Range



65654AT/W/W

65654AT | 20W | LED | Aluminium

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 3 YEAR · IP20



65654AT/W/C







65654BT/W/W

65654BT | 30W | LED | Aluminium

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 3 YEAR · IP20



65654BT/W/C







65654CT/W/W

65654CT | 40W | LED | Aluminium

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 3 YEAR · IP20



65654CT/W/C







65654CTT/W/W

65654CTT | 40W | LED | Dimmable | Aluminium

LED BUILT IN · 90 CRI · TRIAC DIMMABLE · ADJUSTABLE · CE · 3 YEAR · IP20



65654CTT/W/C





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65654AT/W/C	White	Cool white	4000K	20W	1800lm	38°	230V	☐	20	Complete with 450mA driver
65654AT/W/W	White	Warm white	3000K	20W	1800lm	38°	230V	☐	20	Complete with 450mA driver
65654BT/W/C	White	Cool white	4000K	30W	2700lm	38°	230V	☐	10	Complete with 750mA driver
65654BT/W/W	White	Warm white	3000K	30W	2700lm	38°	230V	☐	10	Complete with 750mA driver
65654CT/W/C	White	Cool white	4000K	40W	3600lm	38°	230V	☐	10	Complete with 1050mA driver
65654CT/W/W	White	Warm white	3000K	40W	3600lm	38°	230V	☐	10	Complete with 1050mA driver
65654CTT/W/C	White	Cool white	4000K	40W	3600lm	38°	230V	☐	10	Complete with 1000mA dimmable driver
65654CTT/W/W	White	Warm white	3000K	40W	3600lm	38°	230V	☐	10	Complete with 1000mA dimmable driver

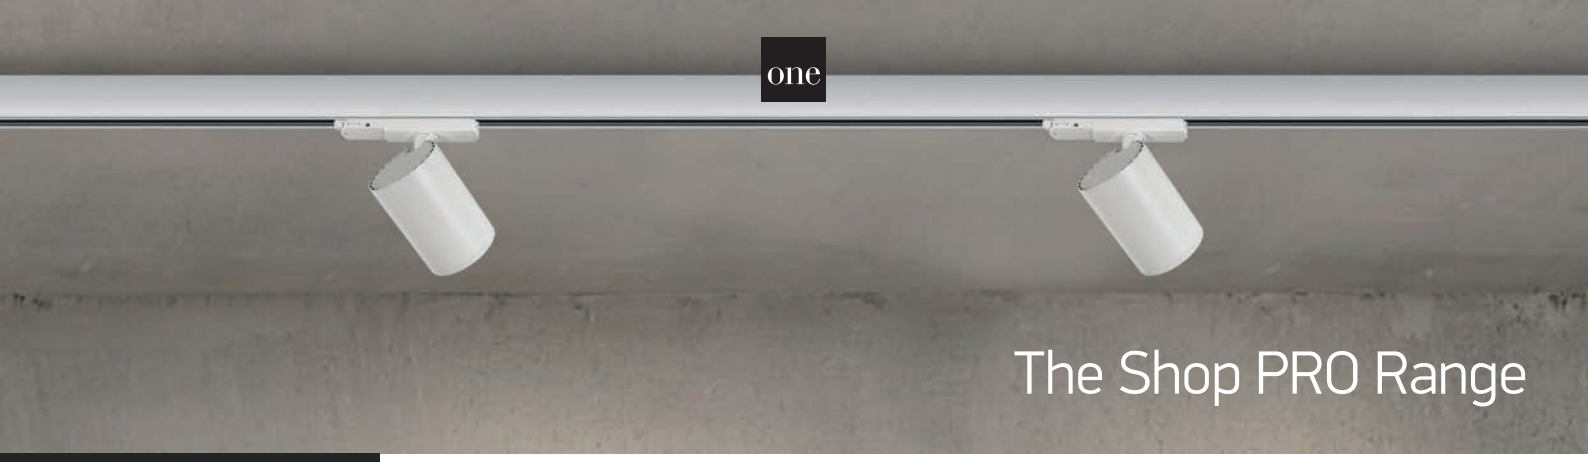

The Shop PRO Range



65654AT/B/W

65654AT | 20W | LED | Aluminium

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 3 YEAR · IP20



65654AT/B/C







65654BT/B/W

65654BT | 30W | LED | Aluminium

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 3 YEAR · IP20



65654BT/B/C







65654CT/B/W

65654CT | 40W | LED | Aluminium

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 3 YEAR · IP20



65654CT/B/C







65654CTT/B/W

65654CTT | 40W | LED | Dimmable | Aluminium

LED BUILT IN · 90 CRI · TRIAC DIMMABLE · ADJUSTABLE · CE · 3 YEAR · IP20



65654CTT/B/C





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65654AT/B/C	Black	Cool white	4000K	20W	1800lm	38°	230V		20	Complete with 450mA driver
65654AT/B/W	Black	Warm white	3000K	20W	1800lm	38°	230V		20	Complete with 450mA driver
65654BT/B/C	Black	Cool white	4000K	30W	2700lm	38°	230V		10	Complete with 750mA driver
65654BT/B/W	Black	Warm white	3000K	30W	2700lm	38°	230V		10	Complete with 750mA driver
65654CT/B/C	Black	Cool white	4000K	40W	3600lm	38°	230V		10	Complete with 1050mA driver
65654CT/B/W	Black	Warm white	3000K	40W	3600lm	38°	230V		10	Complete with 1050mA driver
65654CTT/B/C	Black	Cool white	4000K	40W	3600lm	38°	230V		10	Complete with 1000mA dimmable driver
65654CTT/B/W	Black	Warm white	3000K	40W	3600lm	38°	230V		10	Complete with 1000mA dimmable driver



The COB Cylinder Track Light
Aluminium



65642AT | 10W | COB LED | Aluminium

LED BUILT IN
90 CRI
ADJUSTABLE
CE
3 YEAR
IP20









65642BT | 20W | COB LED | Aluminium

LED BUILT IN
90 CRI
ADJUSTABLE
CE
3 YEAR
IP20









65642CT | 30W | COB LED | Aluminium

LED BUILT IN
90 CRI
ADJUSTABLE
CE
3 YEAR
IP20







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65642AT/W/C	White	Cool white	4000K	10W	900lm	38°	230V		24	Complete with 250mA driver
65642AT/W/W	White	Warm white	3000K	10W	900lm	38°	230V		24	Complete with 250mA driver
65642BT/W/C	White	Cool white	4000K	20W	1800lm	38°	230V		18	Complete with 500mA driver
65642BT/W/W	White	Warm white	3000K	20W	1800lm	38°	230V		18	Complete with 500mA driver
65642CT/W/C	White	Cool white	4000K	30W	2700lm	38°	230V		15	Complete with 750mA driver
65642CT/W/W	White	Warm white	3000K	30W	2700lm	38°	230V		15	Complete with 750mA driver



65642BT/B/C



65642CT/B/C

The COB Cylinder Track Light
Aluminium



65642AT | 10W | COB LED | Aluminium

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 3 YEAR · IP20









65642BT | 20W | COB LED | Aluminium

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 3 YEAR · IP20









65642CT | 30W | COB LED | Aluminium

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 3 YEAR · IP20







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65642AT/B/C	Black	Cool white	4000K	10W	900lm	38°	230V		24	Complete with 250mA driver
65642AT/B/W	Black	Warm white	3000K	10W	900lm	38°	230V		24	Complete with 250mA driver
65642BT/B/C	Black	Cool white	4000K	20W	1800lm	38°	230V		18	Complete with 500mA driver
65642BT/B/W	Black	Warm white	3000K	20W	1800lm	38°	230V		18	Complete with 500mA driver
65642CT/B/C	Black	Cool white	4000K	30W	2700lm	38°	230V		15	Complete with 750mA driver
65642CT/B/W	Black	Warm white	3000K	30W	2700lm	38°	230V		15	Complete with 750mA driver

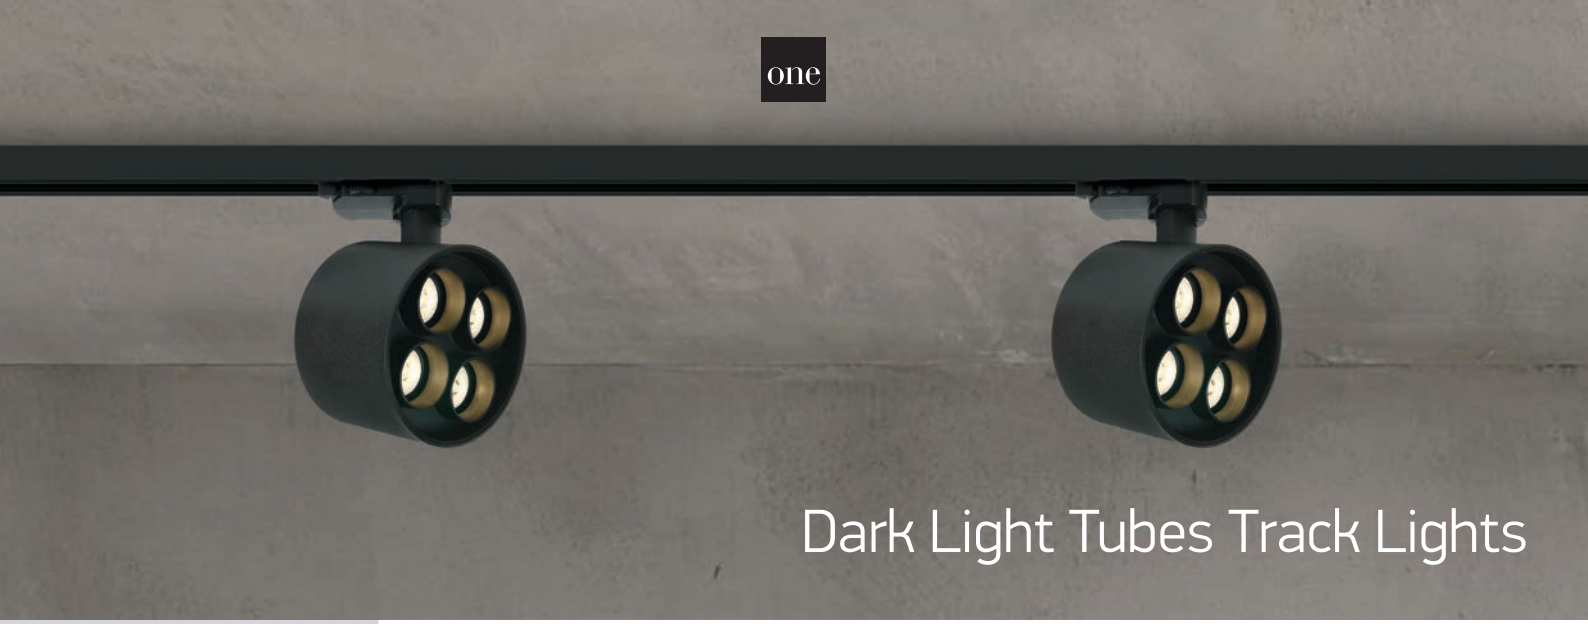

Dark Light Tubes Track Lights



65656AT/W/W

65656AT | 6W | SMD 5050 | Aluminium

DARK LIGHT
IP20
LED BUILT IN
90 CRI
ADJUSTABLE
CE
3 YEAR









65656BT/W/W

65656BT | 12W | SMD 5050 | Aluminium

DARK LIGHT
IP20
LED BUILT IN
90 CRI
ADJUSTABLE
CE
3 YEAR









65656CT/W/W

65656CT | 24W | SMD 5050 | Aluminium

DARK LIGHT
IP20
LED BUILT IN
90 CRI
ADJUSTABLE
CE
3 YEAR









65656DT/W/W

65656DT | 36W | SMD 5050 | Aluminium

DARK LIGHT
IP20
LED BUILT IN
90 CRI
ADJUSTABLE
CE
3 YEAR







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65656AT/W/W	White	Warm white	3000K	6W	480lm	40°	230V		28	Complete with 150mA driver
65656BT/W/W	White	Warm white	3000K	12W	960lm	40°	230V		20	Complete with 350mA driver
65656CT/W/W	White	Warm white	3000K	24W	1920lm	40°	230V		20	Complete with 700mA driver
65656DT/W/W	White	Warm white	3000K	36W	2880lm	40°	230V		15	Complete with 1000mA driver



Dark Light Tubes Track Lights



65656AT/B/W

65656AT | 6W | SMD 5050 | Aluminium

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · DARK LIGHT · IP20 · 3 YEAR









65656BT/B/W

65656BT | 12W | SMD 5050 | Aluminium

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · DARK LIGHT · IP20 · 3 YEAR









65656CT/B/W

65656CT | 24W | SMD 5050 | Aluminium

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · DARK LIGHT · IP20 · 3 YEAR









65656DT/B/W

65656DT | 36W | SMD 5050 | Aluminium

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · DARK LIGHT · IP20 · 3 YEAR







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65656AT/B/W	Black	Warm white	3000K	6W	480lm	40°	230V		28	Complete with 150mA driver
65656BT/B/W	Black	Warm white	3000K	12W	960lm	40°	230V		20	Complete with 350mA driver
65656CT/B/W	Black	Warm white	3000K	24W	1920lm	40°	230V		20	Complete with 700mA driver
65656DT/B/W	Black	Warm white	3000K	36W	2880lm	40°	230V		15	Complete with 1000mA driver



65506BT/B/W



65406BT/B/W

Mirror Square Track Lights
Die cast



65306BT/W/W

65306BT | 12W | COB LED | Die cast

LED BUILT IN
90 CRI
ADJUSTABLE
CE
3 YEAR
IP20



65306BT/B/W







65506BT/W/W

65506BT | 20W | COB LED | Die cast

LED BUILT IN
90 CRI
ADJUSTABLE
CE
3 YEAR
IP20



65506BT/B/W





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65306BT/W/W	White	Warm white	3000K	12W	960lm	38°	230V		30	Complete with 300mA driver
65306BT/B/W	Black	Warm white	3000K	12W	960lm	38°	230V		30	Complete with 300mA driver
65506BT/W/W	White	Warm white	3000K	20W	1600lm	38°	230V		20	Complete with 500mA driver
65506BT/B/W	Black	Warm white	3000K	20W	1600lm	38°	230V		20	Complete with 500mA driver



Mirror Square Track Lights
Die cast



65406BT/W/W

65406BT | 15W | LED | Die cast

LED BUILT IN
90 CRI
ADJUSTABLE
CE
3 YEAR
IP20



65406BT/B/W







65906BT/W/W

65906BT | 30W | LED | Die cast

LED BUILT IN
90 CRI
ADJUSTABLE
CE
3 YEAR
IP20



65906BT/B/W





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65406BT/W/W	White	Warm white	3000K	15W	1200lm	38°	230V		24	Complete with 350mA driver
65406BT/B/W	Black	Warm white	3000K	15W	1200lm	38°	230V		24	Complete with 350mA driver
65906BT/W/W	White	Warm white	3000K	30W	2400lm	38°	230V		16	Complete with 700mA driver
65906BT/B/W	Black	Warm white	3000K	30W	2400lm	38°	230V		16	Complete with 700mA driver



65644T/W/W

65652T/W/W

The Honeycomb Range



65644T/W/W

65644T | 8W | COB LED | Dimmable | Aluminium

Complete with honeycomb.

LED BUILT IN · 80 CRI · TRIAC DIMMABLE · ADJUSTABLE · IP20 · CE · 2 YEAR



65644T/B/W







65652T/W/W

65652T | 30W | COB LED | Die cast

Complete with honeycomb.

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · IP20 · 3 YEAR



65652T/B/W





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65644T/W/W	White	Warm white	3000K	8W	600lm	36°	230V		24	AC LED
65644T/B/W	Black	Warm white	3000K	8W	600lm	36°	230V		24	AC LED
65652T/W/C	White	Cool white	4000K	30W	1800lm	24°	230V		12	Complete with 700mA driver
65652T/W/W	White	Warm white	3000K	30W	1700lm	24°	230V		12	Complete with 700mA driver
65652T/B/C	Black	Cool white	4000K	30W	1800lm	24°	230V		12	Complete with 700mA driver
65652T/B/W	Black	Warm white	3000K	30W	1700lm	24°	230V		12	Complete with 700mA driver



65524T/W/W



65108T/W/W

The COB Compact Cylinder Range



65646T/W/W

65646T | 8W | COB LED | Aluminium

LED BUILT IN · 80 CRI · TRIAC DIMMABLE · ADJUSTABLE · IP20 · CE · 2 YEAR



65646T/B/W





65108T/W/W

65108T | 8W | COB LED | Aluminium

LED BUILT IN · 90 CRI · TRIAC DIMMABLE · ADJUSTABLE · DARK LIGHT · IP20 · CE · 3 YEAR



65108T/B/W





65524T/W/W

65524T | 12W | COB LED | Aluminium

Honeycomb.

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · DARK LIGHT · IP20 · 5 YEAR



65524T/B/W



65524T/BBS/W



Order Code	Colour	Reflector	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65646T/W/W	White	Black	Warm white	3000K	8W	650lm	36°	230V		24	AC LED
65646T/B/W	Black	Black	Warm white	3000K	8W	650lm	36°	230V		24	AC LED
65108T/W/W	White	Black	Warm white	3000K	8W	560lm	36°	230V		24	Complete with 350mA driver
65108T/B/W	Black	Brass	Warm white	3000K	8W	560lm	36°	230V		24	Complete with 350mA driver
65524T/W/W	White	Black	Warm white	3000K	12W	1080lm	36°	230V		24	Complete with 250mA driver
65524T/B/W	Black	Black	Warm white	3000K	12W	1080lm	36°	230V		24	Complete with 250mA driver
65524T/BBS/W	Brushed brass	Black	Warm white	3000K	12W	1080lm	36°	230V		24	Complete with 250mA driver



65624T/W/C

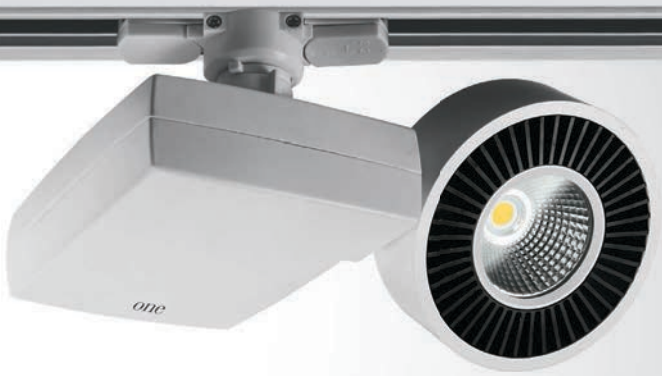

65620TA/W/C

The Black Heatsink Range



65628T/W/C

65628T | 15W | COB LED | Aluminium

IP20 offer

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · 2 YEAR



offer 65628T/B/C







65620TA/W/C

65620TA | 15W | COB LED | Die cast

IP20 offer

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · 2 YEAR



offer 65620TA/W/W

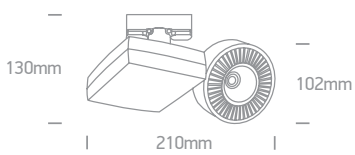





65620T | 20W | COB LED | Aluminium

IP20 offer

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · 2 YEAR







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65628T/W/C	White	Cool white	4000K	15W	1200lm	45°	230V		12	Complete with 400mA driver
65628T/W/W	White	Warm white	3000K	15W	1095lm	45°	230V		12	Complete with 400mA driver
65628T/B/C	Black	Cool white	4000K	15W	1200lm	45°	230V		12	Complete with 400mA driver
65620TA/W/C	White	Cool white	4000K	15W	1200lm	45°	230V		12	Complete with 400mA driver
65620TA/W/W	White	Warm white	3000K	15W	1095lm	45°	230V		12	Complete with 400mA driver
65620T/W/W	White	Warm white	3000K	20W	1460lm	45°	230V		12	Complete with 500mA driver

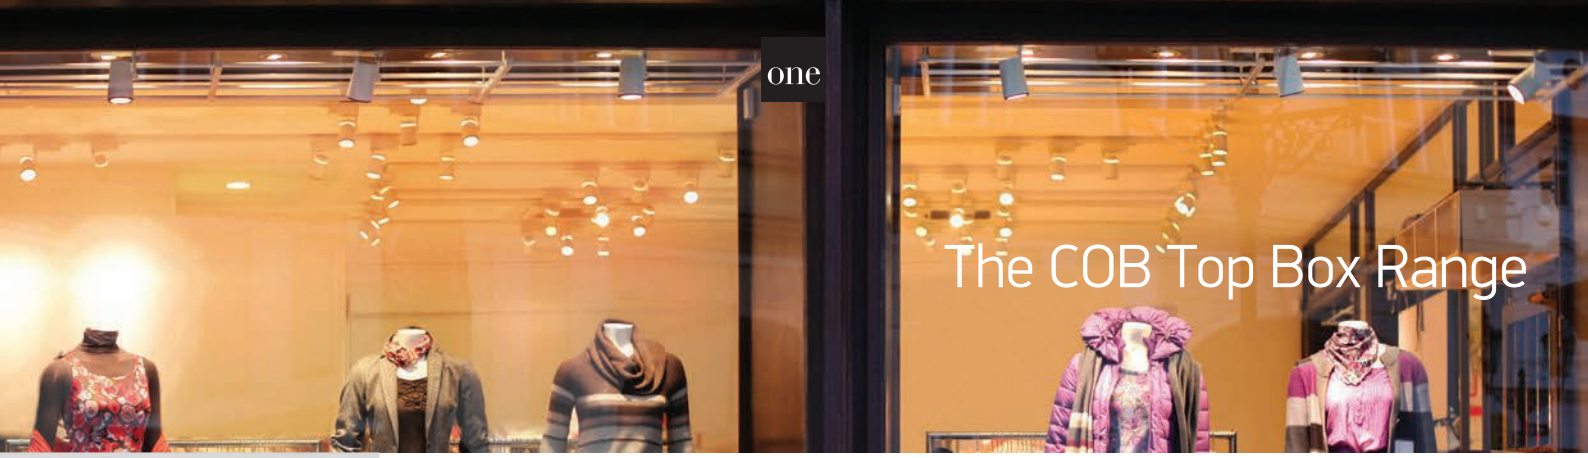

The COB Top Box Range



65618T | 35W | COB LED | Die cast

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · 3 YEAR · IP20 · offer







65619T/W/C

65619T | 38W | COB LED | Aluminium

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · 3 YEAR · IP20



65619T/B/C



15° Reflector for 65619T.
Order code 0742/15.





65624T | 35W | COB LED | Die cast

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · 3 YEAR · IP20 · offer







65638T | 50W | COB LED | Die cast

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · 3 YEAR · IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65618T/W/C	White	Cool white	4000K	35W	3350lm	45°	230V		12	Complete with 900mA driver
65619T/W/C	White	Cool white	4000K	38W	3200lm	36°	230V		16	Complete with 900mA driver
65619T/W/W	White	Warm white	3000K	38W	3000lm	36°	230V		16	Complete with 900mA driver
65619T/B/C	Black	Cool white	4000K	38W	3200lm	36°	230V		16	Complete with 900mA driver
65619T/B/W	Black	Warm white	3000K	38W	3000lm	36°	230V		16	Complete with 900mA driver
65624T/W/C	White	Cool white	4000K	35W	3050lm	45°	230V		12	Complete with 900mA driver
65624T/W/W	White	Warm white	3000K	35W	2950lm	45°	230V		12	Complete with 900mA driver
65638T/W/C	White	Cool white	4000K	50W	3700lm	36°	230V		12	Complete with 1200mA driver



The COB Cylinder Range



65632T/W/W

65632T | 35W | COB LED | Aluminium

LED BUILT IN
80 CRI
ADJUSTABLE
3 YEAR
IP20









65632CT/W/W

65632CT | 50W | COB LED | Die cast

LED BUILT IN
80 CRI
ADJUSTABLE
3 YEAR
IP20









65632CT/B/W

65632CT | 50W | COB LED | Die cast

LED BUILT IN
80 CRI
ADJUSTABLE
3 YEAR
IP20







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65632T/W/W	White	Warm white	3000K	35W	3200lm	36°	230V		9	Complete with 900mA driver
65632CT/W/W	White	Warm white	3000K	50W	3750lm	36°	230V		6	Complete with 1250mA driver
65632CT/B/W	Black	Warm white	3000K	50W	3750lm	36°	230V		6	Complete with 1250mA driver



The COB Side Box Range



65630T | 25W | COB LED | Die cast

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · 3 YEAR · IP20 · offer









65626T/W/C

65626T | 25W | COB LED | Die cast

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · 3 YEAR · IP20 · offer

offer



65626T/W/W







65226T | 26W | COB LED | Die cast

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · 3 YEAR · IP20 · offer









65622T | 34W | COB LED | Die cast

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · 3 YEAR · IP20 · offer



Optional 18° reflector.
Order code 0730/18.





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65630T/W/W	White	Warm white	3000K	25W	1800lm	45°	100-240V		12	Complete with 580mA driver
65626T/W/C	White	Cool white	4000K	25W	2000lm	45°	100-240V		12	Complete with 580mA driver
65626T/W/W	White	Warm white	3000K	25W	1900lm	45°	100-240V		12	Complete with 580mA driver
65226T/W/W	White	Warm white	3000K	26W	1960lm	30°	100-240V		8	Complete with driver
65622T/W/C	White	Cool white	4000K	34W	3550lm	42°	230V		12	Complete with 900mA driver
65622T/W/W	White	Warm white	3000K	34W	3350lm	42°	230V		12	Complete with 900mA driver

Box Series Track Lights



65008T | 10W | LED | Die cast

LED BUILT IN

70 CRI

ADJUSTABLE

IP20

2 YEAR

offer







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65008T/G/D/24	Grey	Daylight	6000K	10W	600lm	24°	230V	⏚	12	Complete with driver

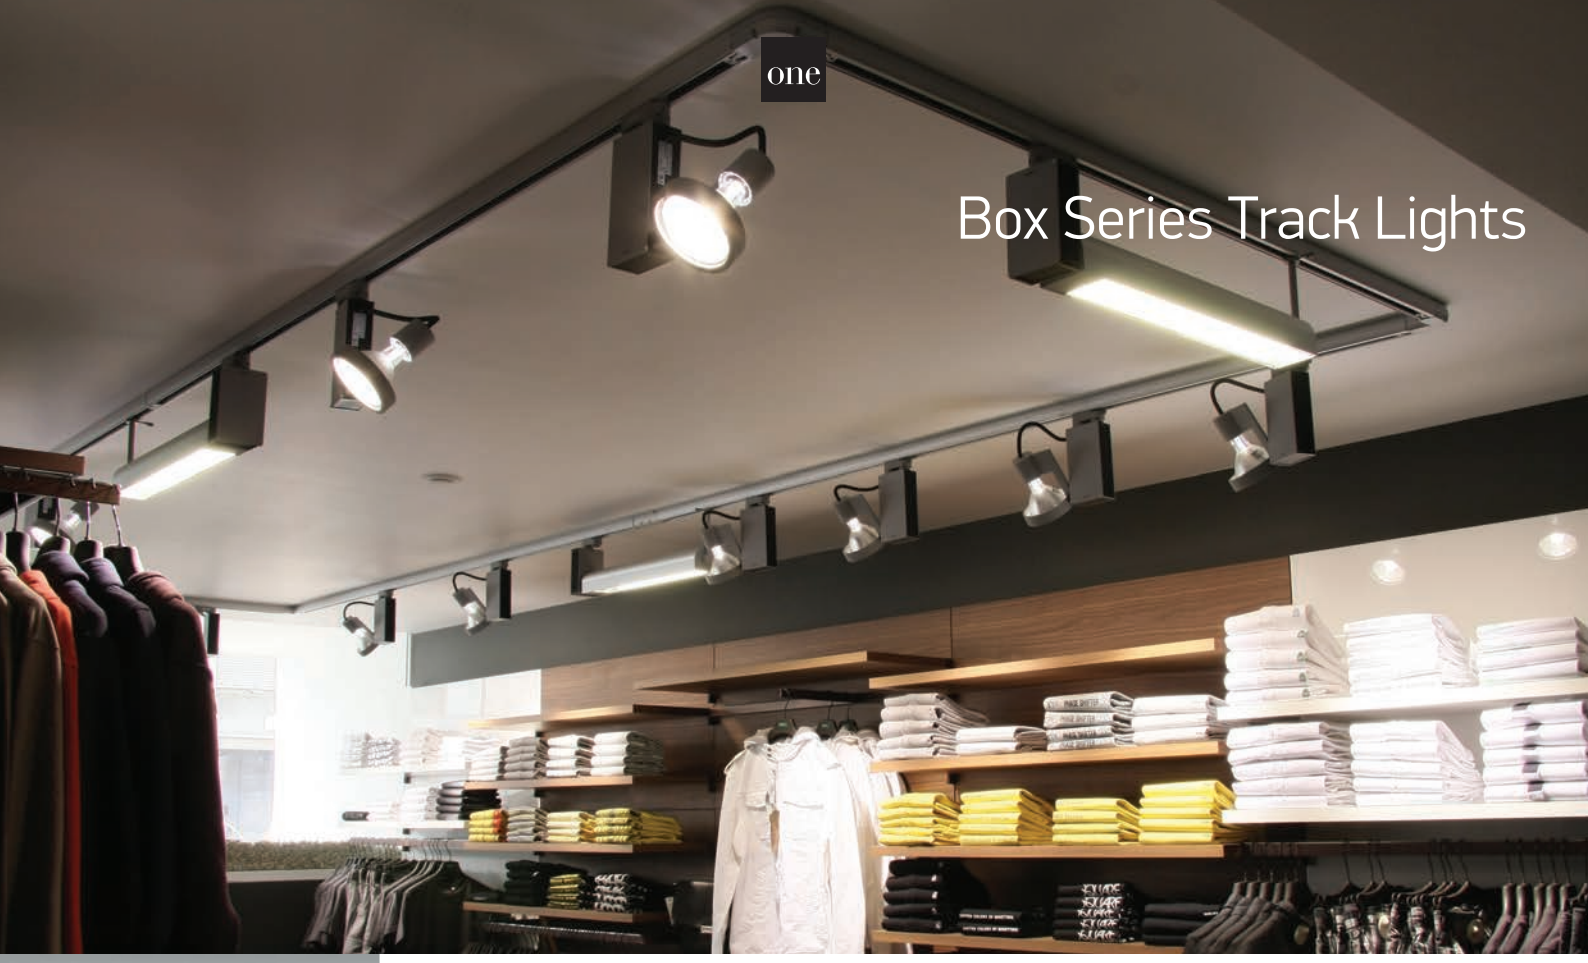

Box Series Track Lights



65012T | 50W | MR16 | GU5,3 | Die cast

IP20

offer

ADJUSTABLE

CE 2 YEAR









65019T/G

65019T | 50W | MR16 | GU10 | Die cast

IP20

offer

ADJUSTABLE

CE 5 YEAR



65019T/W

offer







65011T | 75W | PAR30 | E27 | Die cast

IP20

offer

ADJUSTABLE

CE 5 YEAR



Suitable for PAR30 LED lamp.





Order Code	Colour	Watts	Input	Class		Notes
65012T/G	Grey	50W	230V / 12V		20	Complete with transformer
65019T/W	White	50W	100-240V		16	-
65019T/G	Grey	50W	100-240V		16	-
65011T/G	Grey	75W	100-240V		8	-



65042T/B/W



65040T/B/C

The Track Floodlight Range



65020T/W/W

65020T | 20W | SMD 3030 | Die cast

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · IP20 · 3 YEAR



65020T/B/W







65042T/W/W

65042T | 42W | SMD 2835 | Die cast

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · IP20 · 3 YEAR



65042T/B/W







65040T/W/C

65040T | 40W | COB LED | Aluminium

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · IP20 · 3 YEAR



65040T/B/C





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65020T/W/W	White	Warm white	3000K	20W	1400lm	24°	230V		20	Complete with 600mA driver
65020T/B/W	Black	Warm white	3000K	20W	1400lm	24°	230V		20	Complete with 600mA driver
65042T/W/W	White	Warm white	3000K	42W	3150lm	80°	230V		4	Complete with 1200mA driver
65042T/B/W	Black	Warm white	3000K	42W	3150lm	80°	230V		4	Complete with 1200mA driver
65040T/W/C	White	Cool white	4000K	40W	3600lm	60°	230V		6	Complete with 1050mA driver
65040T/B/C	Black	Cool white	4000K	40W	3600lm	60°	230V		6	Complete with 1050mA driver

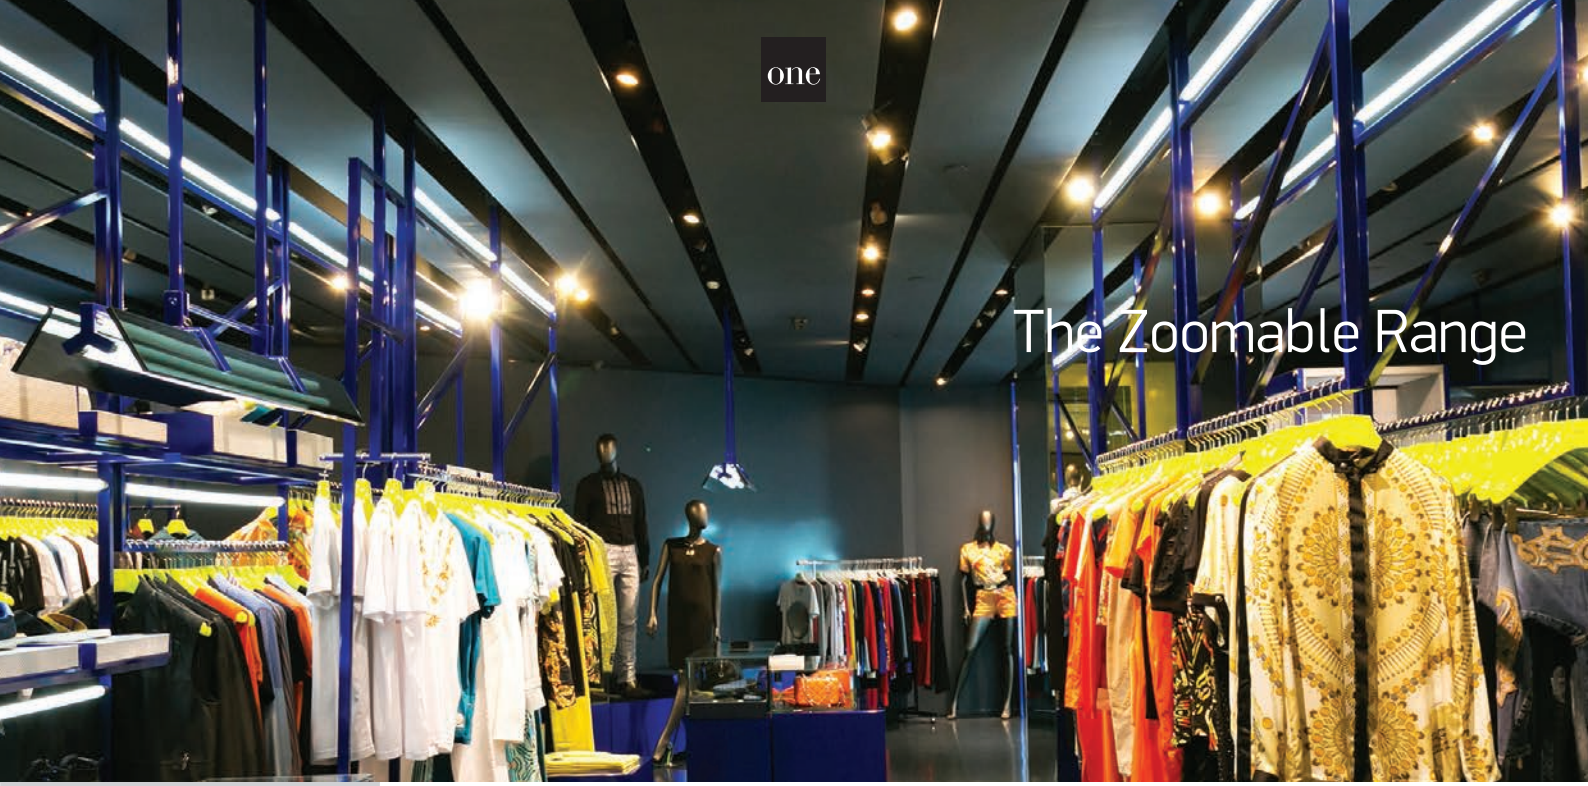



65650AT/W/W

65650AT | 15W | COB LED | Adjustable beam 20°-60° | Aluminium

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · 3 YEAR · IP20



65650AT/B/W







65650T/W/C

65650T | 30W | COB LED | Adjustable beam 20°-60° | Aluminium

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · 3 YEAR · IP20



65650T/B/C







65648T/B/C

65648T | 30W | COB LED | Adjustable beam 12°-60° | Aluminium

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 3 YEAR · IP20



65648T/B/W





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65650AT/W/W	White	Warm white	3000K	15W	1350lm	20°-60°	230V		15	Complete with 350mA driver
65650AT/B/W	Black	Warm white	3000K	15W	1350lm	20°-60°	230V		15	Complete with 350mA driver
65650T/W/C	White	Cool white	4000K	30W	2400lm	20°-60°	230V		15	Complete with 750mA driver
65650T/W/W	White	Warm white	3000K	30W	2300lm	20°-60°	230V		15	Complete with 750mA driver
65650T/B/C	Black	Cool white	4000K	30W	2400lm	20°-60°	230V		15	Complete with 750mA driver
65650T/B/W	Black	Warm white	3000K	30W	2300lm	20°-60°	230V		15	Complete with 750mA driver
65648T/B/C	Black	Cool white	4000K	30W	2550lm	12°-60°	120-240V		12	Complete with 700mA driver
65648T/B/W	Black	Warm white	3000K	30W	2550lm	12°-60°	120-240V		12	Complete with 700mA driver



Adjustable LED Linear Track Light



65024T/W/C

65024T | 10x5W | COB LED | Linear track light | Aluminium + plastic

LED BUILT IN

80 CRI

±45° ADJUSTABLE

3 YEAR

IP20



65024T/B/C

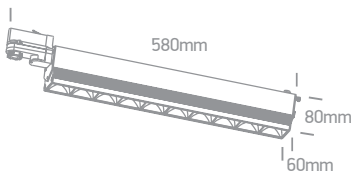





65026T/W/C

65026T | 40W | SMD 2835 | Linear track light | Aluminium + plastic

LED BUILT IN

80 CRI

±45° ADJUSTABLE

3 YEAR

IP20



65026T/B/C





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65024T/W/C	White	Cool white	4000K	10x5W	5800lm	30°	230V		10	Complete with 1200mA driver
65024T/W/W	White	Warm white	3000K	10x5W	5800lm	30°	230V		10	Complete with 1200mA driver
65024T/B/C	Black	Cool white	4000K	10x5W	5800lm	30°	230V		10	Complete with 1200mA driver
65024T/B/W	Black	Warm white	3000K	10x5W	5800lm	30°	230V		10	Complete with 1200mA driver
65026T/W/C	White	Cool white	4000K	40W	3400lm	100°	230V		10	Complete with 1000mA driver
65026T/W/W	White	Warm white	3000K	40W	3200lm	100°	230V		10	Complete with 1000mA driver
65026T/B/C	Black	Cool white	4000K	40W	3400lm	100°	230V		10	Complete with 1000mA driver
65026T/B/W	Black	Warm white	3000K	40W	3200lm	100°	230V		10	Complete with 1000mA driver



LED Linear Track Light

65024TA | 15x1W | LED | Linear system | Aluminium



65024TA/W/W

LED BUILT IN · 80 CRI · ±45° ADJUSTABLE · CE · 3 YEAR · IP20



65024TA/B/W





65018T | 16W | SMD 2835 | Linear light | Aluminium + PC



65018T/W/W

LED BUILT IN · 80 CRI · CE · 3 YEAR · IP20



65018T/B/W



65025T | 25W | SMD 2835 | Linear light | Aluminium + PC



65025T/W/W

LED BUILT IN · 80 CRI · CE · 3 YEAR · IP20



65025T/B/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65024TA/W/W	White	Warm white	3000K	15x1W	1200lm	30°	230V		10	AC LED
65024TA/B/W	Black	Warm white	3000K	15x1W	1200lm	30°	230V		10	AC LED
65018T/W/C	White	Cool white	4000K	16W	1600lm	110°	100-240V		12	Complete with 400mA driver
65018T/W/W	White	Warm white	3000K	16W	1600lm	110°	100-240V		12	Complete with 400mA driver
65018T/B/C	Black	Cool white	4000K	16W	1600lm	110°	100-240V		12	Complete with 400mA driver
65018T/B/W	Black	Warm white	3000K	16W	1600lm	110°	100-240V		12	Complete with 400mA driver
65025T/W/C	White	Cool white	4000K	25W	2500lm	110°	100-240V		12	Complete with 600mA driver
65025T/W/W	White	Warm white	3000K	25W	2500lm	110°	100-240V		12	Complete with 600mA driver
65025T/B/C	Black	Cool white	4000K	25W	2500lm	110°	100-240V		12	Complete with 600mA driver
65025T/B/W	Black	Warm white	3000K	25W	2500lm	110°	100-240V		12	Complete with 600mA driver



High Power Linear Track Light



65170AT/W/W

65170AT | 30W | SMD 3030 | Linear track light | Aluminium

LED BUILT IN

90 CRI

CE

3 YEAR

IP20



65170AT/W/C





65170AT/B/W

65170AT | 30W | SMD 3030 | Linear track light | Aluminium

LED BUILT IN

90 CRI

CE

3 YEAR

IP20



65170AT/B/C



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
65170AT/W/C	White	Cool white	4000K	30W	2700lm	230V		12	Complete with 700mA driver
65170AT/W/W	White	Warm white	3000K	30W	2700lm	230V		12	Complete with 700mA driver
65170AT/B/C	Black	Cool white	4000K	30W	2700lm	230V		12	Complete with 700mA driver
65170AT/B/W	Black	Warm white	3000K	30W	2700lm	230V		12	Complete with 700mA driver





65170BT/W/W

65170BT | 60W | SMD 3030 | Linear track light | Aluminium

LED BUILT IN

90 CRI

CE

3 YEAR

IP20



65170BT/W/C





65170BT/B/W

65170BT | 60W | SMD 3030 | Linear track light | Aluminium

LED BUILT IN

90 CRI

CE

3 YEAR

IP20



65170BT/B/C



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
65170BT/W/C	White	Cool white	4000K	60W	5400lm	230V		12	Complete with 1500mA driver
65170BT/W/W	White	Warm white	3000K	60W	5400lm	230V		12	Complete with 1500mA driver
65170BT/B/C	Black	Cool white	4000K	60W	5400lm	230V		12	Complete with 1500mA driver
65170BT/B/W	Black	Warm white	3000K	60W	5400lm	230V		12	Complete with 1500mA driver

The Dark Light GU10 Range
Round


65105NT/BBS


65105NT/MG


65105NT/W

65105NT | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

5 YEAR

DARK LIGHT

IP20


Suitable for GU10 LED lamp.




65105NT/B

65105NT | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

5 YEAR

DARK LIGHT

IP20


Suitable for GU10 LED lamp.




65105NT/BBS

65105NT | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

5 YEAR

DARK LIGHT

IP20


Suitable for GU10 LED lamp.




65105NT/MG

65105NT | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

5 YEAR

DARK LIGHT

IP20


Suitable for GU10 LED lamp.



Order Code	Colour	Reflector	Watts	Input	Class		Notes
65105NT/W	White	Black	10W	100-240V		24	-
65105NT/B	Black	Brass	10W	100-240V		24	-
65105NT/BBS	Brushed brass	Black	10W	100-240V		24	-
65105NT/MG	Metal grey	Black	10W	100-240V		24	-



The Dark Light GU10 Range
Square



65105NAT/W

65105NAT | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

5 YEAR

DARK LIGHT

IP20



Suitable for GU10 LED lamp.





65105NAT/B

65105NAT | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

5 YEAR

DARK LIGHT

IP20



Suitable for GU10 LED lamp.



Order Code	Colour	Reflector	Watts	Input	Class		Notes
65105NAT/W	White	Black	10W	100-240V		24	-
65105NAT/B	Black	Brass	10W	100-240V		24	-

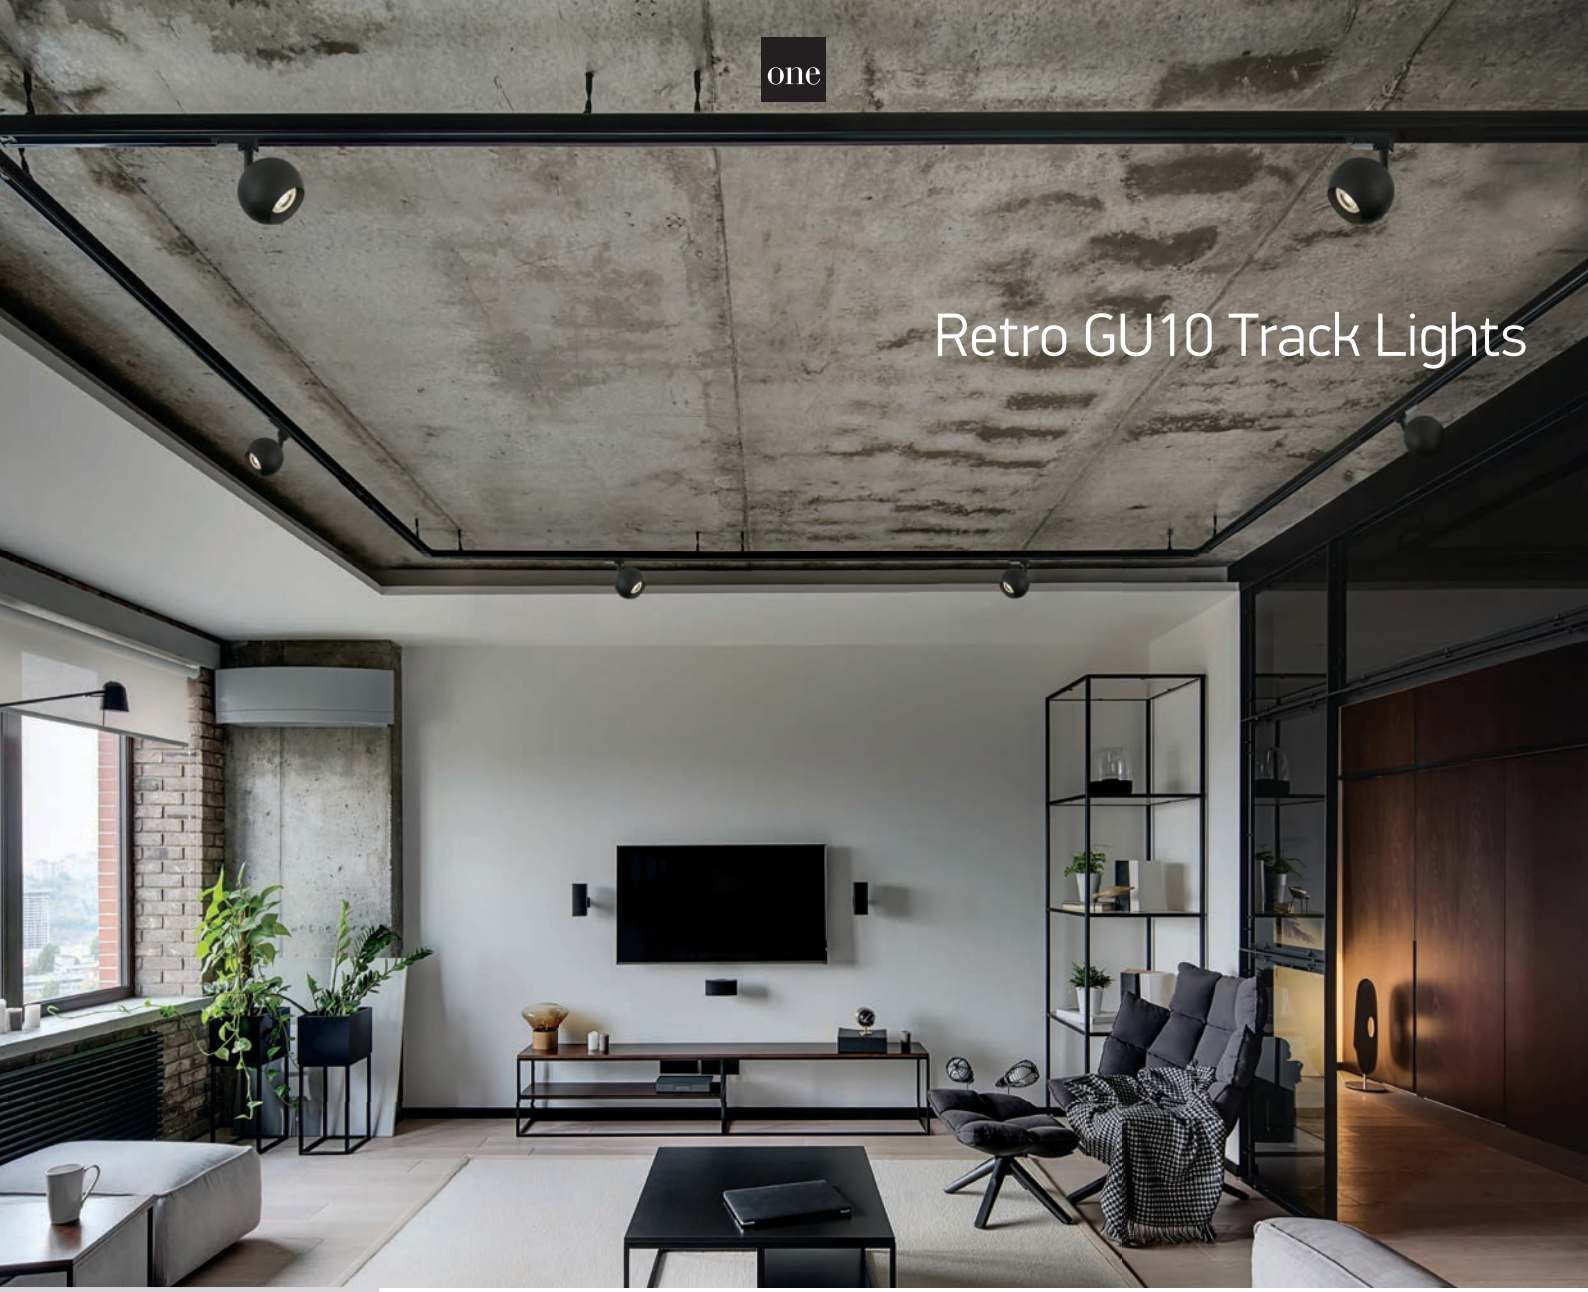

Retro GU10 Track Lights



65105BT/W

65105BT | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

5 YEAR

IP20



65105BT/B







65105WT/W

65105WT | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

5 YEAR

IP20



65105WT/B





Order Code	Colour	Watts	Input	Class		Notes
65105BT/W	White	10W	100-240V		30	-
65105BT/B	Black	10W	100-240V		30	-
65105WT/W	White	10W	100-240V		30	-
65105WT/B	Black	10W	100-240V		30	-



65105WT/W



65105CT/W

Cone GU10 Track Lights



65105CT/W

65105CT | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

CE 5 YEAR

DARK LIGHT

IP20



Complete with Black & Brass reflectors.



Use 7306CG GU10 LED lamp.





65105CT/B

65105CT | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

CE 5 YEAR

DARK LIGHT

IP20



Complete with Black & Brass reflectors.



Use 7306CG GU10 LED lamp.





65105CT/BBS

65105CT | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

CE 5 YEAR

DARK LIGHT

IP20



65105CT/MG



Use 7306CG GU10 LED lamp.



Order Code	Colour	Watts	Input	Class		Notes
65105CT/W	White	10W	100-240V		40	-
65105CT/B	Black	10W	100-240V		40	-
65105CT/BBS	Brushed brass	10W	100-240V		40	-
65105CT/MG	Metal grey	10W	100-240V		40	-



65105GT

MR16 GU10 Track Lights



65520T/B

65520T | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

CE 5 YEAR

IP20



65520T/W



Suitable for GU10 LED lamp.





65522T/B

65522T | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

CE 5 YEAR

DARK LIGHT

IP20



65522T/W



Removable honeycomb.



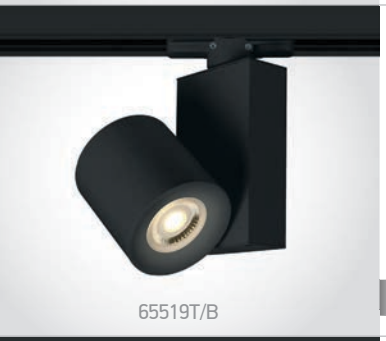

65519T/B

65519T | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

CE 5 YEAR

IP20



65519T/W



Suitable for GU10 LED lamp.





65105GT | 10W | MR16 | GU10 | Polycarbonate

ADJUSTABLE

CE 5 YEAR

IP20





Suitable for GU10 LED lamp.



Order Code	Colour	Watts	Input	Class		Notes
65520T/W	White	10W	100-240V		20	-
65520T/B	Black	10W	100-240V		20	-
65522T/W	White	10W	100-240V		24	-
65522T/B	Black	10W	100-240V		24	-
65519T/W	White	10W	100-240V		12	-
65519T/B	Black	10W	100-240V		12	-
65105GT	Clear	10W	100-240V		40	-

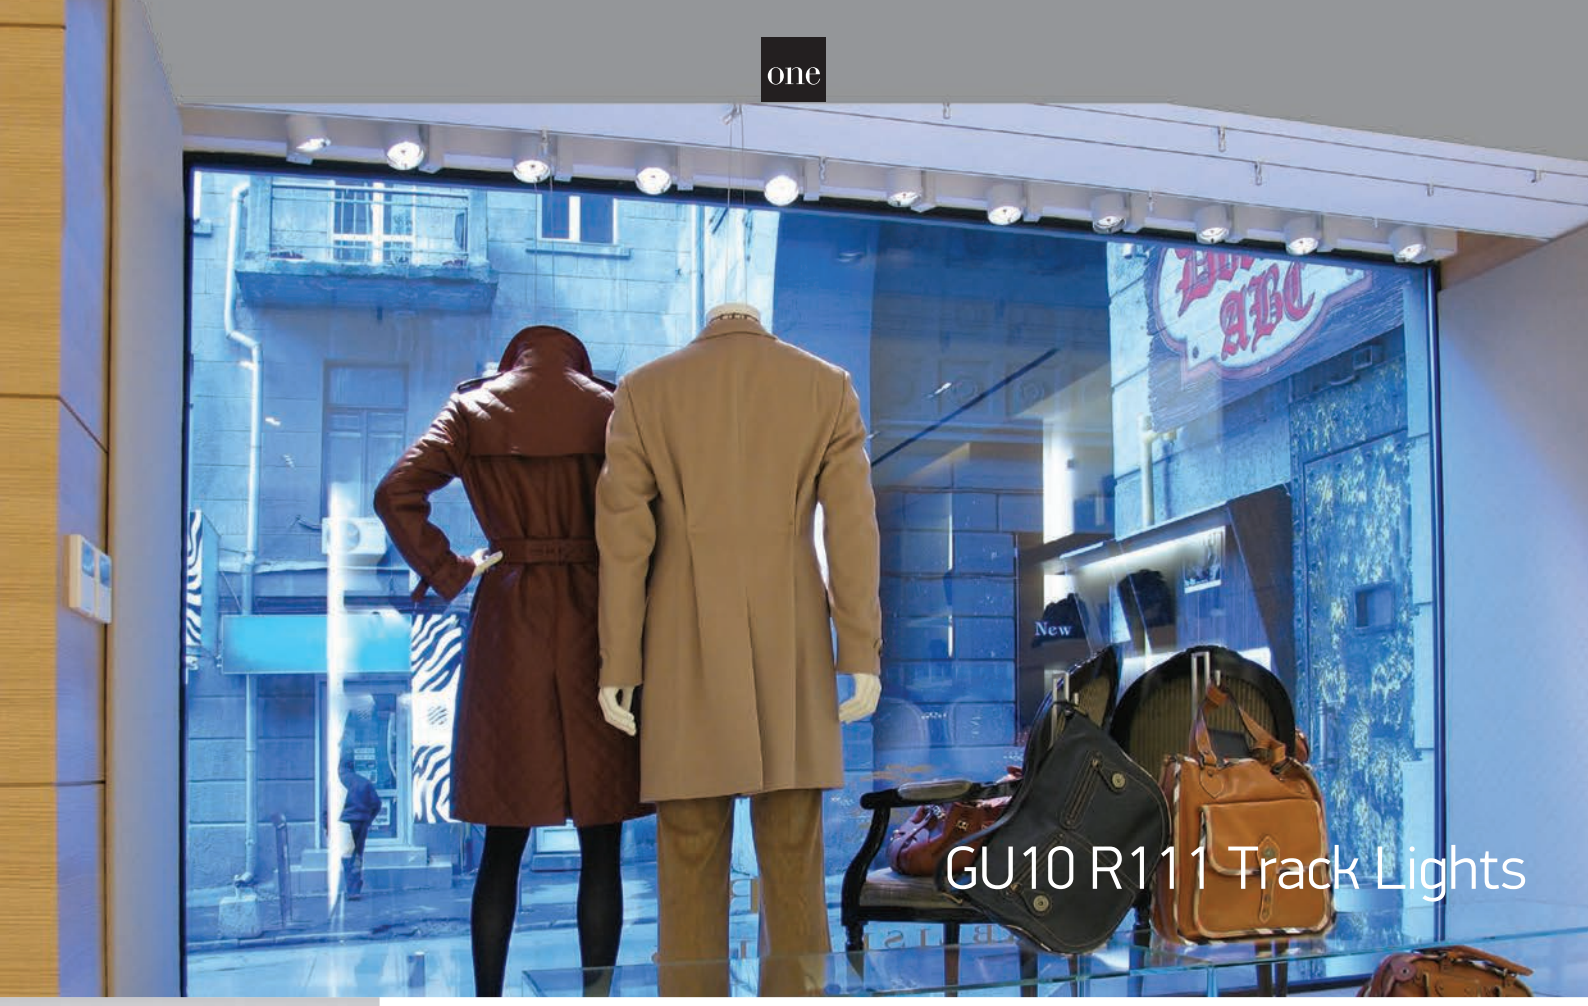

GU10 R111 Track Lights



65518T/W

65518T | 50W | R111 | GU10 | Aluminium

ADJUSTABLE

5 YEAR

IP20



Suitable for R111 LED lamp.





65518T/B

65518T | 50W | R111 | GU10 | Aluminium

ADJUSTABLE

5 YEAR

IP20



Suitable for R111 LED lamp.





65514T | 75W | R111 | GU10 | Die cast

ADJUSTABLE

5 YEAR

IP20

offer



Suitable for R111 LED lamp.



Order Code	Colour	Watts	Input	Class		Notes
65518T/W	White	50W	100-240V		12	-
65518T/B	Black	50W	100-240V		12	-
65514T/G	Grey	75W	100-240V		12	-



The E27 Track Lights
Die cast



65111AT/W

65111AT | 75W | PAR30 | E27 | Die cast

ADJUSTABLE

5 YEAR

IP20



Suitable for PAR30 LED lamp.





65111AT/B

65111AT | 75W | PAR30 | E27 | Die cast

ADJUSTABLE

5 YEAR

IP20



Suitable for PAR30 LED lamp.





65111AT/G

65111AT | 75W | PAR30 | E27 | Die cast

ADJUSTABLE

5 YEAR

IP20



Suitable for PAR30 LED lamp.



Order Code	Colour	Watts	Input	Class		Notes
65111AT/W	White	75W	100-240V		40	-
65111AT/B	Black	75W	100-240V		40	-
65111AT/G	Grey	75W	100-240V		40	-


65111AT/W


65618AT/W

The GU10 Track Lights
Die cast


65118AT/W

65118AT | 50W | R111 | GU10 | Die cast

ADJUSTABLE

5 YEAR

IP20


Suitable for R111 LED lamp.






65118AT/B

65118AT | 50W | R111 | GU10 | Die cast

ADJUSTABLE

5 YEAR

IP20


Suitable for R111 LED lamp.






65118AT/G

65118AT | 50W | R111 | GU10 | Die cast

ADJUSTABLE

5 YEAR

IP20


Suitable for R111 LED lamp.





Order Code	Colour	Watts	Input	Class		Notes
65118AT/W	White	50W	100-240V		40	-
65118AT/B	Black	50W	100-240V		40	-
65118AT/G	Grey	50W	100-240V		40	-



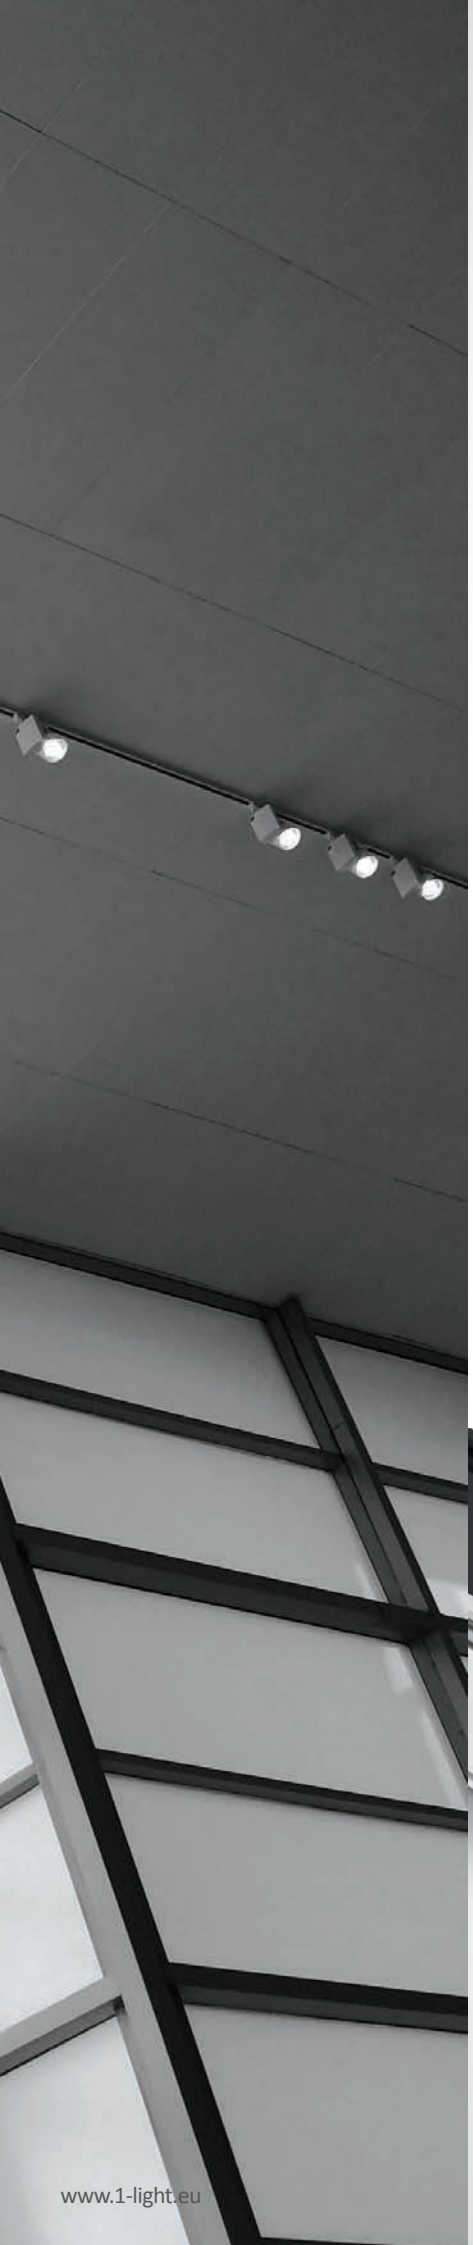

10

Tracks & Magnetic

Pages 329-336

16A | 6A

Die cast | Aluminium | Plastic

IP20

5 YEAR





Square Track Surface


40002A/W

40002A | 16A | 2m Square track | 3-phase | Aluminium

CE 5 YEAR


40002A/B




40003A/W

40003A | 16A | 3m Square track | 3-phase | Aluminium

CE 5 YEAR


40003A/B


40003A/G




40002C/W

40002C | 2m Plastic cover for square tracks 40002A & 40003A

CE 5 YEAR


40002C/B


40002A/B + 40002C/B

100




40020/W

40020 | 2m Profile for square tracks 40002A & 40003A | Aluminium

Track must be ordered separately.

CE 5 YEAR


40020/B


Optional suspension kit. Order code 41026R/W.


Complete with 4 Fixing clips & 4 end cups.

10



Order Code	Colour	Input	Ampere	Class		Notes
40002A/W	White	100-240V	16A	⏚	10	-
40002A/B	Black	100-240V	16A	⏚	10	-
40003A/W	White	100-240V	16A	⏚	10	-
40003A/B	Black	100-240V	16A	⏚	10	-
40003A/G	Grey	100-240V	16A	⏚	10	-

Adjustable Track Suspension



41026R/W | Adjustable wire 2m for square track | Metal

CE 5 YEAR



100



41032/W

41032 | Connector for suspending square track

CE 5 YEAR



41032/B

100



Square Track Accessories



41020/W

41020 | Heavy items mechanical adaptor for square track | Die cast



41020/B



41020/G

50





41004A/W/..

41004A | 16A | Live end for square track | Plastic



41004A/B/..



41004A/G/..





41010A/W

41010A | 16A | Live connector for square track | Plastic



41010A/B



41010A/G





41008A/W

41008A | 16A | Connector for square track | Plastic



41008A/B



41008A/G



Order Code	Colour	Direction	Input	Ampere	Class		Notes
41004A/W/L	White	Left	100-240V	16A		50	-
41004A/W/R	White	Right	100-240V	16A		50	-
41004A/B/L	Black	Left	100-240V	16A		50	-
41004A/B/R	Black	Right	100-240V	16A		50	-
41004A/G/L	Grey	Left	100-240V	16A		50	-
41004A/G/R	Grey	Right	100-240V	16A		50	-
41010A/W	White	-	100-240V	16A		50	-
41010A/B	Black	-	100-240V	16A		50	-
41010A/G	Grey	-	100-240V	16A		50	-
41008A/W	White	-	100-240V	16A		100	-
41008A/B	Black	-	100-240V	16A		100	-
41008A/G	Grey	-	100-240V	16A		100	-

Square Track Accessories

41012A | 16A | Corner for square track | Plastic



41012A/W/..



41012A/B/..



41012A/G/..



41016A | 16A | T connector for square track | Plastic



41016A/W



41016A/B



41016A/G



41024A | 16A | Flexible connector for square track | Plastic



41024A/W



41024A/B



41024A/G



41022A | End cup for square track | Plastic



41022A/W



41022A/B



41022A/G

200



Order Code	Colour	Direction	Input	Ampere	Class		Notes
41012A/W/L	White	Left	100-240V	16A		25	-
41012A/W/R	White	Right	100-240V	16A		25	-
41012A/B/L	Black	Left	100-240V	16A		25	-
41012A/B/R	Black	Right	100-240V	16A		25	-
41012A/G/L	Grey	Left	100-240V	16A		25	-
41012A/G/R	Grey	Right	100-240V	16A		25	-
41016A/W	White	-	100-240V	16A		25	-
41016A/B	Black	-	100-240V	16A		25	-
41016A/G	Grey	-	100-240V	16A		25	-
41024A/W	White	-	100-240V	16A		10	-
41024A/B	Black	-	100-240V	16A		10	-
41024A/G	Grey	-	100-240V	16A		10	-

Rounded Track & Accessories

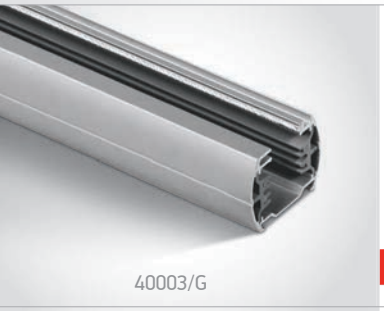

40003/G

40003 | 16A | 3m track | 3-phase | Aluminium

offer



40003/W





41020/G

41020 | Heavy items mechanical adaptor for rounded track | Die cast



41020/W



41020/B

50





41004/G/L

41004 | 16A | Live end for rounded track | Plastic

offer

offer



41004/W/L





41010/G

41010 | 16A | Live connector for rounded track | Plastic

offer

offer



41010/W





41008/G

41008 | 16A | Connector for rounded track | Plastic

offer

offer



41008/W

offer



41008/B



Order Code	Colour	Direction	Input	Ampere	Class		Notes
40003/W	White	-	100-240V	16A		10	-
40003/G	Grey	-	100-240V	16A		10	-
41004/W/L	White	Left	100-240V	16A		50	-
41004/G/L	Grey	Left	100-240V	16A		50	-
41010/W	White	-	100-240V	16A		40	-
41010/G	Grey	-	100-240V	16A		40	-
41008/W	White	-	100-240V	16A		50	-
41008/B	Black	-	100-240V	16A		50	-
41008/G	Grey	-	100-240V	16A		50	-

Rounded Track Accessories



41012/G/..

41012 | 16A | Corner for rounded track | Plastic

offer



41012/W/..

offer



41012/B/..





41016/G

41016 | 16A | T connector for rounded track | Plastic

offer



41016/W





41018/G

41018 | 16A | X connector for rounded track | Plastic

offer



41018/W





41022/G

41022 | End cover for rounded track | Plastic

offer



41022/W

200



Order Code	Colour	Direction	Input	Ampere	Class		Notes
41012/W/L	White	Left	100-240V	16A		20	-
41012/W/R	White	Right	100-240V	16A		20	-
41012/B/L	Black	Left	100-240V	16A		20	-
41012/B/R	Black	Right	100-240V	16A		20	-
41012/G/L	Grey	Left	100-240V	16A		20	-
41012/G/R	Grey	Right	100-240V	16A		20	-
41016/W	White	-	100-240V	16A		10	-
41016/G	Grey	-	100-240V	16A		10	-
41018/W	White	-	100-240V	16A		10	-
41018/G	Grey	-	100-240V	16A		10	-

Square Track Recessed



40003R | 16A | 3m Recessed track | 3-phase | Aluminium

Use accessories on pages 331 & 332.



Recessed fixing clip.
Order code 41034R.

40x3000mm

35mm



Order Code	Colour	Input	Ampere	Class		Notes
40003R/W	White	100-240V	16A	⏚	10	-



41004B/W | Cover for 41004A | Plastic

10





41008B/W | Cover for 41010A | Plastic

10



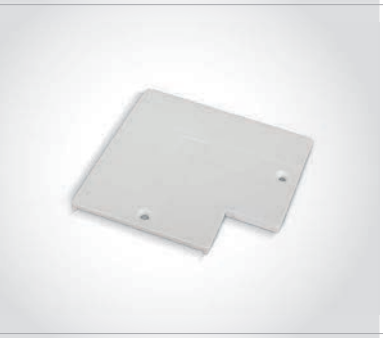

41012B/W | Cover for corner 41012A | Plastic

10





41016B/W | Cover for T connector 41016A | Plastic

10





Track Adaptors & Accessories


41002/W

41002 | 16A | Track adaptor | Plastic

offer

5 YEAR


41002/G




41002A/W

41002A | 6A | Track adaptor | Plastic

5 YEAR


41002A/B


41002A/G




41030/W

41030 | 6A | Surface mount base for track lights | Plastic

5 YEAR

IP20


41030/B


41030/G



Order Code	Colour	Input	Ampere	Class		Notes
41002/W	White	100-240V	16A		150	-
41002/G	Grey	100-240V	16A		150	-
41002A/W	White	100-240V	6A		50	-
41002A/B	Black	100-240V	6A		50	-
41002A/G	Grey	100-240V	6A		50	-
41030/W	White	100-240V	6A		40	-
41030/B	Black	100-240V	6A		40	-
41030/G	Grey	100-240V	6A		40	-





11

Office & Kitchen

Pages 339-356

T5 | T8 | SMD LED

Die cast | Aluminium | Steel | Plastic

IP20

DARK LIGHT QUICK FIX UGR17 UGR19 80 CRI 90 CRI 2 YEAR 3 YEAR 5 YEAR



Reading LED Lamps





61070 | 5W | SMD 2835 | Dimmable | Plastic

LED BUILT IN · DIMMABLE · ADJUSTABLE · CE · 2 YEAR · IP20









61072/W

61072 | 6W | SMD 2835 | Dimmable | ABS

LED BUILT IN · DIMMABLE · ADJUSTABLE · CE · 2 YEAR · IP20









61072/B

61072 | 6W | SMD 2835 | Dimmable | ABS

LED BUILT IN · DIMMABLE · ADJUSTABLE · CE · 2 YEAR · IP20







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
61070/B	Black	Cool white	4000K	5W	480lm	100-240V		8	EU socket charger
61072/W	White	Cool white	4000K	6W	200lm	100-240V		10	With USB charging socket
61072/B	Black	Cool white	4000K	6W	200lm	100-240V		10	With USB charging socket



Reading LED Lamps



61130/W

61130 | 5W | SMD LED | Variable colour temperature | Dimmable | ABS + aluminium

new

LED BUILT IN

DIMMABLE ADJUSTABLE CE

IP20

2 YEAR



Suitable for wireless charging of smartphones.





61130/B

61130 | 5W | SMD LED | Variable colour temperature | Dimmable | ABS + aluminium

new

LED BUILT IN

DIMMABLE ADJUSTABLE CE

IP20

2 YEAR



Suitable for wireless charging of smartphones.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
61130/W	White	Variable	2700K - 3000K - 4500K - 6000K	5W	400lm	230V	III	20	With USB socket charger
61130/B	Black	Variable	2700K - 3000K - 4500K - 6000K	5W	400lm	230V	III	20	With USB socket charger



The Magnifying Lens LED Lamp



61066 | 8W | SMD 2835 | Plastic

Magnifying lens.

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · 2 YEAR

IP20









61066T | White floor stand for 61066

CE · 2 YEAR



1

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
61066/W	White	Daylight	6000K	8W	760lm	230V		4	Complete with driver

one

LED Linear Floating Light



38148N/C

38148N | 48W | SMD 2835 | Aluminium + PC

LED BUILT IN

80 CRI

CE

2 YEAR

IP20



38148N/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38148N/C	White	Cool white	4000K	48W	4800lm	230V	⏚	4	Complete with driver
38148N/W	White	Warm white	3000K	48W	4800lm	230V	⏚	4	Complete with driver





38225M | 25W | SMD 2835 | Aluminium + Plastic

LED BUILT IN

80 CRI

CE

2 YEAR

IP20



Optional suspension kit.
Order code 050090.

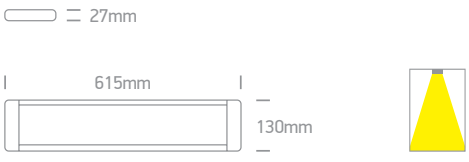



38248M | 48W | SMD 2835 | Aluminium + Plastic

LED BUILT IN

80 CRI

CE

2 YEAR

IP20



Optional suspension kit.
Order code 050090.

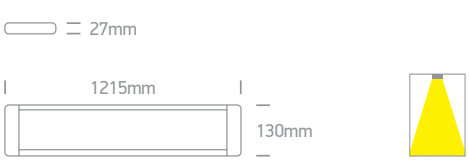

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38225M/W/C	White	Cool white	4000K	25W	2200lm	230V		8	Complete with driver
38225M/W/W	White	Warm white	3000K	25W	2100lm	230V		8	Complete with driver
38248M/W/C	White	Cool white	4000K	48W	4300lm	230V		8	Complete with driver
38248M/W/W	White	Warm white	3000K	48W	4200lm	230V		8	Complete with driver



38248L/W/C



38120L/W/C

The LED Linear Range



38120L | 20W | SMD 2835 | Aluminium + PC

LED BUILT IN

80 CRI

CE

2 YEAR

IP20



Optional suspension kit.
Order code 050090.





38135L | 35W | SMD 2835 | Aluminium + PC

LED BUILT IN

80 CRI

CE

2 YEAR

IP20



Optional suspension kit.
Order code 050090.





38248L | 48W | SMD 2835 | Aluminium + PC

LED BUILT IN

80 CRI

CE

2 YEAR

IP20



Optional suspension kit.
Order code 050090.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38120L/W/C	White	Cool white	4000K	20W	1800lm	230V		12	Complete with driver
38120L/W/W	White	Warm white	3000K	20W	1700lm	230V		12	Complete with driver
38135L/W/C	White	Cool white	4000K	35W	3100lm	230V		12	Complete with driver
38135L/W/W	White	Warm white	3000K	35W	3000lm	230V		12	Complete with driver
38248L/W/C	White	Cool white	4000K	48W	4300lm	230V		12	Complete with driver
38248L/W/W	White	Warm white	3000K	48W	4200lm	230V		12	Complete with driver



LED Linear Profiles
Medium size


38150B/W/C

38150B | 40W | 48LEDs | Linear system | Aluminium

Can be connected in line.

LED BUILT IN · 90 CRI · CE · 3 YEAR · DARK LIGHT · IP20 · UGR17


38150B/B/C


Complete with 4 Fixing clips & 4 connectors.




38150C/W/C

38150C | 40W | 24LEDs + Diffuser | Linear system | Aluminium

Can be connected in line.

LED BUILT IN · 90 CRI · CE · 3 YEAR · IP20 · UGR19


38150C/B/C


Complete with 4 Fixing clips & 4 connectors.




38150BU/W/C

38150BU | 40W + 20W Uplight | 48LEDs + Diffuser | Linear system | Aluminium

Can be connected in line.

LED BUILT IN · 90 CRI · CE · 3 YEAR · DARK LIGHT · IP20 · UGR17


38150BU/B/C


Complete with 4 Fixing clips & 4 connectors.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
38150B/W/C	White	Cool white	4000K	40W	3800lm	34°	230V		300cm	12	Complete with 1000mA driver
38150B/W/W	White	Warm white	3000K	40W	3800lm	34°	230V		300cm	12	Complete with 1000mA driver
38150B/B/C	Black	Cool white	4000K	40W	3800lm	34°	230V		300cm	12	Complete with 1000mA driver
38150B/B/W	Black	Warm white	3000K	40W	3800lm	34°	230V		300cm	12	Complete with 1000mA driver
38150C/W/C	White	Cool white	4000K	40W	3400lm	-	230V		300cm	12	Complete with 1000mA driver
38150C/W/W	White	Warm white	3000K	40W	3400lm	-	230V		300cm	12	Complete with 1000mA driver
38150C/B/C	Black	Cool white	4000K	40W	3400lm	-	230V		300cm	12	Complete with 1000mA driver
38150C/B/W	Black	Warm white	3000K	40W	3400lm	-	230V		300cm	12	Complete with 1000mA driver
38150BU/W/C	White	Cool white	4000K	40W/20W	3800lm/1800lm	34°/120°	230V		300cm	12	Complete with 1000mA + 500mA drivers
38150BU/W/W	White	Warm white	3000K	40W/20W	3800lm/1800lm	34°/120°	230V		300cm	12	Complete with 1000mA + 500mA drivers
38150BU/B/C	Black	Cool white	4000K	40W/20W	3800lm/1800lm	34°/120°	230V		300cm	12	Complete with 1000mA + 500mA drivers
38150BU/B/W	Black	Warm white	3000K	40W/20W	3800lm/1800lm	34°/120°	230V		300cm	12	Complete with 1000mA + 500mA drivers



LED Linear Accessories
Medium size



38150E/W

38150E | 1m Profile for 38150A, 38150B, 38150BU, 38150C & 38151A

Can be connected in line.

5 YEAR

IP20



38150E/B



Complete with
4 Fixing clips
& 4 connectors.

12





050170C/W

050170C | Corner for 38150A, 38150B, 38150BU, 38150C & 38151A

5 YEAR

IP20



050170C/B

2





050170 | 3m Suspension kit for 38150A, 38150B, 38150BU, 38150C, 38151A & 38160A

20



LED Linear Profiles
Medium size



38150A/W/C

38150A | 40W | LED | Linear system | Diffuser | Aluminium

Can be connected in line.

LED BUILT IN | 90 CRI | CE | 3 YEAR | IP20 | UGR19



38150A/B/C



Complete with 4 Fixing clips & 4 connectors.





38151A/W/C

38151A | 50W | LED | Linear system | Diffuser | Aluminium

Can be connected in line.

new | LED BUILT IN | 90 CRI | CE | 3 YEAR | IP20 | UGR19



38151A/B/C



Complete with 4 Fixing clips & 4 connectors.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
38150A/W/C	White	Cool white	4000K	40W	3400lm	230V		300cm	12	Complete with 1000mA driver
38150A/W/W	White	Warm white	3000K	40W	3400lm	230V		300cm	12	Complete with 1000mA driver
38150A/B/C	Black	Cool white	4000K	40W	3400lm	230V		300cm	12	Complete with 1000mA driver
38150A/B/W	Black	Warm white	3000K	40W	3400lm	230V		300cm	12	Complete with 1000mA driver
38151A/W/C	White	Cool white	4000K	50W	4250lm	230V		300cm	9	Complete with 1500mA driver
38151A/W/W	White	Warm white	3000K	50W	4250lm	230V		300cm	9	Complete with 1500mA driver
38151A/B/C	Black	Cool white	4000K	50W	4250lm	230V		300cm	9	Complete with 1500mA driver
38151A/B/W	Black	Warm white	3000K	50W	4250lm	230V		300cm	9	Complete with 1500mA driver



LED Linear Accessories
Medium size



38150E/W

38150E | 1m Profile for 38150A, 38150B, 38150BU, 38150C & 38151A

Can be connected in line.

5 YEAR

IP20



38150E/B



Complete with 4 Fixing clips & 4 connectors.

12





050170C/W

050170C | Corner for 38150A, 38150B, 38150BU, 38150C & 38151A

5 YEAR

IP20



050170C/B

2





050170 | 3m Suspension kit for 38150A, 38150B, 38150BU, 38150C, 38151A & 38160A

20



LED Linear Profiles
Large size



38160A/W/W

38160A | 40W | SMD 2835 | Linear system | Diffuser | Aluminium

Can be connected in line.

LED BUILT IN

90 CRI CE 3 YEAR

IP20 UGR19



Complete with
4 Fixing clips & 4 connectors.





38160A/B/W

38160A | 40W | SMD 2835 | Linear system | Diffuser | Aluminium

Can be connected in line.

LED BUILT IN

90 CRI CE 3 YEAR

IP20 UGR19



Complete with
4 Fixing clips & 4 connectors.





050170 | 3m Suspension kit for 38150A, 38150B, 38150BU, 38150C, 38151A & 38160A

CE

20

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
38160A/W/C	White	Cool white	4000K	40W	3400lm	230V		300cm	12	Complete with 1000mA driver
38160A/W/W	White	Warm white	3000K	40W	3400lm	230V		300cm	12	Complete with 1000mA driver
38160A/B/C	Black	Cool white	4000K	40W	3400lm	230V		300cm	12	Complete with 1000mA driver
38160A/B/W	Black	Warm white	3000K	40W	3400lm	230V		300cm	12	Complete with 1000mA driver



Up & Down LED Linear Profiles

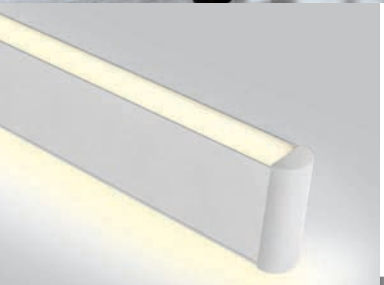

38140AU/W/W

38140AU | 40W Downlight + Uplight | SMD 2835 | Linear suspended | Aluminium

LED BUILT IN

90 CRI CE 3 YEAR

IP20



Complete with 3m suspension kit.





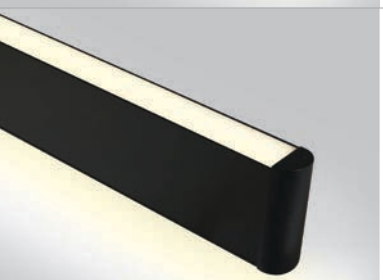

38140AU/B/W

38140AU | 40W Downlight + Uplight | SMD 2835 | Linear suspended | Aluminium

LED BUILT IN

90 CRI CE 3 YEAR

IP20



Complete with 3m suspension kit.





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38140AU/W/C	White	Cool white	4000K	40W	3600lm	230V		12	Complete with 900mA driver
38140AU/W/W	White	Warm white	3000K	40W	3600lm	230V		12	Complete with 900mA driver
38140AU/B/C	Black	Cool white	4000K	40W	3600lm	230V		12	Complete with 900mA driver
38140AU/B/W	Black	Warm white	3000K	40W	3600lm	230V		12	Complete with 900mA driver

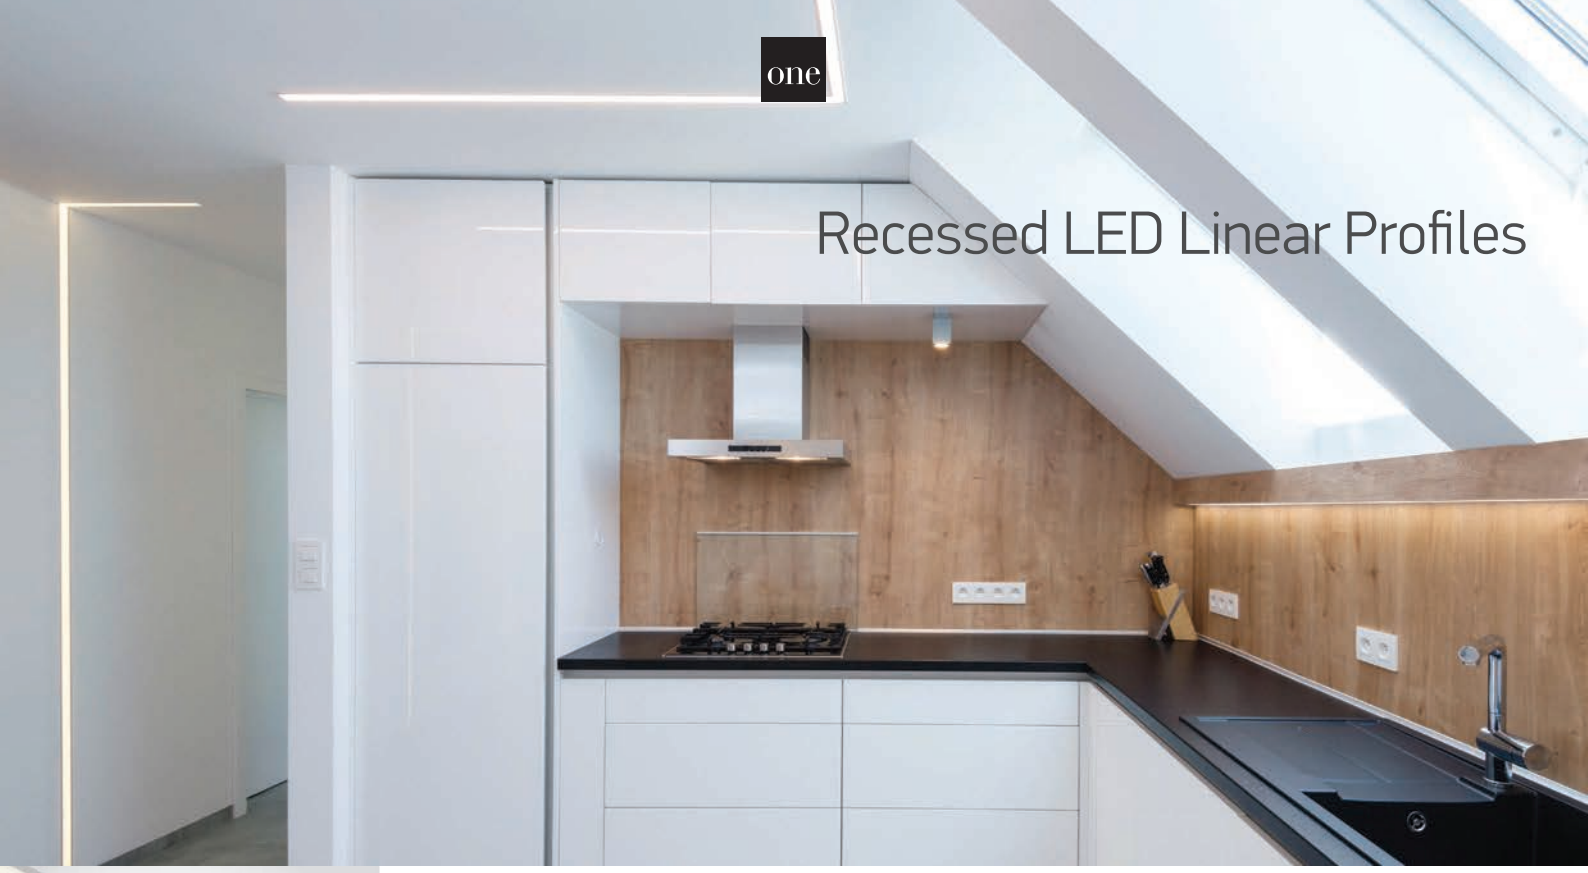

Recessed LED Linear Profiles



38152R/W/C

38152R | 40W | LED | Recessed linear system | Aluminium

Can be connected in line.

LED BUILT IN · 90 CRI · CE · 3 YEAR · IP20



38152R/W/W



Complete with 6pcs fixing clips, 4pcs connectors & 2pcs end cups.





38152RC/W/C

38152RC | 8W | LED | Corner for 38152R | Aluminium

LED BUILT IN · 90 CRI · CE · 3 YEAR · IP20



38152RC/W/W



Complete with 4pcs fixing clips, 4pcs connectors.

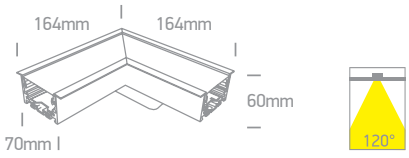



38152RL/W/C

38152RL | 10W | LED | Ceiling to wall corner for 38152R | Aluminium

LED BUILT IN · 90 CRI · CE · 3 YEAR · IP20



38152RL/W/W



Complete with 4pcs fixing clips, 4pcs connectors.

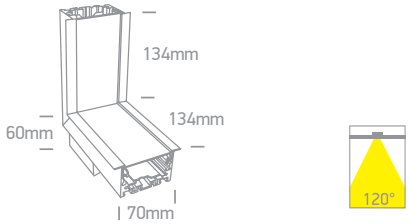

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
38152R/W/C	White	Cool white	4000K	40W	3600lm	120°	230V		1200x60mm	80mm	12	Complete with 1000mA driver
38152R/W/W	White	Warm white	3000K	40W	3600lm	120°	230V		1200x60mm	80mm	12	Complete with 1000mA driver
38152RC/W/C	White	Cool white	4000K	8W	720lm	120°	230V		160x160x60mm	80mm	10	Complete with 250mA driver
38152RC/W/W	White	Warm white	3000K	8W	720lm	120°	230V		160x160x60mm	80mm	10	Complete with 250mA driver
38152RL/W/C	White	Cool white	4000K	10W	900lm	120°	230V		100x100x60mm	80mm	6	Complete with 200mA driver
38152RL/W/W	White	Warm white	3000K	10W	900lm	120°	230V		100x100x60mm	80mm	6	Complete with 200mA driver



UGR19 Recessed LED Linear Profiles



38145AR | 40W | SMD 2835 | Recessed linear system | Aluminium

Can be connected in line.

LED BUILT IN · 90 CRI · CE · 3 YEAR · IP20 · UGR19





Complete with 6pcs fixing clips, 4pcs connectors & 2pcs end cups.





38145AR | 40W | SMD 2835 | Recessed linear system | Aluminium

Can be connected in line.

LED BUILT IN · 90 CRI · CE · 3 YEAR · IP20 · UGR19





Complete with 6pcs fixing clips, 4pcs connectors & 2pcs end cups.





38150AR | 40W | SMD 2835 | Recessed linear system | Aluminium

Can be connected in line.

LED BUILT IN · 90 CRI · CE · 3 YEAR · IP20 · UGR19





Complete with 6pcs fixing clips, 4pcs connectors & 2pcs end cups.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class				Notes
38145AR/W/C	White	Cool white	4000K	40W	3800lm	230V		1200x37mm	80mm	12	Complete with 1000mA driver
38145AR/W/W	White	Warm white	3000K	40W	3800lm	230V		1200x37mm	80mm	12	Complete with 1000mA driver
38145AR/B/C	Black	Cool white	4000K	40W	3800lm	230V		1200x37mm	80mm	12	Complete with 1000mA driver
38145AR/B/W	Black	Warm white	3000K	40W	3800lm	230V		1200x37mm	80mm	12	Complete with 1000mA driver
38150AR/W/C	White	Cool white	4000K	40W	3600lm	230V		1200x68mm	80mm	12	Complete with 1000mA driver
38150AR/W/W	White	Warm white	3000K	40W	3600lm	230V		1200x68mm	80mm	12	Complete with 1000mA driver



Recessed LED Linear Profiles



38145BR/W/C

38145BR | 40W | SMD 3030 | Recessed linear system | Aluminium

Can be connected in line.

LED BUILT IN · 90 CRI · CE · 3 YEAR · DARK LIGHT · IP20 · UGR17



38145BR/W/W



Complete with 6pcs fixing clips, 4pcs connectors & 2pcs end cups.





38150BR/W/C

38150BR | 40W | SMD 3030 | Recessed linear system | Aluminium

Can be connected in line.

LED BUILT IN · 90 CRI · CE · 3 YEAR · DARK LIGHT · IP20 · UGR17



38150BR/B/C



Complete with 6pcs fixing clips, 4pcs connectors & 2pcs end cups.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
38145BR/W/C	White	Cool white	4000K	40W	4000lm	34°	230V		1280x37mm	80mm	12	Complete with 1000mA driver
38145BR/W/W	White	Warm white	3000K	40W	4000lm	34°	230V		1280x37mm	80mm	12	Complete with 1000mA driver
38150BR/W/C	White	Cool white	4000K	40W	4000lm	34°	230V		1280x68mm	80mm	12	Complete with 1000mA driver
38150BR/W/W	White	Warm white	3000K	40W	4000lm	34°	230V		1280x68mm	80mm	12	Complete with 1000mA driver
38150BR/B/C	Black	Cool white	4000K	40W	4000lm	34°	230V		1280x68mm	80mm	12	Complete with 1000mA driver
38150BR/B/W	Black	Warm white	3000K	40W	4000lm	34°	230V		1280x68mm	80mm	12	Complete with 1000mA driver



T5 Suspended Linear



38154A | 54W | T5 | Aluminium

2 YEAR

IP20

offer







38154M | 54W | T5 | Aluminium

2 YEAR

DARK LIGHT

IP20

offer





Order Code	Colour	Watts	Input	Class		Notes
38154A/G	Grey	54W	230V	⏚	6	Complete with electronic ballast
38154M/G	Grey	54W	230V	⏚	6	Complete with electronic ballast



The Office Floor Stand Range
Aluminium



36002/W/C

36002 | 60W | LED | Touch switch | Aluminium — EU Plug.

new

LED BUILT IN · 80 CRI · DIMMABLE · CE · 3 YEAR · UGR19 · IP20







36002/B/C

36002 | 60W | LED | Touch switch | Aluminium — EU Plug.

new

LED BUILT IN · 80 CRI · DIMMABLE · CE · 3 YEAR · UGR19 · IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
36002/W/C	White	Cool white	4000K	60W	8000lm	230V	⏚	1	Complete with 2x700mA drivers
36002/B/C	Black	Cool white	4000K	60W	8000lm	230V	⏚	1	Complete with 2x700mA drivers



The Office Floor Stand Range
Aluminium



36004/W/C

36004 | 75W | LED | Touch switch | Aluminium — EU Plug.

new
DARK LIGHT
IP20

LED BUILT IN
80 CRI
DIMMABLE
3 YEAR
UGR15







36004/B/C

36004 | 75W | LED | Touch switch | Aluminium — EU Plug.

new
DARK LIGHT
IP20

LED BUILT IN
80 CRI
DIMMABLE
3 YEAR
UGR15





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
36004/W/C	White	Cool white	4000K	75W	9700lm	230V	⏚	1	Complete with 700mA +1200mA drivers
36004/B/C	Black	Cool white	4000K	75W	9700lm	230V	⏚	1	Complete with 700mA + 1200mA drivers





12

Wall & Ceiling

Pages 359-400

R111 | MR16 | PAR30 | GU10 | G9 | GX53 | E27

Die cast | Natural aluminium | Gypsum | Stainless steel

IP20 IP44 IP54

ADJUSTABLE ADJUSTABLE DARK LIGHT 2 YEAR 3 YEAR 5 YEAR

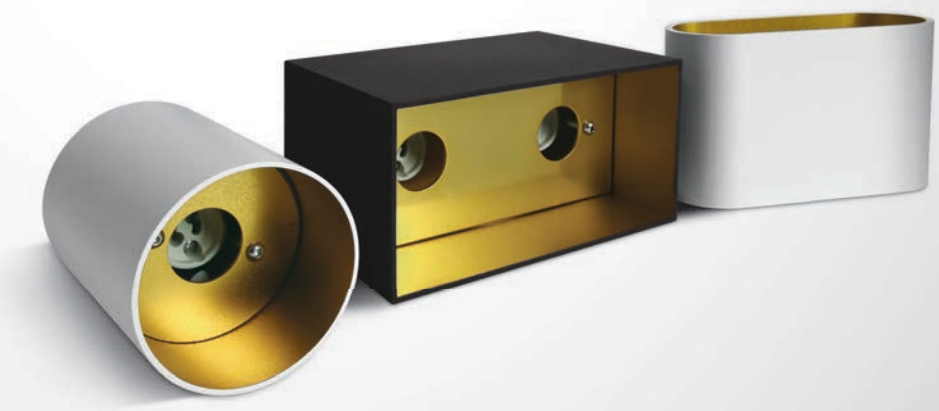



The Decorative Cylinders
Aluminium

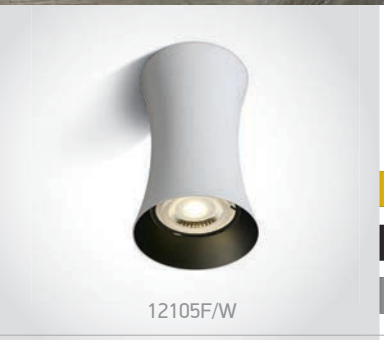

12105F/W

12105F | 10W | MR16 | GU10 | Aluminium

new

DARK LIGHT

IP20

5 YEAR



12105F/BBS



12105F/MG





12105L/W

12105L | 10W | MR16 | GU10 | Aluminium

new

DARK LIGHT

IP20

5 YEAR



12105L/BBS



12105L/DC



Order Code	Colour	Watts	Input	Class		Notes
12105F/W	White	10W	100-240V		30	-
12105F/BBS	Brushed brass	10W	100-240V		30	-
12105F/MG	Metal grey	10W	100-240V		30	-
12105L/W	White	10W	100-240V		30	-
12105L/BBS	Brushed brass	10W	100-240V		30	-
12105L/DC	Dark chrome	10W	100-240V		30	-



The Decorative Cylinders
Aluminium



12105J | 10W | MR16 | GU10 | Aluminium

new
DARK LIGHT
IP20

5 YEAR



Suitable for GU10 LED lamp.





12105K/BBS

12105K | 10W | MR16 | GU10 | Aluminium

new
DARK LIGHT
IP20

5 YEAR



Suitable for GU10 LED lamp.





12105K/DC

12105K | 10W | MR16 | GU10 | Aluminium

new
DARK LIGHT
IP20

5 YEAR



Suitable for GU10 LED lamp.



Order Code	Colour	Watts	Input	Class		Notes
12105J/CU	Copper	10W	100-240V		30	-
12105K/BBS	Brushed brass	10W	100-240V		30	-
12105K/DC	Dark chrome	10W	100-240V		30	-



The Decorative Cylinders
Aluminium



12105H | 10W | MR16 | GU10 | Aluminium

5 YEAR

IP20



Suitable for GU10 LED lamp.





12105H | 10W | MR16 | GU10 | Aluminium

5 YEAR

new

IP20



Suitable for GU10 LED lamp.



Order Code	Colour	Watts	Input	Class		Notes
12105H/BS	Brass	10W	100-240V		30	-
12105H/DC	Dark chrome	10W	100-240V		30	-

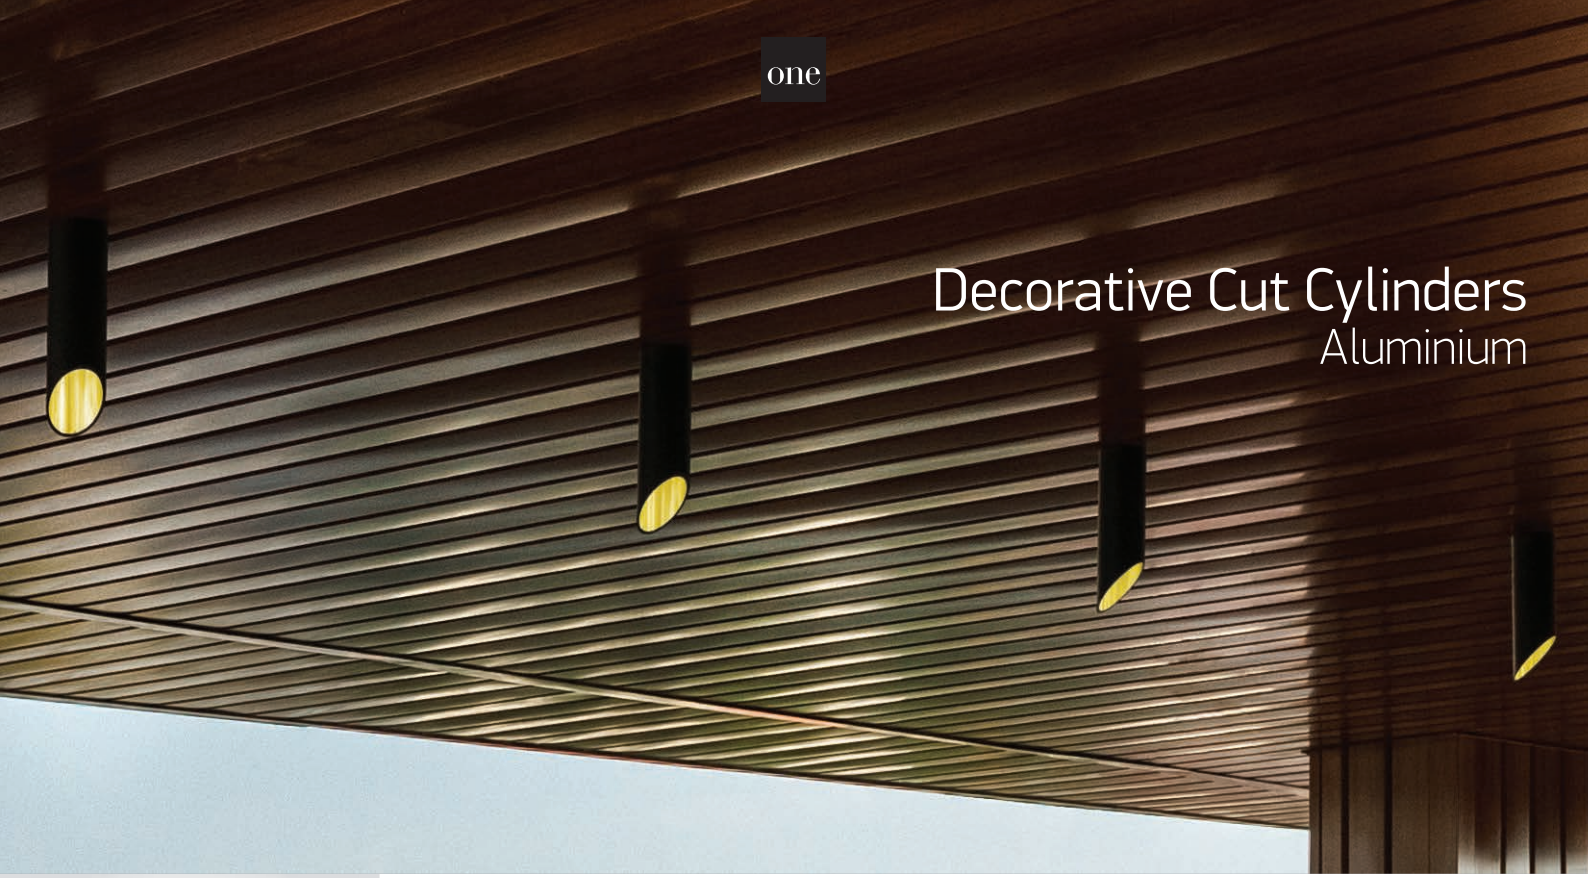

Decorative Cut Cylinders
Aluminium

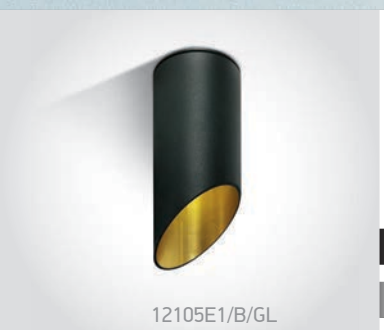

12105E1/B/GL

12105E1 | 10W | MR16 | GU10 | Aluminium

5 YEAR

DARK LIGHT

IP20



12105E1/W/B







12105E2/B/GL

12105E2 | 10W | MR16 | GU10 | Aluminium

5 YEAR

DARK LIGHT

IP20



12105E2/W/B







12105E3/B/GL

12105E3 | 10W | MR16 | GU10 | Aluminium

5 YEAR

DARK LIGHT

IP20



12105E3/W/B





Order Code	Colour	Reflector	Watts	Input	Class		Notes
12105E1/W/B	White	Black	10W	100-240V		20	-
12105E1/B/GL	Black	Gold	10W	100-240V		20	-
12105E2/W/B	White	Black	10W	100-240V		20	-
12105E2/B/GL	Black	Gold	10W	100-240V		20	-
12105E3/W/B	White	Black	10W	100-240V		20	-
12105E3/B/GL	Black	Gold	10W	100-240V		20	-



The Chill Out Cylinder
Aluminium



12105M/B + 050112/BS

12105M | 10W | MR16 | GU10 | Aluminium body + plastic reflector

Reflector must be ordered separately.

5 YEAR

DARK LIGHT

IP20



12105M/W + 050112/B





12105M/BBS + 050112/B

12105M | 10W | MR16 | GU10 | Aluminium body + plastic reflector

Reflector must be ordered separately.

5 YEAR

DARK LIGHT

IP20



12105M/MG + 050112/B





050112/W White



050112/B Black



050112/G Grey



050112/BS Brass



050112/ABS Antique brass



050112/GL Gold



050112/CU Copper



050112/DC Dark chrome

Order Code	Colour	Watts	Input	Class		Notes
12105M/W	White	10W	100-240V		20	-
12105M/B	Black	10W	100-240V		20	-
12105M/BBS	Brushed Brass	10W	100-240V		20	-
12105M/MG	Metal Grey	10W	100-240V		20	-



The Chill Out Cylinder
Aluminium



12105MA/W + 050112/GL

12105MA | 10W | MR16 | GU10 | Aluminium body + plastic reflector

Reflector must be ordered separately.

5 YEAR

DARK LIGHT

IP20



12105MA/B + 050112/BS





12105MA/MG + 050112/B

12105MA | 10W | MR16 | GU10 | Aluminium body + plastic reflector

Reflector must be ordered separately.

5 YEAR

DARK LIGHT

IP20



12105MA/BBS + 050112/B





050112/W White | 050112/B Black | 050112/G Grey | 050112/BS Brass | 050112/ABS Antique brass | 050112/GL Gold | 050112/CU Copper | 050112/DC Dark chrome

Order Code	Colour	Watts	Input	Class		Notes
12105MA/W	White	10W	100-240V		20	-
12105MA/B	Black	10W	100-240V		20	-
12105MA/BBS	Brushed brass	10W	100-240V		20	-
12105MA/MG	Metal grey	10W	100-240V		20	-



The GU10 Dark Light
Aluminium



12105N/W

12105N | 10W | MR16 | GU10 | Aluminium

5 YEAR

DARK LIGHT

IP20



12105N/B





12105N/BBS

12105N | 10W | MR16 | GU10 | Aluminium

5 YEAR

DARK LIGHT

IP20



12105N/MG



Order Code	Colour	Reflector	Watts	Input	Class		Notes
12105N/W	White	Black	10W	100-240V	⏚	36	-
12105N/B	Black	Brass	10W	100-240V	⏚	36	-
12105N/BBS	Brushed brass	Black	10W	100-240V	⏚	36	-
12105N/MG	Metal grey	Black	10W	100-240V	⏚	36	-



The GU10 Dark Light
Aluminium


12105NA/W

12105NA | 10W | MR16 | GU10 | Aluminium

5 YEAR

DARK LIGHT

IP20


12105NA/B




12205NA/W

12205NA | 2x10W | MR16 | GU10 | Aluminium

5 YEAR

DARK LIGHT

IP20


12205NA/B



Order Code	Colour	Reflector	Watts	Input	Class		Notes
12105NA/W	White	Black	10W	100-240V	⏚	36	-
12105NA/B	Black	Brass	10W	100-240V	⏚	36	-
12205NA/W	White	Black	2x10W	100-240V	⏚	24	-
12205NA/B	Black	Brass	2x10W	100-240V	⏚	24	-



GU10 Decorative Cylinders
Aluminium

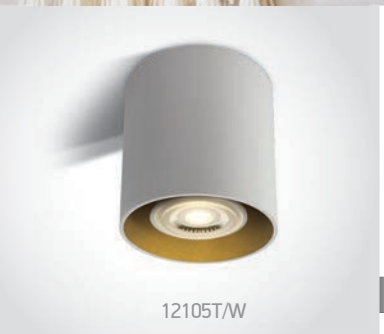

12105T/W

12105T | 10W | MR16 | GU10 | Aluminium

IP20



12105T/B





12205T/W

12205T | 2x10W | MR16 | GU10 | Aluminium

IP20



12205T/B



Order Code	Colour	Reflector	Watts	Input	Class		Notes
12105T/W	White	Brass	10W	100-240V		20	-
12105T/B	Black	Brass	10W	100-240V		20	-
12205T/W	White	Brass	2x10W	100-240V		20	-
12205T/B	Black	Brass	2x10W	100-240V		20	-

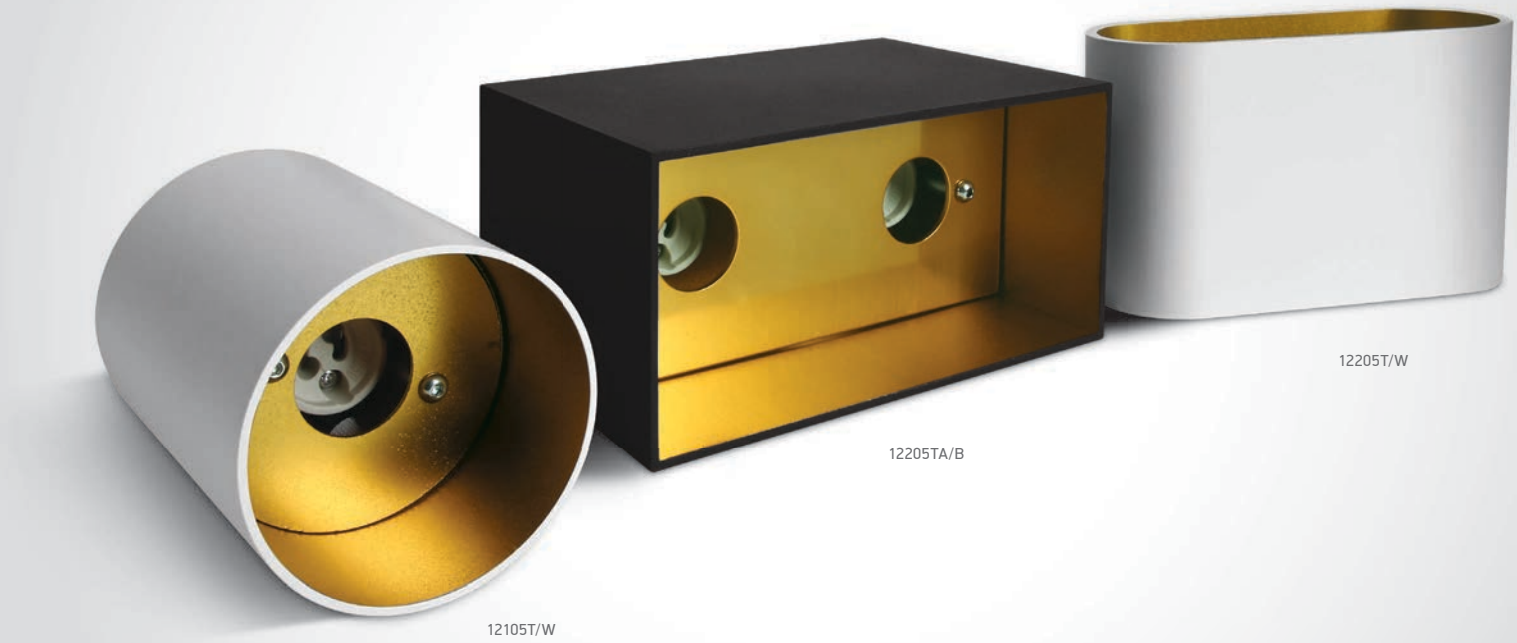

GU10 Decorative Cubes
Aluminium


12105TA/W

12105TA | 10W | MR16 | GU10 | Aluminium

CE 5 YEAR

IP20


12105TA/B




12205TA/W

12205TA | 2x10W | MR16 | GU10 | Aluminium

CE 5 YEAR

IP20


12205TA/B



Order Code	Colour	Reflector	Watts	Input	Class		Notes
12105TA/W	White	Brass	10W	100-240V	⏚	20	-
12105TA/B	Black	Brass	10W	100-240V	⏚	20	-
12205TA/W	White	Brass	2x10W	100-240V	⏚	20	-
12205TA/B	Black	Brass	2x10W	100-240V	⏚	20	-

The GU10 & G9 Ceiling Lights



12132 | 10W | MR16 | GU10 | Natural aluminium

3 YEAR

IP20

offer



Suitable for GU10 LED lamp.





12126 | 10W | MR16 | GU10 | Natural aluminium

3 YEAR

IP20

offer



Suitable for GU10 LED lamp.





12124 | 10W | MR16 | GU10 | Natural aluminium

3 YEAR

IP20

offer



Suitable for GU10 LED lamp.





12134/AL

12134 | 10W | MR16 | GU10 | Natural aluminium

3 YEAR

IP20

offer



12134/B





12120 | 25W | G9 | Natural aluminium

3 YEAR

IP20

offer



Suitable for G9 LED lamp.



Order Code	Colour	Watts	Input	Class		Notes
12132/AL	Aluminium	10W	100-240V		50	-
12126/AL	Aluminium	10W	100-240V		20	-
12124/AL	Aluminium	10W	100-240V		12	-
12134/B	Black	10W	100-240V		20	-
12134/AL	Aluminium	10W	100-240V		20	-
12120/AL	Aluminium	25W	100-240V		4	-



The Dark Light Cylinders
Aluminium



12105E/W

12105E | 10W | MR16 | GU10 | Aluminium

5 YEAR

DARK LIGHT

IP20



12105E/B





12105AL/W/B

12105AL | 10W | MR16 | GU10 | Aluminium

5 YEAR

DARK LIGHT

IP20



12105AL/W/GL





12105AL/B/B

12105AL | 10W | MR16 | GU10 | Aluminium

5 YEAR

DARK LIGHT

IP20



12105AL/B/GL



Order Code	Colour	Reflector	Watts	Input	Class		Notes
12105E/W	White	-	10W	100-240V		20	-
12105E/B	Black	-	10W	100-240V		20	-
12105AL/W/B	White	Black	10W	100-240V		20	-
12105AL/W/GL	White	Gold	10W	100-240V		20	-
12105AL/B/B	Black	Black	10W	100-240V		20	-
12105AL/B/GL	Black	Gold	10W	100-240V		20	-



The GU10 Ceiling Lights
Square



12105AC/W

12105AC | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

CE 3 YEAR

IP20



Suitable for GU10 LED lamp.





12105AC/B

12105AC | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

CE 3 YEAR

IP20



Suitable for GU10 LED lamp.





12105AC/AL

12105AC | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

CE 3 YEAR

IP20



Suitable for GU10 LED lamp.





12105B | 10W | MR16 | GU10 | Natural aluminium

ADJUSTABLE

CE 3 YEAR

IP20

offer



Suitable for GU10 LED lamp.



Order Code	Colour	Watts	Input	Class		Notes
12105AC/W	White	10W	100-240V		10	-
12105AC/B	Black	10W	100-240V		10	-
12105AC/AL	Aluminium	10W	100-240V		10	-
12105B/AL	Aluminium	10W	100-240V		20	-



The GU10 Ceiling Lights
Round



12105AB/W

12105AB | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

3 YEAR

IP20



Suitable for GU10 LED lamp.







12105AB/B

12105AB | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

3 YEAR

IP20



Suitable for GU10 LED lamp.







12105AB/AL

12105AB | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

3 YEAR

IP20



Suitable for GU10 LED lamp.





Order Code	Colour	Watts	Input	Class		Notes
12105AB/W	White	10W	100-240V		20	-
12105AB/B	Black	10W	100-240V		20	-
12105AB/AL	Aluminium	10W	100-240V		20	-



The GU10 Adjustable Cylinders
Aluminium



12105Y/B

12105Y | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

5 YEAR

IP20



12105Y/W





12205Y/B

12205Y | 2x10W | MR16 | GU10 | Aluminium

ADJUSTABLE

5 YEAR

IP20



12205Y/W



Order Code	Colour	Watts	Input	Class		Notes
12105Y/W	White	10W	100-240V		20	-
12105Y/B	Black	10W	100-240V		20	-
12205Y/W	White	2x10W	100-240V		20	-
12205Y/B	Black	2x10W	100-240V		20	-



The GU10 Adjustable Cubes
Aluminium



12105YA/B

12105YA | 10W | MR16 | GU10 | Aluminium

CE 5 YEAR

IP20



12105YA/W





12205YA/B

12205YA | 2x10W | MR16 | GU10 | Aluminium

CE 5 YEAR

IP20



12205YA/W



Order Code	Colour	Watts	Input	Class		Notes
12105YA/W	White	10W	100-240V	⏚	20	-
12105YA/B	Black	10W	100-240V	⏚	20	-
12205YA/W	White	2x10W	100-240V	⏚	20	-
12205YA/B	Black	2x10W	100-240V	⏚	20	-

The Retro GU10 Spots


65105N/B

65105N | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE
DARK LIGHT
IP20
5 YEAR


65105N/W




65205N/B

65205N | 2x10W | MR16 | GU10 | Aluminium

ADJUSTABLE
DARK LIGHT
IP20
5 YEAR


65205N/W




65305N/B

65305N | 3x10W | MR16 | GU10 | Aluminium

ADJUSTABLE
DARK LIGHT
IP20
5 YEAR


65305N/W




65405N/B

65405N | 4x10W | MR16 | GU10 | Aluminium

new
ADJUSTABLE
DARK LIGHT
IP20
5 YEAR


65405N/W




65505N/B

65505N | 5x10W | MR16 | GU10 | Aluminium

new
ADJUSTABLE
DARK LIGHT
IP20
5 YEAR


65505N/W



Order Code	Colour	Reflector	Watts	Input	Class		Notes
65105N/W	White	Black	10W	100-240V		24	-
65105N/B	Black	Brass	10W	100-240V		24	-
65205N/W	White	Black	2x10W	100-240V		12	-
65205N/B	Black	Brass	2x10W	100-240V		12	-
65305N/W	White	Black	3x10W	100-240V		12	-
65305N/B	Black	Brass	3x10W	100-240V		12	-
65405N/W	White	Black	4x10W	100-240V		12	-
65405N/B	Black	Brass	4x10W	100-240V		12	-
65505N/W	White	Black	5x10W	100-240V		10	-
65505N/B	Black	Brass	5x10W	100-240V		10	-

The Retro GU10 Spots



65105N/BBS

65105N | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

DARK LIGHT

5 YEAR

IP20



65105N/MG





65205N/BBS

65205N | 2x10W | MR16 | GU10 | Aluminium

ADJUSTABLE

DARK LIGHT

5 YEAR

IP20



65205N/MG





65305N/BBS

65305N | 3x10W | MR16 | GU10 | Aluminium

ADJUSTABLE

DARK LIGHT

5 YEAR

IP20



65305N/MG



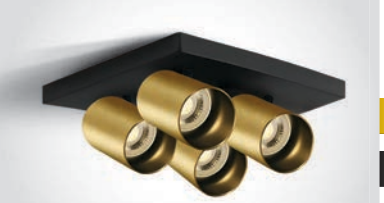

65405N/BBS

65405N | 4x10W | MR16 | GU10 | Aluminium

new

ADJUSTABLE

DARK LIGHT

5 YEAR

IP20



65405N/MG





65505N/BBS

65505N | 5x10W | MR16 | GU10 | Aluminium

new

ADJUSTABLE

DARK LIGHT

5 YEAR

IP20



65505N/MG



Order Code	Colour	Reflector	Watts	Input	Class		Notes
65105N/BBS	Brushed brass	Black	10W	100-240V		24	-
65105N/MG	Metal grey	Black	10W	100-240V		24	-
65205N/BBS	Brushed brass	Black	2x10W	100-240V		12	-
65205N/MG	Metal grey	Black	2x10W	100-240V		12	-
65305N/BBS	Brushed brass	Black	3x10W	100-240V		12	-
65305N/MG	Metal grey	Black	3x10W	100-240V		12	-
65405N/BBS	Brushed brass	Black	4x10W	100-240V		12	-
65405N/MG	Metal grey	Black	4x10W	100-240V		12	-
65505N/BBS	Brushed brass	Black	5x10W	100-240V		10	-
65505N/MG	Metal grey	Black	5x10W	100-240V		10	-



67164/AL



67164/BR

The GU10 Indoor/Outdoor Spots



67164/AL

67164 | 10W | MR16 | GU10 | Aluminium



IP54



67164/G



67164/BR





67162/AL

67162 | 10W | MR16 | GU10 | Aluminium



IP54



67162/BR



Order Code	Colour	Watts	Input	Class		Notes
67164/G	Grey	10W	100-240V		20	-
67164/AL	Aluminium	10W	100-240V		20	-
67164/BR	Rust brown	10W	100-240V		20	-
67162/AL	Aluminium	10W	100-240V		10	-
67162/BR	Rust brown	10W	100-240V		20	-



Decorative Directional Spots
Aluminium



12105E4/W

12105E4 | 10W | MR16 | GU10 | Aluminium

DARK LIGHT
IP20
ADJUSTABLE
5 YEAR



Suitable for 7306CG GU10 LED lamp.



Complete with Black & Brass reflectors.





12105E4/B

12105E4 | 10W | MR16 | GU10 | Aluminium

DARK LIGHT
IP20
ADJUSTABLE
5 YEAR



Suitable for 7306CG GU10 LED lamp.



Complete with Black & Brass reflectors.





12105E6/W

12105E6 | 10W | MR16 | GU10 | Die cast

new
DARK LIGHT
IP20
ADJUSTABLE
5 YEAR



Suitable for 7306CG GU10 LED lamp.



Complete with Black & Brass reflectors.





12105E6/B

12105E6 | 10W | MR16 | GU10 | Die cast

new
DARK LIGHT
IP20
ADJUSTABLE
5 YEAR



Suitable for 7306CG GU10 LED lamp.



Complete with Black & Brass reflectors.



Order Code	Colour	Watts	Input	Class		Notes
12105E4/W	White	10W	100-240V		30	-
12105E4/B	Black	10W	100-240V		30	-
12105E6/W	White	10W	100-240V		30	-
12105E6/B	Black	10W	100-240V		30	-

Adjustable Ceiling Lights



12140 | 75W | PAR30 | E27 | Die cast

ADJUSTABLE

5 YEAR

IP20

offer



Suitable for PAR30 LED lamp.





12142 | 15W | R111 | GU10 | Aluminium

ADJUSTABLE

5 YEAR

IP20



Suitable for R111 LED lamp.





12138G/W

12138G | 75W | R111 | GU10 | Die cast

ADJUSTABLE

5 YEAR

IP20

offer



Suitable for R111 LED lamp.





12138G/B

12138G | 75W | R111 | GU10 | Die cast

ADJUSTABLE

5 YEAR

IP20

offer



Suitable for R111 LED lamp.





12138G/G

12138G | 75W | R111 | GU10 | Die cast

ADJUSTABLE

5 YEAR

IP20

offer



Suitable for R111 LED lamp.



Order Code	Colour	Watts	Input	Class		Notes
12140/G	Grey	75W	100-240V		18	-
12142/W	White	15W	100-240V		20	-
12138G/W	White	75W	100-240V		32	-
12138G/B	Black	75W	100-240V		32	-
12138G/G	Grey	75W	100-240V		32	-



R111 GU10 Ceiling Lights



12144/B

12144 | 15W | R111 | GU10 | Aluminium

5 YEAR

IP20



12144/W





12144A/B

12144A | 15W | R111 | GU10 | Aluminium

5 YEAR

IP20



12144A/W



Order Code	Colour	Watts	Input	Class		Notes
12144/W	White	15W	100-240V		20	-
12144/B	Black	15W	100-240V		20	-
12144A/W	White	15W	100-240V		20	-
12144A/B	Black	15W	100-240V		20	-

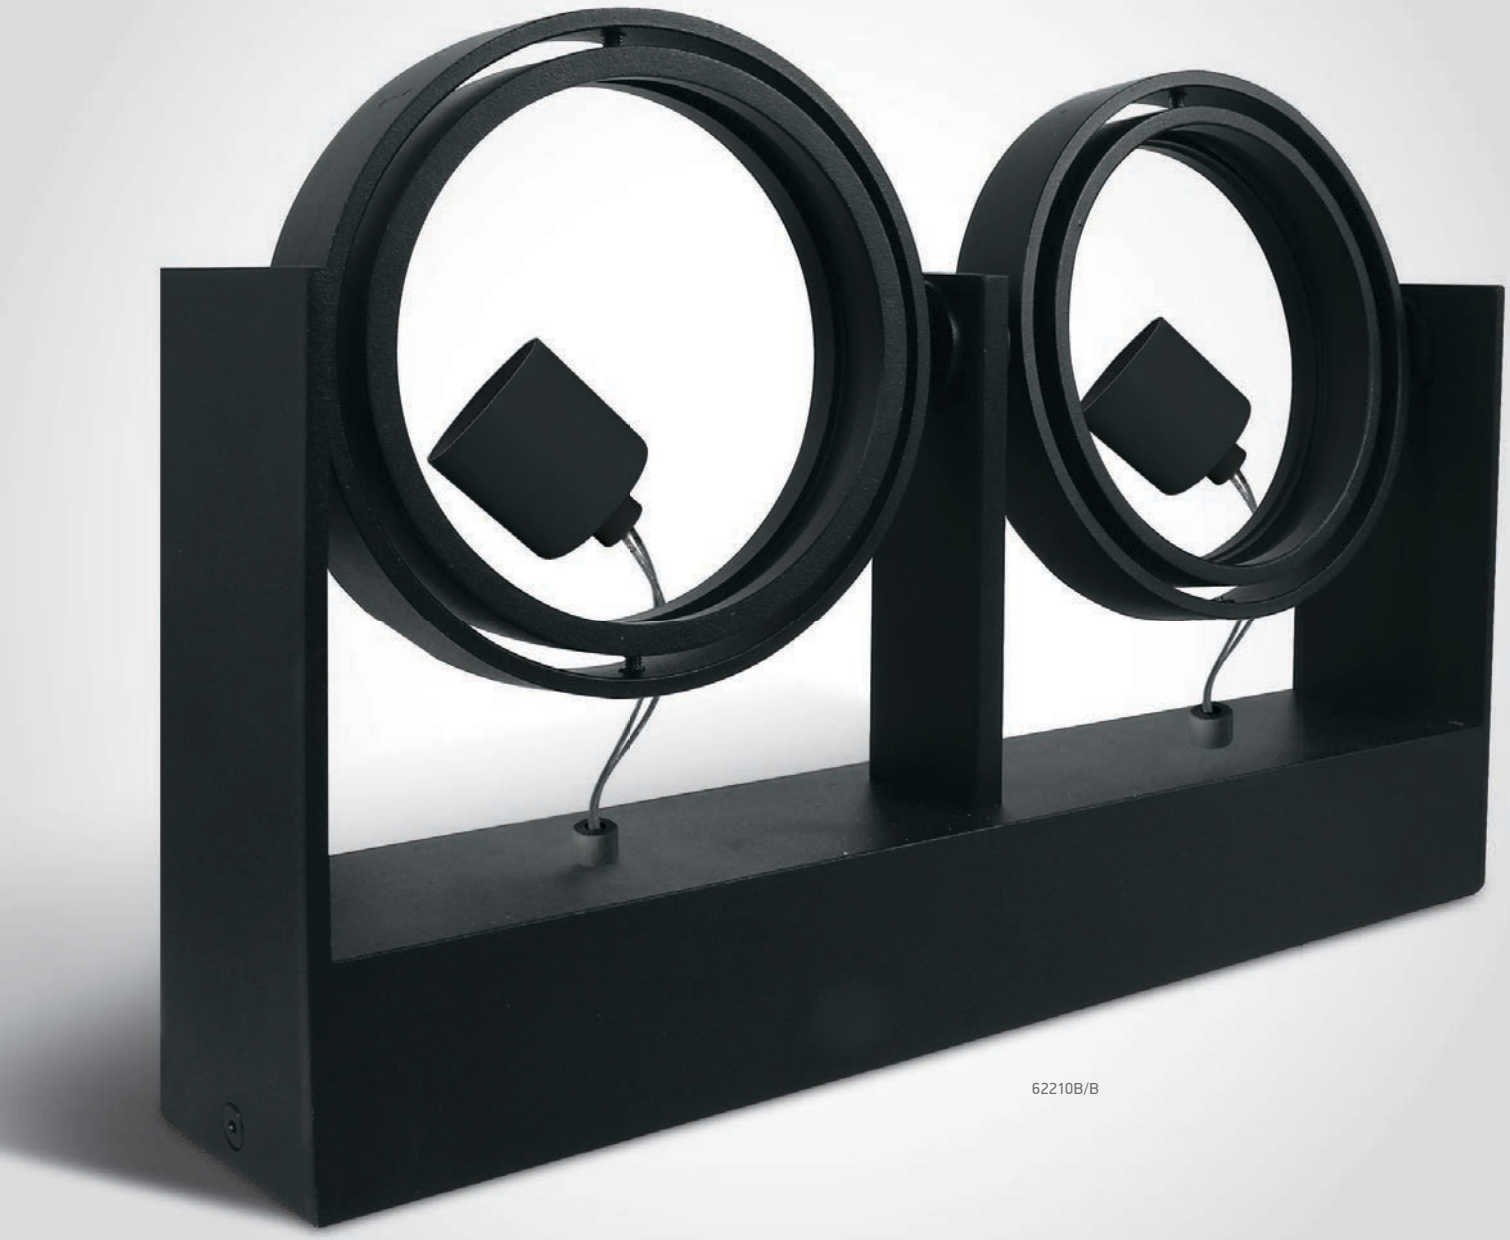

The R111 GU10 Spots
Aluminium



62210B | 2x75W | R111 | GU10 | Aluminium





IP20



Suitable for R111 LED lamps.



Order Code	Colour	Watts	Input	Class		Notes
62210B/B	Black	2x75W	100-240V	⏚	20	-

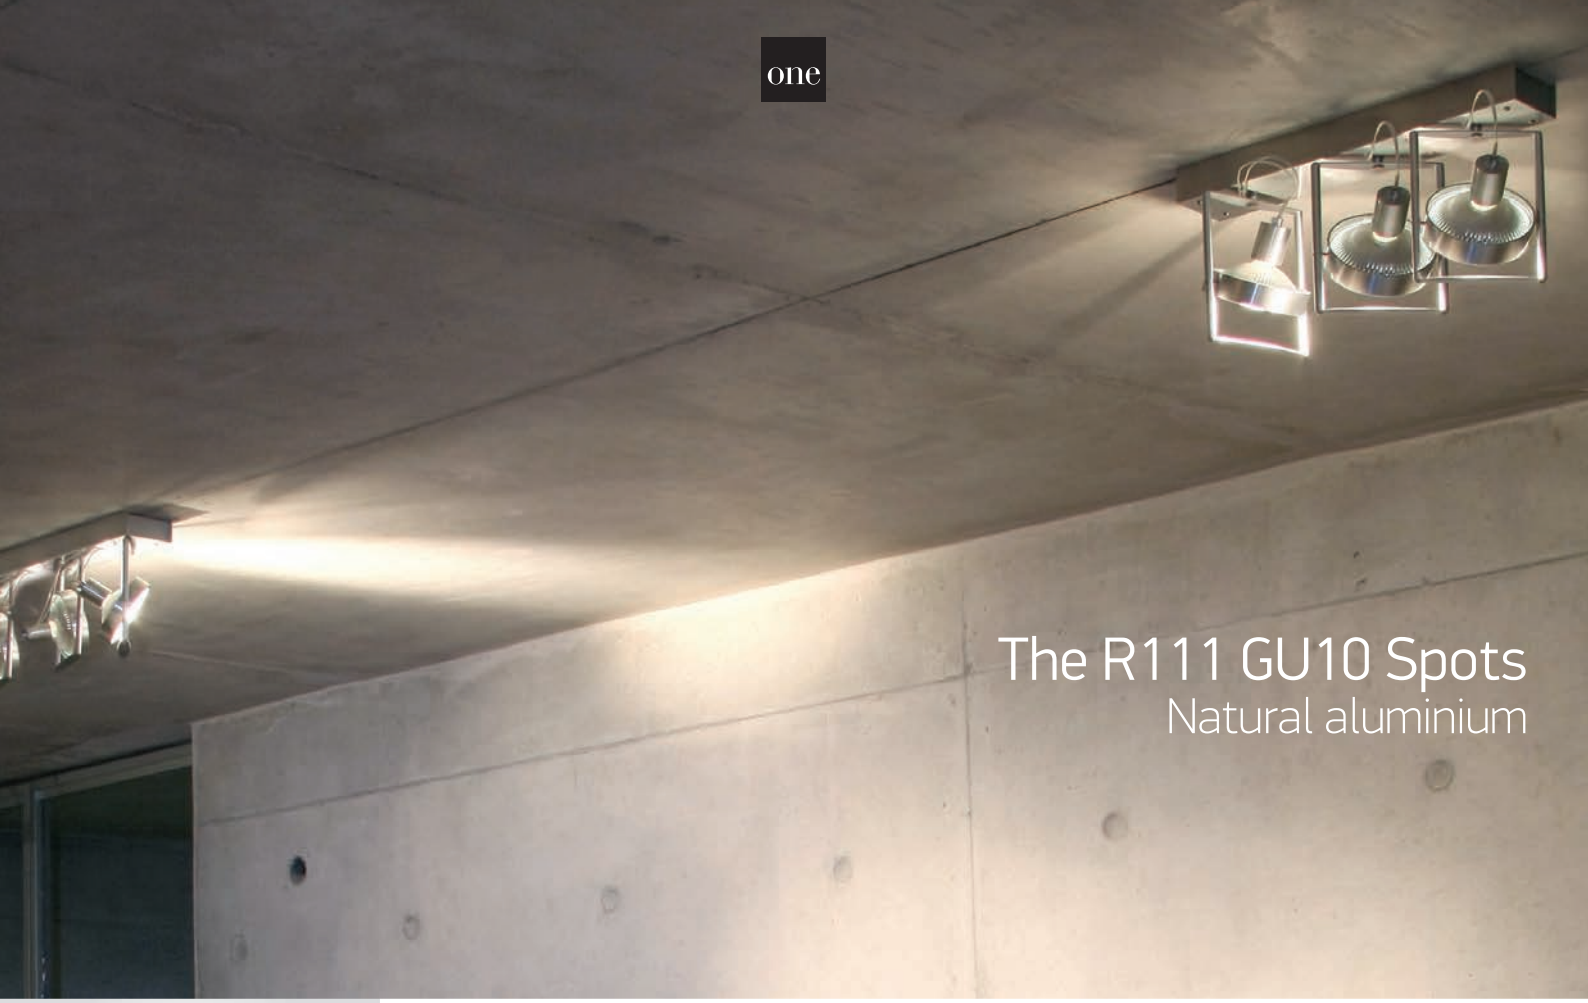



62110 | 75W | R111 | GU10 | Natural aluminium

ADJUSTABLE

IP20

3 YEAR

offer



Suitable for R111 LED lamp.





62110A | 75W | R111 | GU10 | Natural aluminium

ADJUSTABLE

IP20

3 YEAR

offer



Suitable for R111 LED lamp.

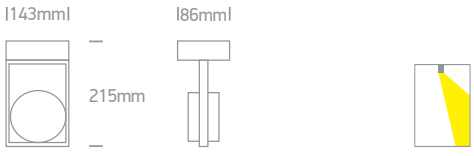



62310A | 3x75W | R111 | GU10 | Natural aluminium

ADJUSTABLE

IP20

3 YEAR

offer



Suitable for R111 LED lamp.

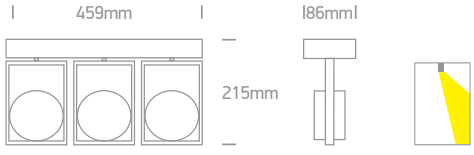

Order Code	Colour	Watts	Input	Class		Notes
62110/AL	Aluminium	75W	100-240V		12	-
62110A/AL	Aluminium	75W	100-240V		10	-
62310A/AL	Aluminium	3x75W	100-240V		4	-



G9 Decorative Wall Lights
Aluminium


60056/W

60056 | 10W | G9 | Aluminium

IP20


60056/B




6017/W

6017 | 10W | G9 | Aluminium

IP20


6017/B




6017A/W

6017A | 10W | G9 | Aluminium

IP20


6017A/B




6030/W

6030 | 10W | G9 | Mirror reflector | Aluminium

IP20


6030/B



Order Code	Colour	Reflector	Watts	Input	Class		Notes
60056/W	White	Brass	10W	100-240V		20	-
60056/B	Black	Brass	10W	100-240V		20	-
6017/W	White	Brass	10W	100-240V		20	-
6017/B	Black	Brass	10W	100-240V		20	-
6017A/W	White	Brass	10W	100-240V		20	-
6017A/B	Black	Brass	10W	100-240V		20	-
6030/W	White	White	10W	100-240V		20	-
6030/B	Black	Black	10W	100-240V		20	-



The GU10 & G9 Wall Lights



6017G | 40W | G9 | Natural aluminium

IP20 offer

3 YEAR



Suitable for G9 LED lamp.





6012 | 40W | G9 | Natural aluminium

IP20 offer

3 YEAR



Suitable for G9 LED lamp.





6022 | 2x10W | MR16 | GU10 | Natural aluminium

IP20 offer

3 YEAR



Suitable for GU10 LED lamps.





6005 | 10W | MR16 | GU10 | Die cast

IP20 offer

5 YEAR



Suitable for GU10 LED lamp.



Order Code	Colour	Watts	Input	Class		Notes
6017G/AL	Aluminium	40W	100-240V		20	-
6012/AL	Aluminium	40W	100-240V		10	-
6022/AL	Aluminium	2x10W	100-240V		25	-
6005/G	Grey	10W	100-240V		20	-



The Decorative Wall Lights
Gypsum

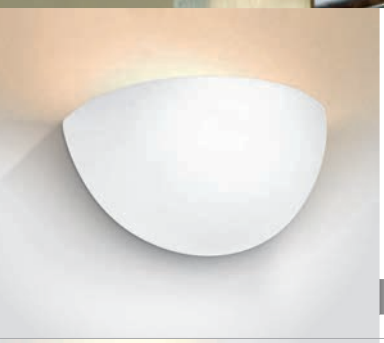

60038 | 20W | E27 | Gypsum

IP20



Suitable for E27 LED lamp.





60040 | 10W | G9 | Gypsum

IP20



Suitable for G9 LED lamp.





60042 | 10W | G9 | Gypsum

IP20



Suitable for G9 LED lamp.





60054 | 2x10W | MR16 | GU10 | Gypsum

IP20



Suitable for GU10 LED lamps.



Order Code	Colour	Watts	Input	Class		Notes
60038	White	20W	100-240V		6	-
60040	White	10W	100-240V		18	-
60042	White	10W	100-240V		9	-
60054	White	2x10W	100-240V		9	-



Indoor/Outdoor Wall Light


67518/W

67518 | 12W | E27 | ABS + PC

new

IP65

2 YEAR


67518/AN





67302A | 2x9W | GX53 | Natural aluminium

IP54

3 YEAR


Suitable for GX53 LED lamps.





67134A | 2x9W | GX53 | Die cast

IP54

offer

3 YEAR


Suitable for GX53 LED lamps.



Order Code	Colour	Watts	Input	Class		Notes
67518/W	White	12W	100-240V		10	-
67518/AN	Anthracite	12W	100-240V		10	-
67302A/AL	Aluminium	2x9W	100-240V		10	-
67134A/W	White	2x9W	100-240V		8	-



The GU10 Outdoor Wall Lights
Die cast



67400A/W

67400A | 10W | MR16 | GU10 | Die cast

IP54

3 YEAR



67400A/AN



67400A/B



67400A/G

new



67400A/BR





67400B/W

67400B | 2x10W | MR16 | GU10 | Die cast

IP54

3 YEAR



67400B/AN



67400B/B



67400B/G

new



67400B/BR



Order Code	Colour	Watts	Input	Class		Notes
67400A/W	White	10W	100-240V		12	-
67400A/AN	Anthracite	10W	100-240V		12	-
67400A/B	Black	10W	100-240V		12	-
67400A/G	Grey	10W	100-240V		12	-
67400A/BR	Rust brown	10W	100-240V		12	-
67400B/W	White	2x10W	100-240V		12	-
67400B/AN	Anthracite	2x10W	100-240V		12	-
67400B/B	Black	2x10W	100-240V		12	-
67400B/G	Grey	2x10W	100-240V		12	-
67400B/BR	Rust brown	2x10W	100-240V		12	-



The PAR30 Outdoor Wall Lights
Die cast


67400D/AN

67400D | 20W | PAR30 | E27 | Die cast

IK06

CE 3 YEAR

IP65


67400D/W


67400D/B


67400D/G




67400E/AN

67400E | 2x20W | PAR30 | E27 | Die cast

IK06

CE 3 YEAR

IP65


67400E/W


67400E/B


67400E/G



Order Code	Colour	Watts	Input	Class		Notes
67400D/W	White	20W	100-240V		6	-
67400D/AN	Anthracite	20W	100-240V		6	-
67400D/B	Black	20W	100-240V		6	-
67400D/G	Grey	20W	100-240V		6	-
67400E/W	White	2x20W	100-240V		6	-
67400E/AN	Anthracite	2x20W	100-240V		6	-
67400E/B	Black	2x20W	100-240V		6	-
67400E/G	Grey	2x20W	100-240V		6	-



The GU10 Outdoor Cube Lights
Die cast



67426/AN

67426 | 10W | MR16 | GU10 | Die cast

3 YEAR

IP65



67426/W



67426/B



67426/G





67426A/AN

67426A | 2x10W | MR16 | GU10 | Die cast

3 YEAR

IP65



67426A/W



67426A/B



67426A/G



Order Code	Colour	Watts	Input	Class		Notes
67426/W	White	10W	100-240V		18	-
67426/AN	Anthracite	10W	100-240V		18	-
67426/B	Black	10W	100-240V		18	-
67426/G	Grey	10W	100-240V		18	-
67426A/W	White	2x10W	100-240V		12	-
67426A/AN	Anthracite	2x10W	100-240V		12	-
67426A/B	Black	2x10W	100-240V		12	-
67426A/G	Grey	2x10W	100-240V		12	-



The GU10 Dark Light Outdoor
Aluminium



67130DD/W

67130DD | 10W | MR16 | GU10 | Aluminium

3 YEAR

DARK LIGHT

IP54



Suitable for GU10 LED lamp.





67130DD/AN

67130DD | 10W | MR16 | GU10 | Aluminium

3 YEAR

DARK LIGHT

IP54



Suitable for GU10 LED lamp.





67130DD/B

67130DD | 10W | MR16 | GU10 | Aluminium

3 YEAR

DARK LIGHT

IP54



Suitable for GU10 LED lamp.



Order Code	Colour	Watts	Input	Class		Notes
67130DD/W	White	10W	100-240V		18	-
67130DD/AN	Anthracite	10W	100-240V		18	-
67130DD/B	Black	10W	100-240V		18	-





67130E/BR



67130D/G



67130C/W

67130A/W

GU10 Outdoor Cylinders

Die cast

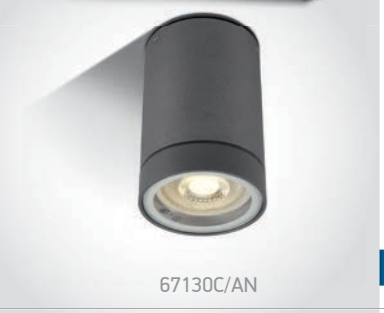

67130C/AN

67130C | 10W | MR16 | GU10 | Die cast



67130C/W



67130C/B



67130C/G



67130C/BR





67130E/AN

67130E | 10W | MR16 | GU10 | Die cast



67130E/W



67130E/B



67130E/G



67130E/BR





67130/AN

67130 | 2x10W | MR16 | GU10 | Die cast



67130/W



67130/B



67130/G



67130/BR



Order Code	Colour	Watts	Input	Class		Notes
67130C/W	White	10W	100-240V		30	-
67130C/AN	Anthracite	10W	100-240V		30	-
67130C/B	Black	10W	100-240V		30	-
67130C/G	Grey	10W	100-240V		30	-
67130C/BR	Rust brown	10W	100-240V		30	-
67130E/W	White	10W	100-240V		18	-
67130E/AN	Anthracite	10W	100-240V		18	-
67130E/B	Black	10W	100-240V		18	-
67130E/G	Grey	10W	100-240V		18	-
67130E/BR	Rust brown	10W	100-240V		18	-
67130/W	White	2x10W	100-240V		18	-
67130/AN	Anthracite	2x10W	100-240V		18	-
67130/B	Black	2x10W	100-240V		18	-
67130/G	Grey	2x10W	100-240V		18	-
67130/BR	Rust brown	2x10W	100-240V		18	-

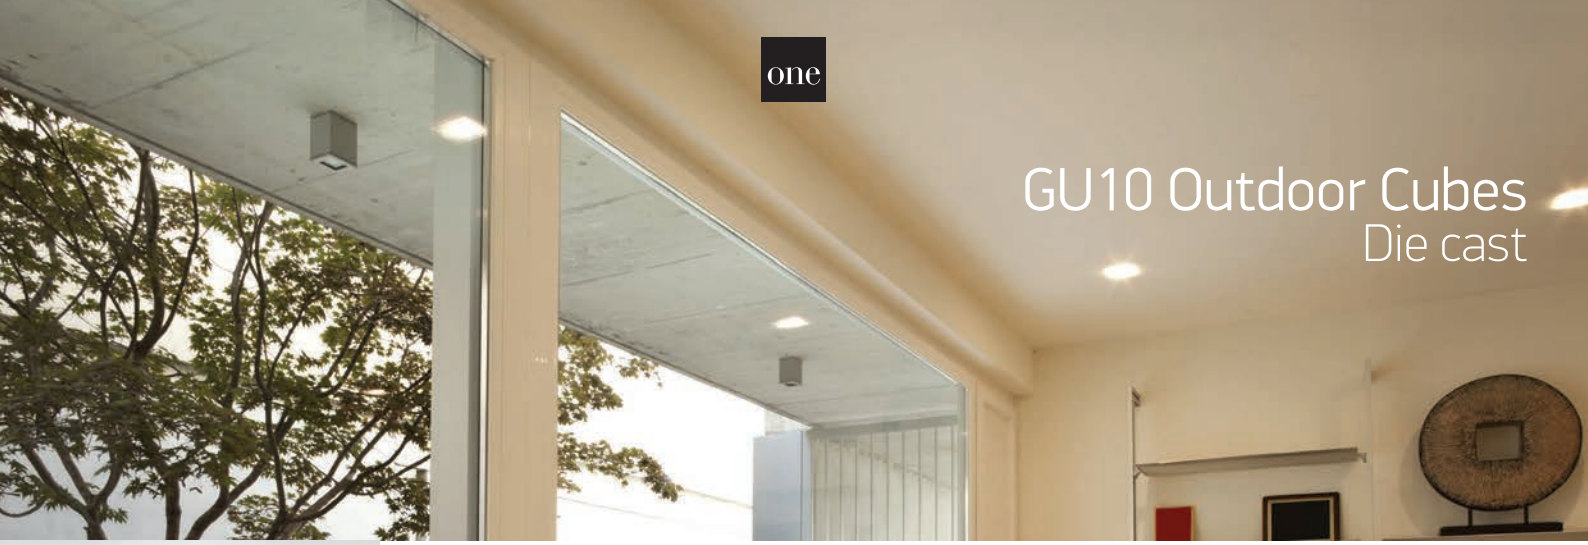

GU10 Outdoor Cubes
Die cast

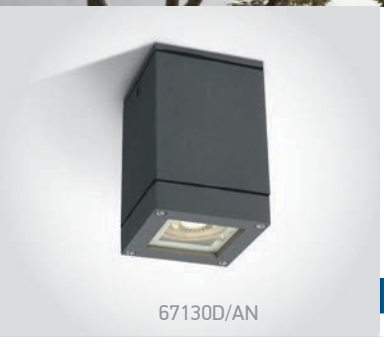

67130D/AN

67130D | 10W | MR16 | GU10 | Die cast







67130D/W



67130D/B



67130D/G





67130F/AN

67130F | 10W | MR16 | GU10 | Die cast







67130F/W



67130F/B



67130F/G



67130F/BR





67130A/AN

67130A | 2x10W | MR16 | GU10 | Die cast







67130A/W



67130A/B



67130A/G



67130A/BR



Order Code	Colour	Watts	Input	Class		Notes
67130D/W	White	10W	100-240V		20	-
67130D/AN	Anthracite	10W	100-240V		20	-
67130D/B	Black	10W	100-240V		20	-
67130D/G	Grey	10W	100-240V		20	-
67130F/W	White	10W	100-240V		20	-
67130F/AN	Anthracite	10W	100-240V		20	-
67130F/B	Black	10W	100-240V		20	-
67130F/G	Grey	10W	100-240V		20	-
67130F/BR	Rust brown	10W	100-240V		20	-
67130A/W	White	2x10W	100-240V		20	-
67130A/AN	Anthracite	2x10W	100-240V		20	-
67130A/B	Black	2x10W	100-240V		20	-
67130A/G	Grey	2x10W	100-240V		20	-
67130A/BR	Rust brown	2x10W	100-240V		20	-



67132C/BR



67132D/G



67132A/W

PAR30 Outdoor Cylinders
Die cast



67132C/W

67132C | 20W | PAR30 | E27 | Die cast

3 YEAR

IP54



67132C/AN



67132C/B





67132C/G

67132C | 20W | PAR30 | E27 | Die cast

3 YEAR

IP54



67132C/BR





67132/W

67132 | 2x20W | PAR30 | E27 | Die cast

3 YEAR

IP54



67132/G



Order Code	Colour	Watts	Input	Class		Notes
67132C/W	White	20W	100-240V		18	-
67132C/AN	Anthracite	20W	100-240V		18	-
67132C/B	Black	20W	100-240V		18	-
67132C/G	Grey	20W	100-240V		18	-
67132C/BR	Rust brown	20W	100-240V		18	-
67132/W	White	2x20W	100-240V		12	-
67132/G	Grey	2x20W	100-240V		12	-



PAR30 Outdoor Cubes
Die cast



67132D/AN

67132D | 20W | PAR30 | E27 | Die cast

3 YEAR

IP54



67132D/W



67132D/B



67132D/G





67132F/AN

67132F | 20W | PAR30 | E27 | Die cast

3 YEAR

IP54



67132F/B



67132F/G





67132A/AN

67132A | 2x20W | PAR30 | E27 | Die cast

3 YEAR

IP54



67132A/W



67132A/B



67132A/G



Order Code	Colour	Watts	Input	Class		Notes
67132D/W	White	20W	100-240V		18	-
67132D/AN	Anthracite	20W	100-240V		18	-
67132D/B	Black	20W	100-240V		18	-
67132D/G	Grey	20W	100-240V		18	-
67132F/AN	Anthracite	20W	100-240V		12	-
67132F/B	Black	20W	100-240V		12	-
67132F/G	Grey	20W	100-240V		12	-
67132A/W	White	2x20W	100-240V		12	-
67132A/AN	Anthracite	2x20W	100-240V		12	-
67132A/B	Black	2x20W	100-240V		12	-
67132A/G	Grey	2x20W	100-240V		12	-



The E27 Outdoor Plafo
Die cast

67204B | 2x10W | E27 | Die cast


67204B/AN

IP54 | CE | 3 YEAR


67204B/W


67204B/B


67204B/G



67204 | 12W | E27 | Die cast


67204/AN

IP54 | CE | 3 YEAR


67204/W


67204/B


67204/G



67206 | 3x10W | E27 | Die cast



IP54 | CE | 3 YEAR





67216 | 2x20W | E27 | Die cast



IP54 | CE | 3 YEAR


Suitable for
E27 LED lamps.



Order Code	Colour	Watts	Input	Class		Notes
67204B/W	White	2x10W	100-240V		10	-
67204B/AN	Anthracite	2x10W	100-240V		10	-
67204B/B	Black	2x10W	100-240V		10	-
67204B/G	Grey	2x10W	100-240V		10	-
67204/W	White	12W	100-240V		6	-
67204/AN	Anthracite	12W	100-240V		6	-
67204/B	Black	12W	100-240V		6	-
67204/G	Grey	12W	100-240V		6	-
67206/G	Grey	3x10W	100-240V		3	-
67216/G	Grey	2x20W	100-240V		6	-




67208B/AN

67208B | 2x10W | E27 | Die cast


67208B/W


67208B/B


67208B/G




67208/AN

67208 | 12W | E27 | Die cast


67208/W


67208/G




67210/AN

67210 | 2x10W | E27 | Die cast


67210/W


67210/B


67210/G



Order Code	Colour	Watts	Input	Class		Notes
67208B/W	White	2x10W	100-240V		10	-
67208B/AN	Anthracite	2x10W	100-240V		10	-
67208B/B	Black	2x10W	100-240V		10	-
67208B/G	Grey	2x10W	100-240V		10	-
67208/W	White	12W	100-240V		8	-
67208/AN	Anthracite	12W	100-240V		8	-
67208/G	Grey	12W	100-240V		8	-
67210/W	White	2x10W	100-240V		6	-
67210/AN	Anthracite	2x10W	100-240V		6	-
67210/B	Black	2x10W	100-240V		6	-
67210/G	Grey	2x10W	100-240V		6	-





Outdoor E27 Square
Die cast


67328/G

67328 | 12W | E27 | Die cast + PC

3 YEAR

IP54


67328/AN





67328A | 12W | E27 | Die cast + PC

3 YEAR

IP54


Suitable for E27 LED lamp.





67292 | 2x12W | E27 | Die cast + glass

3 YEAR

IP54





Order Code	Colour	Watts	Input	Class		Notes
67328/AN	Anthracite	12W	100-240V	⏚	8	-
67328/G	Grey	12W	100-240V	⏚	8	-
67328A/G	Grey	12W	100-240V	⏚	8	-
67292/G	Grey	2x12W	100-240V	⏚	4	-



Outdoor E27 Square
Die cast



67420/W

67420 | 12W | E27 | Die cast + frosted glass





IP54



67420/B



67420/AN



67420/G





67420A/AN

67420A | 12W | E27 | Die cast + frosted glass





IP54



67420A/G





67420B/W

67420B | 2x12W | E27 | Die cast + frosted glass





IP54



67420B/B



67420B/AN



67420B/G



Order Code	Colour	Watts	Input	Class		Notes
67420/W	White	12W	100-240V		6	-
67420/AN	Anthracite	12W	100-240V		6	-
67420/B	Black	12W	100-240V		6	-
67420/G	Grey	12W	100-240V		6	-
67420A/AN	Anthracite	12W	100-240V		6	-
67420A/G	Grey	12W	100-240V		6	-
67420B/W	White	2x12W	100-240V		4	-
67420B/AN	Anthracite	2x12W	100-240V		4	-
67420B/B	Black	2x12W	100-240V		4	-
67420B/G	Grey	2x12W	100-240V		4	-

Outdoor Wall & Ceiling Spot
Stainless steel



67032 | 10W | MR16 | GU10 | Stainless steel 304

ADJUSTABLE

2 YEAR

IP44



Suitable for GU10 LED lamp.



Order Code	Colour	Watts	Input	Class		Notes
67032	Stainless steel	10W	100-240V	⏚	12	-

Outdoor Wall & Ceiling Spot
Stainless steel



67160 | 2x10W | MR16 | GU10 | Natural aluminium

3 YEAR

IP54



Suitable for GU10 LED lamps.



Order Code	Colour	Watts	Input	Class		Notes
67160/AL	Aluminium	2x10W	100-240V	⏚	10	-





13

Wall & Ceiling LED

Pages 403-476

COB LED | SMD LED | LED

Die cast | Natural aluminium | Gypsum | ABS + PC

IP20 IP40 IP54 IP65

ADJUSTABLE ADJUSTABLE DIMMABLE DARK LIGHT QUICK FIX 80 CRI 85 CRI 90 CRI 97 CRI 2 YEAR 3 YEAR





Window Frame Illumination



67454/AN/C

67454 | 6W | LED | Die cast

Window frame illumination.

new

IP65

LED BUILT IN

80 CRI

IK08

CE

2 YEAR



67454/AN/W





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
67454/AN/C	Anthracite	Cool white	4000K	6W	330lm	270°	100-240V		18	Complete with 500mA driver
67454/AN/W	Anthracite	Warm white	3000K	6W	330lm	270°	100-240V		18	Complete with 500mA driver



62401AL/D/15



60008/AL/D



60008A/AL/BL

Indoor Mini Series
Natural aluminium



60008A | 1W | LED | Natural aluminium

LED BUILT IN
2 YEAR
IP20
offer







60008 | 2x1W | LED | Natural aluminium

LED BUILT IN
2 YEAR
IP20
offer







65102 | 1W | LED | Natural aluminium

LED BUILT IN
ADJUSTABLE
2 YEAR
IP20
offer



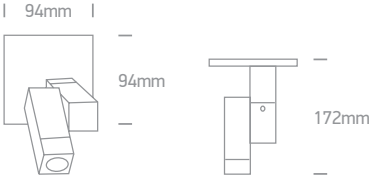



62401AL | 4x1W | LED | Natural aluminium

LED BUILT IN
ADJUSTABLE
2 YEAR
IP20
offer





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
60008A/AL/BL	Aluminium	Blue	-	1W	-	100-240V		50	Complete with driver
60008/AL/D	Aluminium	Daylight	6000K	2x1W	2x60lm	100-240V		50	Complete with driver
60008/AL/BL	Aluminium	Blue	-	2x1W	-	100-240V		50	Complete with driver
65102/D	Aluminium	Daylight	6000K	1W	60lm	100-240V		20	Complete with driver
65102/W	Aluminium	Warm white	3000K	1W	45lm	100-240V		20	Complete with driver
62401AL/D/15	Aluminium	Daylight	6000K	4x1W	4x60lm	100-240V		20	Complete with driver
62401AL/W/15	Aluminium	Warm white	3000K	4x1W	4x45lm	100-240V		20	Complete with driver

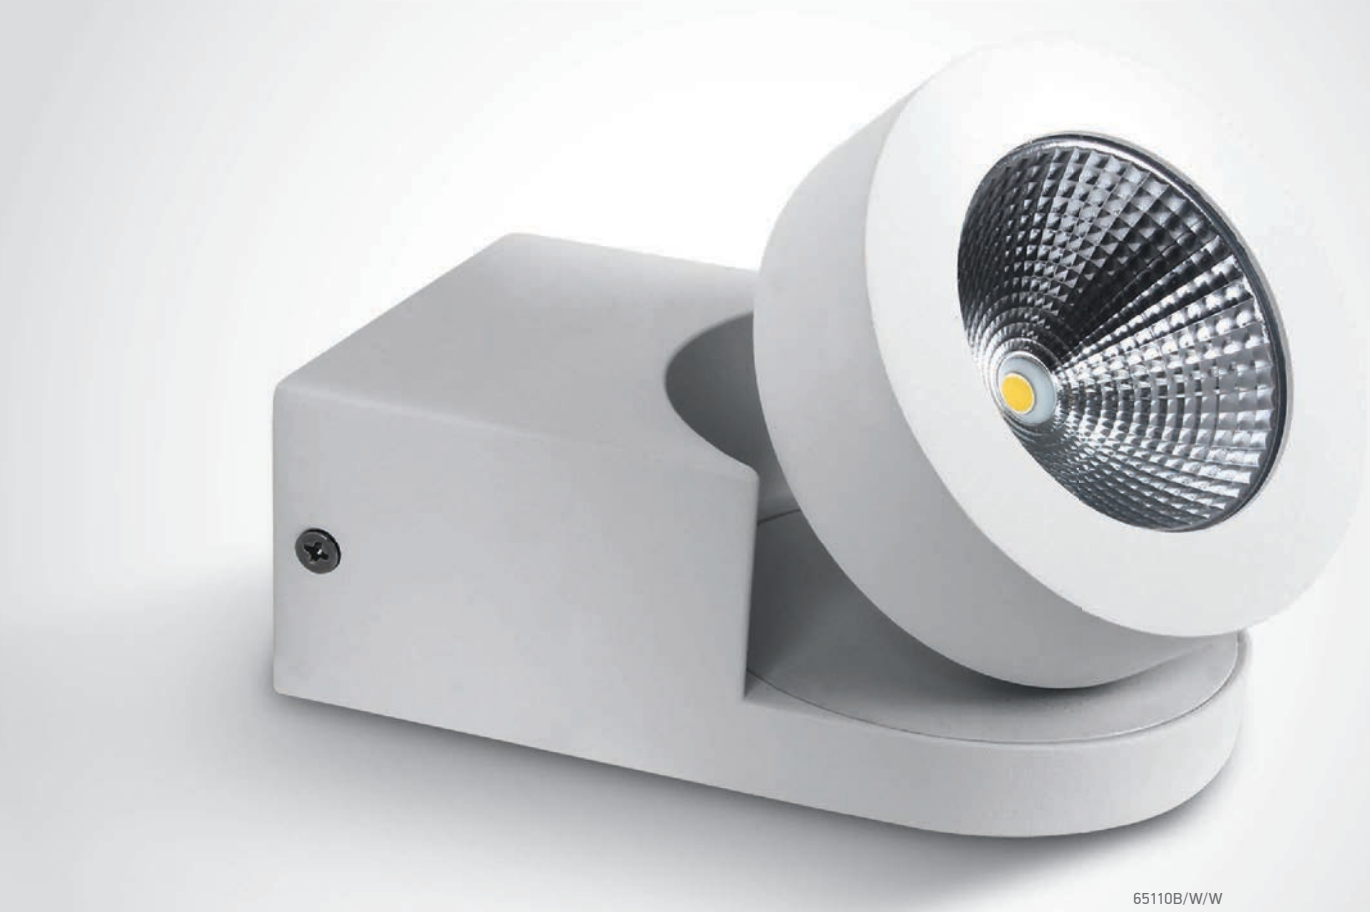

65110B/W/W

The COB Moving Heads Spots

Die cast



65110B | 10W | COB LED | Die cast

LED BUILT IN

80 CRI

ADJUSTABLE

CE

2 YEAR

IP20







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65110B/W/W	White	Warm white	3000K	10W	900lm	60°	230V	⏚	10	Complete with 250mA driver



The COB Moving Heads Spots
Die cast



65110E | 3x10W | COB LED | Die cast

LED BUILT IN
80 CRI
ADJUSTABLE
2 YEAR
IP20









65110F | 4x10W | COB LED | Die cast

LED BUILT IN
80 CRI
ADJUSTABLE
2 YEAR
IP20







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65110E/W/W	White	Warm white	3000K	3x10W	3x900lm	60°	230V		4	Complete with 700mA driver
65110F/W/W	White	Warm white	3000K	4x10W	4x900lm	60°	230V		4	Complete with 1000mA driver

Adjustable Display Spots





12108LA/W/W

12108LA | 8W | COB LED | Aluminium

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · 2 YEAR · IP20



12108LA/B/W







12208LA/W/W

12208LA | 2x8W | COB LED | Aluminium

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · 2 YEAR · IP20



12208LA/B/W





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12108LA/W/W	White	Warm white	3000K	8W	600lm	25°	230V		24	Complete with 200mA driver
12108LA/B/W	Black	Warm white	3000K	8W	600lm	25°	230V		24	Complete with 200mA driver
12208LA/W/W	White	Warm white	3000K	2x8W	2x600lm	25°	230V		18	Complete with 200mA drivers
12208LA/B/W	Black	Warm white	3000K	2x8W	2x600lm	25°	230V		18	Complete with 200mA drivers



65107/W/W

12108LA/W/W

The COB Adjustable Decorative Spot



12112LA | 12W | COB LED | Aluminium

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · 2 YEAR · IP20









65107 | 7W | COB LED | Aluminium

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · 2 YEAR · IP20 · offer



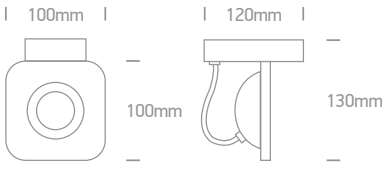



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12112LA/W/W	White	Warm white	3000K	12W	740lm	30°	230V		20	Complete with 300mA driver
65107/W/W	White	Warm white	3000K	7W	594lm	35°	100-240V		12	Complete with 700mA driver

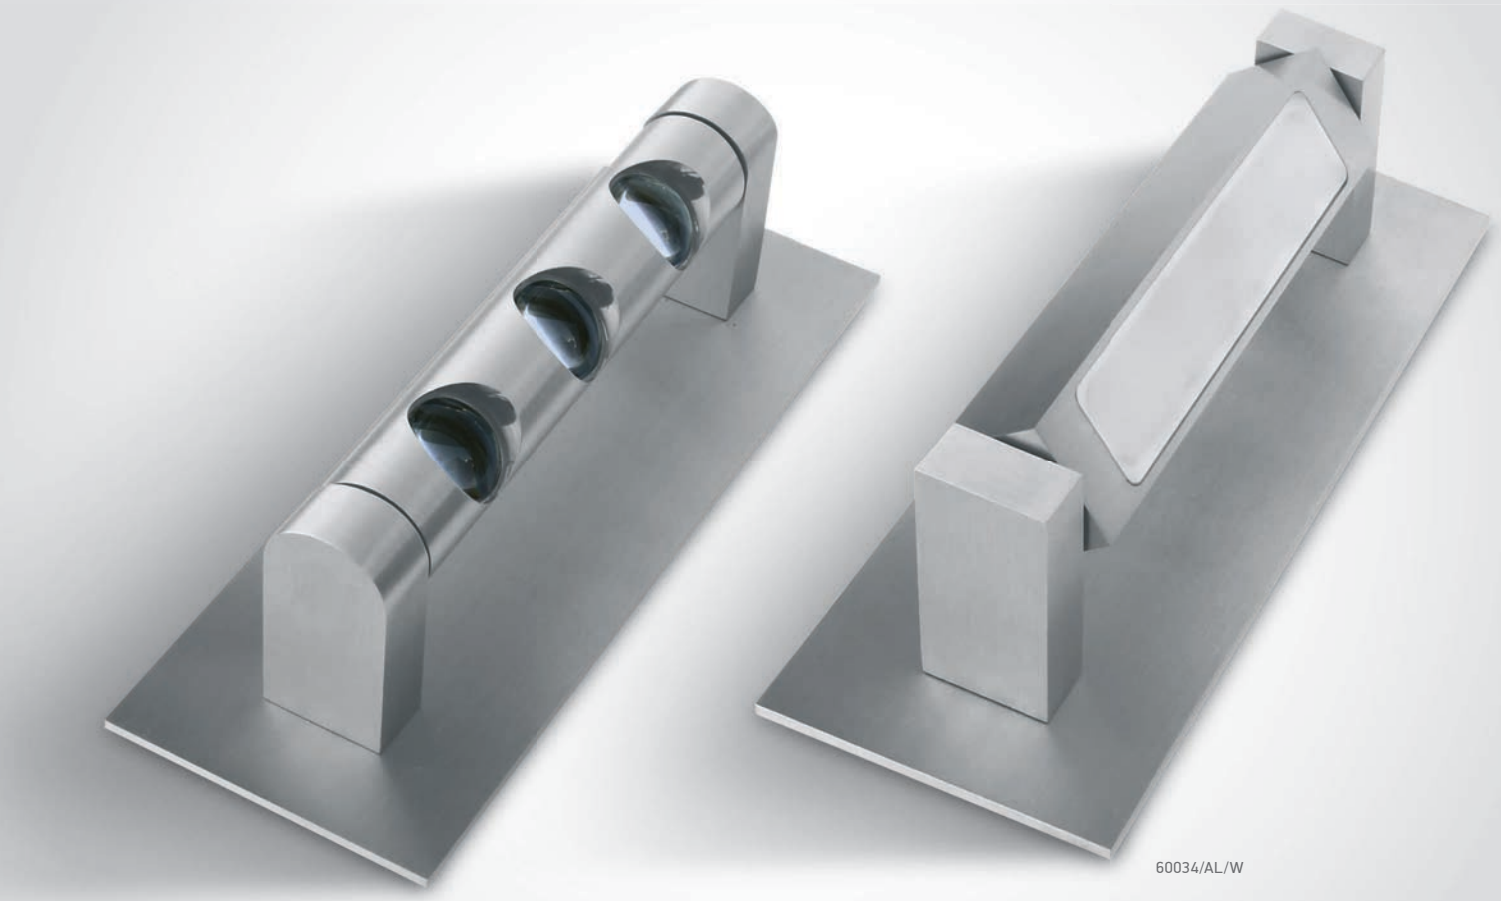

Decorative Indoor Wall Lights
Natural aluminium

60032 | 3x1W | LED | Natural aluminium



IP20 offer

LED BUILT IN · ADJUSTABLE · CE · 2 YEAR





60034 | 3x1W | LED | Natural aluminium



IP20 offer

LED BUILT IN · ADJUSTABLE · CE · 2 YEAR





Order Code	Colour	Light Colour	CCT (K)	Watts	Input	Class		Notes
60032/AL/W	Aluminium	Warm white	3000K	3x1W	100-240V	⏚	20	Complete with driver
60034/AL/W	Aluminium	Warm white	3000K	3x1W	100-240V	⏚	10	Complete with driver



Decorative Wall & Ceiling
Natural aluminium



12101/AL/D

12101 | 6x0,2W | LED | Natural aluminium + PC

LED BUILT IN · CE · 2 YEAR · IP20 · offer

offer



12101/AL/W





60004 | 6x0,2W | LED | Natural aluminium + PC

LED BUILT IN · CE · 2 YEAR · IP20 · offer







60001 | 3x0,2W | LED | Natural aluminium

LED BUILT IN · CE · 2 YEAR · IP20 · offer







60010 | 1W | LED | Natural aluminium

LED BUILT IN · CE · 2 YEAR · IP20 · offer





Order Code	Colour	Light Colour	CCT (K)	Watts	Input	Class		Notes
12101/AL/D	Aluminium	Daylight	6000K	6x0,2W	230V		24	Complete with driver
12101/AL/W	Aluminium	Warm white	3000K	6x0,2W	230V		24	Complete with driver
60004/AL/GR	Aluminium	Green	-	6x0,2W	230V		20	Complete with driver
60001/AL/BL	Aluminium	Blue	-	6x0,2W	230V		100	Complete with driver
Other available colours: **60001/AL/GR** Green **60001/AL/R** Red **60001/AL/Y** Yellow								
60010/AL/BL	Aluminium	Blue	-	1W	100-240V		100	Complete with driver

The Backlight Wall Range

Aluminium



67466A/B/W



67466B/B/W



67466C/B/W





The Backlight Wall Range
Aluminium



67466A/W/W

67466A | 6W | SMD 2835 | Aluminium

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP20







67466B/W/W

67466B | 6W | SMD 2835 | Aluminium

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP20







67466C/W/W

67466C | 12W | SMD 2835 | Aluminium

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67466A/W/W	White	Warm white	3000K	6W	400lm	230V	⏚	12	Complete with 300mA driver
67466A/B/W	Black	Warm white	3000K	6W	400lm	230V	⏚	12	Complete with 300mA driver
67466B/W/W	White	Warm white	3000K	6W	400lm	230V	⏚	12	Complete with 300mA driver
67466B/B/W	Black	Warm white	3000K	6W	400lm	230V	⏚	12	Complete with 300mA driver
67466C/W/W	White	Warm white	3000K	12W	800lm	230V	⏚	12	Complete with 300mA driver
67466C/B/W	Black	Warm white	3000K	12W	800lm	230V	⏚	12	Complete with 300mA driver



The COB Indoor Round Cylinders



12106C | 6W | COB LED | Aluminium

LED BUILT IN
80 CRI
ADJUSTABLE
2 YEAR
IP20









12110D | 10W | COB LED | Die cast

LED BUILT IN
85 CRI
ADJUSTABLE
2 YEAR
IP20









12104M | 4,5W | COB LED | Cement + black reflector

LED BUILT IN
DARK LIGHT
90 CRI
2 YEAR
IP20
offer







Order Code	Colour	Reflector	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12106C/W/W	White	-	Warm white	3000K	6W	480lm	36°	230V		10	Complete with 700mA driver
12110D/W/W	White	-	Warm white	3000K	10W	800lm	36°	100-240V		18	Complete with 500mA driver
12104M/W	Cement	Black	Warm white	3000K	4,5W	350lm	40°	100-240V		18	Complete with 350mA driver



12107KA/W/W + 050106/B

12107K/B/W + 050106/BS

12107K/W/W + 050106/W

The Chill Out LED Cylinders
Dimmable



12107K/B/W + 050106/BS

12107K | 7W | COB LED | Dimmable | Aluminium

Ring must be ordered separately.

LED BUILT IN · 80 CRI · TRIAC DIMMABLE · CE · IP20 · 2 YEAR



12107K/W/W + 050106/B







12107KA/B/W + 050106/BS

12107KA | 7W | COB LED | Dimmable | Aluminium

Ring must be ordered separately.

LED BUILT IN · 80 CRI · TRIAC DIMMABLE · CE · IP20 · 2 YEAR



12107KA/W/W + 050106/B







050106/W White



050106/B Black



050106/BS Brass

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12107K/W/W	White	Warm white	3000K	7W	500lm	35°	230V		30	AC LED
12107K/B/W	Black	Warm white	3000K	7W	500lm	35°	230V		30	AC LED
12107KA/W/W	White	Warm white	3000K	7W	500lm	35°	230V		30	AC LED
12107KA/B/W	Black	Warm white	3000K	7W	500lm	35°	230V		30	AC LED

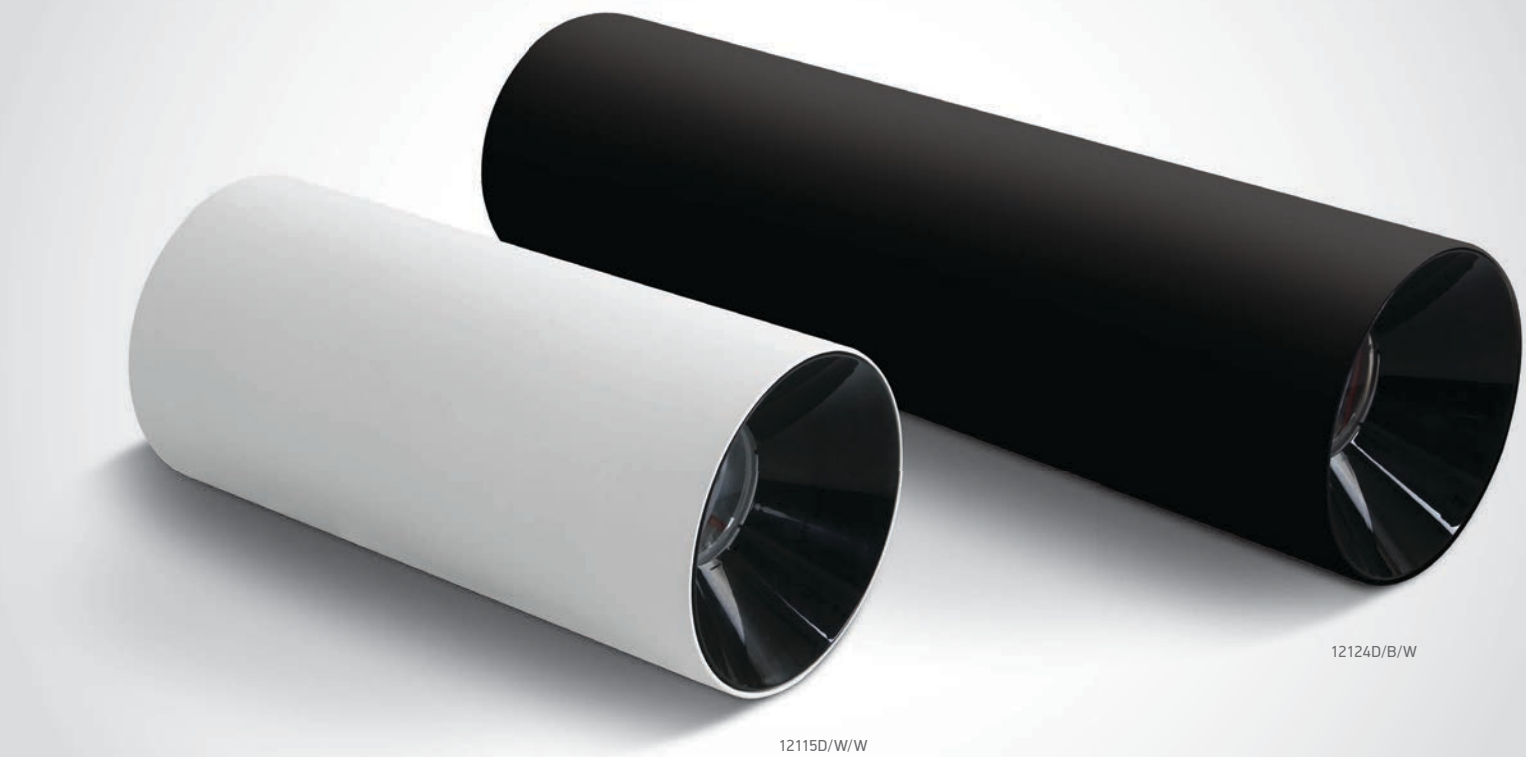

12124D/B/W

12115D/W/W

LED Decorative Cylinders



12115D/B/W

12115D | 15W | COB LED | Aluminium + plastic

LED BUILT IN

80 CRI CE 3 YEAR

IP20



12115D/W/W







12124D/B/W

12124D | 24W | COB LED | Aluminium + plastic

LED BUILT IN

80 CRI CE 3 YEAR

IP20



12124D/W/W





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12115D/W/W	White	Warm white	3000K	15W	1200lm	45°	230V		24	Complete with 350mA driver
12115D/B/W	Black	Warm white	3000K	15W	1200lm	45°	230V		24	Complete with 350mA driver
12124D/W/W	White	Warm white	3000K	24W	2000lm	45°	230V		18	Complete with 600mA driver
12124D/B/W	Black	Warm white	3000K	24W	2000lm	45°	230V		18	Complete with 600mA driver



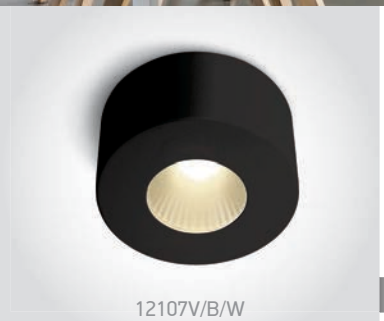

12107V/B/W

12107V | 7W | LED | Dimmable | Aluminium

LED BUILT IN
80 CRI
TRIAC DIMMABLE
CE
3 YEAR
IP20



12107V/W/W







12108C/B/W

12108C | 8W | COB LED | Die cast

LED BUILT IN
90 CRI
CE
3 YEAR
IP20



12108C/W/W







12122C/B/W

12122C | 22W | COB LED | Die cast

LED BUILT IN
90 CRI
CE
3 YEAR
IP20



12122C/W/W





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12107V/W/W	White	Warm white	3000K	7W	500lm	40°	230V		20	AC LED
12107V/B/W	Black	Warm white	3000K	7W	500lm	40°	230V		20	AC LED
12108C/W/W	White	Warm white	3000K	8W	520lm	38°	230V		50	Complete with 700mA driver
12108C/B/W	Black	Warm white	3000K	8W	520lm	38°	230V		50	Complete with 700mA driver
12122C/W/W	White	Warm white	3000K	22W	1500lm	38°	230V		20	Complete with 500mA driver
12122C/B/W	Black	Warm white	3000K	22W	1500lm	38°	230V		20	Complete with 500mA driver

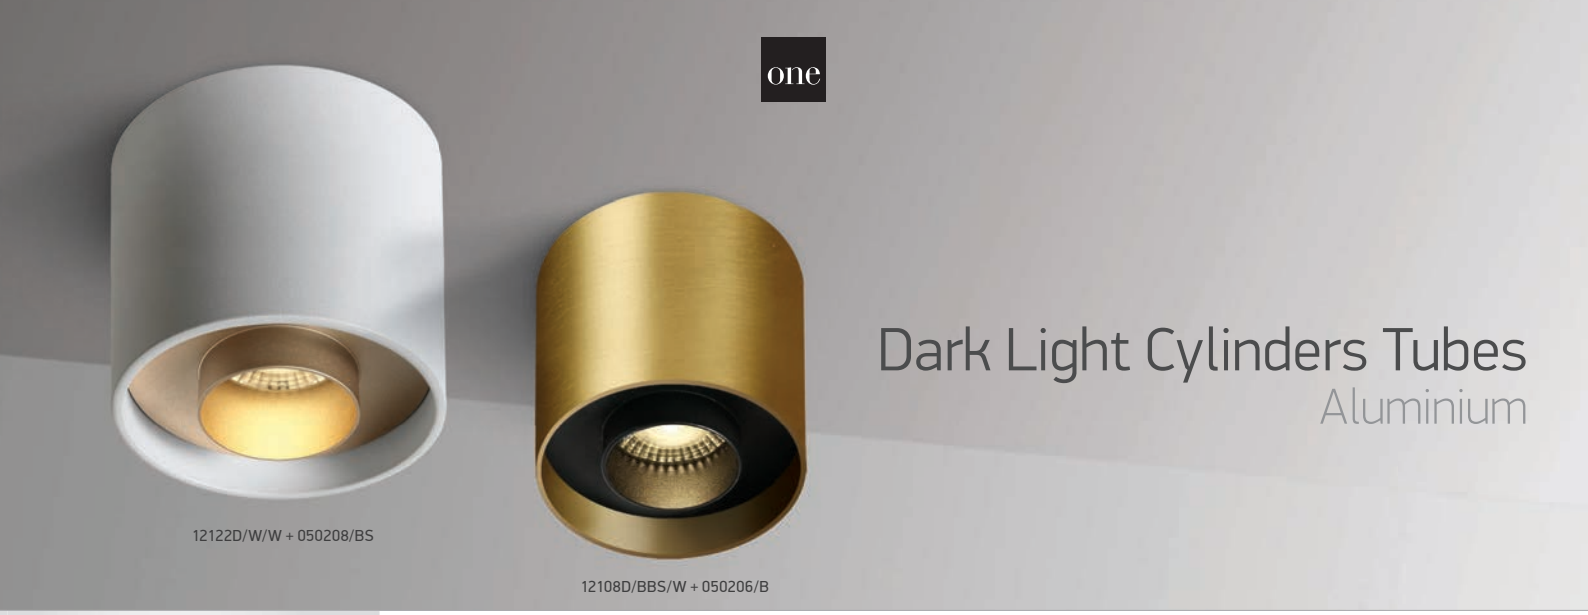

12122D/W/W + 050208/BS

12108D/BBS/W + 050206/B

Dark Light Cylinders Tubes
Aluminium



12108D/W/W + 050206/W

12108D | 8W | COB LED | Aluminium

Reflector must be ordered separately.

new DARK LIGHT IP20 | LED BUILT IN | 90 CRI | CE | 3 YEAR



12108D/B/W + 050206/B





12108D/BBS/W + 050206/B

12108D | 8W | COB LED | Aluminium

Reflector must be ordered separately.

new DARK LIGHT IP20 | LED BUILT IN | 90 CRI | CE | 3 YEAR



12108D/MG/W + 050206/B





12108DB/W/W + 050206/B

12108DB | 8W | LED | Backlit | Aluminium

Reflector must be ordered separately.

new DARK LIGHT IP20 | LED BUILT IN | 90 CRI | CE | 3 YEAR



12108DB/B/W + 050206/BS





050206/W White



050206/B Black



050206/BS Brass

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	📦	Notes
12108D/W/W	White	Warm white	3000K	8W	560lm	24°	230V		50	Complete with 700mA driver
12108D/B/W	Black	Warm white	3000K	8W	560lm	24°	230V		50	Complete with 700mA driver
12108D/BBS/W	Brushed brass	Warm white	3000K	8W	560lm	24°	230V		50	Complete with 700mA driver
12108D/MG/W	Metal grey	Warm white	3000K	8W	560lm	24°	230V		50	Complete with 700mA driver
12108DB/W/W	White	Warm white	3000K	8W	320+100lm	36°	230V		50	Complete with 700mA driver
12108DB/B/W	Black	Warm white	3000K	8W	320+100lm	36°	230V		50	Complete with 700mA driver



Dark Light Cylinders Tubes
Aluminium



12122D/W/W + 050208/BS

12122D | 22W | COB LED | Aluminium

Reflector must be ordered separately.

new
DARK LIGHT
IP20

LED BUILT IN
90 CRI
CE
3 YEAR



12122D/B/W + 050208/B





12122D/BBS/W + 050208/B

12122D | 22W | COB LED | Aluminium

Reflector must be ordered separately.

new
DARK LIGHT
IP20

LED BUILT IN
90 CRI
CE
3 YEAR



12122D/MG/W + 050208/B





050208/W White



050208/B Black



050208/BS Brass

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12122D/W/W	White	Warm white	3000K	22W	1540lm	24°	230V		20	Complete with 500mA driver
12122D/B/W	Black	Warm white	3000K	22W	1540lm	24°	230V		20	Complete with 500mA driver
12122D/BBS/W	Brushed brass	Warm white	3000K	22W	1540lm	24°	230V		20	Complete with 500mA driver
12122D/MG/W	Metal grey	Warm white	3000K	22W	1540lm	24°	230V		20	Complete with 500mA driver



The Retro Dark Light Cylinders



12112Z/B/W

12112Z | 12W | COB LED | Die cast + Plastic

LED BUILT IN

80 CRI

CE

3 YEAR

DARK LIGHT

IP20



12112Z/W/W



Complete with Black & Brass reflectors.





12120Z/B/W

12120Z | 20W | COB LED | Die cast + Plastic

LED BUILT IN

80 CRI

CE

3 YEAR

DARK LIGHT

IP20



12120Z/W/W



Complete with Black & Brass reflectors.





12130Z/B/W

12130Z | 30W | COB LED | Die cast + Plastic

LED BUILT IN

80 CRI

CE

3 YEAR

DARK LIGHT

IP20



12130Z/W/W



Complete with Black & Brass reflectors.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12112Z/W/W	White	Warm white	3000K	12W	960lm	45°	230V		30	Complete with 300mA driver
12112Z/B/W	Black	Warm white	3000K	12W	960lm	45°	230V		30	Complete with 300mA driver
12120Z/W/W	White	Warm white	3000K	20W	1600lm	45°	230V		24	Complete with 500mA driver
12120Z/B/W	Black	Warm white	3000K	20W	1600lm	45°	230V		24	Complete with 500mA driver
12130Z/W/W	White	Warm white	3000K	30W	2400lm	45°	230V		12	Complete with 750mA driver
12130Z/B/W	Black	Warm white	3000K	30W	2400lm	45°	230V		12	Complete with 750mA driver



The Retro Dark Light Cubes



12112ZA/B/W

12112ZA | 12W | COB LED | Die cast + Plastic

LED BUILT IN · 80 CRI · CE · 3 YEAR · DARK LIGHT · IP20



12112ZA/W/W



Complete with Black & Brass reflectors.







12120ZA/B/W

12120ZA | 20W | COB LED | Die cast + Plastic

LED BUILT IN · 80 CRI · CE · 3 YEAR · DARK LIGHT · IP20



12120ZA/W/W



Complete with Black & Brass reflectors.





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12112ZA/W/W	White	Warm white	3000K	12W	960lm	45°	230V	⏚	30	Complete with 300mA driver
12112ZA/B/W	Black	Warm white	3000K	12W	960lm	45°	230V	⏚	30	Complete with 300mA driver
12120ZA/W/W	White	Warm white	3000K	20W	1600lm	45°	230V	⏚	24	Complete with 500mA driver
12120ZA/B/W	Black	Warm white	3000K	20W	1600lm	45°	230V	⏚	24	Complete with 500mA driver



Surface Shop Square Boxes
Aluminium



12107B | 7W | COB LED | Dimmable | Aluminium

LED BUILT IN · 90 CRI · TRIAC DIMMABLE · CE · 3 YEAR · IP20









12207B | 2x7W | COB LED | Aluminium

LED BUILT IN · 90 CRI · CE · 3 YEAR · IP20









12307B | 3x7W | COB LED | Aluminium

LED BUILT IN · 90 CRI · CE · 3 YEAR · IP20







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12107B/W/W	White	Warm white	3000K	7W	550lm	36°	230V		36	Complete with 350mA driver
12207B/W/W	White	Warm white	3000K	2x7W	1100lm	36°	100-240V		24	Complete with 350mA driver
12307B/W/W	White	Warm white	3000K	3x7W	1650lm	36°	100-240V		12	Complete with 350mA driver



12110HA/W/W

12115HA/W/W

Dark Light Pro Cubes
Aluminium

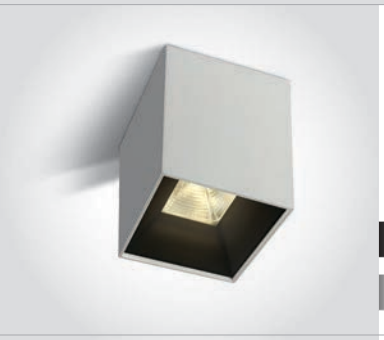

12110HA | 10W | COB LED | Aluminium

LED BUILT IN · 80 CRI · CE · 3 YEAR · DARK LIGHT · IP20



80x80mm

104mm

60°



12115HA | 15W | COB LED | Aluminium

LED BUILT IN · 80 CRI · CE · 3 YEAR · DARK LIGHT · IP20



100x100mm

120mm

60°

12110HA/W/W	White	Warm white	3000K	10W	800lm	60°	230V		48	Complete with 250mA driver
12115HA/W/W	White	Warm white	3000K	15W	1200lm	60°	230V		48	Complete with 350mA driver

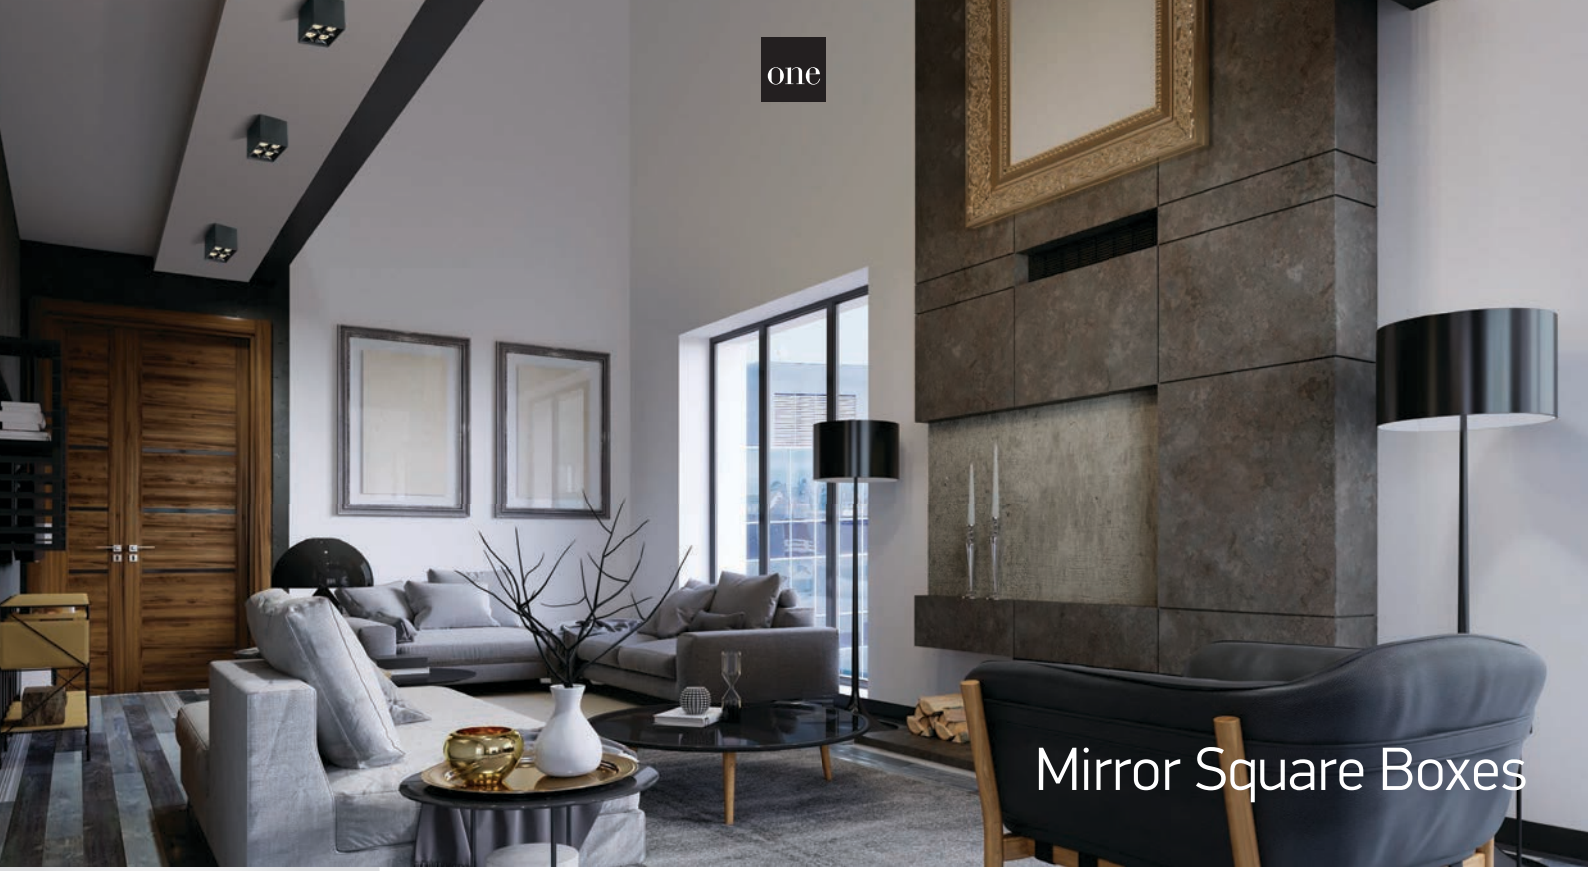

12106B | 6W | COB LED | Aluminium



12106B/W/W

LED BUILT IN
90 CRI
3 YEAR
IP20



12106B/B/W





12406B | 15W | COB LED | Aluminium



12406B/W/W

LED BUILT IN
90 CRI
3 YEAR
IP20



12406B/B/W





12906B | 30W | COB LED | Aluminium



12906B/W/W

LED BUILT IN
90 CRI
3 YEAR
IP20



12906B/B/W





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12106B/W/W	White	Warm white	3000K	6W	480lm	38°	230V		60	Complete with 120mA driver
12106B/B/W	Black	Warm white	3000K	6W	480lm	38°	230V		60	Complete with 120mA driver
12406B/W/W	White	Warm white	3000K	15W	1200lm	38°	230V		30	Complete with 350mA driver
12406B/B/W	Black	Warm white	3000K	15W	1200lm	38°	230V		30	Complete with 350mA driver
12906B/W/W	White	Warm white	3000K	30W	2400lm	38°	230V		12	Complete with 700mA driver
12906B/B/W	Black	Warm white	3000K	30W	2400lm	38°	230V		12	Complete with 700mA driver



Dark Light Ceiling Tubes


12406C/W/W

12406C | 10W | SMD 3535 | Aluminium

LED BUILT IN
85 CRI
CE
3 YEAR
DARK LIGHT
IP20


12406C/B/W






12606C/W/W

12606C | 15W | SMD 3535 | Aluminium

LED BUILT IN
85 CRI
CE
3 YEAR
DARK LIGHT
IP20


12606C/B/W






12906C/W/W

12906C | 20W | SMD 3535 | Aluminium

LED BUILT IN
85 CRI
CE
3 YEAR
DARK LIGHT
IP20


12906C/B/W





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12406C/W/W	White	Warm white	3000K	10W	800lm	25°	230V		40	Complete with 700mA driver
12406C/B/W	Black	Warm white	3000K	10W	800lm	25°	230V		40	Complete with 700mA driver
12606C/W/W	White	Warm white	3000K	15W	1200lm	25°	230V		30	Complete with 700mA driver
12606C/B/W	Black	Warm white	3000K	15W	1200lm	25°	230V		30	Complete with 700mA driver
12906C/W/W	White	Warm white	3000K	20W	1600lm	25°	230V		20	Complete with 700mA driver
12906C/B/W	Black	Warm white	3000K	20W	1600lm	25°	230V		20	Complete with 700mA driver



The COB Indoor Cubes



12106CA | 6W | COB LED | Aluminium

LED BUILT IN
80 CRI
ADJUSTABLE
CE
2 YEAR
IP20









12107AL | 7W | COB LED | Aluminium

LED BUILT IN
80 CRI
ADJUSTABLE
TRIAC DIMMABLE
IP20
offer
CE
2 YEAR







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12106CA/W/W	White	Warm white	3000K	6W	480lm	36°	230V		10	Complete with 700mA driver
12107AL/AL/W	Aluminium	Warm white	3000K	7W	480lm	38°	230V		20	Complete with dimmable driver

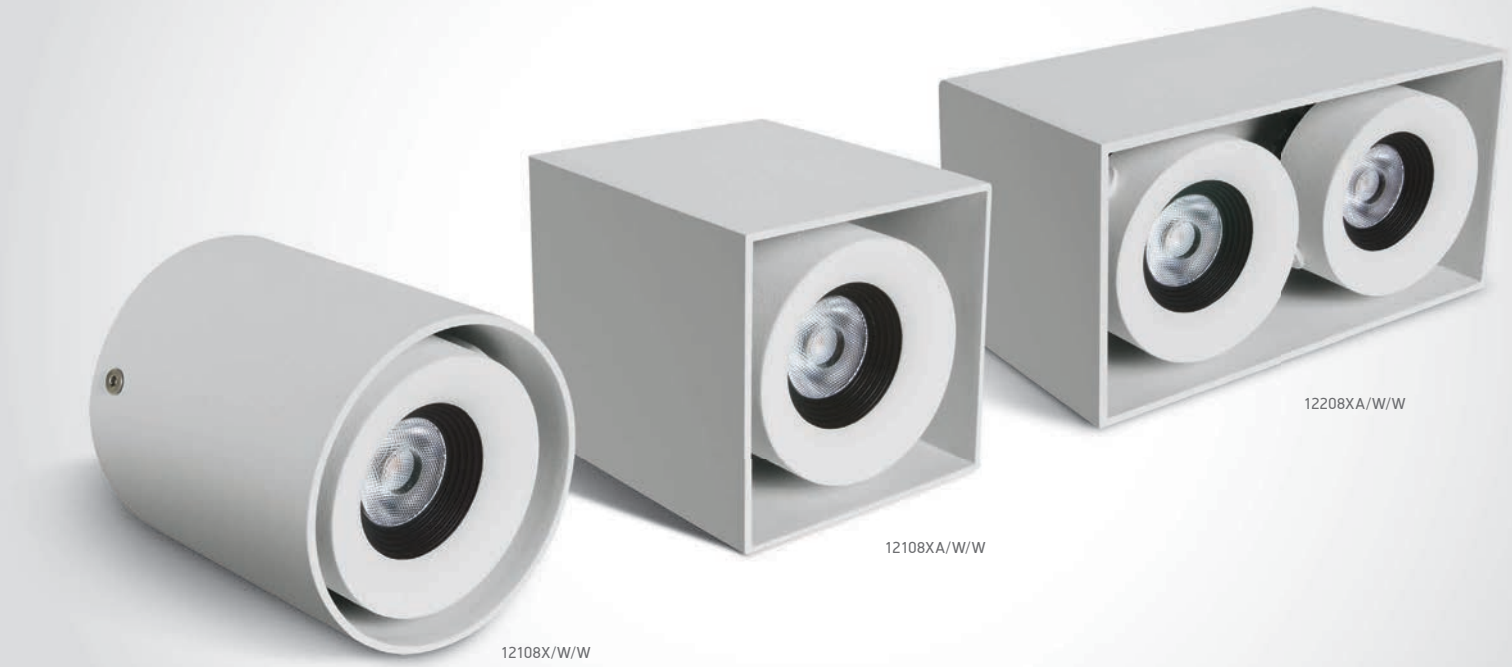

Adjustable COB Ceiling Lights



12108X | 8W | COB LED | Dimmable | Aluminium

LED BUILT IN · TRIAC DIMMABLE · ADJUSTABLE · 90 CRI · CE · 3 YEAR · IP20









12108XA | 8W | COB LED | Dimmable | Aluminium

LED BUILT IN · TRIAC DIMMABLE · ADJUSTABLE · 90 CRI · CE · 3 YEAR · IP20









12208XA | 2x8W | COB LED | Dimmable | Aluminium

LED BUILT IN · TRIAC DIMMABLE · ADJUSTABLE · 90 CRI · CE · 3 YEAR · IP20







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12108X/W/W	White	Warm white	3000K	8W	640lm	36°	230V		36	Complete with 350mA driver
12108XA/W/W	White	Warm white	3000K	8W	640lm	36°	230V		36	Complete with 350mA driver
12208XA/W/W	White	Warm white	3000K	2x8W	2x640lm	36°	230V		24	Complete with 350mA driver

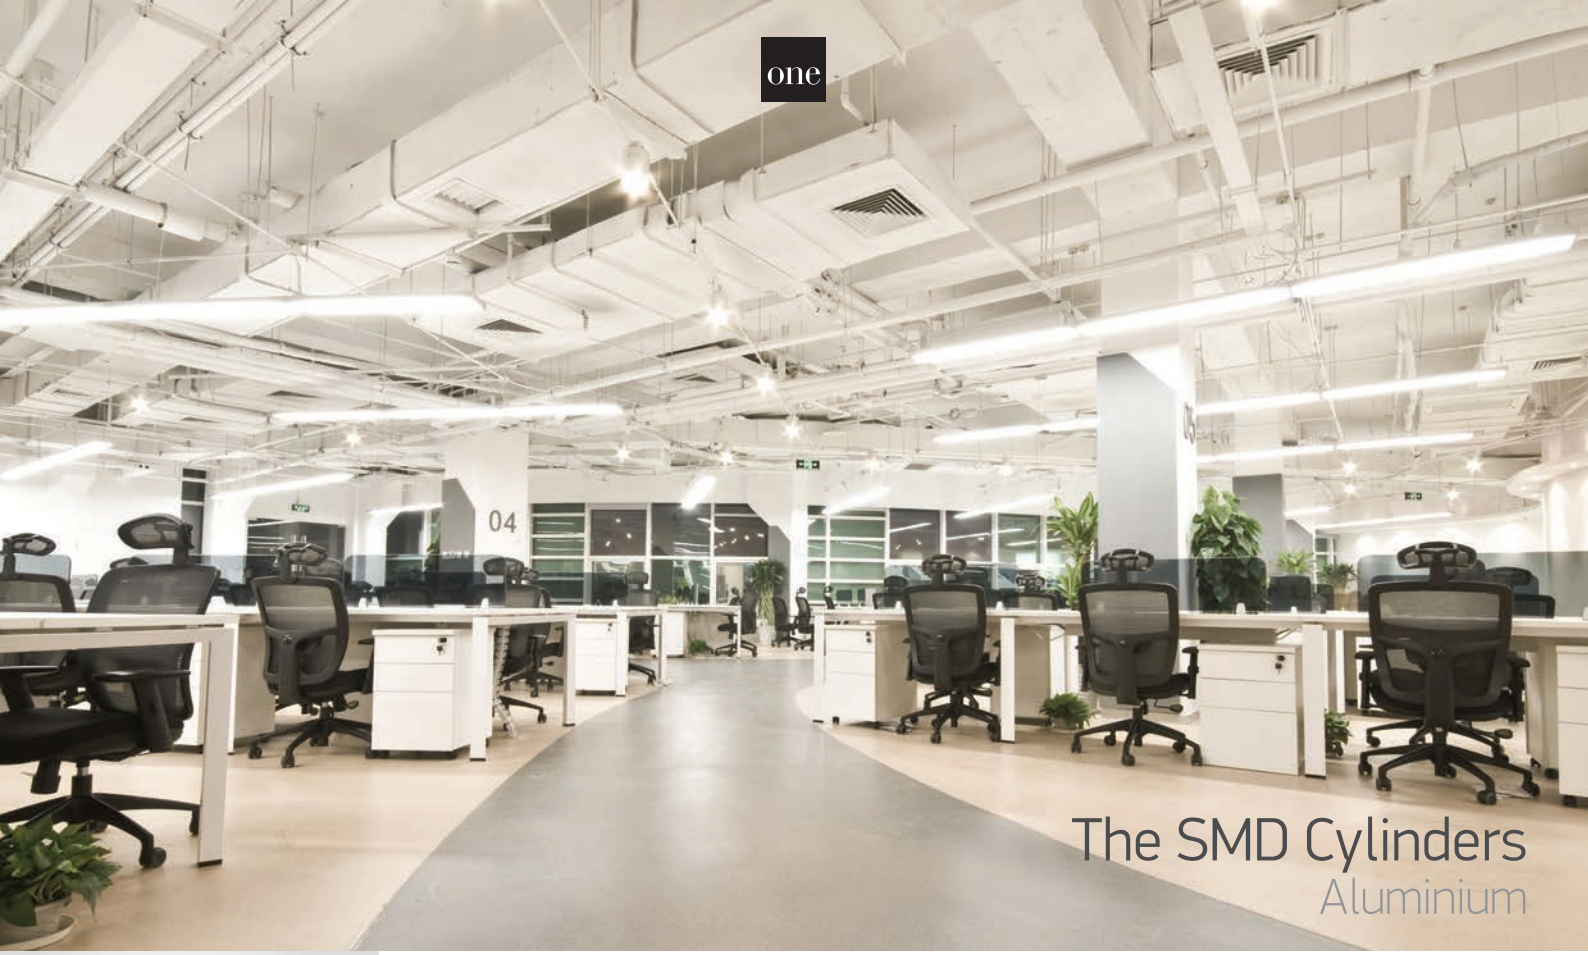

The SMD Cylinders
Aluminium



12115L/W/W

12115L | 15W | SMD LED | Aluminium

LED BUILT IN

80 CRI CE 3 YEAR

IP40



12115L/B/W







12125L | 25W | SMD LED | Aluminium

LED BUILT IN

80 CRI CE 3 YEAR

IP40









12135L | 35W | SMD LED | Aluminium

LED BUILT IN

80 CRI CE 3 YEAR

IP40







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
12115L/W/W	White	Warm white	3000K	15W	1280lm	230V		36	Complete with 350mA driver
12115L/B/W	Black	Warm white	3000K	15W	1280lm	230V		36	Complete with 350mA driver
12125L/W/W	White	Warm white	3000K	25W	2050lm	230V		36	Complete with 600mA driver
12135L/W/W	White	Warm white	3000K	35W	3000lm	230V		12	Complete with 800mA driver



The SMD Cylinders
Aluminium



12107LD | 7W | SMD 2835 | Aluminium

LED BUILT IN · 80 CRI · CE · 3 YEAR · DARK LIGHT · IP20









12115LD | 15W | SMD 2835 | Aluminium

LED BUILT IN · 80 CRI · CE · 3 YEAR · DARK LIGHT · IP20









12125LD | 25W | SMD 2835 | Aluminium

LED BUILT IN · 80 CRI · CE · 3 YEAR · DARK LIGHT · IP20







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12107LD/W/W	White	Warm white	3000K	7W	600lm	90°	230V		48	Complete with 150mA driver
12115LD/W/W	White	Warm white	3000K	15W	1280lm	90°	230V		18	Complete with 350mA driver
12125LD/W/W	White	Warm white	3000K	25W	2050lm	90°	230V		18	Complete with 600mA driver



12108FD/W/W

12116FD/W/W

The Hidden Light Cylinders Range



12108FD/W/W

12108FD | 8W | SMD 2835 | Die cast

LED BUILT IN · 80 CRI · CE · 3 YEAR · DARK LIGHT · IP20





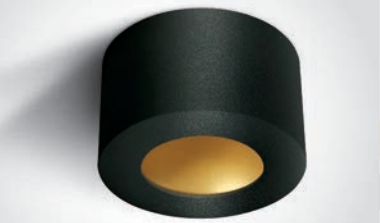

12108FD/B/BS

12108FD | 8W | SMD 2835 | Die cast

new · LED BUILT IN · 80 CRI · CE · 3 YEAR · DARK LIGHT · IP20







12116FD/W/W

12116FD | 16W | SMD 2835 | Die cast

LED BUILT IN · 80 CRI · CE · 3 YEAR · DARK LIGHT · IP20







12116FD/B/BS

12116FD | 16W | SMD 2835 | Die cast

new · LED BUILT IN · 80 CRI · CE · 3 YEAR · DARK LIGHT · IP20





Order Code	Colour	Reflector	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
12108FD/W/W	White	White	Warm white	3000K	8W	560lm	230V	⏚	36	Complete with 300mA driver
12108FD/B/BS	Black	Brass	Warm white	3000K	8W	400lm	230V	⏚	36	Complete with 300mA driver
12116FD/W/W	White	White	Warm white	3000K	16W	1100lm	230V	⏚	20	Complete with 300mA driver
12116FD/B/BS	Black	Brass	Warm white	3000K	16W	800lm	230V	⏚	20	Complete with 300mA driver



The COB LED Indoor Cylinders
Aluminium



12115LA | 15W | COB LED | Aluminium

LED BUILT IN
80 CRI
CE
3 YEAR
IP20









12125LA | 25W | COB LED | Aluminium

LED BUILT IN
80 CRI
CE
3 YEAR
IP20









12130LA | 30W | COB LED | Aluminium

LED BUILT IN
80 CRI
CE
3 YEAR
IP20







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12115LA/W/W	White	Warm white	3000K	15W	1300lm	50°	230V		36	Complete with 350mA driver
12125LA/W/W	White	Warm white	3000K	25W	2100lm	50°	230V		18	Complete with 600mA driver
12130LA/W/W	White	Warm white	3000K	30W	2500lm	50°	230V		12	Complete with 700mA driver





67380 | 10W | COB LED | Aluminium

LED BUILT IN
80 CRI
CE
2 YEAR
IP54









67380A | 25W | COB LED | Die cast

LED BUILT IN
80 CRI
CE
2 YEAR
IP54







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
67380/W/W	White	Warm white	3000K	10W	730lm	60°	230V		24	Complete with 230mA driver
67380A/W/W	White	Warm white	3000K	25W	1800lm	60°	230V		12	Complete with 600mA driver



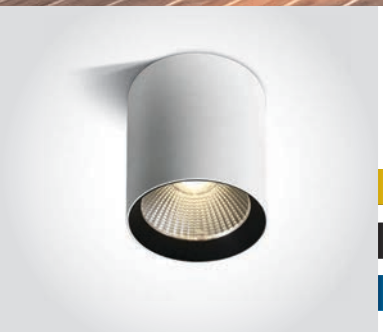

67516A | 15W | COB LED | Aluminium

new
DARK LIGHT
IP65
LED BUILT IN
90 CRI
CE
2 YEAR









67516C | 40W | COB LED | Aluminium

new
DARK LIGHT
IP65
LED BUILT IN
90 CRI
CE
2 YEAR







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
67516A/W/W	White	Warm white	3000K	15W	1200lm	40°	230V		24	Complete with 400mA driver
67516C/W/W	White	Warm white	3000K	40W	3200lm	40°	230V		6	Complete with 1000mA driver



Outdoor Ceiling Cylinders
Die cast



67138E/G/D | 6x1W | LED | Die cast

LED BUILT IN

CE 2 YEAR

IP54 offer









67138C/G/D

67138C | 6x1W | LED | Die cast

LED BUILT IN

CE 2 YEAR

IP54 offer



67138C/G/W





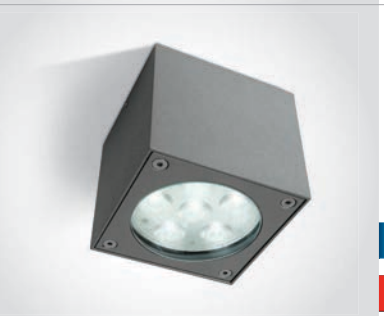

67138D | 6x1W | LED | Die cast

LED BUILT IN

CE 2 YEAR

IP54 offer







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67138E/G/D	Grey	Daylight	6000K	6x1W	-	230V		12	Complete with driver
67138C/G/D	Grey	Daylight	6000K	6x1W	440lm	230V		12	Complete with driver
67138C/G/W	Grey	Warm white	3000K	6x1W	440lm	230V		12	Complete with driver
67138D/G/D	Grey	Daylight	6000K	6x1W	440lm	230V		12	Complete with driver



Outdoor Ceiling Cylinders

Die cast



67138C/AN/W

67138C | 6W | COB LED | Die cast

LED BUILT IN

80 CRI

CE

2 YEAR

IP54



67138C/W/W



67138C/B/W





67138D/AN/W

67138D | 6W | COB LED | Die cast

LED BUILT IN

80 CRI

CE

2 YEAR

IP54



67138D/W/W



67138D/B/W



67138D/G/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
67138C/W/W	White	Warm white	3000K	6W	440lm	35°	100-240V		18	Complete with 500mA driver
67138C/AN/W	Anthracite	Warm white	3000K	6W	440lm	35°	100-240V		18	Complete with 500mA driver
67138C/B/W	Black	Warm white	3000K	6W	440lm	35°	100-240V		18	Complete with 500mA driver
67138D/W/W	White	Warm white	3000K	6W	440lm	35°	100-240V		18	Complete with 500mA driver
67138D/AN/W	Anthracite	Warm white	3000K	6W	440lm	35°	100-240V		18	Complete with 500mA driver
67138D/B/W	Black	Warm white	3000K	6W	440lm	35°	100-240V		18	Complete with 500mA driver
67138D/G/W	Grey	Warm white	3000K	6W	440lm	35°	100-240V		18	Complete with 500mA driver



Outdoor Wall Cylinders
Down beam

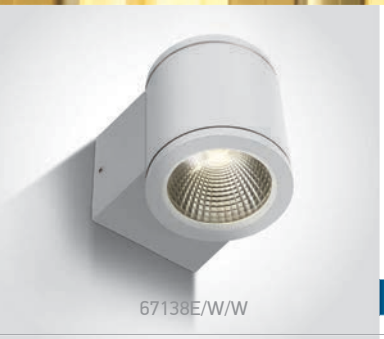
67138E/W/W

67138E | 6W | COB LED | Die cast

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP54








67138E/AN/W

67138E | 6W | COB LED | Die cast

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP54








67138E/B/W

67138E | 6W | COB LED | Die cast

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP54








67138E/G/W

67138E | 6W | COB LED | Die cast

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP54







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
67138E/W/W	White	Warm white	3000K	6W	440lm	35°	100-240V		12	Complete with 500mA driver
67138E/AN/W	Anthracite	Warm white	3000K	6W	440lm	35°	100-240V		12	Complete with 500mA driver
67138E/B/W	Black	Warm white	3000K	6W	440lm	35°	100-240V		12	Complete with 500mA driver
67138E/G/W	Grey	Warm white	3000K	6W	440lm	35°	100-240V		12	Complete with 500mA driver



Outdoor Wall Cylinders
Down beam



67138F | 6W | COB LED | Die cast

LED BUILT IN
80 CRI
CE
2 YEAR
IP54



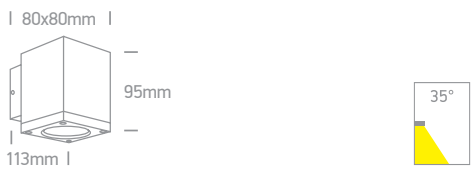



67138F | 6W | COB LED | Die cast

LED BUILT IN
80 CRI
CE
2 YEAR
IP54



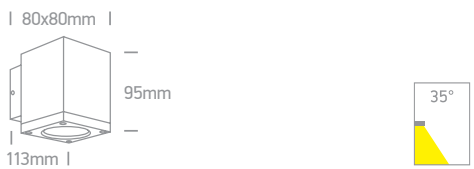



67138F | 6W | COB LED | Die cast

LED BUILT IN
80 CRI
CE
2 YEAR
IP54



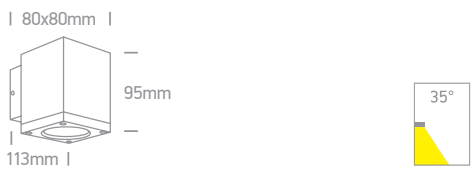



67138F | 6W | COB LED | Die cast

LED BUILT IN
80 CRI
CE
2 YEAR
IP54



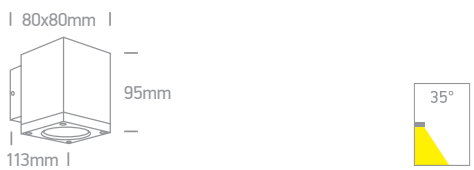

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
67138F/W/W	White	Warm white	3000K	6W	440lm	35°	100-240V	⏚	12	Complete with 500mA driver
67138F/AN/W	Anthracite	Warm white	3000K	6W	440lm	35°	100-240V	⏚	12	Complete with 500mA driver
67138F/B/W	Black	Warm white	3000K	6W	440lm	35°	100-240V	⏚	12	Complete with 500mA driver
67138F/G/W	Grey	Warm white	3000K	6W	440lm	35°	100-240V	⏚	12	Complete with 500mA driver




67138/AN/W

67138 | 2x6W | COB LED | Die cast

LED BUILT IN
80 CRI
CE
2 YEAR
IP54


67138/W/W


67138/B/W


67138/G/W




67138A/AN/W

67138A | 2x6W | COB LED | Die cast

LED BUILT IN
80 CRI
CE
2 YEAR
IP54


67138A/W/W


67138A/B/W


67138A/G/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
67138/W/W	White	Warm white	3000K	2x6W	2x440lm	35°	230V		12	Complete with 500mA driver
67138/AN/W	Anthracite	Warm white	3000K	2x6W	2x440lm	35°	230V		12	Complete with 500mA driver
67138/B/W	Black	Warm white	3000K	2x6W	2x440lm	35°	230V		12	Complete with 500mA driver
67138/G/W	Grey	Warm white	3000K	2x6W	2x440lm	35°	230V		12	Complete with 500mA driver
67138A/W/W	White	Warm white	3000K	2x6W	2x440lm	35°	230V		12	Complete with 500mA driver
67138A/AN/W	Anthracite	Warm white	3000K	2x6W	2x440lm	35°	230V		12	Complete with 500mA driver
67138A/B/W	Black	Warm white	3000K	2x6W	2x440lm	35°	230V		12	Complete with 500mA driver
67138A/G/W	Grey	Warm white	3000K	2x6W	2x440lm	35°	230V		12	Complete with 500mA driver



Outdoor Wall Cylinders High Power



67138EL/AN/C

67138EL | 20W | COB LED | Die cast

LED BUILT IN

80 CRI

TRIAC DIMMABLE

CE

IP65

2 YEAR



67138EL/AN/W







67138L/AN/C

67138L | 2x20W | COB LED | Die cast

LED BUILT IN

80 CRI

TRIAC DIMMABLE

CE

IP65

2 YEAR



67138L/AN/W





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
67138EL/AN/C	Anthracite	Cool white	4000K	20W	1400lm	35°	230V	⏚	4	AC LED
67138EL/AN/W	Anthracite	Warm white	3000K	20W	1400lm	35°	230V	⏚	4	AC LED
67138L/AN/C	Anthracite	Cool white	4000K	2x20W	2x1400lm	35°	230V	⏚	2	AC LED
67138L/AN/W	Anthracite	Warm white	3000K	2x20W	2x1400lm	35°	230V	⏚	2	AC LED

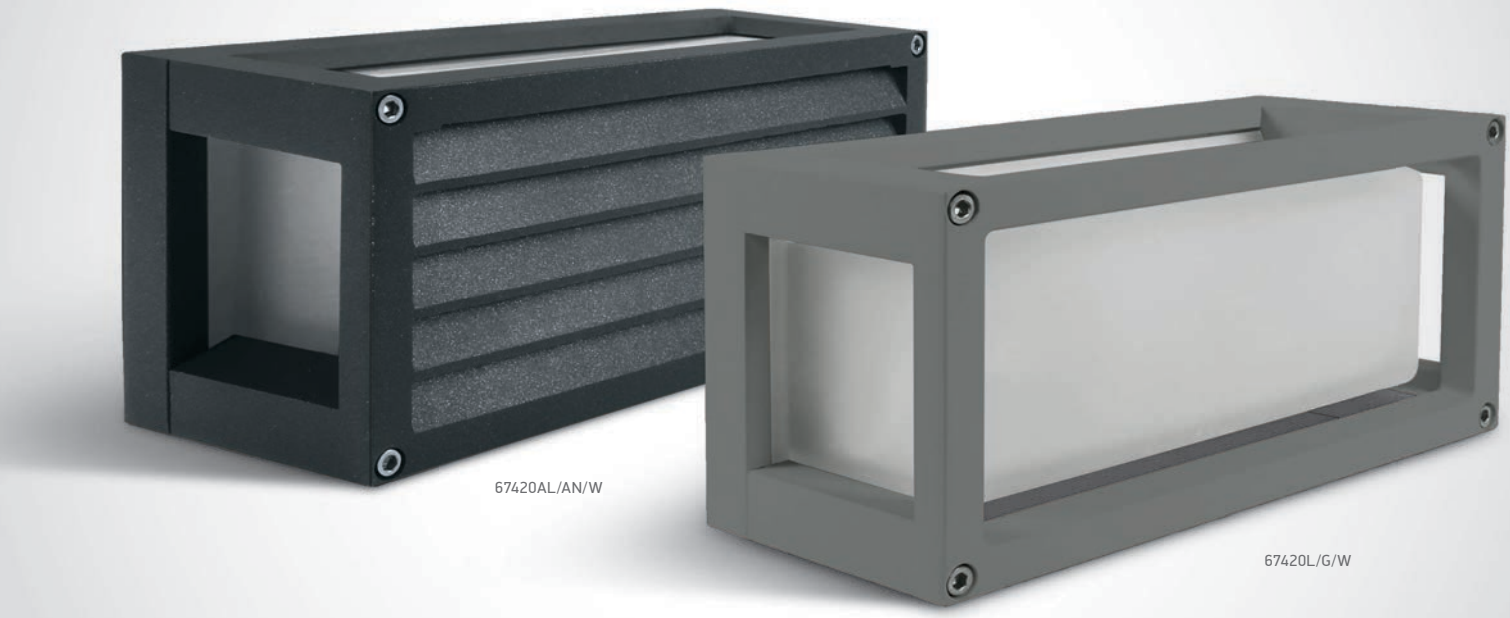

The Cage Wall Lights



67420L | 7W | SMD 2835 | Die cast + frosted glass

LED BUILT IN
80 CRI
CE
2 YEAR
IP54







67420AL | 7W | SMD 2835 | Die cast + frosted glass

LED BUILT IN
80 CRI
CE
2 YEAR
IP54





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67420L/G/W	Grey	Warm white	3000K	7W	500lm	230V	⏚	6	Complete with 350mA driver
67420AL/AN/W	Anthracite	Warm white	3000K	7W	300lm	230V	⏚	6	Complete with 350mA driver



The Cage Ceiling Lights



67420BL/W/W

67420BL | 13W | SMD 2835 | Die cast + frosted glass

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP54







67420BL/G/W

67420BL | 13W | SMD 2835 | Die cast + frosted glass

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP54





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67420BL/W/W	White	Warm white	3000K	13W	800lm	230V	⏚	4	Complete with 300mA driver
67420BL/G/W	Grey	Warm white	3000K	13W	800lm	230V	⏚	4	Complete with 300mA driver



Wall Adjustable Beams



67440/AN/W

67440 | 9W | SMD 2835 | Adjustable beam | Die cast

LED BUILT IN

80 CRI

CE

2 YEAR

IP54



67440/W/W





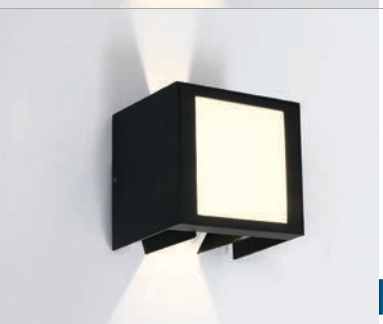

67440A | 11W | SMD 2835 | Adjustable beam | Die cast

LED BUILT IN

80 CRI

CE

2 YEAR

IP54







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67440/W/W	White	Warm white	3000K	9W	600lm	230V		8	Complete with 350mA driver
67440/AN/W	Anthracite	Warm white	3000K	9W	600lm	230V		8	Complete with 350mA driver
67440A/AN/W	Anthracite	Warm white	3000K	11W	700lm	230V		8	Complete with 350mA driver



The Glass Face Wall Lights



67076/W/W

67076 | 4W | SMD LED | Glass + metal

LED BUILT IN
80 CRI
2 YEAR
DARK LIGHT
IP65



67076/B/W





67076A/W/W

67076A | 5W | SMD LED | Glass + metal

LED BUILT IN
80 CRI
2 YEAR
DARK LIGHT
IP65



67076A/B/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67076/W/W	White	Warm white	3000K	4W	300lm	230V	⏚	12	AC LED
67076/B/W	Black	Warm white	3000K	4W	300lm	230V	⏚	12	AC LED
67076A/W/W	White	Warm white	3000K	5W	350lm	230V	⏚	12	AC LED
67076A/B/W	Black	Warm white	3000K	5W	350lm	230V	⏚	12	AC LED



Outdoor Wall Up & Down Lights

Die cast



67356 | 5W | LED | Die cast

LED BUILT IN
85 CRI
CE
2 YEAR
IP54







67342 | 4x3W | LED | Die cast

LED BUILT IN
80 CRI
CE
2 YEAR
IP54







67374 | 2x3W | SMD 5630 | Die cast

LED BUILT IN
80 CRI
CE
2 YEAR
IP54







67374A | 2x6W | SMD 2835 | Die cast

LED BUILT IN
80 CRI
CE
2 YEAR
IP54





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67356/W/W	White	Warm white	3000K	5W	170lm	230V		18	AC LED
67356/G/W	Grey	Warm white	3000K	5W	170lm	230V		18	AC LED
67342/G/W	Grey	Warm white	3000K	4x3W	350lm	230V		12	Complete with 700mA driver
67374/W/W	White	Warm white	3000K	2x3W	2x210lm	230V		24	Complete with 350mA driver
67374/AN/W	Anthracite	Warm white	3000K	2x3W	2x210lm	230V		24	Complete with 350mA driver
67374A/W/W	White	Warm white	3000K	2x6W	2x420lm	230V		12	Complete with 300mA driver
67374A/AN/W	Anthracite	Warm white	3000K	2x6W	2x420lm	230V		12	Complete with 300mA driver



Outdoor Wall Lights



67492 | 12W | SMD 2835 | Plastic + PC

LED BUILT IN

80 CRI

CE

2 YEAR

IP54







67492P | 12W | SMD 2835 | Sensor | Plastic + PC

LED BUILT IN

80 CRI

CE

2 YEAR

IP54





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67492/AN/W	Anthracite	Warm white	3000K	12W	600lm	230V		12	Complete with 300mA driver
67492P/AN/W	Anthracite	Warm white	3000K	12W	600lm	230V		12	Complete with 300mA driver



Outdoor Wall Up & Down Lights



67474 | 10W | LED | Die cast

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP54







67474A | 10W | LED | Die cast

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP54







67474B | 10W | AC LED | Die cast

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP54





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67474/AN/W	Anthracite	Warm white	3000K	10W	700lm	230V	⏚	12	AC LED
67474A/AN/W	Anthracite	Warm white	3000K	10W	700lm	230V	⏚	12	AC LED
67474B/AN/W	Anthracite	Warm white	3000K	10W	700lm	230V	⏚	12	AC LED



Outdoor Wall Up & Down Lights



67362B | 9W | SMD LED | Die cast

LED BUILT IN

80 CRI

CE

2 YEAR

IP54







67362C/AN/W

67362C | 2x4,5W | SMD 3014 | Die cast

LED BUILT IN

80 CRI

CE

2 YEAR

IP54



67362C/W/W





67392/AN/W

67392 | 7W | SMD 2835 | ABS + PC

LED BUILT IN

80 CRI

CE

2 YEAR

IP65



67392/W/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67362B/AN/W	Anthracite	Warm white	3000K	9W	600lm	230V		12	Complete with 350mA driver
67362C/W/W	White	Warm white	3000K	2x4,5W	2x315lm	230V		12	Complete with 350mA driver
67362C/AN/W	Anthracite	Warm white	3000K	2x4,5W	2x315lm	230V		12	Complete with 350mA driver
67392/W/W	White	Warm white	3000K	7W	400lm	230V		20	Complete with 500mA driver
67392/AN/W	Anthracite	Warm white	3000K	7W	400lm	230V		20	Complete with 500mA driver



Outdoor Slim Oval Range
Up & down beam



67378/AN/W

67378 | 2x3W | SMD 5630 | Die cast

LED BUILT IN

80 CRI

CE

2 YEAR

IP54



67378/W/W





67378A/AN/W

67378A | 2x6W | SMD 2835 | Die cast

LED BUILT IN

80 CRI

CE

2 YEAR

IP54



67378A/W/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67378/W/W	White	Warm white	3000K	2x3W	2x210lm	230V		24	Complete with 350mA driver
67378/AN/W	Anthracite	Warm white	3000K	2x3W	2x210lm	230V		24	Complete with 350mA driver
67378A/W/W	White	Warm white	3000K	2x6W	2x420lm	230V		12	Complete with 300mA driver
67378A/AN/W	Anthracite	Warm white	3000K	2x6W	2x420lm	230V		12	Complete with 300mA driver



Outdoor Slim Range

Up & down beam



67376 | 2x3W | SMD 2835 | Die cast

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP54







67376A | 2x6W | SMD 2835 | Die cast

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP54







67412 | 2x6W | COB LED | Adjustable beam | Die cast

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP54



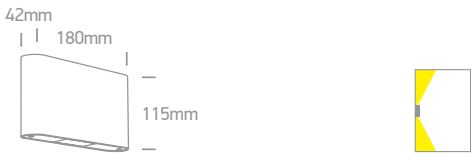

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67376/W/W	White	Warm white	3000K	2x3W	2x210lm	230V		24	Complete with 350mA driver
67376/AN/W	Anthracite	Warm white	3000K	2x3W	2x210lm	230V		24	Complete with 350mA driver
67376A/W/W	White	Warm white	3000K	2x6W	2x420lm	230V		12	Complete with 300mA driver
67376A/AN/W	Anthracite	Warm white	3000K	2x6W	2x420lm	230V		12	Complete with 300mA driver
67412/W/W	White	Warm white	3000K	2x6W	2x400lm	230V		12	Complete with 500mA driver
67412/AN/W	Anthracite	Warm white	3000K	2x6W	2x400lm	230V		12	Complete with 500mA driver

Indoor/Outdoor Wall Lines
Natural aluminium

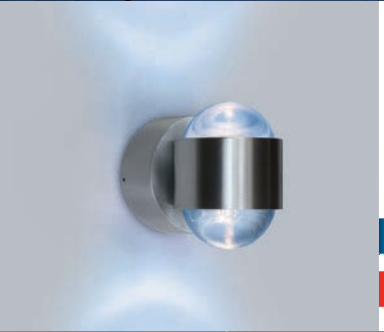

67274A | 2x1W | LED | Natural aluminium

LED BUILT IN

IP54 offer

CE 2 YEAR







Order Code	Colour	Light Colour	Watts	Input	Class		Notes
67274A/AL/BL	Aluminium	Blue	2x1W	100-240V	⏚	12	Complete with driver

one

Indoor/Outdoor Wall Lines

Natural aluminium



67274B | 4x1,5W | LED | Natural aluminium

LED BUILT IN

CE 2 YEAR

IP54









Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		
67274B/AL/W	Aluminium	Warm white	3000K	4x1,5W	200lm	100-240V	⏚	12	Complete with driver



Adjustable Beams
Indoor / Outdoor


67340A/W/W

67340A | 2x3W | LED | Adjustable beam | Die cast

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP54






67340A/AN/W

67340A | 2x3W | LED | Adjustable beam | Die cast

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP54






67340A/G/W

67340A | 2x3W | LED | Adjustable beam | Die cast

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP54







67354 | 2x3W | LED | Die cast

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP54 · offer


Use provided accessories to change to narrow beam.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67340A/W/W	White	Warm white	3000K	2x3W	2x210lm	230V		8	Complete with 700mA driver
67340A/AN/W	Anthracite	Warm white	3000K	2x3W	2x210lm	230V		8	Complete with 700mA driver
67340A/G/W	Grey	Warm white	3000K	2x3W	2x210lm	230V		8	Complete with 700mA driver
67354/G/W	Grey	Warm white	3000K	2x3W	182lm	100-240V		12	Complete with driver



Outdoor Wall Dark Lights
Die cast

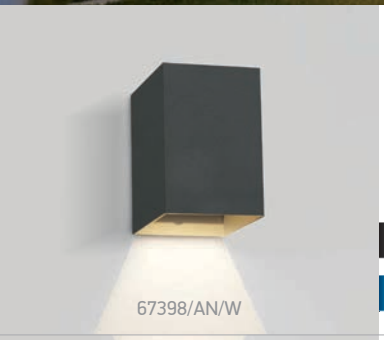
67398/AN/W

67398 | 3W | COB LED | Die cast

LED BUILT IN
80 CRI
CE
2 YEAR
DARK LIGHT
IP54


67398/W/W



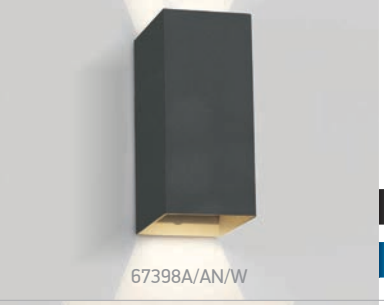
67398A/AN/W

67398A | 2x3W | LED | Die cast

LED BUILT IN
80 CRI
CE
2 YEAR
DARK LIGHT
IP54


67398A/W/W


67398A/B/W



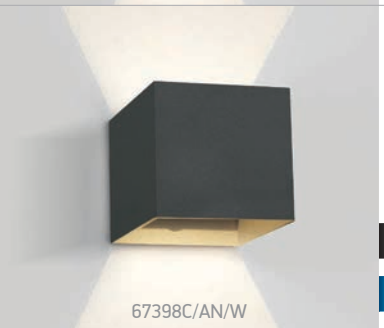
67398C/AN/W

67398C | 2x3W | LED | Die cast

LED BUILT IN
80 CRI
CE
2 YEAR
DARK LIGHT
IP54


67398C/W/W


67398C/B/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67398/W/W	White	Warm white	3000K	3W	200lm	100-240V		24	Complete with 350mA driver
67398/AN/W	Anthracite	Warm white	3000K	3W	200lm	100-240V		24	Complete with 350mA driver
67398A/W/W	White	Warm white	3000K	2x3W	2x200lm	100-240V		12	Complete with 350mA driver
67398A/AN/W	Anthracite	Warm white	3000K	2x3W	2x200lm	100-240V		12	Complete with 350mA driver
67398A/B/W	Black	Warm white	3000K	2x3W	2x200lm	100-240V		12	Complete with 350mA driver
67398C/W/W	White	Warm white	3000K	2x3W	2x200lm	100-240V		18	Complete with 350mA driver
67398C/AN/W	Anthracite	Warm white	3000K	2x3W	2x200lm	100-240V		18	Complete with 350mA driver
67398C/B/W	Black	Warm white	3000K	2x3W	2x200lm	100-240V		18	Complete with 350mA driver



Indoor/Outdoor Wall Lights
Die cast



67480A | 6W | COB LED | Die cast

LED BUILT IN
80 CRI
IK06
CE
IP65
2 YEAR









67480B | 2x6W | COB LED | Die cast

LED BUILT IN
80 CRI
IK06
CE
IP65
2 YEAR







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67480A/AN/W	Anthracite	Warm white	3000K	6W	480lm	230V		8	Complete with 500mA driver
67480B/AN/W	Anthracite	Warm white	3000K	2x6W	960lm	230V		8	Complete with 500mA driver

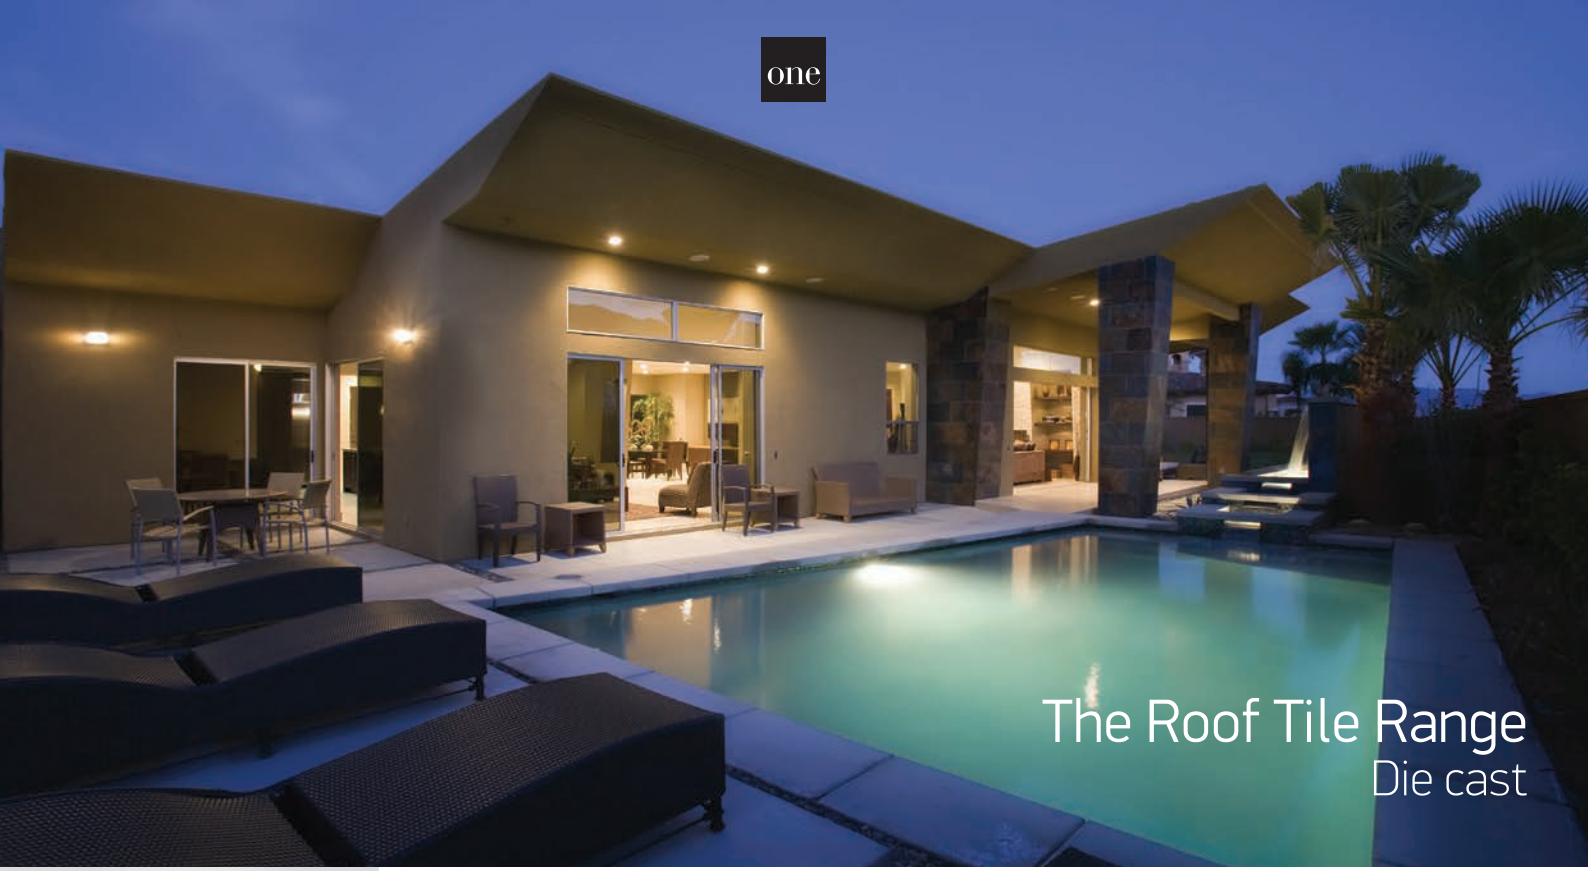

The Roof Tile Range
Die cast

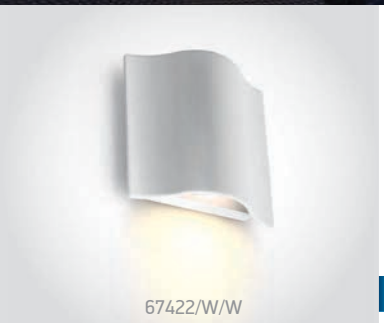

67422/W/W

67422 | 6W | COB LED | Die cast

LED BUILT IN

80 CRI

CE

2 YEAR

IP54



67422/AN/W



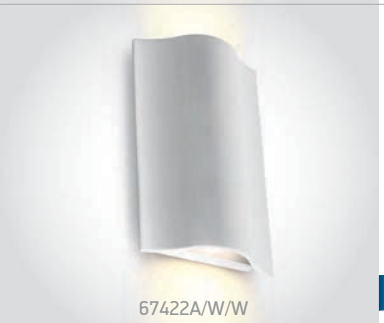

67422A/W/W

67422A | 2x6W | COB LED | Die cast

LED BUILT IN

80 CRI

CE

2 YEAR

IP54



67422A/AN/W





67512/W/W

67512 | 8W | SMD 2835 | ABS + PC

LED BUILT IN

80 CRI

CE

2 YEAR

new

IP65



67512/AN/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67422/W/W	White	Warm white	3000K	6W	400lm	230V		24	Complete with 500mA driver
67422/AN/W	Anthracite	Warm white	3000K	6W	400lm	230V		24	Complete with 500mA driver
67422A/W/W	White	Warm white	3000K	2x6W	2x400lm	230V		12	Complete with 500mA driver
67422A/AN/W	Anthracite	Warm white	3000K	2x6W	2x400lm	230V		12	Complete with 500mA driver
67512/W/W	White	Warm white	3000K	8W	400lm	230V		20	AC LED
67512/AN/W	Anthracite	Warm white	3000K	8W	400lm	230V		20	AC LED

Outdoor Wall Lights
Die cast

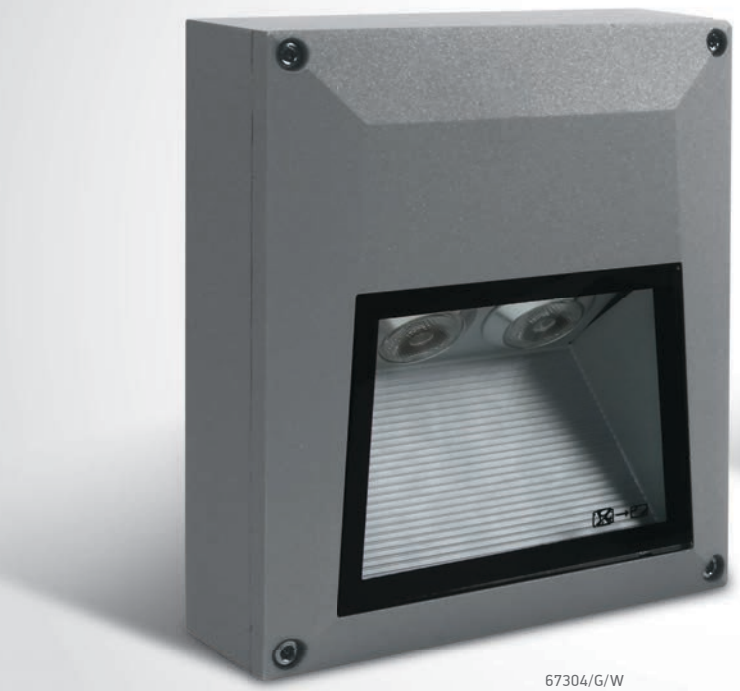

67304/G/W



67124/G/BL



67468 | 10W | LED | Dimmable | Die cast + glass

LED BUILT IN
80 CRI
TRIAC DIMMABLE
CE
2 YEAR
IP65





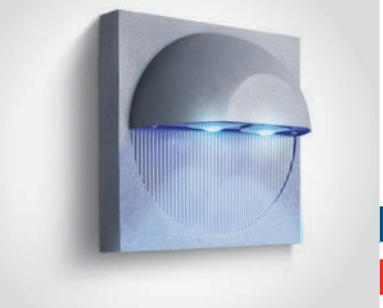

67124 | 2x1W | LED | Die cast

LED BUILT IN
CE
2 YEAR
IP54
offer







67304 | 2x1W | LED | Die cast

LED BUILT IN
CE
2 YEAR
IP54





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67468/W/W	White	Warm white	3000K	10W	600lm	230V		6	AC LED
67124/G/BL	Grey	Blue	-	2x1W	-	230V		18	Complete with driver
67304/G/W	Grey	Warm white	3000K	2x1W	-	100-240V		12	Complete with driver

Indoor/Outdoor Wall Lines
Die cast



67170 | 3W | LED | Die cast

LED BUILT IN

IP54

offer

CE 2 YEAR





Order Code	Colour	Light Colour	Watts	Input	Class		Notes
67170/G/BL	Grey	Blue	3W	100-240V		40	Complete with driver

The Retro Opal Range

Die cast + PC





67424 | 9W | SMD 3528 | Die cast + PC

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP54







67424A | 9W | SMD 3528 | Die cast + PC

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP54







67424B | 20W | SMD 3528 | Die cast + PC

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP54







67364 | 8W | SMD LED | Die cast + PC

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP54

Automatic day/night operation.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67424/W/W	White	Warm white	3000K	9W	600lm	230V		12	Complete with 350mA driver
67424A/W/W	White	Warm white	3000K	9W	600lm	230V		12	Complete with 350mA driver
67424B/W/W	White	Warm white	3000K	20W	1100lm	230V		6	Complete with 500mA driver
67364/G/W	Grey	Warm white	3000K	8W	450lm	230V		8	Photocell



Outdoor General Lighting
ABS + PC



67394B/W/W

67394B | 3,5W | SMD 2835 | ABS + PC

LED BUILT IN · 80 CRI · IK08 · CE · 2 YEAR · IP65



67394B/AN/W





67394A/W/W

67394A | 3,5W | SMD 2835 | ABS + PC

LED BUILT IN · 80 CRI · IK08 · CE · 2 YEAR · IP65



67394A/AN/W





67394/W/W

67394 | 3,5W | SMD 2835 | ABS + PC

LED BUILT IN · 80 CRI · IK08 · CE · 2 YEAR · IP65



67394/AN/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67394B/W/W	White	Warm white	3000K	3,5W	250lm	230V	☐	40	AC LED
67394B/AN/W	Anthracite	Warm white	3000K	3,5W	250lm	230V	☐	40	AC LED
67394A/W/W	White	Warm white	3000K	3,5W	250lm	230V	☐	40	AC LED
67394A/AN/W	Anthracite	Warm white	3000K	3,5W	250lm	230V	☐	40	AC LED
67394/W/W	White	Warm white	3000K	3,5W	250lm	230V	☐	24	AC LED
67394/AN/W	Anthracite	Warm white	3000K	3,5W	250lm	230V	☐	24	AC LED

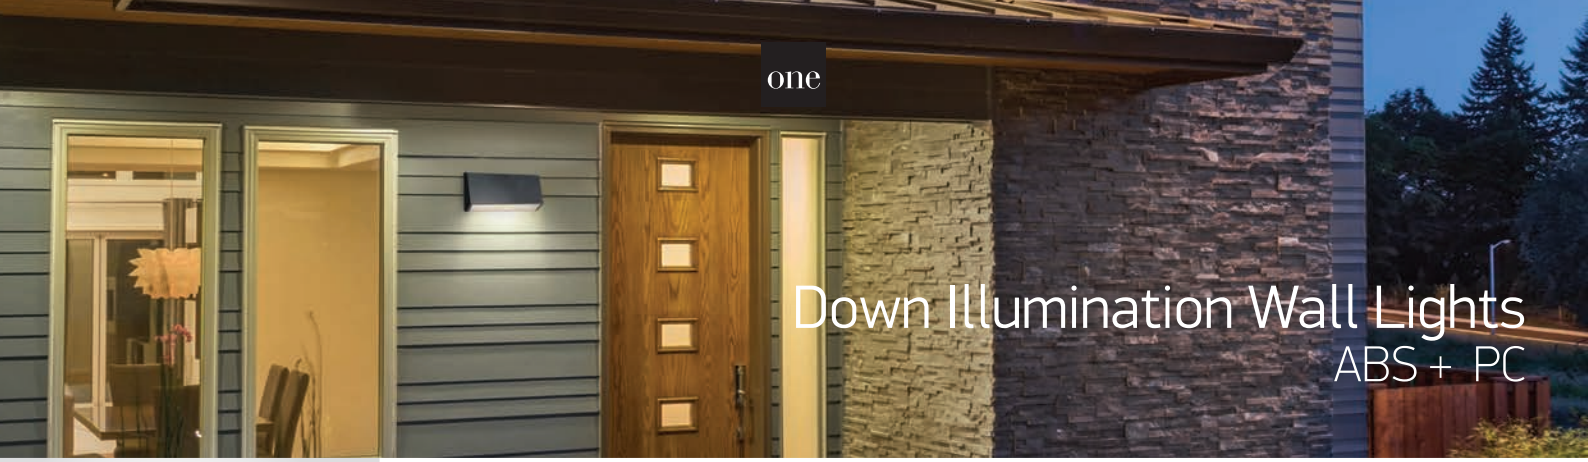

Down Illumination Wall Lights
ABS + PC

67386A | 1,5W | SMD 2835 | ABS + PC

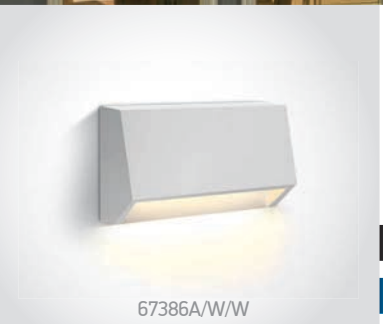
67386A/W/W

LED BUILT IN
80 CRI
CE
2 YEAR
DARK LIGHT
IP65


67386A/AN/W



67386C | 4W | SMD 2835 | ABS + PC


67386C/W/W

LED BUILT IN
80 CRI
CE
2 YEAR
DARK LIGHT
IP65


67386C/AN/W



67396 | 6W | SMD 2835 | ABS + PC


67396/W/W

LED BUILT IN
80 CRI
CE
2 YEAR
IP65


67396/AN/W



67396A | 6W | SMD 2835 | Sensor | ABS + PC


67396A/W/W

LED BUILT IN
80 CRI
CE
2 YEAR
IP65


67396A/AN/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67386A/W/W	White	Warm white	3000K	1,5W	80lm	230V		40	AC LED
67386A/AN/W	Anthracite	Warm white	3000K	1,5W	80lm	230V		40	AC LED
67386C/W/W	White	Warm white	3000K	4W	220lm	230V		20	AC LED
67386C/AN/W	Anthracite	Warm white	3000K	4W	220lm	230V		20	AC LED
67396/W/W	White	Warm white	3000K	6W	300lm	230V		20	AC LED
67396/AN/W	Anthracite	Warm white	3000K	6W	300lm	230V		20	AC LED
67396A/W/W	White	Warm white	3000K	6W	300lm	230V		20	AC LED
67396A/AN/W	Anthracite	Warm white	3000K	6W	300lm	230V		20	AC LED

one

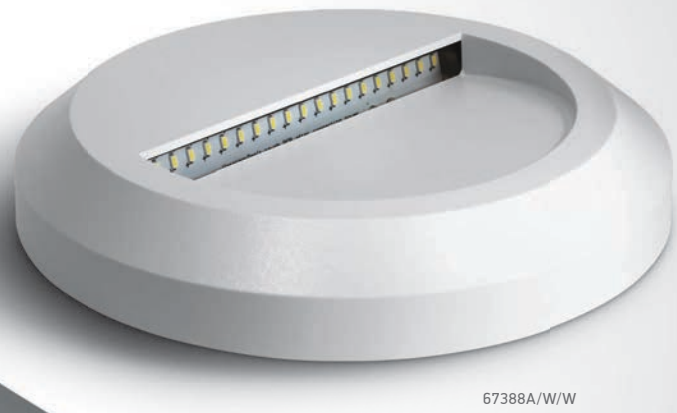

67388A/W/W

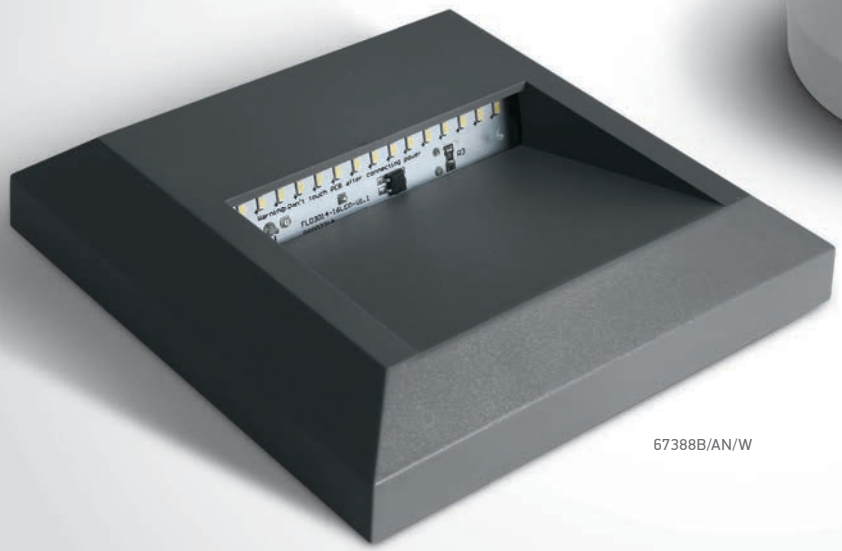

67388B/AN/W

Outdoor Dark Lights
ABS + PC



67388A | 2W | SMD 2835 | ABS + PC

LED BUILT IN

80 CRI | IK 08 | CE

DARK LIGHT | IP65

2 YEAR







67388B/W/W

67388B | 2W | SMD 2835 | ABS + PC

LED BUILT IN

80 CRI | IK 08 | CE

DARK LIGHT | IP65

2 YEAR



67388B/AN/W





67388C/W/W

67388C | 2W | SMD 2835 | ABS + PC

LED BUILT IN

80 CRI | IK 08 | CE

DARK LIGHT | IP65

2 YEAR



67388C/AN/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67388A/W/W	White	Warm white	3000K	2W	65lm	230V		40	AC LED
67388B/W/W	White	Warm white	3000K	2W	60lm	230V		40	AC LED
67388B/AN/W	Anthracite	Warm white	3000K	2W	60lm	230V		40	AC LED
67388C/W/W	White	Warm white	3000K	2W	75lm	230V		24	AC LED
67388C/AN/W	Anthracite	Warm white	3000K	2W	75lm	230V		24	AC LED



Round Indoor/Outdoor Wall Dark Lights
Die cast


67359/AN/W

67359 | 3W | SMD 5630 | Die cast

LED BUILT IN
80 CRI
2 YEAR
DARK LIGHT
IP54


67359/W/W




67360/AN/W

67360 | 9W | SMD 5630 | Die cast

LED BUILT IN
80 CRI
2 YEAR
DARK LIGHT
IP54


67360/W/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67359/W/W	White	Warm white	3000K	3W	200lm	100-240V		30	Complete with 350mA driver
67359/AN/W	Anthracite	Warm white	3000K	3W	200lm	100-240V		30	Complete with 350mA driver
67360/W/W	White	Warm white	3000K	9W	350lm	230V		12	Complete with 700mA driver
67360/AN/W	Anthracite	Warm white	3000K	9W	350lm	230V		12	Complete with 700mA driver



Square Indoor/Outdoor Wall Dark Lights
Die cast



67359A/AN/W

67359A | 4W | SMD 5630 | Die cast

LED BUILT IN
80 CRI
CE
2 YEAR
DARK LIGHT
IP54



67359A/W/W



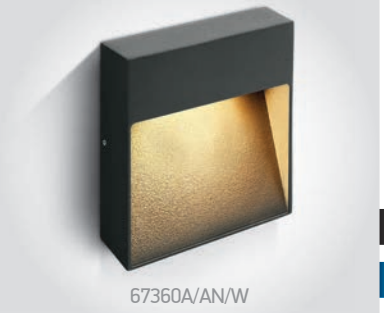

67360A/AN/W

67360A | 9W | SMD 5630 | Die cast

LED BUILT IN
80 CRI
CE
2 YEAR
DARK LIGHT
IP54



67360A/W/W





67359B/AN/W

67359B | 7W | SMD 2835 | Die cast

LED BUILT IN
80 CRI
CE
2 YEAR
DARK LIGHT
IP54



67359B/W/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67359A/W/W	White	Warm white	3000K	4W	200lm	100-240V		30	Complete with 350mA driver
67359A/AN/W	Anthracite	Warm white	3000K	4W	200lm	100-240V		30	Complete with 350mA driver
67360A/W/W	White	Warm white	3000K	9W	450lm	230V		12	Complete with 700mA driver
67360A/AN/W	Anthracite	Warm white	3000K	9W	450lm	230V		12	Complete with 700mA driver
67359B/W/W	White	Warm white	3000K	7W	400lm	230V		24	Complete with 350mA driver
67359B/AN/W	Anthracite	Warm white	3000K	7W	400lm	230V		24	Complete with 350mA driver



Outdoor Dark Lights



67430B | 8W | SMD 2835 | ABS + PC

LED BUILT IN

80 CRI

CE

2 YEAR

DARK LIGHT

IP65









67430A/AN/W

67430A | 8W | SMD 2835 | ABS + PC

LED BUILT IN

80 CRI

CE

2 YEAR

DARK LIGHT

IP65



67430A/W/W





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67430B/AN/W	Anthracite	Warm white	3000K	8W	350lm	230V		20	Complete with 300mA driver
67430A/W/W	White	Warm white	3000K	8W	350lm	230V		20	Complete with 300mA driver
67430A/AN/W	Anthracite	Warm white	3000K	8W	350lm	230V		20	Complete with 300mA driver

Outdoor Dark Lights



67416/W/W



67418/AN/W



67414/AN/W

67414 | 3W | SMD 2835 | ABS + PC



67414/AN/W

LED BUILT IN · 80 CRI · CE · 2 YEAR · DARK LIGHT · IP65



67414/W/W



67416 | 3W | SMD 2835 | ABS + PC



67416/AN/W

LED BUILT IN · 80 CRI · CE · 2 YEAR · DARK LIGHT · IP65



67416/W/W



67418 | 3W | SMD 2835 | ABS + PC



67418/AN/W

LED BUILT IN · 80 CRI · CE · 2 YEAR · DARK LIGHT · IP65



67418/W/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	📦	Notes
67414/W/W	White	Warm white	3000K	3W	100lm	230V	□	40	AC LED
67414/AN/W	Anthracite	Warm white	3000K	3W	100lm	230V	□	40	AC LED
67416/W/W	White	Warm white	3000K	3W	100lm	230V	□	40	AC LED
67416/AN/W	Anthracite	Warm white	3000K	3W	100lm	230V	□	40	AC LED
67418/W/W	White	Warm white	3000K	3W	100lm	230V	□	40	AC LED
67418/AN/W	Anthracite	Warm white	3000K	3W	100lm	230V	□	40	AC LED



Indoor/Outdoor Wall Lights
ABS + PC



67472A | 6W | SMD 2835 | ABS + PC

LED BUILT IN
80 CRI
CE
2 YEAR
IP65









67472 | 2x6W | SMD 2835 | ABS + PC

LED BUILT IN
80 CRI
CE
2 YEAR
IP65







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67472A/AN/W	Anthracite	Warm white	3000K	6W	500lm	230V	☐	20	Complete with 300mA driver
67472/AN/W	Anthracite	Warm white	3000K	2x6W	2x500lm	230V	☐	20	Complete with 300mA driver

Wood Decor Wall Lights



67522A/AN/W



67522A | 8W | SMD 3030 | Die cast + wood

new

IP65

LED BUILT IN

80 CRI

IK07

CE

2 YEAR







67522B | 2x6,5W | SMD 3030 | Die cast + wood

new

IP65

LED BUILT IN

80 CRI

IK07

CE

2 YEAR





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67522A/AN/W	Anthracite	Warm white	3000K	8W	600lm	100-240V	⏚	12	Complete with 350mA driver
67522B/AN/W	Anthracite	Warm white	3000K	2x6,5W	1000lm	100-240V	⏚	12	Complete with 300mA driver



Outdoor Wall Bricks

Die cast



67174/G/D

67174 | 3W | LED | Die cast

LED BUILT IN

80 CRI

CE

2 YEAR

IP54



67174/W/D





67176/G/W

67176 | 3W | LED | Die cast

LED BUILT IN

80 CRI

CE

2 YEAR

IP54



67176/W/D



Order Code	Colour	Light Colour	CCT (K)	Watts	Input	Class		Notes
67174/W/D	White	Daylight	6000K	3W	230V		12	Complete with driver
67174/G/D	Grey	Daylight	6000K	3W	230V		12	Complete with driver
67176/W/D	White	Daylight	6000K	3W	230V		12	Complete with driver
67176/G/W	Grey	Warm white	3000K	3W	230V		12	Complete with driver



Outdoor Wall Bricks
ABS + PC



67502A/W/W

67502A | 6W | SMD 2835 | ABS + PC

new · DARK LIGHT · IP65 · LED BUILT IN · 80 CRI · CE · 2 YEAR



67502A/AN/W



Removable front grill.





67502B/W/W

67502B | 6W | SMD 2835 | ABS + PC

new · DARK LIGHT · IP65 · LED BUILT IN · 80 CRI · CE · 2 YEAR



67502B/AN/W



Removable front grill.





67502C/W/W

67502C | 6W | SMD 2835 | ABS + PC

new · IP65 · LED BUILT IN · 80 CRI · CE · 2 YEAR



67502C/AN/W



Removable front grill.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67502A/W/W	White	Warm white	3000K	6W	120lm	230V	☐	20	AC LED
67502A/AN/W	Anthracite	Warm white	3000K	6W	120lm	230V	☐	20	AC LED
67502B/W/W	White	Warm white	3000K	6W	110lm	230V	☐	20	AC LED
67502B/AN/W	Anthracite	Warm white	3000K	6W	110lm	230V	☐	20	AC LED
67502C/W/W	White	Warm white	3000K	6W	330lm	230V	☐	20	AC LED
67502C/AN/W	Anthracite	Warm white	3000K	6W	330lm	230V	☐	20	AC LED

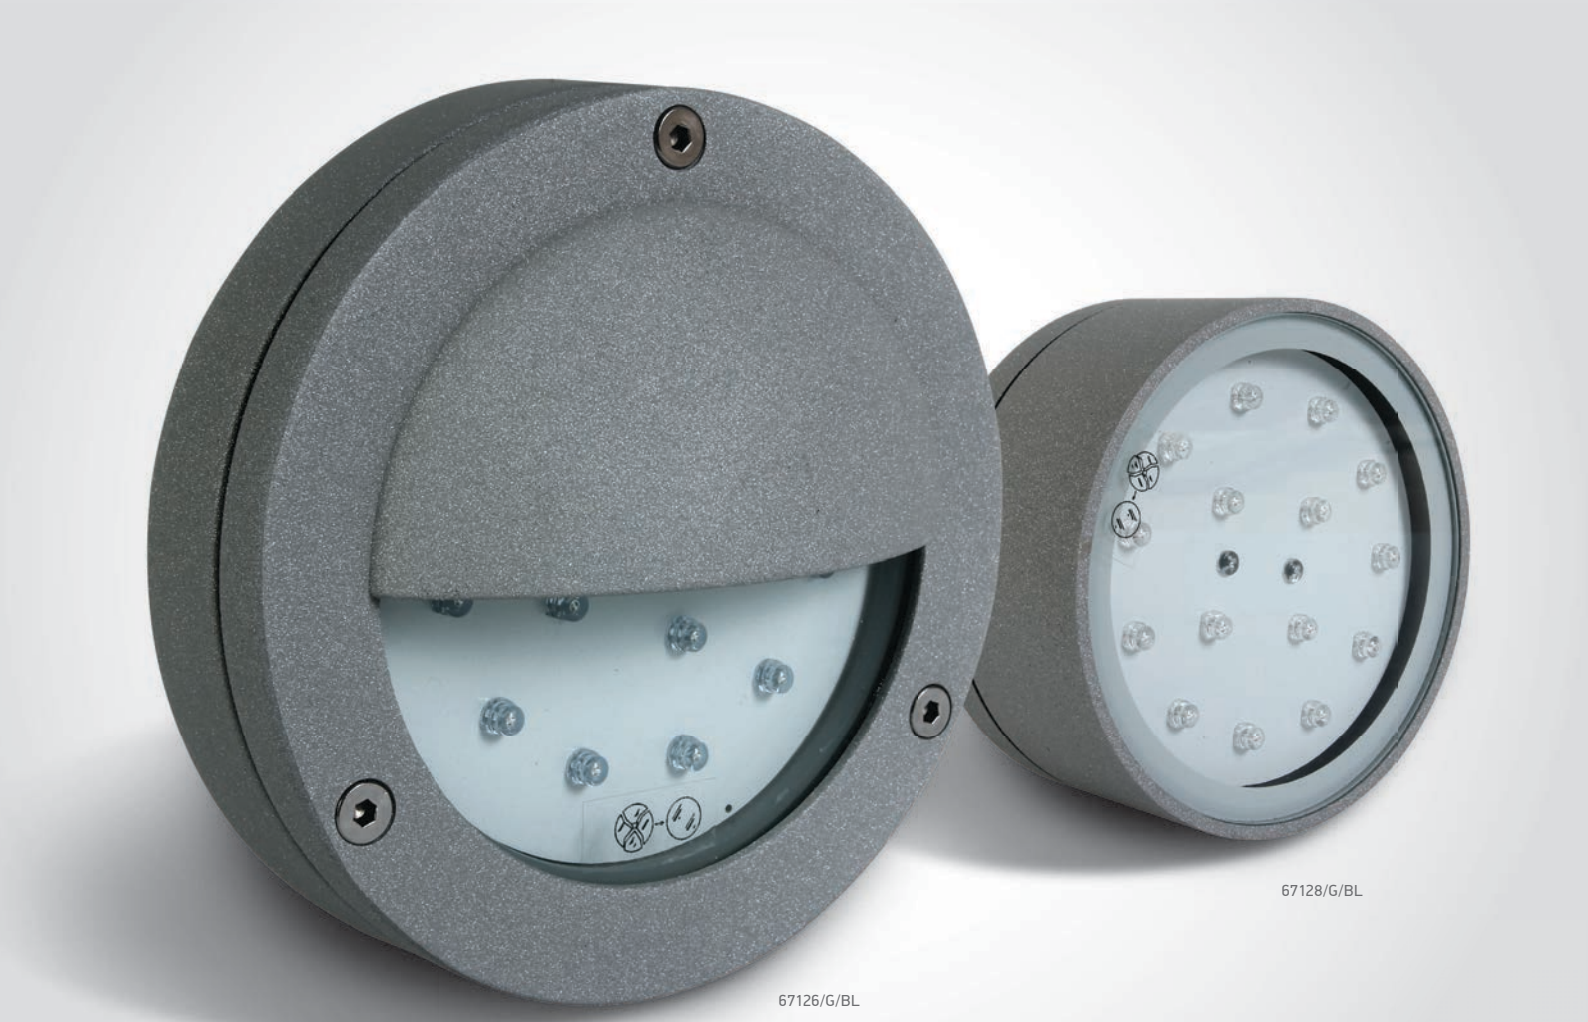

67128/G/BL

67126/G/BL

Outdoor Surface Round Points
Die cast



67126 | 1,5W | LED | Die cast

LED BUILT IN

CE 2 YEAR

IP54 offer







67128 | 1,5W | LED | Die cast

LED BUILT IN

CE 2 YEAR

IP54 offer





Order Code	Colour	Light Colour	Watts	Input	Class		Notes
67126/G/BL	Grey	Blue	1,5W	230V		30	Complete with driver
67128/G/BL	Grey	Blue	1,5W	230V		30	Complete with driver



Outdoor Surface Square Points
Die cast



67116 | 1,6W | LED | Die cast

LED BUILT IN

CE 2 YEAR

IP54







67118 | 1,6W | LED | Die cast

LED BUILT IN

CE 2 YEAR

IP54

offer







67242 | 3W | LED | Die cast

LED BUILT IN

CE 2 YEAR

DARK LIGHT

IP54

offer





Order Code	Colour	Light Colour	CCT (K)	Watts	Input	Class		Notes
67116/G/W	Grey	Warm white	3000K	1,6W	230V		30	Complete with driver
67118/G/D	Grey	Daylight	6000K	1,6W	230V		30	Complete with driver
67242/G/D	Grey	Daylight	6000K	3W	100-240V		30	Complete with driver



The Classic Outdoor Range
Die cast

67444C | 10W | SMD 2835 | Die cast


67444C/W/W

LED BUILT IN
80 CRI
CE
2 YEAR
IP54


67444C/B/W



67442B | 10W | SMD 2835 | Die cast


67442B/W/W

LED BUILT IN
80 CRI
CE
2 YEAR
IP54


67442B/B/W



67442C | 10W | SMD 2835 | Die cast


67442C/W/W

LED BUILT IN
80 CRI
CE
2 YEAR
IP54


67442C/B/W



67442 | 10W | SMD 2835 | Die cast


67442/W/W

LED BUILT IN
80 CRI
CE
2 YEAR
IP54


67442/B/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67444C/W/W	White	Warm white	3000K	10W	600lm	230V		12	AC LED
67444C/B/W	Black	Warm white	3000K	10W	600lm	230V		12	AC LED
67442B/W/W	White	Warm white	3000K	10W	600lm	230V		12	AC LED
67442B/B/W	Black	Warm white	3000K	10W	600lm	230V		12	AC LED
67442C/W/W	White	Warm white	3000K	10W	600lm	230V		12	AC LED
67442C/B/W	Black	Warm white	3000K	10W	600lm	230V		12	AC LED
67442/W/W	White	Warm white	3000K	10W	600lm	230V		12	AC LED
67442/B/W	Black	Warm white	3000K	10W	600lm	230V		12	AC LED



Indoor/Outdoor Light Points



67220A | 1W | LED | Natural aluminium + acrylic

LED BUILT IN · CE · 2 YEAR · IP54 offer









67222A | 1W | LED | Natural aluminium + acrylic

LED BUILT IN · CE · 2 YEAR · IP54 offer









67484/W/W

67484 | 6W | AC LED | Die cast

LED BUILT IN · 80 CRI · TRIAC DIMMABLE · IK06 · CE · 2 YEAR · IP65



67484/B/W







67478/W/W

67478 | 12W | SMD 2835 | Die cast + PC

LED BUILT IN · 80 CRI · IK06 · CE · 2 YEAR · DARK LIGHT · IP65



67478/B/W





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67220A/AL/D	Aluminium	Daylight	6000K	1W	-	100-240V		20	Complete with driver
67222A/AL/D	Aluminium	Daylight	6000K	1W	-	100-240V		20	Complete with driver
67484/W/W	White	Warm white	3000K	6W	480lm	230V		12	AC LED
67484/B/W	Black	Warm white	3000K	6W	480lm	230V		12	AC LED
67478/W/W	White	Warm white	3000K	12W	325lm	230V		6	Complete with 300mA driver
67478/B/W	Black	Warm white	3000K	12W	325lm	230V		6	Complete with 300mA driver

Indoor/Outdoor Light Points
Natural aluminium



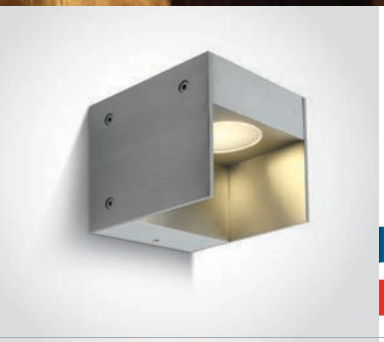

67334 | 1W | LED | Natural aluminium

LED BUILT IN

CE 2 YEAR

IP54 offer







67336 | 2x1W | LED | Natural aluminium

LED BUILT IN

CE 2 YEAR

IP54 offer





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67334/AL/W	Aluminium	Warm white	3000K	1W	65lm	100-240V		20	Complete with driver
67336/AL/W	Aluminium	Warm white	3000K	2x1W	130lm	100-240V		20	Complete with driver



Outdoor Wall Washers
Die cast



67346/W/W

67346 | 12W | SMD 2835 | Die cast

LED BUILT IN
80 CRI
ADJUSTABLE
CE
IP65
2 YEAR







67346/AN/W

67346 | 12W | SMD 2835 | Die cast

LED BUILT IN
80 CRI
ADJUSTABLE
CE
IP65
2 YEAR





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67346/W/W	White	Warm white	3000K	12W	840lm	230V	⏚	8	Complete with 250mA driver
67346/AN/W	Anthracite	Warm white	3000K	12W	840lm	230V	⏚	8	Complete with 250mA driver




67450/W/W

67450 | 7W | SMD 2835 | ABS + PC

LED BUILT IN
80 CRI
IK08
CE
DARK LIGHT
IP54
2 YEAR


67450/AN/W





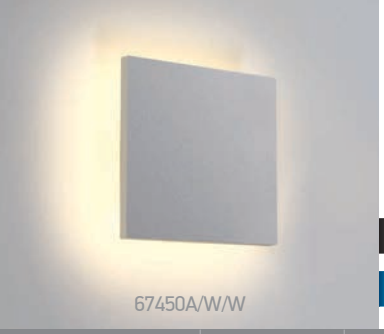
67450A/W/W

67450A | 7W | SMD 2835 | ABS + PC

LED BUILT IN
80 CRI
IK08
CE
DARK LIGHT
IP54
2 YEAR


67450A/AN/W





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67450/W/W	White	Warm white	3000K	7W	600lm	230V		24	Complete with 300mA driver
67450/AN/W	Anthracite	Warm white	3000K	7W	600lm	230V		24	Complete with 300mA driver
67450A/W/W	White	Warm white	3000K	7W	600lm	230V		24	Complete with 300mA driver
67450A/AN/W	Anthracite	Warm white	3000K	7W	600lm	230V		24	Complete with 300mA driver

The Plafo Ceiling Fan



24002 | 30W LED | 35W FAN | 6 Speed Fan | Plastic DC Motor.

LED BUILT IN

80 CRI

CE

2 YEAR

IP20



Complete with remote control.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
24002/W	White	Warm white-Cool white-Daylight	3000K-4000K-6000K	30W LED / 35W FAN	2600lm	230V		1	-





14

Plafo

Pages 479-522

E27 | G9 | SMD LED | LED

Die cast | Steel | Metal | PC

IP20 IP40 IP54 IP65

DIMMABLE DARK LIGHT 80 CRI 2 YEAR 5 YEAR





64002/G/C



64004/G/C

Multi LED Slim Plafo
Round



64002/W/C

64002 | 7W | LED | Die cast

DARK LIGHT
IP20
offer

LED BUILT IN
CE 2 YEAR







64002/G/C

64002 | 7W | LED | Die cast

DARK LIGHT
IP20
offer

LED BUILT IN
CE 2 YEAR







64004 | 16W | LED | Die cast

DARK LIGHT
IP20
offer

LED BUILT IN
CE 2 YEAR





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		
64002/W/C	White	Cool white	4000K	7W	400lm	230V		10	Complete with driver
64002/G/C	Grey	Cool white	4000K	7W	400lm	230V		10	Complete with driver
64004/G/C	Grey	Cool white	4000K	16W	860lm	230V		10	Complete with driver



Multi LED Slim Plafo
Square



64008 | 8W | LED | Die cast

DARK LIGHT
IP20
offer

LED BUILT IN

CE 2 YEAR







64010 | 17W | LED | Die cast

DARK LIGHT
IP20
offer

LED BUILT IN

CE 2 YEAR





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
64008/G/C	Grey	Cool white	4000K	8W	500lm	230V		10	Complete with driver
64010/G/C	Grey	Cool white	4000K	17W	1100lm	230V		10	Complete with driver

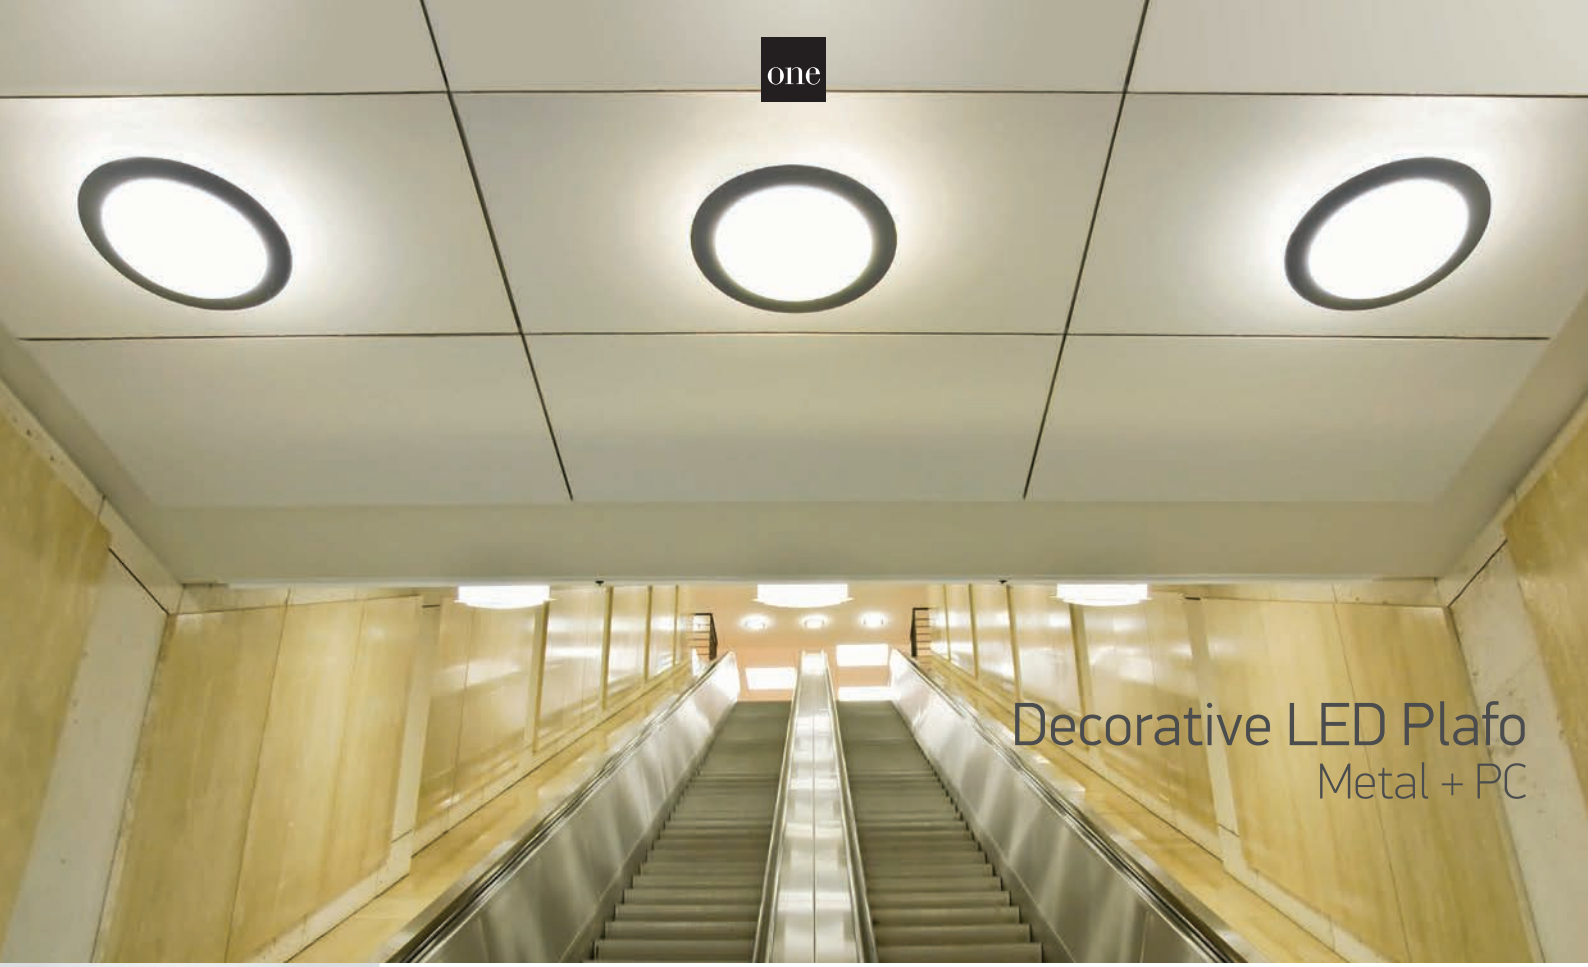

Decorative LED Plafo
Metal + PC



62010/G/F

62010 | 11W | LED | Metal + PC

LED BUILT IN

CE 2 YEAR

IP20

offer









offer

62010/G/BL



offer

62010/G/OR



offer

62010/G/V



62010A | 31W | LED | Metal + PC

LED BUILT IN

CE 2 YEAR

IP20

offer







Order Code	Colour	Ring Colour	Light Colour	CCT (K)	Watts	Input	Class		Notes
62010/G/F	Grey	Frosted	Warm white	3000K	11W	230V	⏚	5	-
62010/G/BL	Grey	Blue	Warm white	3000K	11W	230V	⏚	5	-
62010/G/OR	Grey	Orange	Warm white	3000K	11W	230V	⏚	5	-
62010/G/V	Grey	Violet	Warm white	3000K	11W	230V	⏚	5	-
62010A/G/V	Grey	Violet	Warm white	3000K	31W	230V	⏚	5	-



Decorative LED Plafo

Metal + PC



62014 | 31W | LED | Metal + PC

LED BUILT IN

IP20

2 YEAR

offer









62012 | 16W | LED | Metal + PC

LED BUILT IN

IP20

2 YEAR

offer







Order Code	Colour	Ring Colour	Light Colour	CCT (K)	Watts	Input	Class		Notes
62014/G	Grey	-	Warm white	3000K	31W	230V	⏚	5	-
62012/G/V	Grey	Violet	Warm white	3000K	16W	230V	⏚	5	-

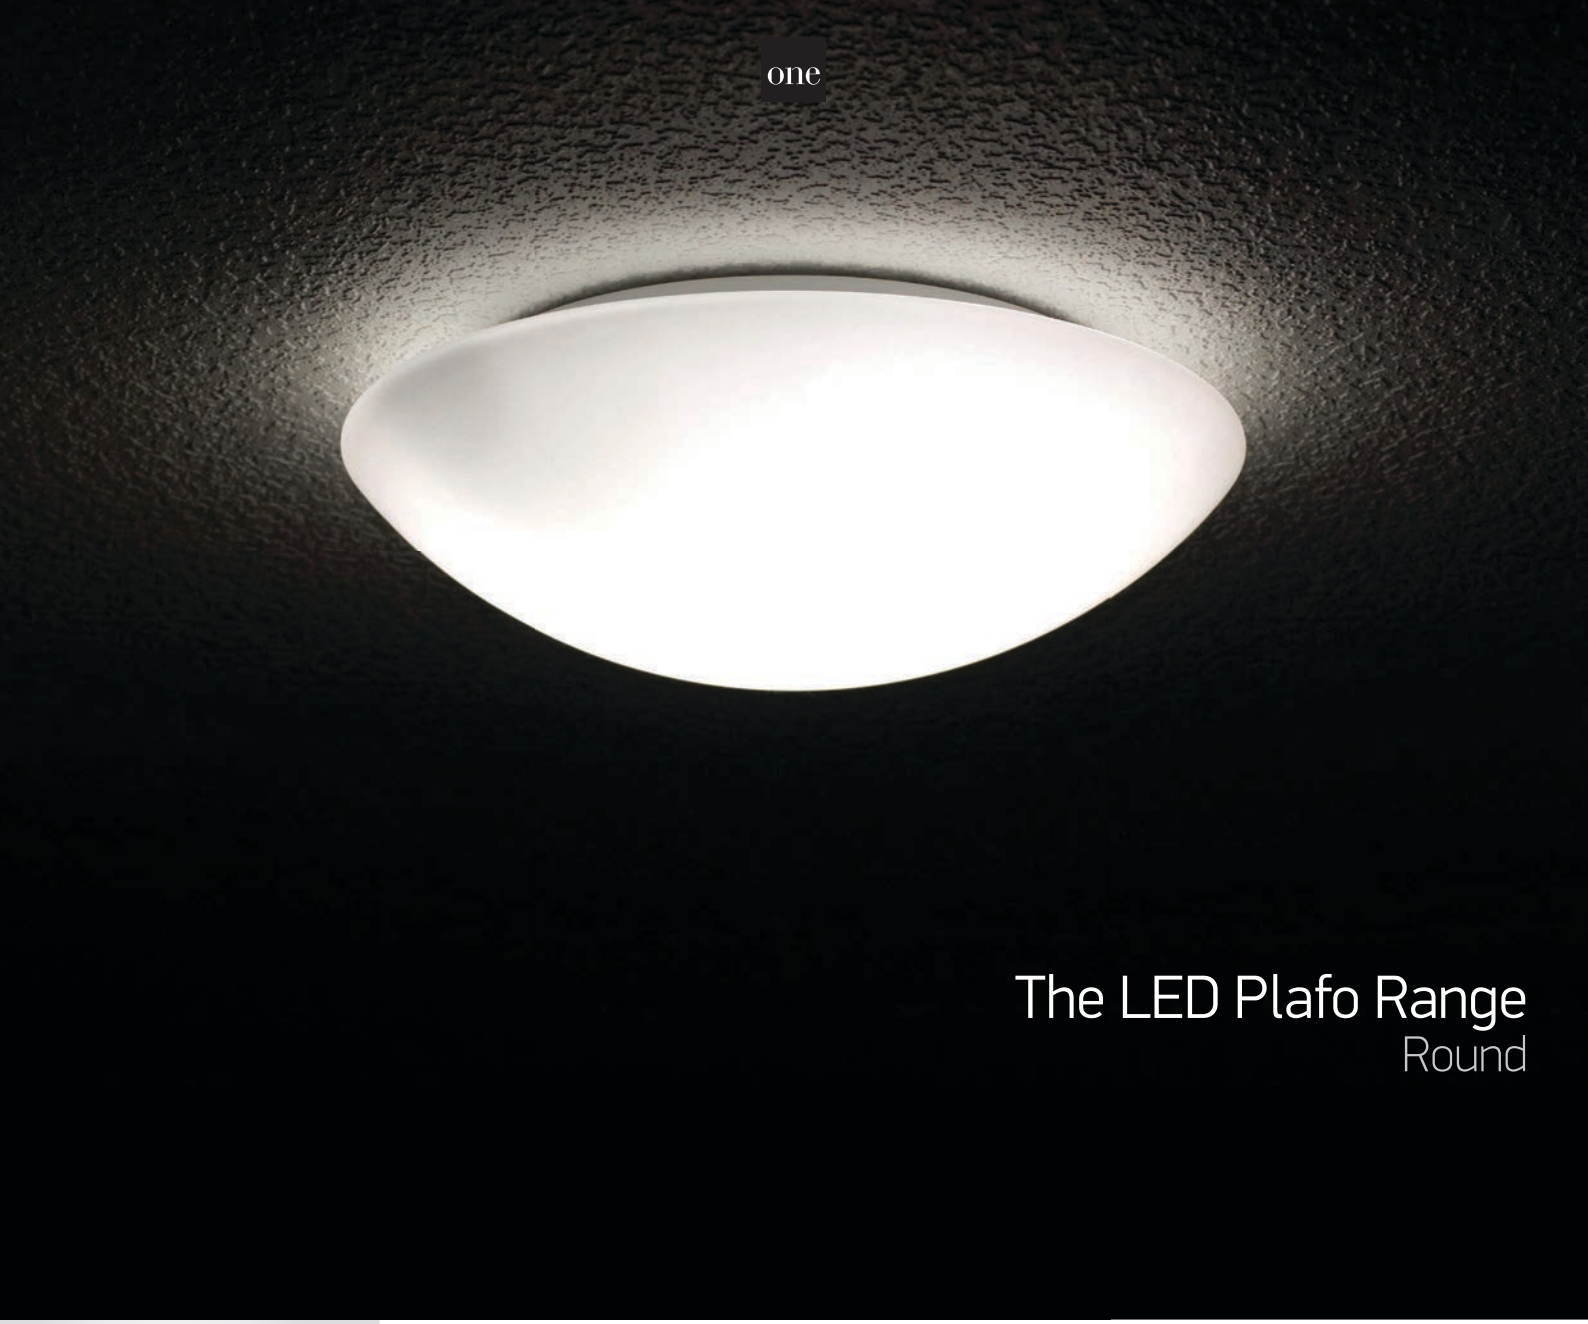

The LED Plafo Range
Round



62024B | 18W | SMD LED | Metal + plastic

LED BUILT IN

CE 2 YEAR

IP20









62024C | 26W | SMD LED | Metal + plastic

LED BUILT IN

CE 2 YEAR

IP20







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62024B/W	White	Warm white	3000K	18W	1100lm	230V		5	Complete with 450mA driver
62024C/C	White	Cool white	4000K	26W	1600lm	230V		5	Complete with 700mA driver
62024C/W	White	Warm white	3000K	26W	1600lm	230V		5	Complete with 700mA driver

The LED Plafo Range



62026D/W/W



62026A | 15W | SMD 2835 | Metal + PMMA

LED BUILT IN | 80 CRI | CE | 2 YEAR | IP20









62026B | 24W | SMD 2835 | Metal + PMMA

LED BUILT IN | 80 CRI | CE | 2 YEAR | IP20









62026C | 30W | SMD 2835 | Metal + PMMA

LED BUILT IN | 80 CRI | CE | 2 YEAR | IP20









62026D | 50W | SMD 2835 | Metal + PMMA

new | LED BUILT IN | 80 CRI | CE | 2 YEAR | IP20







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62026A/W	White	Warm white	3000K	15W	1050lm	230V		5	Complete with driver
62026B/W	White	Warm white	3000K	24W	1700lm	230V		5	Complete with driver
62026C/W	White	Warm white	3000K	30W	2150lm	230V		5	Complete with driver
62026D/W/C	White	Cool white	4000K	50W	3750lm	230V		5	Complete with driver
62026D/W/W	White	Warm white	3000K	50W	3750lm	230V		5	Complete with driver



62022B/W/W

The LED Slim Plafo Range
Round



62022A | 20W | SMD 2835 | PC

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP20









62022B | 25W | SMD 2835 | PC

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP20









62022C | 36W | SMD 2835 | PC

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP20









62022AM | 20W | SMD 2835 | Sensor 30min timer | PC

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP20







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62022A/W/W	White	Warm white	3000K	20W	1600lm	230V	☐	5	Complete with 450mA driver
62022B/W/W	White	Warm white	3000K	25W	2000lm	230V	☐	5	Complete with 600mA driver
62022C/W/W	White	Warm white	3000K	36W	2900lm	230V	☐	4	Complete with 900mA driver
62022AM/W/W	White	Warm white	3000K	20W	1600lm	230V	☐	5	Complete with 450mA driver



The LED Super Slim Plafo
Round

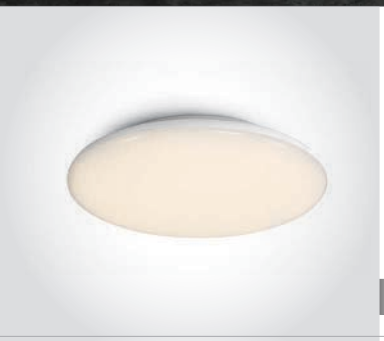

67404M | 12W | SMD 2835 | PC

LED BUILT IN

80 CRI

IK08

CE

2 YEAR

IP40









67404A | 25W | SMD 2835 | PC

LED BUILT IN

80 CRI

IK08

CE

2 YEAR

IP40







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67404M/W/W	White	Warm white	3000K	12W	1100lm	100-240V	⧈	20	Complete with driver
67404A/W/W	White	Warm white	3000K	25W	2300lm	100-240V	⧈	10	Complete with driver





67448 | 24W | SMD LED | Metal + Plastic

LED BUILT IN

85 CRI

CE

2 YEAR

IP20









67448A | 36W | SMD LED | Metal + Plastic

LED BUILT IN

85 CRI

CE

2 YEAR

IP20







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67448/W/W	White	Warm white	3000K	24W	1800lm	230V		5	Complete with 550mA driver
67448A/W/W	White	Warm white	3000K	36W	2700lm	230V		5	Complete with 900mA driver





62154/W/W

62154 | 24W | SMD 2835 | Metal + Plastic

LED BUILT IN

80 CRI

CE

2 YEAR

IP20







62154/B/W

62154 | 24W | SMD 2835 | Metal + Plastic

LED BUILT IN

80 CRI

CE

2 YEAR

IP20







62154/C/W

62154 | 24W | SMD 2835 | Metal + Plastic

LED BUILT IN

80 CRI

CE

2 YEAR

IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62154/W/W	White	Warm white	3000K	24W	1560lm	230V		10	Complete with 200mA driver
62154/B/W	Black	Warm white	3000K	24W	1560lm	230V		10	Complete with 200mA driver
62154/C/W	Chrome	Warm white	3000K	24W	1560lm	230V		10	Complete with 200mA driver

The LED Project Plafo
Metal



67438A/W/W



62125D/W/C



62118D | 20W | SMD 2835 | Metal

LED BUILT IN
80 CRI
CE
3 YEAR
IP20









62125D | 25W | SMD 2835 | Metal

LED BUILT IN
80 CRI
CE
3 YEAR
IP20









62150D | 50W | SMD 2835 | Metal

LED BUILT IN
80 CRI
CE
3 YEAR
IP20







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
62118D/W/W	White	Warm white	3000K	20W	1700lm	120°	230V		1	Complete with 500mA driver
62125D/W/C	White	Cool white	4000K	25W	2125lm	120°	230V		1	Complete with 700mA driver
62125D/W/W	White	Warm white	3000K	25W	2125lm	120°	230V		1	Complete with 700mA driver
62150D/W/C	White	Cool white	4000K	50W	4250lm	120°	230V		1	Complete with 1400mA driver
62150D/W/W	White	Warm white	3000K	50W	4250lm	120°	230V		1	Complete with 1400mA driver



The LED Project Plafo
Aluminium



67438/B/W

67438 | 40W | SMD 3030 | Aluminium

LED BUILT IN

90 CRI

CE

3 YEAR

IP20



67438/W/W







67438A/B/W

67438A | 45W | SMD 2835 | Aluminium

LED BUILT IN

80 CRI

CE

3 YEAR

IP20



67438A/W/W





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67438/W/W	White	Warm white	3000K	40W	3400lm	230V		1	Complete with 1000mA driver
67438/B/W	Black	Warm white	3000K	40W	3400lm	230V		1	Complete with 1000mA driver
67438A/W/W	White	Warm white	3000K	45W	3150lm	230V		1	Complete with 450mA driver
67438A/B/W	Black	Warm white	3000K	45W	3150lm	230V		1	Complete with 450mA driver



The LED Slim Line Plafo



62146/W/W

62146 | 55W | SMD 2835 | Metal + PS

new

IP20

LED BUILT IN

80 CRI

CE

3 YEAR







62146/B/W

62146 | 55W | SMD 2835 | Metal + PS

IP20

LED BUILT IN

80 CRI

CE

3 YEAR







62146A | 50W | SMD 2835 | Metal + PS

IP20

LED BUILT IN

80 CRI

CE

3 YEAR





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62146/W/W	White	Warm white	3000K	55W	4100lm	230V		1	Complete with 600mA driver
62146/B/W	Black	Warm white	3000K	55W	4100lm	230V		1	Complete with 600mA driver
62146A/B/W	Black	Warm white	3000K	50W	3800lm	230V		1	Complete with 480mA driver





62160/B/W

62160 | 62W | SMD 2835 | Metal

LED BUILT IN

80 CRI

CE

3 YEAR

IP20



62160/W/W







62160A/B/W

62160A | 62W | SMD 2835 | Aluminium

LED BUILT IN

80 CRI

CE

3 YEAR

IP20



62160A/W/W





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
62160/W/W	White	Warm white	3000K	62W	3600lm	120°	230V		1	Complete with 1500mA driver
62160/B/W	Black	Warm white	3000K	62W	3600lm	120°	230V		1	Complete with 1500mA driver
62160A/W/W	White	Warm white	3000K	62W	3600lm	120°	230V		1	Complete with 1500mA driver
62160A/B/W	Black	Warm white	3000K	62W	3600lm	120°	230V		1	Complete with 1500mA driver

The Ultra Slim LED Floating Plafo

Aluminium





62140FB/W/W

62140FB | 40W | SMD 2835 | Aluminium

LED BUILT IN

80 CRI CE 3 YEAR

IP20



62140FB/B/C







62160FB/W/W

62160FB | 60W | SMD 2835 | Aluminium

LED BUILT IN

80 CRI CE 3 YEAR

IP20



62160FB/B/C





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62140FB/W/C	White	Cool white	4000K	40W	3500lm	230V		4	Complete with 1000mA driver
62140FB/W/W	White	Warm white	3000K	40W	3500lm	230V		4	Complete with 1000mA driver
62140FB/B/C	Black	Cool white	4000K	40W	3500lm	230V		4	Complete with 1000mA driver
62160FB/W/C	White	Cool white	4000K	60W	5300lm	230V		3	Complete with 1500mA driver
62160FB/W/W	White	Warm white	3000K	60W	5300lm	230V		3	Complete with 1500mA driver
62160FB/B/C	Black	Cool white	4000K	60W	5300lm	230V		3	Complete with 1500mA driver



The Super Slim LED Plafo



62152/W/W

62152 | 40W | SMD 2835 | Aluminium

Super slim.

LED BUILT IN

80 CRI

CE

3 YEAR

IP20



62152/B/W





62152A/W/W

62152A | 40W | SMD 2835 | Aluminium

Super slim.

LED BUILT IN

80 CRI

CE

3 YEAR

IP20



62152A/B/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62152/W/C	White	Cool white	4000K	40W	2800lm	230V		5	Complete with 950mA driver
62152/W/W	White	Warm white	3000K	40W	2800lm	230V		5	Complete with 950mA driver
62152/B/W	Black	Warm white	3000K	40W	2800lm	230V		5	Complete with 950mA driver
62152A/W/C	White	Cool white	4000K	40W	2800lm	230V		5	Complete with 950mA driver
62152A/W/W	White	Warm white	3000K	40W	2800lm	230V		5	Complete with 900mA driver
62152A/B/W	Black	Warm white	3000K	40W	2800lm	230V		5	Complete with 900mA driver



62130N/W/W

62132NA/B/W

The LED Decorative Plafo
Round



62130N/AN/W

62130N | 20W | SMD 2835 | Aluminium

LED BUILT IN

80 CRI CE 3 YEAR

IP20



62130N/W/W



120°



62132N/AN/W

62132N | 32W | SMD 2835 | Aluminium

LED BUILT IN

80 CRI CE 3 YEAR

IP20



62132N/W/W



120°



62142N/AN/W

62142N | 42W | SMD 2835 | Aluminium

LED BUILT IN

80 CRI CE 3 YEAR

IP20



62142N/W/W



120°

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
62130N/W/W	White	Warm white	3000K	20W	1700lm	120°	230V		1	Complete with 500mA driver
62130N/AN/W	Anthracite	Warm white	3000K	20W	1700lm	120°	230V		1	Complete with 500mA driver
62132N/W/W	White	Warm white	3000K	32W	2720lm	120°	230V		1	Complete with 800mA driver
62132N/AN/W	Anthracite	Warm white	3000K	32W	2720lm	120°	230V		1	Complete with 800mA driver
62142N/W/W	White	Warm white	3000K	42W	3570lm	120°	230V		1	Complete with 1050mA driver
62142N/AN/W	Anthracite	Warm white	3000K	42W	3570lm	120°	230V		1	Complete with 1050mA driver



The LED Decorative Plafo
Square



62132NA/B/W

62132NA | 38W | SMD 2835 | Aluminium

LED BUILT IN

80 CRI

CE

3 YEAR

IP20



62132NA/W/W







62142NA/B/W

62142NA | 50W | SMD 2835 | Aluminium

LED BUILT IN

80 CRI

CE

3 YEAR

IP20



62142NA/W/W





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
62132NA/W/W	White	Warm white	3000K	38W	3230lm	120°	230V	⏚	1	Complete with 1000mA driver
62132NA/B/W	Black	Warm white	3000K	38W	3230lm	120°	230V	⏚	1	Complete with 1000mA driver
62142NA/W/W	White	Warm white	3000K	50W	4250lm	120°	230V	⏚	1	Complete with 1200mA driver
62142NA/B/W	Black	Warm white	3000K	50W	4250lm	120°	230V	⏚	1	Complete with 1200mA driver

The LED Decorative Plafo





62134N/W/W

62134N | 30W | SMD 2835 | Metal

new

IP20

LED BUILT IN

80 CRI

CE

3 YEAR









62134N/B/W

62134N | 30W | SMD 2835 | Metal

new

IP20

LED BUILT IN

80 CRI

CE

3 YEAR









62134N/BBS/W

62134N | 30W | SMD 2835 | Metal

new

IP20

LED BUILT IN

80 CRI

CE

3 YEAR









62134N/BGL/W

62134N | 30W | SMD 2835 | Metal

IP20

LED BUILT IN

80 CRI

CE

3 YEAR







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
62134N/W/W	White	Warm white	3000K	30W	2550lm	120°	230V		1	Complete with 700mA driver
62134N/B/W	Black	Warm white	3000K	30W	2550lm	120°	230V		1	Complete with 700mA driver
62134N/BBS/W	Brushed brass	Warm white	3000K	30W	2550lm	120°	230V		1	Complete with 700mA driver
62134N/BGL/W	Brushed gold	Warm white	3000K	30W	2550lm	120°	230V		1	Complete with 700mA driver



The LED Decorative Plafo



62144N/W/W

62144N | 50W | SMD 2835 | Metal

LED BUILT IN · 80 CRI · CE · 3 YEAR · IP20









62144N/B/W

62144N | 50W | SMD 2835 | Metal

LED BUILT IN · 80 CRI · CE · 3 YEAR · IP20









62144N/BBS/W

62144N | 50W | SMD 2835 | Metal

new · LED BUILT IN · 80 CRI · CE · 3 YEAR · IP20









62144N/BGL/W

62144N | 50W | SMD 2835 | Metal

LED BUILT IN · 80 CRI · CE · 3 YEAR · IP20







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
62144N/W/W	White	Warm white	3000K	50W	4250lm	120°	230V		1	Complete with 1200mA driver
62144N/B/W	Black	Warm white	3000K	50W	4250lm	120°	230V		1	Complete with 1200mA driver
62144N/BBS/W	Brushed brass	Warm white	3000K	50W	4250lm	120°	230V		1	Complete with 1200mA driver
62144N/BGL/W	Brushed gold	Warm white	3000K	50W	4250lm	120°	230V		1	Complete with 1200mA driver



The LED Decorative Plafo



62130L/W/W

62130L | 30W | SMD 2835 | Aluminium

LED BUILT IN · 80 CRI · CE · 3 YEAR · IP20







62130L/B/W

62130L | 30W | SMD 2835 | Aluminium

LED BUILT IN · 80 CRI · CE · 3 YEAR · IP20







62130L/BBS/W

62130L | 30W | SMD 2835 | Aluminium

new · LED BUILT IN · 80 CRI · CE · 3 YEAR · IP20







62130L/BGL/W

62130L | 30W | SMD 2835 | Aluminium

LED BUILT IN · 80 CRI · CE · 3 YEAR · IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62130L/W/W	White	Warm white	3000K	30W	2550lm	230V		1	Complete with 750mA driver
62130L/B/W	Black	Warm white	3000K	30W	2550lm	230V		1	Complete with 750mA driver
62130L/BBS/W	Brushed brass	Warm white	3000K	30W	2550lm	230V		1	Complete with 750mA driver
62130L/BGL/W	Brushed gold	Warm white	3000K	30W	2550lm	230V		1	Complete with 750mA driver



62148L/W/W



62148L/B/W

The LED Decorative Plafo



62148L/W/W

62148L | 48W | SMD 2835 | Aluminium

LED BUILT IN · 80 CRI · CE · 3 YEAR · IP20







62148L/B/W

62148L | 48W | SMD 2835 | Aluminium

LED BUILT IN · 80 CRI · CE · 3 YEAR · IP20







62148L/BBS/W

62148L | 48W | SMD 2835 | Aluminium

new · LED BUILT IN · 80 CRI · CE · 3 YEAR · IP20







62148L/BGL/W

62148L | 48W | SMD 2835 | Aluminium

LED BUILT IN · 80 CRI · CE · 3 YEAR · IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62148L/W/W	White	Warm white	3000K	48W	4080lm	230V		1	Complete with 1200mA driver
62148L/B/W	Black	Warm white	3000K	48W	4080lm	230V		1	Complete with 1200mA driver
62148L/BBS/W	Brushed brass	Warm white	3000K	48W	4080lm	230V		1	Complete with 1200mA driver
62148L/BGL/W	Brushed gold	Warm white	3000K	48W	4080lm	230V		1	Complete with 1200mA driver

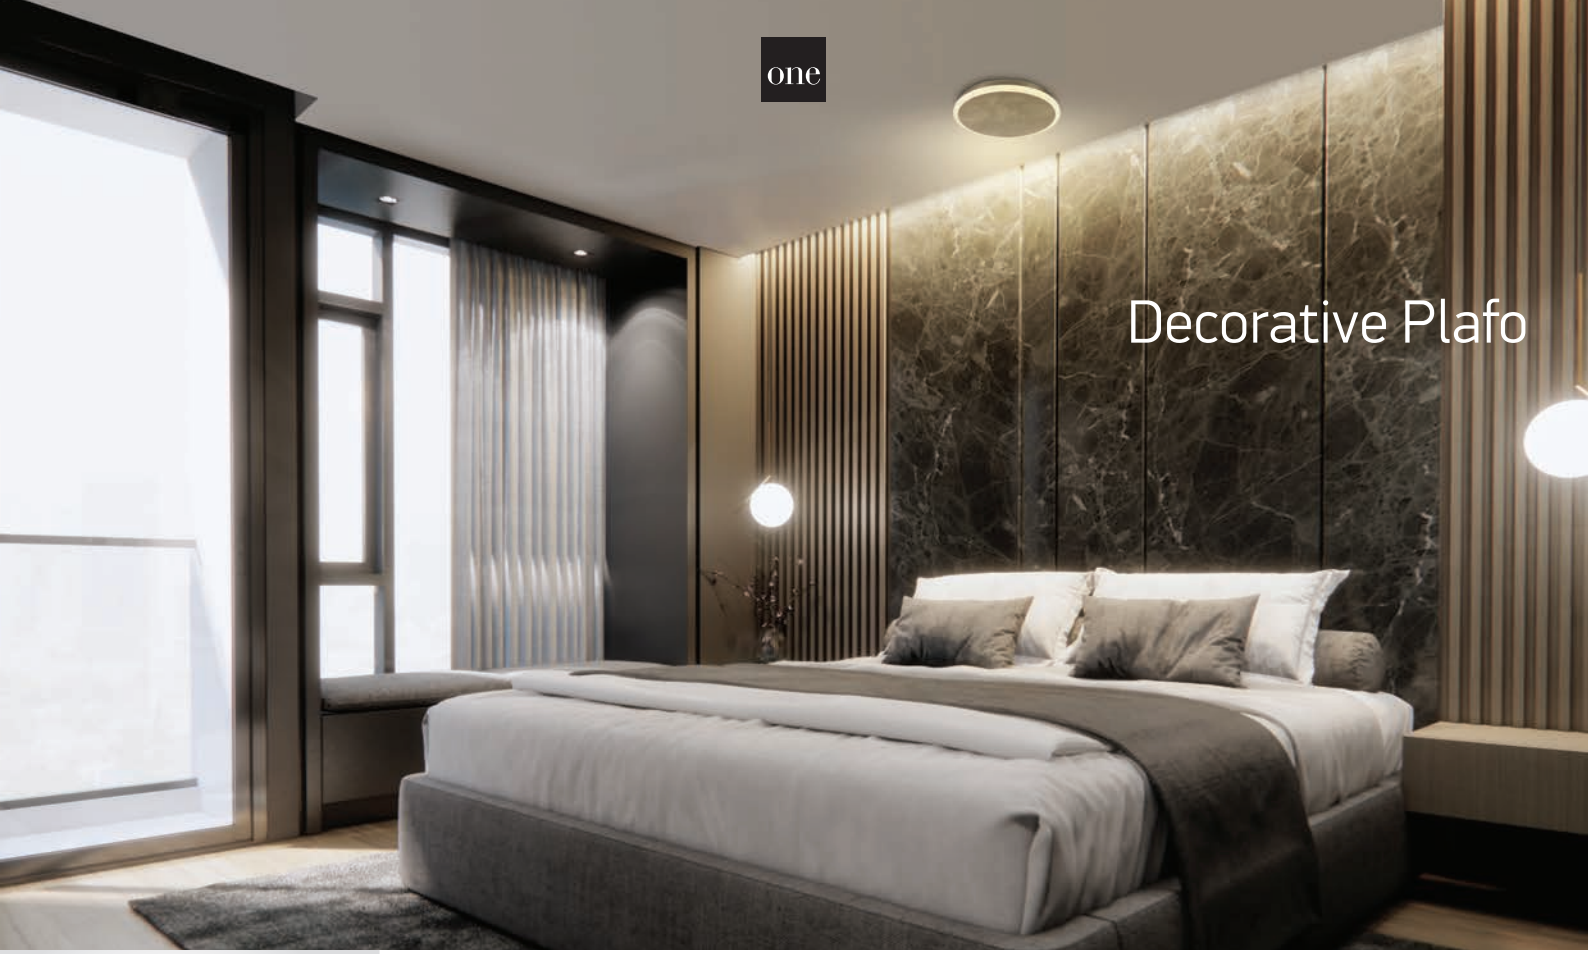

Decorative Plafo



62112 | 12W | SMD 2835 | Aluminium

LED BUILT IN

80 CRI CE 2 YEAR

IP20







67452/W/W

67452 | 30W | SMD 3030 | Aluminium

LED BUILT IN

90 CRI CE 3 YEAR

DARK LIGHT

IP20



67452/B/W

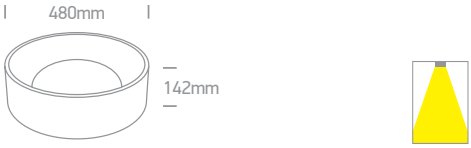



62135NA | 35W | SMD 2835 | Metal

LED BUILT IN

80 CRI CE 3 YEAR

IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62112/BS/W	Brass	Warm white	3000K	12W	960lm	230V		1	Complete with 24V DC driver
67452/W/W	White	Warm white	3000K	30W	2400lm	230V		1	Complete with 500mA driver
67452/B/W	Black	Warm white	3000K	30W	2400lm	230V		1	Complete with 500mA driver
62135NA/W/W	White	Warm white	3000K	35W	2100lm	230V		1	Complete with 700mA driver



62182 | 40W | SMD 2835 | Aluminium



62182/BAN/W

LED BUILT IN

80 CRI

CE

3 YEAR

IP20



62182/BGL/W



62182/BBR/W



62182A | 50W | SMD 2835 | Aluminium



62182A/BAN/W

LED BUILT IN

80 CRI

CE

3 YEAR

IP20



62182A/BGL/W



62182A/BBR/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62182/BAN/W	Brushed anthracite	Warm white	3000K	40W	3400lm	230V		1	Complete with 1050mA driver
62182/BGL/W	Brushed gold	Warm white	3000K	40W	3400lm	230V		1	Complete with 1050mA driver
62182/BBR/W	Brushed brown	Warm white	3000K	40W	3400lm	230V		1	Complete with 1050mA driver
62182A/BAN/W	Brushed anthracite	Warm white	3000K	50W	4250lm	230V		1	Complete with 1300mA driver
62182A/BGL/W	Brushed gold	Warm white	3000K	50W	4250lm	230V		1	Complete with 1300mA driver
62182A/BBR/W	Brushed brown	Warm white	3000K	50W	4250lm	230V		1	Complete with 1300mA driver



Indoor LED & Music Plafo



67402/W/W

67402 | 25W | SMD 2835 | Aluminium + PC

LED BUILT IN

80 CRI CE 2 YEAR

IP40



67402/B/W





62025 | 24W | SMD LED | Dimmable + RGB + Speaker | CCT Adjustable | ABS + PMMA

Bluetooth speaker plafo.

LED BUILT IN

80 CRI DIMMABLE CE 2 YEAR

IP20

ANDROID APP ON Google play

Available on the App Store

Application iLight.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67402/W/W	White	Warm white	3000K	25W	1850lm	100-240V		10	Complete with driver
67402/B/W	Black	Warm white	3000K	25W	1850lm	100-240V		10	Complete with driver
62025	White	Extra warm white - Daylight	2700K - 6500K	24W	1560lm	100-240V		5	Complete with driver



LED Circular Plafo
Metal + PC



62018 | 11W | LED | Metal + PC

LED BUILT IN

IP20

CE 2 YEAR

offer









62018A | 27W | LED | Metal + PC

LED BUILT IN

IP20

CE 2 YEAR

offer







Order Code	Colour	Light Colour	CCT (K)	Watts	Input	Class		Notes
62018/G	Grey	Warm white	3000K	11W	230V		5	-
62018A/D	White	Daylight	6000K	27W	230V		5	-
62018A/W	White	Warm white	3000K	27W	230V		5	-



Slim Line Panel Plafo



62116F | 16W | SMD 2835 | Surface / Recessed Mounted | Plastic

LED BUILT IN

80 CRI

CE

2 YEAR

IP20



Adjustable cutout hole.





62116FA | 16W | SMD 2835 | Surface / Recessed Mounted | Plastic

LED BUILT IN

80 CRI

CE

2 YEAR

IP20



Adjustable cutout hole.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class				Notes
62116F/W/C	White	Cool white	4000K	16W	1500lm	230V	⧈	70-175mm	50mm	20	Complete with 210mA driver
62116F/W/W	White	Warm white	3000K	16W	1500lm	100-240V	⧈	70-175mm	50mm	20	Complete with 210mA driver
62116FA/W/C	White	Cool white	4000K	16W	1500lm	100-240V	⧈	70-190mm	50mm	20	Complete with 230mA driver
62116FA/W/W	White	Warm white	3000K	16W	1500lm	100-240V	⧈	70-190mm	50mm	20	Complete with 230mA driver

The Ultra Slim LED Panel Plafo



62018F | 18W | SMD 4014 | Aluminium + PC

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP40







62030F | 30W | SMD 4014 | Aluminium + PC

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP40







62038F | 38W | SMD 4014 | Aluminium + PC

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP40







62046F | 46W | SMD 4014 | Aluminium + PC

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP40







62018AF | 18W | SMD 4014 | Aluminium + PC

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP40





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62018F/W/C	White	Cool white	4000K	18W	1450lm	230V		20	Complete with driver
62018F/W/W	White	Warm white	3000K	18W	1400lm	230V		20	Complete with driver
62030F/W/C	White	Cool white	4000K	30W	2400lm	230V		10	Complete with driver
62030F/W/W	White	Warm white	3000K	30W	2300lm	230V		10	Complete with driver
62038F/W/C	White	Cool white	4000K	38W	3000lm	230V		5	Complete with driver
62038F/W/W	White	Warm white	3000K	38W	2900lm	230V		5	Complete with driver
62046F/W/C	White	Cool white	4000K	46W	3600lm	230V		5	Complete with driver
62018AF/W/C	White	Cool white	4000K	18W	1450lm	230V		20	Complete with driver
62018AF/W/W	White	Warm white	3000K	18W	1400lm	230V		20	Complete with driver

The LED Panel Plafo
Round



62115F/W/W



62130F/G/C



62115F/W/W

62115F | 16W | SMD 4014 | Die cast

LED BUILT IN

80 CRI

CE

2 YEAR

IP40



62115F/B/C



62115F/B/W





62130F/W/W

62130F | 30W | SMD 4014 | Die cast

Optional dimmable driver code 040060.

LED BUILT IN

80 CRI

CE

2 YEAR

IP40



62130F/B/W



62130F/G/C



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62115F/W/C	White	Cool white	4000K	16W	1360lm	230V		10	Complete with 500mA driver
62115F/W/W	White	Warm white	3000K	16W	1360lm	230V		10	Complete with 500mA driver
62115F/B/C	Black	Cool white	4000K	16W	1360lm	230V		10	Complete with 500mA driver
62115F/B/W	Black	Warm white	3000K	16W	1360lm	230V		10	Complete with 500mA driver
62130F/W/C	White	Cool white	4000K	30W	2550lm	230V		10	Complete with 700mA driver
62130F/W/W	White	Warm white	3000K	30W	2550lm	230V		10	Complete with 700mA driver
62130F/B/W	Black	Warm white	3000K	30W	2550lm	230V		10	Complete with 700mA driver
62130F/G/C	Grey	Cool white	4000K	30W	2550lm	230V		10	Complete with 700mA driver

The LED Panel Plafo
Square



62122F/W/W

62130AF/W/W



62122F/W/W

62122F | 22W | SMD LED | Die cast

Optional dimmable driver code 040058.

LED BUILT IN

80 CRI CE 2 YEAR

IP40



62122F/B/W





62130AF/W/W

62130AF | 30W | SMD 4014 | Die cast

Optional dimmable driver code 040060.

LED BUILT IN

80 CRI CE 2 YEAR

IP40



62130AF/W/C



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62122F/W/W	White	Warm white	3000K	22W	1870lm	230V	☐	10	Complete with 700mA driver
62122F/B/W	Black	Warm white	3000K	22W	1870lm	230V	☐	10	Complete with 700mA driver
62130AF/W/C	White	Cool white	4000K	30W	2550lm	230V	☐	10	Complete with 700mA driver
62130AF/W/W	White	Warm white	3000K	30W	2550lm	230V	☐	10	Complete with 700mA driver



LED Aluminium Panel Range



62140AE | 40W | SMD 2835 | Aluminium

Backlit.

LED BUILT IN

80 CRI

CE

2 YEAR

IP40









62140RE | 40W | SMD 2835 | Aluminium

Backlit.

LED BUILT IN

80 CRI

CE

2 YEAR

IP40







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62140AE/W/C	White	Cool white	4000K	40W	3600lm	230V		4	Complete with 1000mA driver
62140RE/W/C	White	Cool white	4000K	40W	3600lm	230V		4	Complete with 1000mA driver
62140RE/W/W	White	Warm white	3000K	40W	3600lm	230V		4	Complete with 1000mA driver



LED Die Cast Panel Range

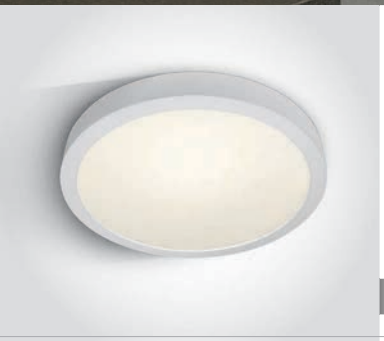

62140F | 40W | SMD 4014 | Die cast

LED BUILT IN

80 CRI CE 2 YEAR

IP40



Suspension kit included.





62140AF | 40W | SMD 4014 | Die cast

LED BUILT IN

80 CRI CE 2 YEAR

IP40



Suspension kit included.





62140RF | 40W | SMD 2016 | Die cast

LED BUILT IN

80 CRI CE 2 YEAR

IP40



Optional suspension kit.
Order code 050128.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62140F/W/C	White	Cool white	4000K	40W	2800lm	230V	☐	5	Complete with 1000mA driver
62140F/W/W	White	Warm white	3000K	40W	2520lm	230V	☐	5	Complete with 1000mA driver
62140AF/W/C	White	Cool white	4000K	40W	2850lm	230V	☐	4	Complete with 1000mA driver
62140AF/W/W	White	Warm white	3000K	40W	2560lm	230V	☐	4	Complete with 1000mA driver
62140RF/W/C	White	Cool white	4000K	40W	2700lm	230V	☐	5	Complete with 1000mA driver
62140RF/W/W	White	Warm white	3000K	40W	2700lm	230V	☐	5	Complete with 1000mA driver



Square LED Plafo
Steel



62102 | 17W | SMD LED | Steel

LED BUILT IN
80 CRI
CE
2 YEAR
IP20
offer







62104 | 30W | SMD LED | Steel

LED BUILT IN
80 CRI
CE
2 YEAR
IP20
offer





Order Code	Colour	Light Colour	CCT (K)	Watts	Input	Class		Notes
62102/MC	Brushed chrome	Warm white	3000K	17W	230V		5	Complete with 700mA driver
62104/MC	Brushed chrome	Warm white	3000K	30W	230V		4	Complete with 700mA driver

The IP44 Ceiling Plafo

67436 | 20W | SMD 2835 | Aluminium



LED BUILT IN

80 CRI

CE

2 YEAR

IP44





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67436/W/W	White	Warm white	3000K	20W	1400lm	230V	⏚	5	Complete with 500mA driver



The LED Slim Plafo Range
Round



67366 | 12W | SMD 2835 | PC

LED BUILT IN · 80 CRI · IK08 · CE · IP54 · 2 YEAR









67366E | 12W | SMD 2835 | Emergency 3Hrs Maintained | PC

LED BUILT IN · 80 CRI · IK08 · CE · IP54 · 2 YEAR









67368 | 18W | SMD 2835 | PC

LED BUILT IN · 80 CRI · IK08 · CE · IP54 · 2 YEAR









67368M | 25W | SMD 2835 | Sensor 120sec timer | PC

LED BUILT IN · 80 CRI · IK08 · CE · IP54 · 2 YEAR







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67366/W/C	White	Cool white	4000K	12W	960lm	230V	☐	20	Complete with 160mA driver
67366/W/W	White	Warm white	3000K	12W	960lm	230V	☐	20	Complete with 160mA driver
67366E/W/C	White	Cool white	4000K	12W	960lm	230V	☐	20	Emergency 3Hrs Maintained
67366E/W/W	White	Warm white	3000K	12W	960lm	230V	☐	20	Emergency 3Hrs Maintained
67368/W/C	White	Cool white	4000K	18W	1488lm	100-240V	☐	10	Complete with 225mA driver
67368/W/W	White	Warm white	3000K	18W	1350lm	100-240V	☐	10	Complete with 225mA driver
67368M/W/C	White	Cool white	4000K	25W	2100lm	230V	☐	10	Complete with driver



The LED Slim Plafo Range
PC



67370 | 25W | SMD 2835 | PC

LED BUILT IN

80 CRI

IK08

CE

IP54

2 YEAR









67372 | 25W | SMD 2835 | PC

LED BUILT IN

80 CRI

IK08

CE

IP54

2 YEAR







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67370/W/C	White	Cool white	4000K	25W	2000lm	100-240V		10	Complete with 300mA driver
67370/W/W	White	Warm white	3000K	25W	1875lm	100-240V		10	Complete with 300mA driver
67372/W/C	White	Cool white	4000K	25W	2000lm	100-240V		10	Complete with 300mA driver
67372/W/W	White	Warm white	3000K	25W	1875lm	100-240V		10	Complete with 300mA driver



Outdoor Project LED Plafo
Die cast



67384/AN/W

67384 | 30W | SMD 3014 | Die cast

LED BUILT IN

80 CRI CE 2 YEAR

IP54



67384/W/W





67384A/AN/W

67384A | 30W | SMD 3014 | Die cast

LED BUILT IN

80 CRI CE 2 YEAR

IP54



67384A/W/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67384/W/W	White	Warm white	3000K	30W	2500lm	100-240V		4	Complete with 700mA driver
67384/AN/W	Anthracite	Warm white	3000K	30W	2500lm	100-240V		4	Complete with 700mA driver
67384A/W/W	White	Warm white	3000K	30W	2500lm	100-240V		4	Complete with 700mA driver
67384A/AN/W	Anthracite	Warm white	3000K	30W	2500lm	100-240V		4	Complete with 700mA driver



Outdoor Slim LED Plafo
Die cast


67362/AN/W

67362 | 25W | SMD LED | Die cast

LED BUILT IN
80 CRI
CE
2 YEAR
IP54


67362/W/W




67363/AN/W

67363 | 30W | SMD LED | Die cast

LED BUILT IN
80 CRI
CE
2 YEAR
IP54


67363/W/W




67362A/AN/W

67362A | 25W | SMD LED | Die cast

LED BUILT IN
80 CRI
CE
2 YEAR
IP54


67362A/W/W




67363A/AN/W

67363A | 30W | SMD LED | Die cast

LED BUILT IN
80 CRI
CE
2 YEAR
IP54


67363A/W/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67362/W/W	White	Warm white	3000K	25W	1600lm	230V		8	Complete with 350mA driver
67362/AN/W	Anthracite	Warm white	3000K	25W	1600lm	230V		8	Complete with 350mA driver
67363/W/W	White	Warm white	3000K	30W	2500lm	100-240V		6	Complete with 700mA driver
67363/AN/W	Anthracite	Warm white	3000K	30W	2500lm	100-240V		6	Complete with 700mA driver
67362A/W/W	White	Warm white	3000K	25W	1600lm	230V		8	Complete with 350mA driver
67362A/AN/W	Anthracite	Warm white	3000K	25W	1600lm	230V		8	Complete with 350mA driver
67363A/W/W	White	Warm white	3000K	30W	2500lm	100-240V		6	Complete with 700mA driver
67363A/AN/W	Anthracite	Warm white	3000K	30W	2500lm	100-240V		6	Complete with 700mA driver



The LED Plafo Outdoor Square
Plastic

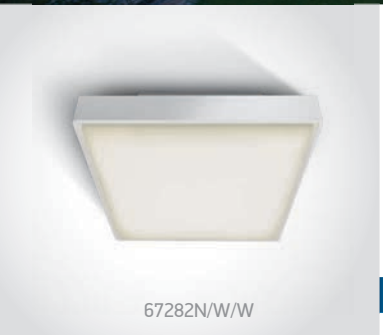

67282N/W/W

67282N | 16W | SMD 2835 | ABS + PC

LED BUILT IN · 80 CRI · IK08 · CE · IP65 · 2 YEAR



67282N/G/W



67282N/AN/W





67282AN/W/W

67282AN | 24W | SMD 2835 | ABS + PC

LED BUILT IN · 80 CRI · IK08 · CE · IP65 · 2 YEAR



67282AN/G/W



67282AN/AN/W





67282BN/W/W

67282BN | 30W | SMD 2835 | ABS + PC

LED BUILT IN · 80 CRI · IK08 · CE · IP65 · 2 YEAR



67282BN/G/W



67282BN/AN/W





67282ANE | 16W | SMD 2835 | Emergency 3Hrs Maintained | ABS + PC

LED BUILT IN · 80 CRI · IK08 · CE · IP65 · 2 YEAR





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67282N/W/W	White	Warm white	3000K	16W	960lm	230V	☐	10	Complete with 500mA driver
67282N/AN/W	Anthracite	Warm white	3000K	16W	960lm	230V	☐	10	Complete with 500mA driver
67282N/G/W	Grey	Warm white	3000K	16W	960lm	230V	☐	10	Complete with 500mA driver
67282AN/W/W	White	Warm white	3000K	24W	1440lm	230V	☐	10	Complete with 600mA driver
67282AN/AN/W	Anthracite	Warm white	3000K	24W	1440lm	230V	☐	10	Complete with 600mA driver
67282AN/G/W	Grey	Warm white	3000K	24W	1440lm	230V	☐	10	Complete with 600mA driver
67282BN/W/W	White	Warm white	3000K	30W	1800lm	230V	☐	4	Complete with 700mA driver
67282BN/AN/W	Anthracite	Warm white	3000K	30W	1800lm	230V	☐	4	Complete with 700mA driver
67282BN/G/W	Grey	Warm white	3000K	30W	1800lm	230V	☐	4	Complete with 700mA driver
67282ANE/G/W	Grey	Warm white	3000K	16W	1280lm	230V	☐	10	Emergency 3Hrs Maintained

The LED Plafo Outdoor Round



67280N/W/W

67280N | 16W | SMD 2835 | ABS + PC

LED BUILT IN · 80 CRI · IK08 · CE · IP65 · 2 YEAR



67280N/G/W



67280N/AN/W





67280AN/W/W

67280AN | 24W | SMD 2835 | ABS + PC

LED BUILT IN · 80 CRI · IK08 · CE · IP65 · 2 YEAR



67280AN/G/W



67280AN/AN/W





67280BN/W/W

67280BN | 30W | SMD 2835 | ABS + PC

LED BUILT IN · 80 CRI · IK08 · CE · IP65 · 2 YEAR



67280BN/G/W



67280BN/AN/W





67280ANE | 15W | SMD 2835 | Emergency 3Hrs Maintained | ABS + PC

LED BUILT IN · 80 CRI · IK08 · CE · IP65 · 2 YEAR





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67280N/W/C	White	Cool white	4000K	16W	960lm	230V	☐	10	Complete with 500mA driver
67280N/W/W	White	Warm white	3000K	16W	960lm	230V	☐	10	Complete with 500mA driver
67280N/AN/W	Anthracite	Warm white	3000K	16W	960lm	230V	☐	10	Complete with 500mA driver
67280N/G/W	Grey	Warm white	3000K	16W	960lm	230V	☐	10	Complete with 500mA driver
67280AN/W/C	White	Cool white	4000K	24W	1440lm	230V	☐	10	Complete with 600mA driver
67280AN/W/W	White	Warm white	3000K	24W	1440lm	230V	☐	10	Complete with 600mA driver
67280AN/AN/W	Anthracite	Warm white	3000K	24W	1440lm	230V	☐	10	Complete with 600mA driver
67280AN/G/W	Grey	Warm white	3000K	24W	1440lm	230V	☐	10	Complete with 600mA driver
67280BN/W/W	White	Warm white	3000K	30W	1800lm	230V	☐	5	Complete with 700mA driver
67280BN/AN/W	Anthracite	Warm white	3000K	30W	1800lm	230V	☐	5	Complete with 700mA driver
67280BN/G/W	Grey	Warm white	3000K	30W	1800lm	230V	☐	5	Complete with 700mA driver
67280ANE/G/W	Grey	Warm white	3000K	15W	1000lm	230V	☐	10	Emergency 3Hrs Maintained





67282E/B

67282E | 12W | E27 | ABS + PC

IK08

CE 2 YEAR

IP65



67282E/W



67282E/G



67282E/AN





67282EA/B

67282EA | 2x12W | E27 | ABS + PC

IK08

CE 2 YEAR

IP65



67282EA/W



67282EA/G



67282EA/AN



Order Code	Colour	Watts	Input	Class		Notes
67282E/W	White	12W	100-240V		10	-
67282E/AN	Anthracite	12W	100-240V		10	-
67282E/B	Black	12W	100-240V		10	-
67282E/G	Grey	12W	100-240V		10	-
67282EA/W	White	2x12W	100-240V		10	-
67282EA/AN	Anthracite	2x12W	100-240V		10	-
67282EA/B	Black	2x12W	100-240V		10	-
67282EA/G	Grey	2x12W	100-240V		10	-



The E27 Plafo Outdoor Range
Round



67280E/B

67280E | 12W | E27 | ABS + PC

IK08

CE 2 YEAR

IP65



67280E/W



67280E/G



67280E/AN





67280EA/B

67280EA | 2x12W | E27 | ABS + PC

IK08

CE 2 YEAR

IP65



67280EA/W



67280EA/G



67280EA/AN



Order Code	Colour	Watts	Input	Class		Notes
67280E/W	White	12W	100-240V		10	-
67280E/AN	Anthracite	12W	100-240V		10	-
67280E/B	Black	12W	100-240V		10	-
67280E/G	Grey	12W	100-240V		10	-
67280EA/W	White	2x12W	100-240V		10	-
67280EA/AN	Anthracite	2x12W	100-240V		10	-
67280EA/B	Black	2x12W	100-240V		10	-
67280EA/G	Grey	2x12W	100-240V		10	-





67390/W/C

67390 | 21W | SMD 2835 | ABS + PC

new

IP65

LED BUILT IN

80 CRI

CE

2 YEAR









67390/W/W

67390 | 21W | SMD 2835 | ABS + PC

LED BUILT IN

80 CRI

CE

2 YEAR

IP65







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67390/W/C	White	Cool white	4000K	21W	1300lm	230V	☐	10	Complete with 500mA driver
67390/W/W	White	Warm white	3000K	21W	1300lm	230V	☐	10	Complete with 500mA driver



The IP65 Plafo Range



67390/AN/C

67390 | 21W | SMD 2835 | ABS + PC

LED BUILT IN

80 CRI

CE

2 YEAR

IP65









67390/AN/W

67390 | 21W | SMD 2835 | ABS + PC

LED BUILT IN

80 CRI

CE

2 YEAR

IP65







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67390/AN/C	Anthracite	Cool white	4000K	21W	1300lm	230V		10	Complete with 500mA driver
67390/AN/W	Anthracite	Warm white	3000K	21W	1300lm	230V		10	Complete with 500mA driver





15

Pendants

Pages 525-542

MR16 | GU10 | E27 | COB LED | LED

Die cast | Natural aluminium | Gypsum | Metal

IP20

ADJUSTABLE 80 CRI 2 YEAR 3 YEAR 5 YEAR





Cylinder Pendants



63105M/W + 050112/GL

63105M | 10W | MR16 | GU10 | Aluminium body + plastic reflector

Reflector must be ordered separately.

5 YEAR

DARK LIGHT

IP20



63105M/B + 050112/W







63105M/BBS + 050112/B

63105M | 10W | MR16 | GU10 | Aluminium + plastic reflector

Reflector must be ordered separately.

5 YEAR

DARK LIGHT

IP20



63105M/MG + 050112/B







050112/W White



050112/B Black



050112/G Grey



050112/BS Brass



050112/ABS Antique brass



050112/GL Gold



050112/CU Copper



050112/DC Dark chrome

Order Code	Colour	Watts	Input	Class		Notes
63105M/W	White	10W	100-240V		12	-
63105M/B	Black	10W	100-240V		12	-
63105M/BBS	Brushed brass	10W	100-240V		12	-
63105M/MG	Metal grey	10W	100-240V		12	-



63105MA/W + 050112/CU

63105MA/MG + 050112/DC

63105MA/BBS + 050112/GL

63105MA/B + 050112/G

Cylinder Pendants



63105MA/B + 050112/W

63105MA | 10W | MR16 | GU10 | Aluminium + plastic reflector

Reflector must be ordered separately.

DARK LIGHT

IP20

5 YEAR



63105MA/W + 050112/GL







63105MA/MG + 050112/DC

63105MA | 10W | MR16 | GU10 | Aluminium + plastic reflector

Reflector must be ordered separately.

DARK LIGHT

IP20

5 YEAR



63105MA/BBS + 050112/B







050112/W White



050112/B Black



050112/G Grey



050112/BS Brass



050112/ABS Antique brass



050112/GL Gold



050112/CU Copper



050112/DC Dark chrome

Order Code	Colour	Watts	Input	Class		Notes
63105MA/W	White	10W	100-240V		12	-
63105MA/B	Black	10W	100-240V		12	-
63105MA/BBS	Brushed brass	10W	100-240V		12	-
63105MA/MG	Metal grey	10W	100-240V		12	-

Cylinder Pendants





63105N/W

63105N | 10W | MR16 | GU10 | Aluminium

5 YEAR

DARK LIGHT

IP20







63105N/B

63105N | 10W | MR16 | GU10 | Aluminium

5 YEAR

DARK LIGHT

IP20





Order Code	Colour	Reflector	Watts	Input	Class		Notes
63105N/W	White	Black	10W	100-240V		24	-
63105N/B	Black	Brass	10W	100-240V		24	-



LED Pendant Tubes

63108A/W/W

63108A | 6W | COB LED | Die cast

LED BUILT IN

80 CRI

CE

3 YEAR

IP20







63108A/B/W

63108A | 6W | COB LED | Die cast

LED BUILT IN

80 CRI

CE

3 YEAR

IP20







Order Code	Colour	Reflector	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
63108A/W/W	White	Black	Warm white	3000K	6W	420lm	30°	230V	⏚	12	Complete with 700mA driver
63108A/B/W	Black	Brass	Warm white	3000K	6W	420lm	30°	230V	⏚	12	Complete with 700mA driver



E27 Pendant Tubes



63124/B

63124 | 20W | E27 | Aluminium

5 YEAR

IP20



63124/BBS



63124/CU





63124B/B

63124B | 3x20W | E27 | Aluminium

5 YEAR

IP20



63124B/BBS





63124C/B

63124C | 5x20W | E27 | Aluminium

5 YEAR

IP20



63124C/BBS



Order Code	Colour	Watts	Input	Class		Notes
63124/B	Black	20W	100-240V		20	-
63124/BBS	Brushed brass	20W	100-240V		20	-
63124/CU	Copper	20W	100-240V		20	-
63124B/B	Black	3x20W	100-240V		1	-
63124B/BBS	Brushed brass	3x20W	100-240V		1	-
63124C/B	Black	5x20W	100-240V		1	-
63124C/BBS	Brushed brass	5x20W	100-240V		1	-



E27 Pendant Cones



63122/B

63122 | 10W | E27 | Aluminium

new

IP20

5 YEAR



63122/BBS



63122/CU





63122B/B

63122B | 3x10W | E27 | Aluminium

new

IP20

5 YEAR



63122B/BBS



63122B/CU



Order Code	Colour	Watts	Input	Class		Notes
63122/B	Black	10W	100-240V		1	-
63122/BBS	Brushed brass	10W	100-240V		1	-
63122/CU	Copper	10W	100-240V		1	-
63122B/B	Black	3x10W	100-240V		1	-
63122B/BBS	Brushed brass	3x10W	100-240V		1	-
63122B/CU	Copper	3x10W	100-240V		1	-



E27 Round Pendants


63140/B

63140 | 10W | E27 | Aluminium

new

IP20

5 YEAR


63140/BBS






63140B/B

63140B | 2x10W | E27 | Aluminium

new

IP20

5 YEAR


63140B/BBS






63140C/B

63140C | 3x10W | E27 | Aluminium

new

IP20

5 YEAR


63140C/BBS





Order Code	Colour	Watts	Input	Class		Notes
63140/B	Black	10W	100-240V		1	-
63140/BBS	Brushed brass	10W	100-240V		1	-
63140B/B	Black	2x10W	100-240V		1	-
63140B/BBS	Brushed brass	2x10W	100-240V		1	-
63140C/B	Black	3x10W	100-240V		1	-
63140C/BBS	Brushed brass	3x10W	100-240V		1	-



Gypsum Pendants



63036 | 10W | MR16 | GU10 | Gypsum

5 YEAR

IP20



Suitable for GU10 LED lamp.





63038 | 7W | GX53 | Gypsum

5 YEAR

IP20

offer



Suitable for GX53 LED lamp.



Order Code	Colour	Watts	Input	Class		Notes
63036	White	10W	100-240V		12	-
63038	White	7W	100-240V		12	-



E27 Pendant Kit

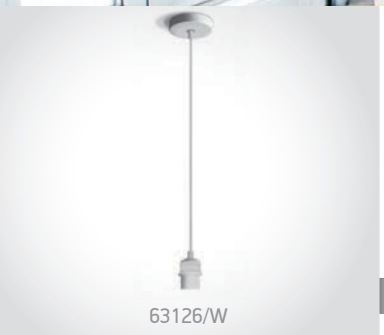

63126/W

63126 | 20W | E27 | Aluminium

Suitable for shade or glass.

5 YEAR

IP20



63126/B



63126/CU





63126A/W

63126A | 20W | E27 | Aluminium

Suitable for shade or glass.

5 YEAR

IP20



63126A/B



63126A/BBS



63126A/CU





63128/BBS

63128 | 20W | E27 | Aluminium

Suitable for shade or glass.

5 YEAR

IP20



63128/CU



Order Code	Colour	Watts	Input	Class		Notes
63126/W	White	20W	100-240V		20	-
63126/B	Black	20W	100-240V		20	-
63126/CU	Copper	20W	100-240V		20	-
63126A/W	White	20W	100-240V		20	-
63126A/B	Black	20W	100-240V		20	-
63126A/BBS	Brushed brass	20W	100-240V		20	-
63126A/CU	Copper	20W	100-240V		20	-
63128/BBS	Brushed brass	20W	100-240V		20	-
63128/CU	Copper	20W	100-240V		20	-



0990/BBS

0990/B

Decorative E27



0990/B

0990 | 20W | E27

5 YEAR

IP20



Suitable for E27 LED lamp.





0990/BBS

0990 | 20W | E27

5 YEAR

IP20



Suitable for E27 LED lamp.





0992 | 20W | E27

5 YEAR

IP20



Suitable for E27 LED lamp.



Order Code	Colour	Lampholder	Watts	Input	Class		Notes
0990/B	Black	E27	20W	100-240V		36	-
0990/BBS	Brushed brass	E27	20W	100-240V		36	-
0992/B	Black	E27	20W	100-240V		36	-



Retro Pendants



63040 | 12W | E27 | Aluminium

5 YEAR

IP20









63042 | 12W | E27 | Aluminium

5 YEAR

IP20









63044 | 12W | E27 | Aluminium

5 YEAR

IP20







Order Code	Colour	Reflector	Watts	Input	Class		Notes
63040/B/BS	Black	Brass	12W	100-240V		1	-
63042/B/BS	Black	Brass	12W	100-240V		1	-
63044/B/BS	Black	Brass	12W	100-240V		1	-



Retro Pendants



63118 | 10W | E27 | Steel

5 YEAR

IP20









63020/W/G

63020 | 20W | E27 | Aluminium

5 YEAR

IP20









63020/B/G

63020 | 20W | E27 | Aluminium

5 YEAR

IP20



63020/B/BS





Order Code	Colour	Reflector	Watts	Input	Class		Notes
63118/BBS	Brushed brass	White	10W	100-240V		4	-
63020/W/G	White	Grey	20W	100-240V		1	-
63020/B/G	Black	Grey	20W	100-240V		1	-
63020/B/BS	Black	Brass	20W	100-240V		1	-

Bowl Shade Pendant Range



63016A/W/G

63016A/B/BS



63016A/W/G

63016A | 20W | E27 | Aluminium

5 YEAR

IP20









63022/W/BS

63022 | 20W | E27 | Aluminium

5 YEAR

IP20









63022A/W/BS

63022A | 20W | E27 | Aluminium

5 YEAR

IP20









63022B/W/BS

63022B | 25W | E27 | Aluminium

5 YEAR

IP20







Order Code	Colour	Reflector	Watts	Input	Class		Notes
63016A/W/G	White	Grey	20W	100-240V		1	-
63022/W/BS	White	Brass	20W	100-240V		1	-
63022A/W/BS	White	Brass	20W	100-240V		1	-
63022B/W/BS	White	Brass	25W	100-240V		1	-



Bowl Shade Pendant Range



63016A/B/BS

63016A | 20W | E27 | Aluminium

5 YEAR

IP20



63016A/B/G





63022/B/BS

63022 | 20W | E27 | Aluminium

5 YEAR

IP20







63022A/B/BS

63022A | 20W | E27 | Aluminium

5 YEAR

IP20







63022B/B/BS

63022B | 25W | E27 | Aluminium

5 YEAR

IP20





Order Code	Colour	Reflector	Watts	Input	Class		Notes
63016A/B/G	Black	Grey	20W	100-240V		1	-
63016A/B/BS	Black	Brass	20W	100-240V		1	-
63022/B/BS	Black	Brass	20W	100-240V		1	-
63022A/B/BS	Black	Brass	20W	100-240V		1	-
63022B/B/BS	Black	Brass	25W	100-240V		1	-



Bowl Pendants



63074/BBS

63074 | 20W | E27 | Aluminium

5 YEAR

IP20









63074/MG

63074 | 20W | E27 | Aluminium

5 YEAR

IP20









63074/CU

63074 | 20W | E27 | Aluminium

5 YEAR

IP20







Order Code	Colour	Watts	Input	Class		Notes
63074/BBS	Brushed brass	20W	100-240V		1	-
63074/MG	Metal grey	20W	100-240V		1	-
63074/CU	Copper	20W	100-240V		1	-

Retro Pendants



63072/BBS

63072 | 20W | E27 | Aluminium

5 YEAR

IP20







63072/MG

63072 | 20W | E27 | Aluminium

5 YEAR

IP20







63072/CU

63072 | 20W | E27 | Aluminium

5 YEAR

IP20







63072A/BBS

63072A | 20W | E27 | Aluminium

5 YEAR

IP20





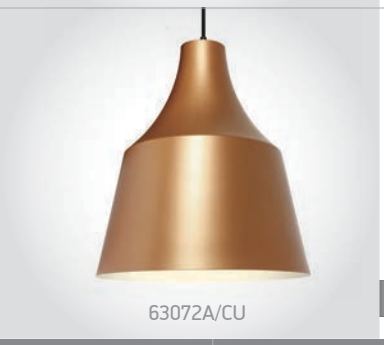

63072A/CU

63072A | 20W | E27 | Aluminium

5 YEAR

IP20





Order Code	Colour	Watts	Input	Class		Notes
63072/BBS	Brushed brass	20W	100-240V		1	-
63072/MG	Metal grey	20W	100-240V		1	-
63072/CU	Copper	20W	100-240V		1	-
63072A/BBS	Brushed brass	20W	100-240V		1	-
63072A/CU	Copper	20W	100-240V		1	-

one

The COB Moving Heads Pendant



65110P | 4x10W | COB LED | Die cast

LED BUILT IN

80 CRI

ADJUSTABLE

CE

2 YEAR

IP20







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65110P/W/W	White	Warm white	3000K	4x10W	4x900lm	60°	230V	⏚	2	Complete with 1000mA driver



Linear LED Bars



38018 | 6x1W | LED | Metal

LED BUILT IN

IP20

CE 2 YEAR

offer









38016/G/W

38016 | 16W | LED | Die cast

LED BUILT IN

IP20

CE 2 YEAR

offer

offer



38016/W/D





Order Code	Colour	Light Colour	CCT (K)	Watts	Input	Class		Notes
38018/G/W	Grey	Warm white	3000K	6x1W	100-240V		1	Complete with driver
38016/W/D	White	Daylight	6000K	16W	100-240V		1	Complete with driver
38016/W/W	White	Warm white	3000K	16W	100-240V		1	Complete with driver
38016/G/W	Grey	Warm white	3000K	16W	100-240V		1	Complete with driver



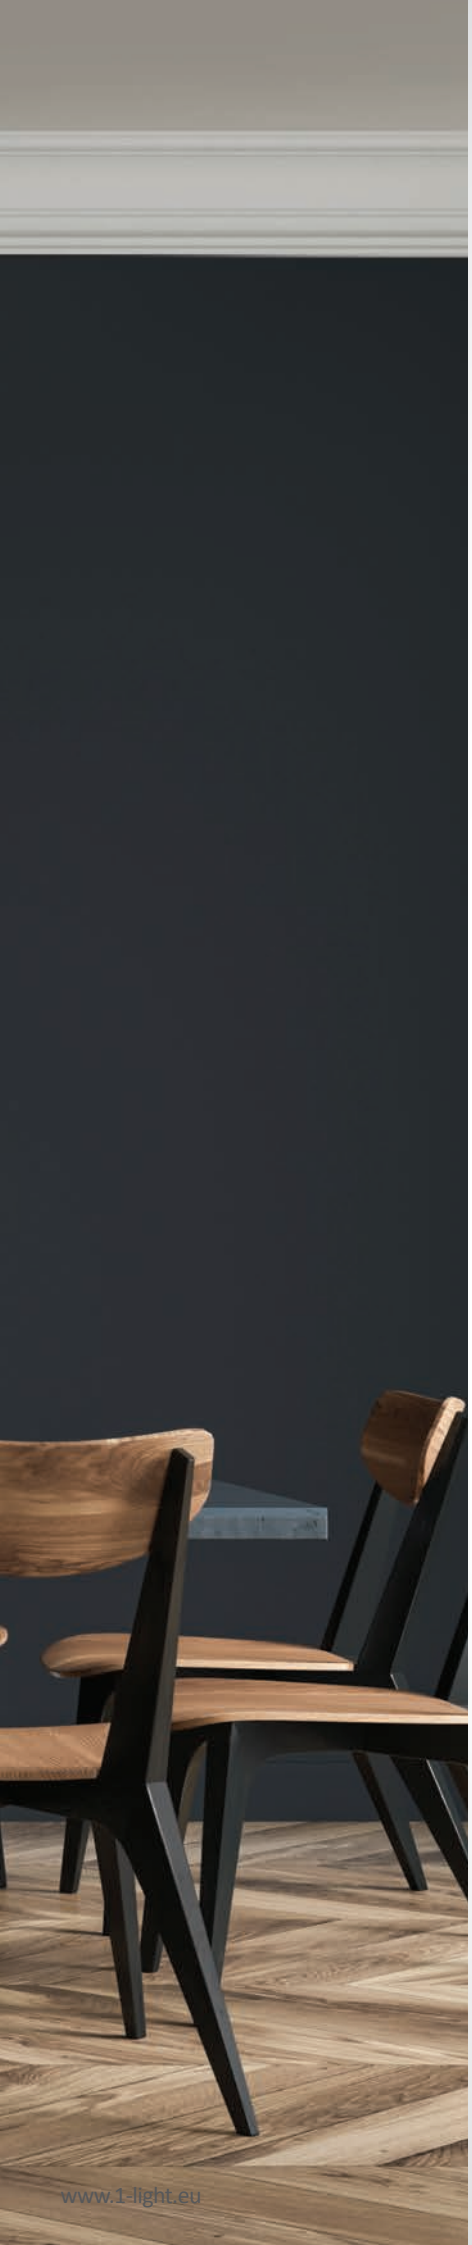

16

Decorative

Pages 545-582

MR16 | GU10 | GU5,3 | G4 | G9 | E27 | E14 | SMD LED | LED

Die cast + crystal | Wood | Metal | Plastic | ABS | PC

IP20 IP44 IP54 IP65

ADJUSTABLE ADJUSTABLE DIMMABLE 80 CRI 2 YEAR 3 YEAR 5 YEAR





61048A | 40W | E27 | Metal | Table lamp

5 YEAR

IP20



Suitable for E27 LED lamp.





61048B | 40W | E27 | Metal | Floor lamp

5 YEAR

IP20



Suitable for E27 LED lamp.



Order Code	Colour	Watts	Input	Class		Notes
61048A	Antique oriental	40W	100-240V		1	-
61048B	Antique oriental	40W	100-240V		1	-





61050A | 40W | E27 | Metal | Table lamp

5 YEAR

IP20



Suitable for E27 LED lamp.





61050B | 40W | E27 | Metal | Floor lamp

5 YEAR

IP20



Suitable for E27 LED lamp.



Order Code	Colour	Watts	Input	Class		Notes
61050A	Antique oriental	40W	100-240V		1	-
61050B	Antique oriental	40W	100-240V		1	-





9C006 | LED | Flickering flame | Metal + glass

ON/OFF and 5 hours timer functions.

LED BUILT IN

2 YEAR

IP20

offer







9C008 | LED | Flickering flame | Plastic

ON/OFF and 5 hours timer functions.

LED BUILT IN

2 YEAR

IP20

offer





Order Code	Battery		Notes
9C006/F	2xAA	10	-
9C008/F	2xC	8	-





9C004A | LED | Flickering candle | Plastic

ON/OFF and 5 hours timer functions.

LED BUILT IN

2 YEAR

IP20

offer







9C004B | LED | Flickering candle | Plastic

ON/OFF and 5 hours timer functions.

LED BUILT IN

2 YEAR

IP20

offer





Order Code	Battery		Notes
9C004A/F	2xAA	24	-
9C004B/F	2xAA	24	-

Portable Trendy Light


61082A/W


61082A/B


61082A/BR

Portable Trendy Light




61082A/W

61082A | 3,3W | SMD LED | Touch switch | Dimmable | Die cast

Rechargeable USB socket.

LED BUILT IN · 80 CRI · DIMMABLE · IK06 · IP65 · 2 YEAR





Charging time: 6Hrs
Working time: 9Hrs




61082A/B

61082A | 3,3W | SMD LED | Touch switch | Dimmable | Die cast

Rechargeable USB socket.

LED BUILT IN · 80 CRI · DIMMABLE · IK06 · IP65 · 2 YEAR





Charging time: 6Hrs
Working time: 9Hrs




61082A/BR

61082A | 3,3W | SMD LED | Touch switch | Dimmable | Die cast

Rechargeable USB socket.

LED BUILT IN · 80 CRI · DIMMABLE · IK06 · IP65 · 2 YEAR





Charging time: 6Hrs
Working time: 9Hrs



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Class		Notes
61082A/W	White	Warm white	3000K	3,3W	200lm	III	6	2x2200mAh lithium battery
61082A/B	Black	Warm white	3000K	3,3W	200lm	III	6	2x2200mAh lithium battery
61082A/BR	Brown	Warm white	3000K	3,3W	200lm	III	6	2x2200mAh lithium battery



Portable Table Light



61084 | 2W | SMD LED | Touch switch | 3-Step dimming | Metal + PC

Rechargeable USB socket.

LED BUILT IN

3-STEP DIMMABLE

IP44

2 YEAR





Charging time: 4Hrs
Working time: 8Hrs

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Class		Notes
61084/B	Black	Warm white	3000K	2W	80lm	III	8	2200mAh lithium battery





61118 | 12W | E27 | Wood + beige fabric shade — EU Plug.

5 YEAR

IP20









61118A | 12W | E27 | Wood + beige fabric shade — EU Plug.

5 YEAR

IP20







Order Code	Colour	Watts	Input	Class		Notes
61118	Wood	12W	100-240V	⧈	4	With ON/OFF Switch
61118A	Wood	12W	100-240V	⧈	1	With ON/OFF Switch



The Ribbon Table Lamp



61086/W

61086 | 10W | SMD 2835 | Steel + aluminium + acrylic

With ON/OFF Switch / EU Plug.

LED BUILT IN

80 CRI

CE

2 YEAR

IP20





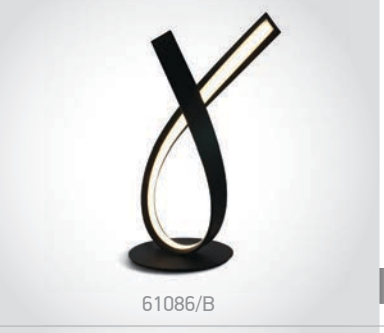

61086/B

61086 | 10W | SMD 2835 | Steel + aluminium + acrylic

With ON/OFF Switch / EU Plug.

LED BUILT IN

80 CRI

CE

2 YEAR

IP20







61086/BS

61086 | 10W | SMD 2835 | Steel + aluminium + acrylic

With ON/OFF Switch / EU Plug.

LED BUILT IN

80 CRI

CE

2 YEAR

IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
61086/W	White	Warm white	3000K	10W	550lm	230V	☐	5	Complete with 24V DC driver
61086/B	Black	Warm white	3000K	10W	550lm	230V	☐	5	Complete with 24V DC driver
61086/BS	Brass	Warm white	3000K	10W	550lm	230V	☐	5	Complete with 24V DC driver




61086A/W

61086A | 29W | SMD 2835 | Steel + aluminium + acrylic — With ON/OFF Switch / EU Plug.

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP20






61086A/B

61086A | 29W | SMD 2835 | Steel + aluminium + acrylic — With ON/OFF Switch / EU Plug.

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP20






61086A/BS

61086A | 29W | SMD 2835 | Steel + aluminium + acrylic — With ON/OFF Switch / EU Plug.

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
61086A/W	White	Warm white	3000K	29W	1740lm	230V	☐	1	Complete with 24V DC driver
61086A/B	Black	Warm white	3000K	29W	1740lm	230V	☐	1	Complete with 24V DC driver
61086A/BS	Brass	Warm white	3000K	29W	1740lm	230V	☐	1	Complete with 24V DC driver





63046 | 25W | SMD 2835 | Steel + aluminium

Oval shape.

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP20



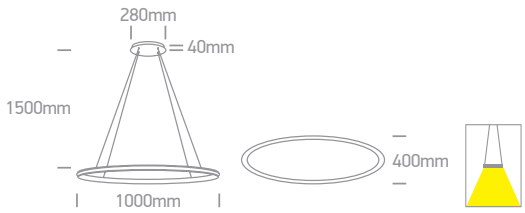



63046A/W

63046A | 45W | SMD 2835 | Steel + aluminium

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP20



63046A/B

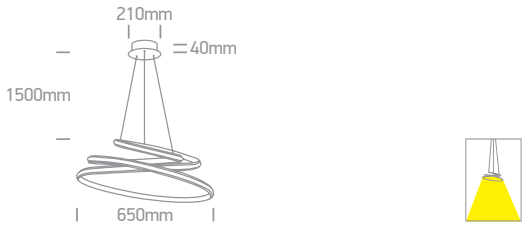



63046B | 50W | SMD 2835 | Steel + aluminium

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP20



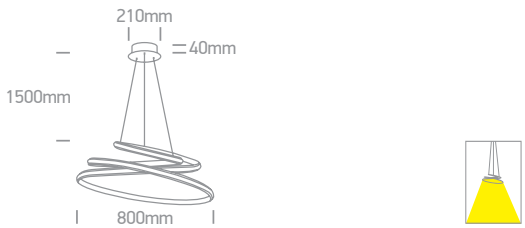

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
63046/W	White	Warm white	3000K	25W	1540lm	230V	⏚	1	Complete with 24V DC driver
63046A/W	White	Warm white	3000K	45W	2700lm	230V	⏚	1	Complete with 24V DC driver
63046A/B	Black	Warm white	3000K	45W	2700lm	230V	⏚	1	Complete with 24V DC driver
63046B/W	White	Warm white	3000K	50W	3000lm	230V	⏚	1	Complete with 24V DC driver



LED Pendant Rings



63048/W

63048 | 19W | SMD 2835 | Steel + aluminium

LED BUILT IN

80 CRI

CE

2 YEAR

IP20









63048/B

63048 | 19W | SMD 2835 | Steel + aluminium

LED BUILT IN

80 CRI

CE

2 YEAR

IP20









63048/C

63048 | 19W | SMD 2835 | Steel + aluminium

LED BUILT IN

80 CRI

CE

2 YEAR

IP20







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
63048/W	White	Warm white	3000K	19W	1000lm	230V		1	Complete with 24V DC driver
63048/B	Black	Warm white	3000K	19W	1000lm	230V		1	Complete with 24V DC driver
63048/C	Chrome	Warm white	3000K	19W	1000lm	230V		1	Complete with 24V DC driver



LED Pendant Rings



63050/W

63050 | 40W | SMD 2835 | Steel + aluminium

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP20



63050/B





62144NB/W/W

62144NB | 50W | SMD 2835 | Metal

LED BUILT IN · 80 CRI · CE · 3 YEAR · IP20



62144NB/B/W





62144NB/BGL/W

62144NB | 50W | SMD 2835 | Metal

LED BUILT IN · 80 CRI · CE · 3 YEAR · IP20







63114/W/W

63114 | 40W | SMD 2835 | Metal + ABS

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP20



63114/B/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
63050/W	White	Warm white	3000K	40W	2250lm	230V		1	Complete with 24V DC driver
63050/B	Black	Warm white	3000K	40W	2250lm	230V		1	Complete with 24V DC driver
62144NB/W/W	White	Warm white	3000K	50W	3000lm	230V		1	Complete with 1200mA driver
62144NB/B/W	Black	Warm white	3000K	50W	3000lm	230V		1	Complete with 1200mA driver
62144NB/BGL/W	Brushed gold	Warm white	3000K	50W	3000lm	230V		1	Complete with 1200mA driver
63114/W/W	White	Warm white	3000K	40W	2400lm	230V		1	Complete with 1000mA driver
63114/B/W	Black	Warm white	3000K	40W	2400lm	230V		1	Complete with 1000mA driver



LED Circle Rings



62156C | 65W | SMD 2835 | Aluminium

LED BUILT IN

80 CRI

CE

3 YEAR

IP20



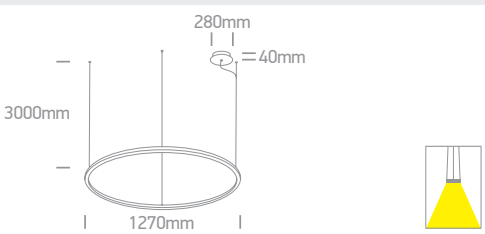



62156D | 100W | SMD 2835 | Aluminium

LED BUILT IN

80 CRI

CE

3 YEAR

IP20



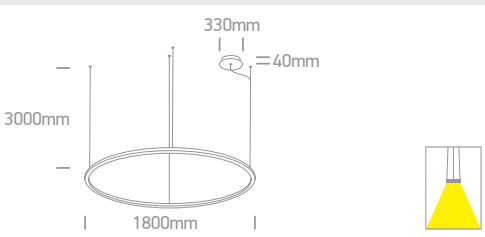

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62156C/B/W	Black	Warm white	3000K	65W	4300lm	230V		1	Complete with 1600mA driver
62156D/B/W	Black	Warm white	3000K	100W	6500lm	230V		1	Complete with 1200mA drivers



The Swirl Range



63064/W

63064 | 36W | SMD 2835 | Steel + aluminium

LED BUILT IN

80 CRI

CE

2 YEAR

IP20



63064/B





63066A/W

63066A | 30W | SMD 2835 | Steel + aluminium

LED BUILT IN

80 CRI

CE

2 YEAR

IP20



63066A/B





63066/W

63066 | 30W | SMD 2835 | Steel + aluminium

LED BUILT IN

80 CRI

CE

2 YEAR

IP20



63066/B



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
63064/W	White	Warm white	3000K	36W	1800lm	230V		1	Complete with 24V DC driver
63064/B	Black	Warm white	3000K	36W	1800lm	230V		1	Complete with 24V DC driver
63066A/W	White	Warm white	3000K	30W	1800lm	230V		1	Complete with 24V DC driver
63066A/B	Black	Warm white	3000K	30W	1800lm	230V		1	Complete with 24V DC driver
63066/W	White	Warm white	3000K	30W	1500lm	230V		1	Complete with 24V DC driver
63066/B	Black	Warm white	3000K	30W	1500lm	230V		1	Complete with 24V DC driver

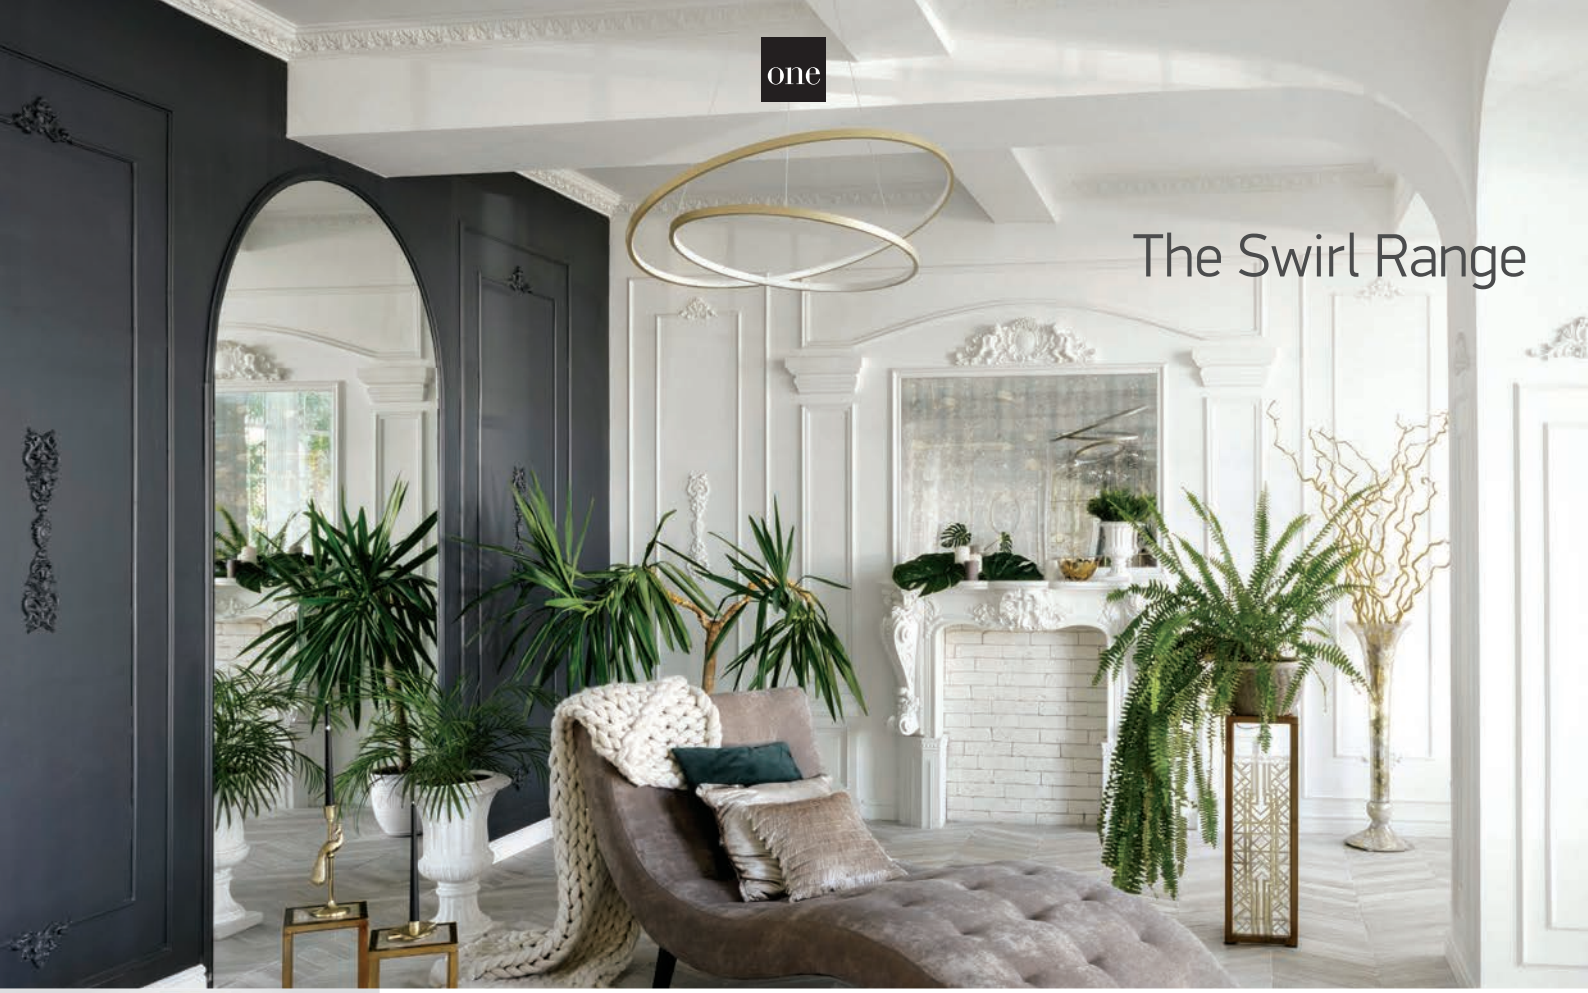

The Swirl Range



63062 | 36W | SMD 2835 | Steel + aluminium + acrylic

LED BUILT IN

80 CRI

CE

2 YEAR

IP20







63068A | 40W | SMD 2835 | Steel + aluminium + acrylic

LED BUILT IN

80 CRI

CE

2 YEAR

IP20







63068 | 30W | SMD 2835 | Steel + aluminium + acrylic

LED BUILT IN

80 CRI

CE

2 YEAR

IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
63062/BS	Brass	Warm white	3000K	36W	1800lm	230V		1	Complete with 24V DC driver
63068A/BS	Brass	Warm white	3000K	40W	2400lm	230V		1	Complete with 24V DC driver
63068/BS	Brass	Warm white	3000K	30W	1500lm	230V		1	Complete with 24V DC driver



The Crystal Swirl Range



63054A | 20W | SMD 2835 | Steel + aluminium + acrylic crystal look

LED BUILT IN

80 CRI

CE

2 YEAR

IP20









63054B | 40W | SMD 2835 | Steel + aluminium + acrylic crystal look

LED BUILT IN

80 CRI

CE

2 YEAR

IP20









63054C | 150W | SMD 2835 | Steel + aluminium + acrylic crystal look

LED BUILT IN

80 CRI

CE

2 YEAR

IP20







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
63054A/B	Black	Warm white	3000K	20W	1000lm	230V		1	Complete with 24V DC driver
63054B/B	Black	Warm white	3000K	40W	2000lm	230V		1	Complete with 24V DC driver
63054C/B	Black	Warm white	3000K	150W	8500lm	230V		1	Complete with 24V DC driver

one

The Light Bars





63056 | 65W | SMD 2835 | Steel + aluminium + acrylic

LED BUILT IN

80 CRI

CE

2 YEAR

IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
63056/BBS	Brushed brass	Warm white	3000K	65W	3900lm	230V	⏚	1	Complete with 24V DC driver



Mushroom Pendants



63058/BGL/W

63058 | 60W | SMD 2835 | Aluminium

LED BUILT IN

80 CRI

CE

2 YEAR

IP20



63058/BAN/W



63058/BBR/W





63058A/BGL/W

63058A | 80W | SMD 2835 | Aluminium

LED BUILT IN

80 CRI

CE

2 YEAR

IP20



63058A/BAN/W



63058A/BBR/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
63058/BAN/W	Brushed anthracite	Warm white	3000K	60W	4200lm	230V		1	Complete with 1400mA driver
63058/BGL/W	Brushed gold	Warm white	3000K	60W	4200lm	230V		1	Complete with 1400mA driver
63058/BBR/W	Brushed brown	Warm white	3000K	60W	4200lm	230V		1	Complete with 1400mA driver
63058A/BAN/W	Brushed anthracite	Warm white	3000K	80W	5600lm	230V		1	Complete with 1050mA drivers
63058A/BGL/W	Brushed gold	Warm white	3000K	80W	5600lm	230V		1	Complete with 1050mA drivers
63058A/BBR/W	Brushed brown	Warm white	3000K	80W	5600lm	230V		1	Complete with 1050mA drivers



LED Pendant Rings



62142NB/AN/W

62142NB | 42W | SMD 2835 | Aluminium

LED BUILT IN

80 CRI CE 3 YEAR

IP20



62142NB/W/W





62180NB/B/W

62180NB | 80W | SMD 2835 | Metal base + aluminium + PMMA

LED BUILT IN

80 CRI CE 2 YEAR

IP20



62180NB/W/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62142NB/W/W	White	Warm white	3000K	42W	3570lm	230V		1	Complete with 1050mA driver
62142NB/AN/W	Anthracite	Warm white	3000K	42W	3570lm	230V		1	Complete with 1050mA driver
62180NB/W/W	White	Warm white	3000K	80W	6400lm	230V		1	Complete with 1000mA drivers
62180NB/B/W	Black	Warm white	3000K	80W	6400lm	230V		1	Complete with 1000mA drivers

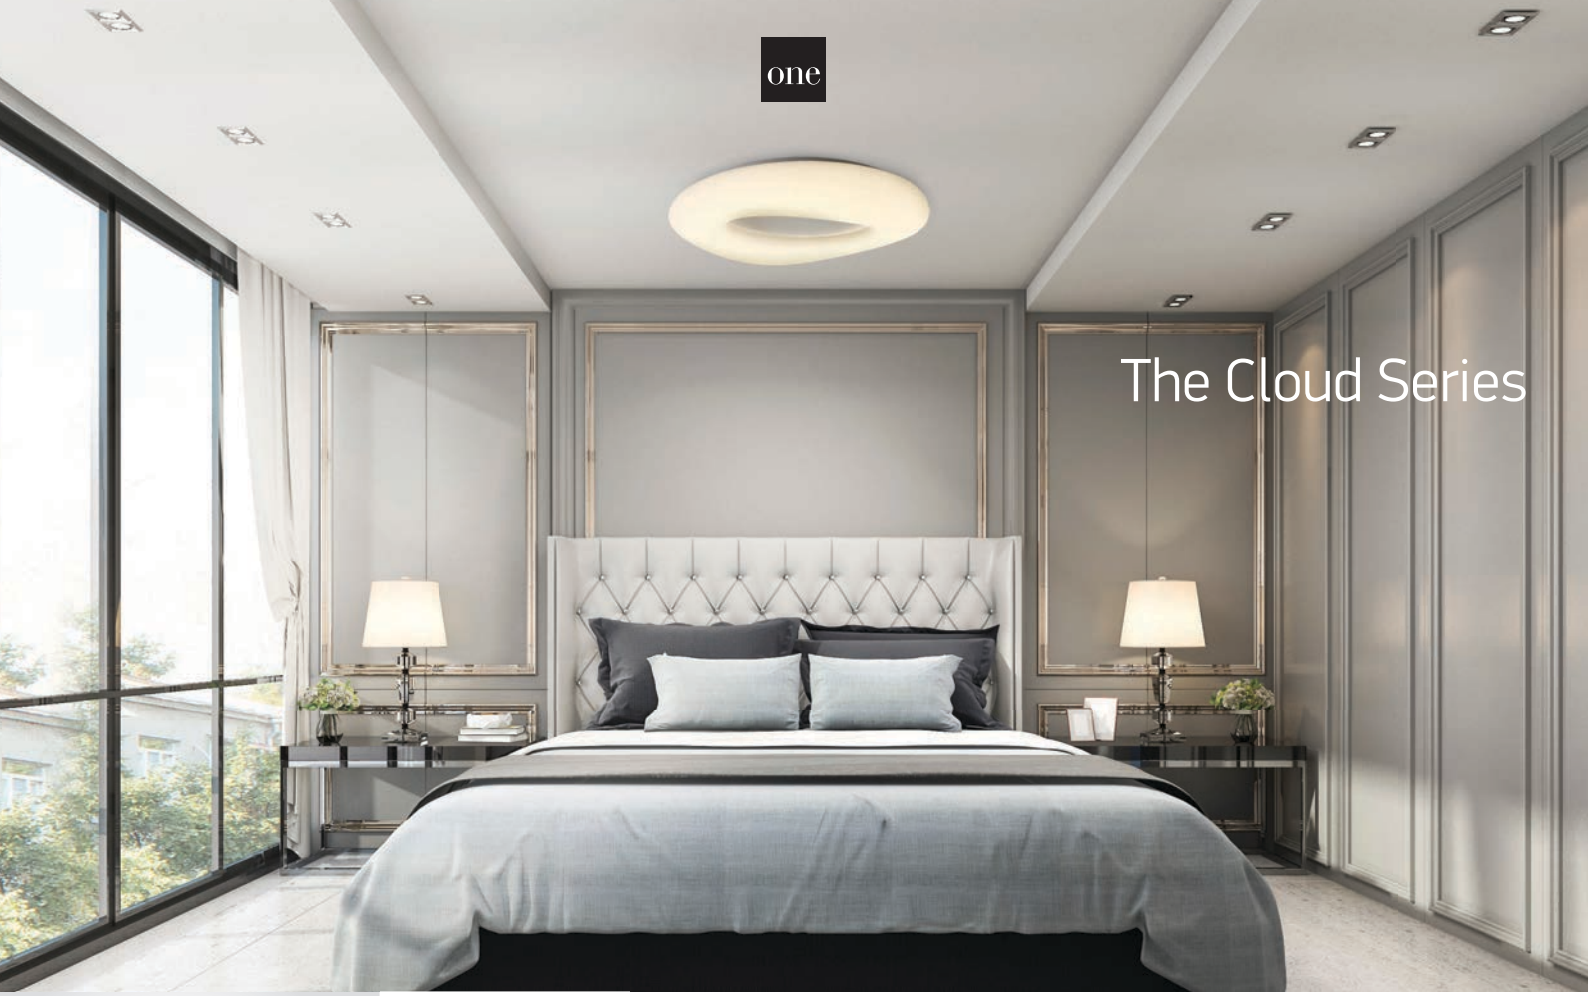



62148A | 23W | SMD 2835 | Metal base + PC

LED BUILT IN
80 CRI
CE
3 YEAR
IP20









62148B | 40W | SMD 2835 | Metal base + PC

LED BUILT IN
80 CRI
CE
3 YEAR
IP20









62148D | 108W | SMD 2835 | Metal base + PC

LED BUILT IN
80 CRI
CE
3 YEAR
IP20







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62148A/W	White	Warm white	3000K	23W	1900lm	230V		1	Complete with 500mA driver
62148B/W	White	Warm white	3000K	40W	3200lm	230V		1	Complete with 1000mA driver
62148D/W	White	Warm white	3000K	108W	8700lm	230V		1	Complete with 1300mA drivers

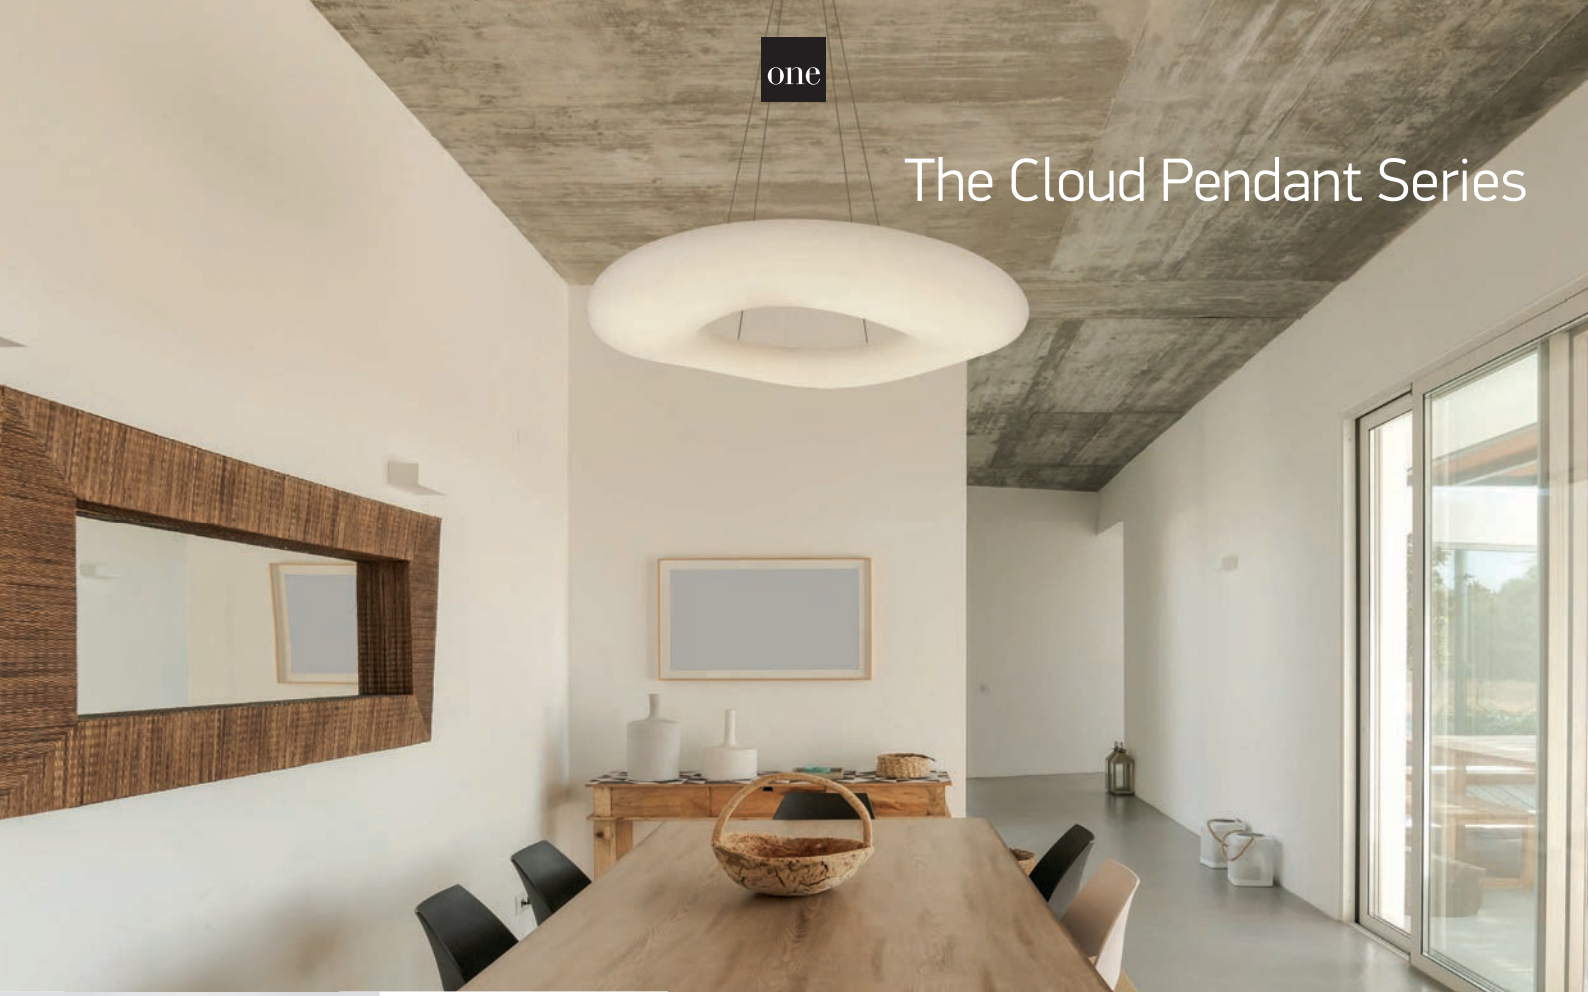

The Cloud Pendant Series



63110C | 80W | SMD 2835 | Metal base + PC

LED BUILT IN

80 CRI

CE

3 YEAR

IP20









63110D | 108W | SMD 2835 | Metal base + PC

LED BUILT IN

80 CRI

CE

3 YEAR

IP20









63112 | 60W | SMD 2835 | Metal + Plastic

LED BUILT IN

80 CRI

CE

2 YEAR

IP20







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
63110C/W	White	Warm white	3000K	80W	6400lm	230V		1	Complete with 1000mA drivers
63110D/W	White	Warm white	3000K	108W	8700lm	230V		1	Complete with 1300mA drivers
63112/W	White	Warm white	3000K	60W	4800lm	230V		1	Complete with 1300mA driver



The Nordic Decorative Range

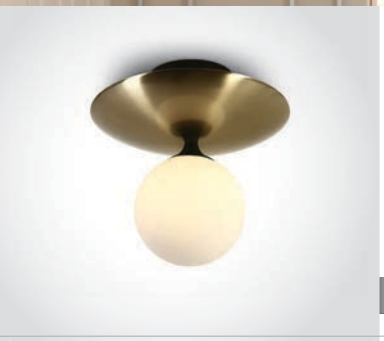

62116 | 9W | G9 | Steel

5 YEAR

IP20



Suitable for G9 LED lamp.





62116A | 5x9W | G9 | Steel

5 YEAR

IP20



Suitable for G9 LED lamp.





60116 | 9W | G9 | Steel

5 YEAR

IP20



Suitable for G9 LED lamp.





61116/BBS

61116 | 9W | G9 | Steel

EU Schuko Plug.

5 YEAR

IP20



61116/B



Order Code	Colour	Watts	Input	Class			Notes
62116/BBS	Brushed brass	9W	100-240V		-	4	-
62116A/BBS	Brushed brass	5x9W	100-240V		-	2	-
60116/BBS	Brushed brass	9W	100-240V		-	4	-
61116/B	Black	9W	100-240V		150cm	4	With ON/OFF Switch
61116/BBS	Brushed brass	9W	100-240V		150cm	4	With ON/OFF Switch





63116 | 9W | G9 | Steel

5 YEAR

IP20



Suitable for G9 LED lamp.





63116A | 5x9W | G9 | Steel

5 YEAR

IP20



Suitable for G9 LED lamp.



Order Code	Colour	Watts	Input	Class		Notes
63116/BBS	Brushed brass	9W	100-240V		4	-
63116A/BBS	Brushed brass	5x9W	100-240V		2	-



The Nordic Decorative Range

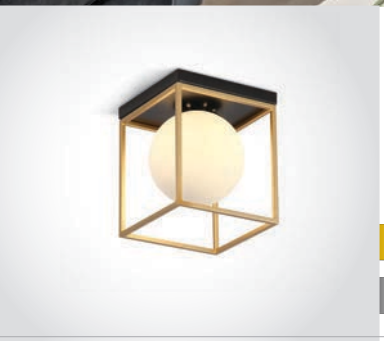

62174A | 8W | E14 | Metal + glass

new

IP20

3 YEAR



Suitable for E14 LED lamp.







62174B | 4x8W | E14 | Metal + glass

new

IP20

3 YEAR



Suitable for E14 LED lamps.







63174C | 3x8W | E14 | Metal + glass

new

IP20

3 YEAR



Suitable for E14 LED lamps.





Order Code	Colour	Watts	Input	Class		Notes
62174A/BS	Brass	8W	100-240V		1	-
62174B/BS	Brass	4x8W	100-240V		1	-
63174C/BS	Brass	3x8W	100-240V		1	-





62172A | 12W | E27 | Metal

new

IP20

3 YEAR



Suitable for E27 LED lamp.





62172B | 3x12W | E27 | Metal

new

IP20

3 YEAR



Suitable for E27 LED lamps.





62172C | 6x12W | E27 | Metal

new

IP20

3 YEAR



Suitable for E27 LED lamps.



Order Code	Colour	Watts	Input	Class		Notes
62172A/BS	Brass	12W	100-240V		10	-
62172B/BS	Brass	3x12W	100-240V		5	-
63172C/BS	Brass	6x12W	100-240V		5	-

Retro Classic Pendants



63134P | 4x8W | E14 | Fabric + glass

3 YEAR

new

IP20



Suitable for E14 LED lamps.





Order Code	Colour	Watts	Input	Class		Notes
63134P	Dark grey	4x8W	100-240V		1	-





63132P | 8x8W | E14 | Aluminium + glass

new

IP20

3 YEAR



Suitable for E14 LED lamps.





60132 | 2x8W | E14 | Aluminium + glass

new

IP20

3 YEAR



Suitable for E14 LED lamps.



Order Code	Colour	Watts	Input	Class		Notes
63132P	Brass	8x8W	100-240V		1	-
60132	Brass	2x8W	100-240V		8	-

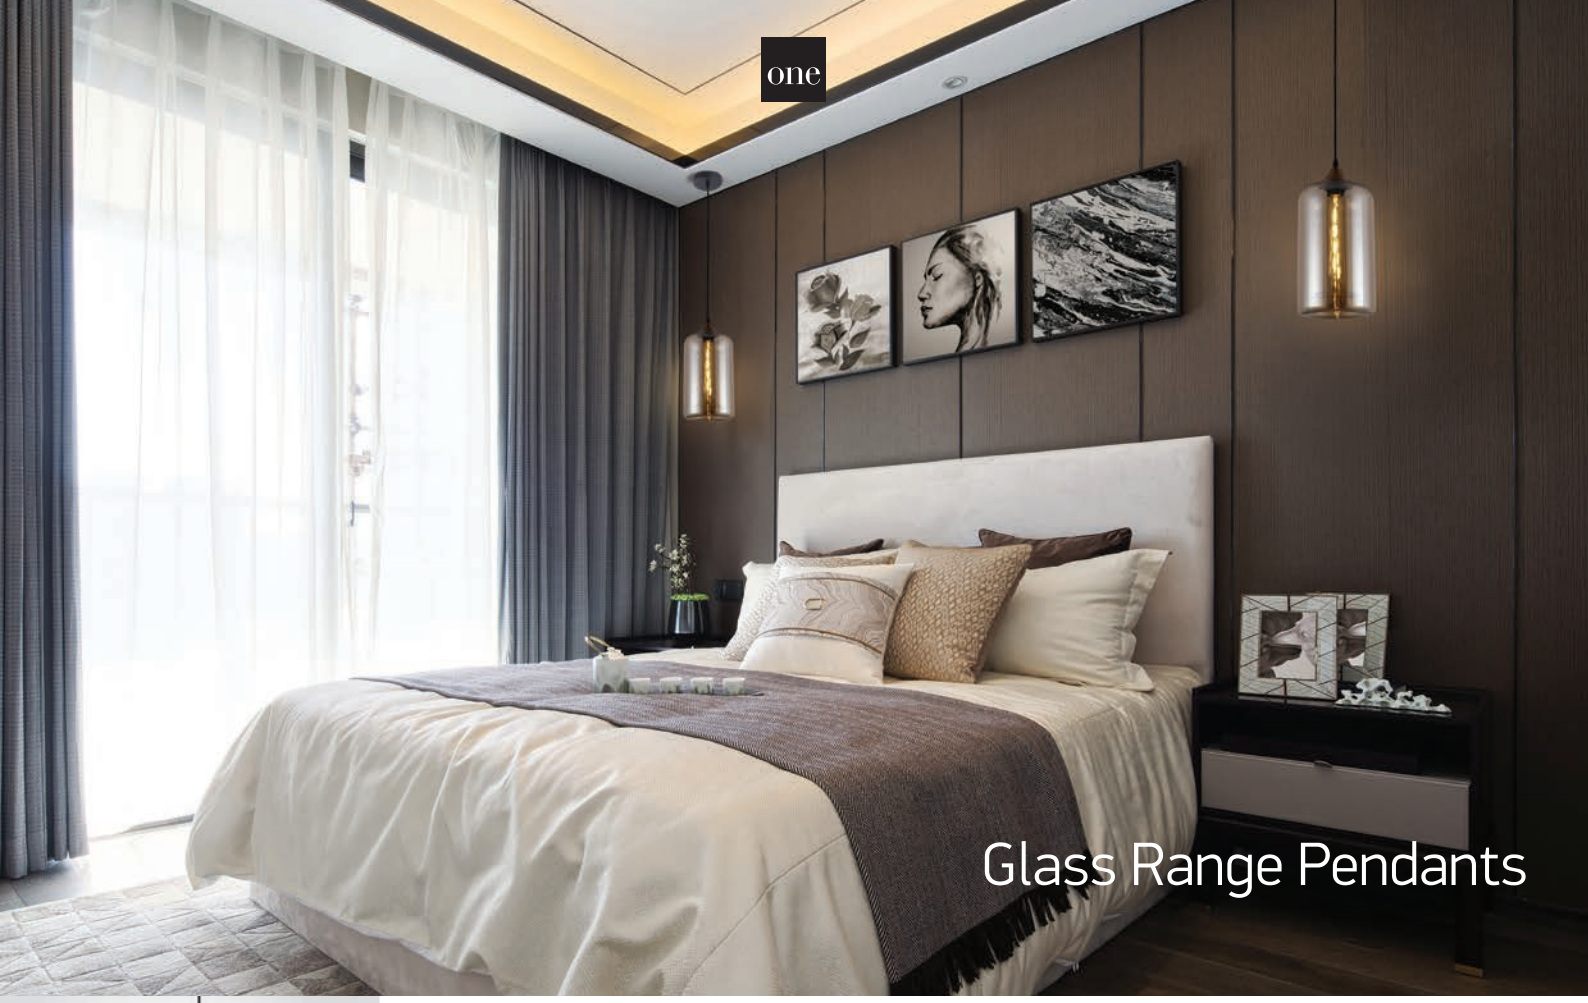

Glass Range Pendants



63136 | 12W | E27 | Metal + glass

new

IP20

3 YEAR



Suitable for E27 LED lamp.





63138/A

63138 | 12W | E27 | Metal + glass

new

IP20

3 YEAR



Suitable for E27 LED lamp.





63138/DC

63138 | 12W | E27 | Metal + glass

new

IP20

3 YEAR



Suitable for E27 LED lamp.



Order Code	Colour	Watts	Input	Class		Notes
63136/DC	Dark chrome	12W	100-240V		2	-
63138/A	Amber	12W	100-240V		4	-
63138/DC	Dark chrome	12W	100-240V		4	-



Modern Glass Art Range

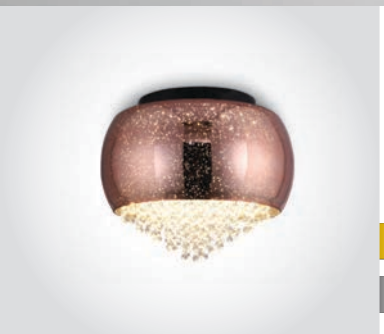

62170A | 4x9W | G9 | Metal + glass

new

IP20

3 YEAR



Suitable for G9 LED lamps.



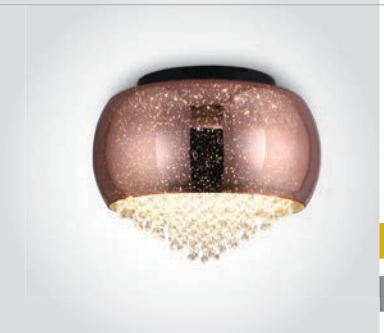

62170B | 6x9W | G9 | Metal + glass

new

IP20

3 YEAR



Suitable for G9 LED lamps.



Order Code	Colour	Watts	Input	Class		Notes
62170A	Copper	4x9W	100-240V		1	-
62170B	Copper	6x9W	100-240V		1	-





62176A | 3x9W | G9 | Metal + glass

new

IP20

3 YEAR



Suitable for G9 LED lamps.





62176B | 5x9W | G9 | Metal + glass

new

IP20

3 YEAR



Suitable for G9 LED lamps.





60176 | 2x9W | G9 | Metal + glass

new

IP20

3 YEAR



Suitable for G9 LED lamps.



Order Code	Colour	Watts	Input	Class		Notes
62176A	Chrome	3x9W	100-240V		4	-
62176B	Chrome	5x9W	100-240V		1	-
60176	Chrome	2x9W	100-240V		10	-



The Classic Luxury Range

62162A | 6x9W | G9 | Metal + plastic beads + glass



new

IP20

3 YEAR



Suitable for G9 LED lamps.





62162B | 10x9W | G9 | Metal + plastic beads + glass



new

IP20

3 YEAR



Suitable for G9 LED lamps.





60162 | 2x9W | G9 | Metal + Plastic beads + glass



new

IP20

3 YEAR



Suitable for G9 LED lamps.





Order Code	Colour	Watts	Input	Class		Notes
62162A	Chrome	6x9W	100-240V		1	-
62162B	Chrome	10x9W	100-240V		1	-
60162	Chrome	2x9W	100-240V		8	-



The Classic Range



62158A | 4x9W | G9 | Metal + aluminium rods + glass

new

IP20

3 YEAR



Suitable for G9 LED lamps.





62158B | 6x9W | G9 | Metal + aluminium rods + glass

new

IP20

3 YEAR



Suitable for G9 LED lamps.





60158 | 2x9W | G9 | Metal + aluminium rods + glass

new

IP20

3 YEAR



Suitable for G9 LED lamps.



Order Code	Colour	Watts	Input	Class		Notes
62158A	Chrome	4x9W	100-240V		4	-
62158B	Chrome	6x9W	100-240V		1	-
60158	Chrome	2x9W	100-240V		8	-

The Classic Range





63130P | 9x9W | G9 | Metal + glass rods + glass

3 YEAR

new

IP20



Suitable for G9 LED lamps.



Order Code	Colour	Watts	Input	Class		Notes
63130P	Chrome	9x9W	100-240V		1	-





62166B | 5x9W | G9 | Metal + glass

new

IP20

3 YEAR



Suitable for G9 LED lamps.





63166P | 5x9W | G9 | Metal + glass

new

IP20

3 YEAR



Suitable for G9 LED lamps.



Order Code	Colour	Watts	Input	Class		Notes
62166B	Chrome	5x9W	100-240V		2	-
63166P	Chrome	5x9W	100-240V		2	-



The Classic Range

62164A | 4x9W | G9 | Metal + glass rods + glass



new

IP20

3 YEAR



Suitable for G9 LED lamps.



62164B | 6x9W | G9 | Metal + glass rods + glass



new

IP20

3 YEAR



Suitable for G9 LED lamps.



62168B | 8x9W | G9 | Metal + aluminium tubes



new

IP20

3 YEAR



Suitable for G9 LED lamps.



60168 | 2x9W | G9 | Metal + aluminium tubes



new

IP20

3 YEAR



Suitable for G9 LED lamps.



Order Code	Colour	Watts	Input	Class		Notes
62164A	Chrome	4x9W	100-240V		1	-
62164B	Chrome	6x9W	100-240V		1	-
62168B	Chrome	8x9W	100-240V		1	-
60168	Chrome	2x9W	100-240V		8	-

Crystal Recessed

Die cast + crystal



10105C4 | 50W | MR16 | GU5,3 | Die cast + crystal

3 YEAR

IP20

offer





Order Code	Colour	Watts	Input	Class					Notes
10105C4/C	Chrome	50W	12V	III	40cm	72mm	50mm	4	-





10101C4 | 10W | G4 | Die cast + crystal

IP20

offer

3 YEAR







65305B | 3x10W | G9 | Die cast + glass

IP20

offer

ADJUSTABLE

3 YEAR



Suitable for LED lamps.



Order Code	Colour	Watts	Input	Class					Notes
10101C4/C	Chrome	10W	12V		40cm	60mm	30mm	50	-
65305B/MC	Brushed chrome	3x10W	100-240V		-	-	-	10	-





17

Hotel & Bedroom

Pages 585-598

MR16 | GU10 | GU5,3 | G4 | G9 | E27 | E14 | SMD LED | LED

Die cast + crystal | Wood | Metal | Plastic | ABS | PC

IP20 IP44 IP54 IP65

ADJUSTABLE ADJUSTABLE DIMMABLE 80 CRI 2 YEAR 3 YEAR 5 YEAR

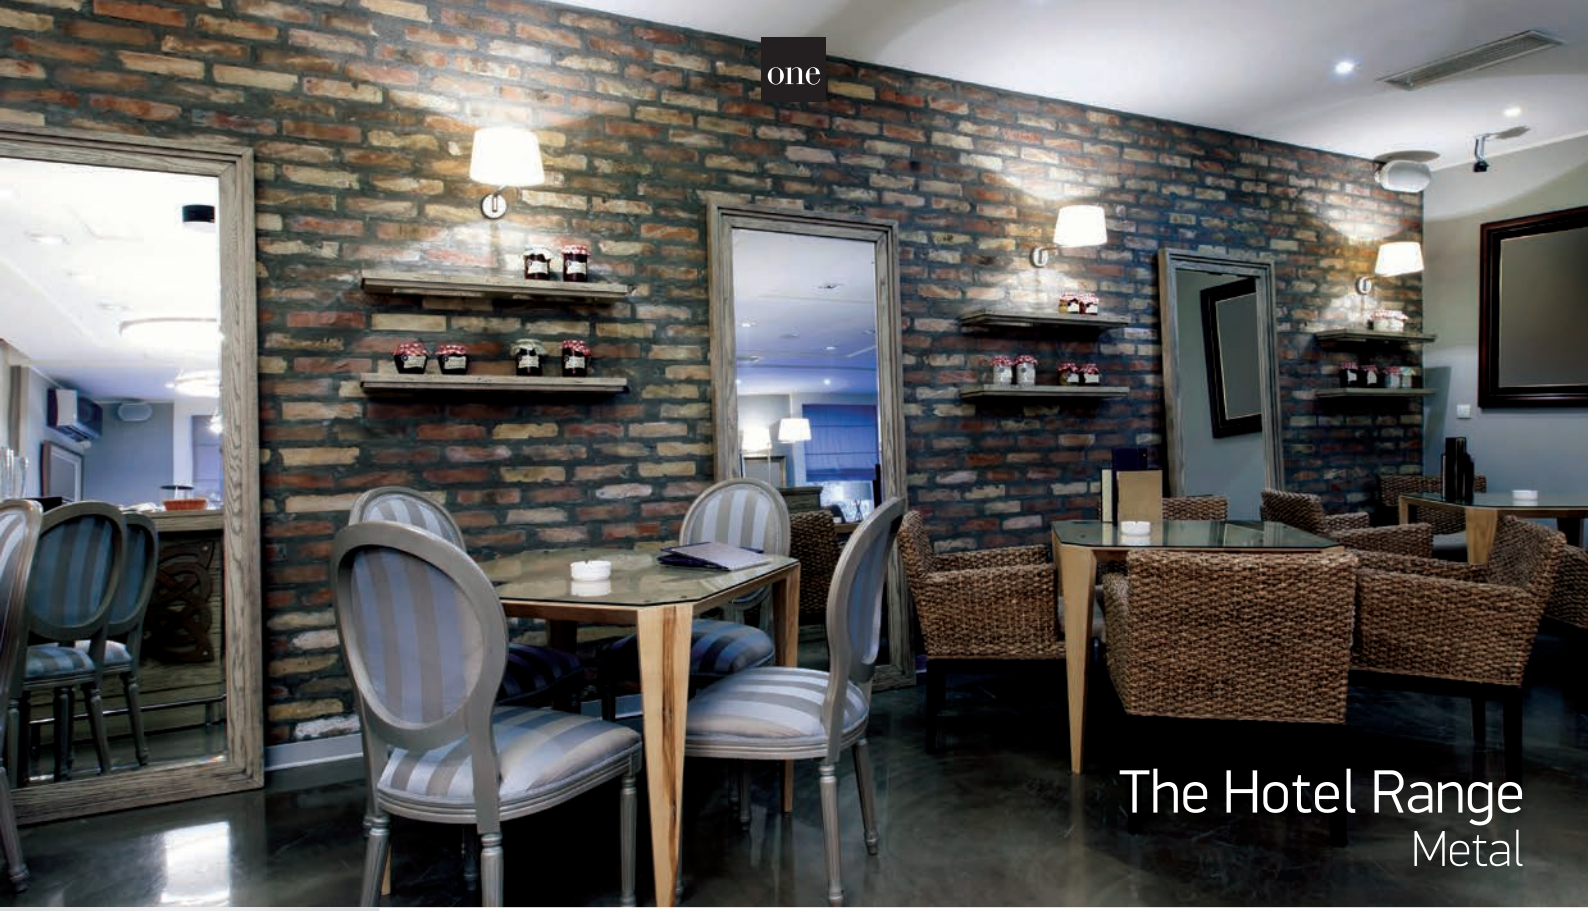

The Hotel Range
Metal



61046 | 12W | E27 | Metal + white fabric shade

ADJUSTABLE

2 YEAR

IP20



Suitable for E27 LED lamp.





61076/BBS

61076 | 12W | E27 | Metal + white fabric shade

2 YEAR

IP20



61076/C





61078/BBS

61078 | 12W | E27 | Metal + white fabric shade

2 YEAR

IP20



61078/C



Order Code	Colour	Watts	Input	Class		Notes
61046/MC	Brushed chrome	12W	100-240V		8	With ON/OFF Switch
61076/C	Chrome	12W	100-240V		12	With ON/OFF Switch
61076/BBS	Brushed brass	12W	100-240V		12	With ON/OFF Switch
61078/C	Chrome	12W	100-240V		8	With ON/OFF Switch
61078/BBS	Brushed brass	12W	100-240V		8	With ON/OFF Switch

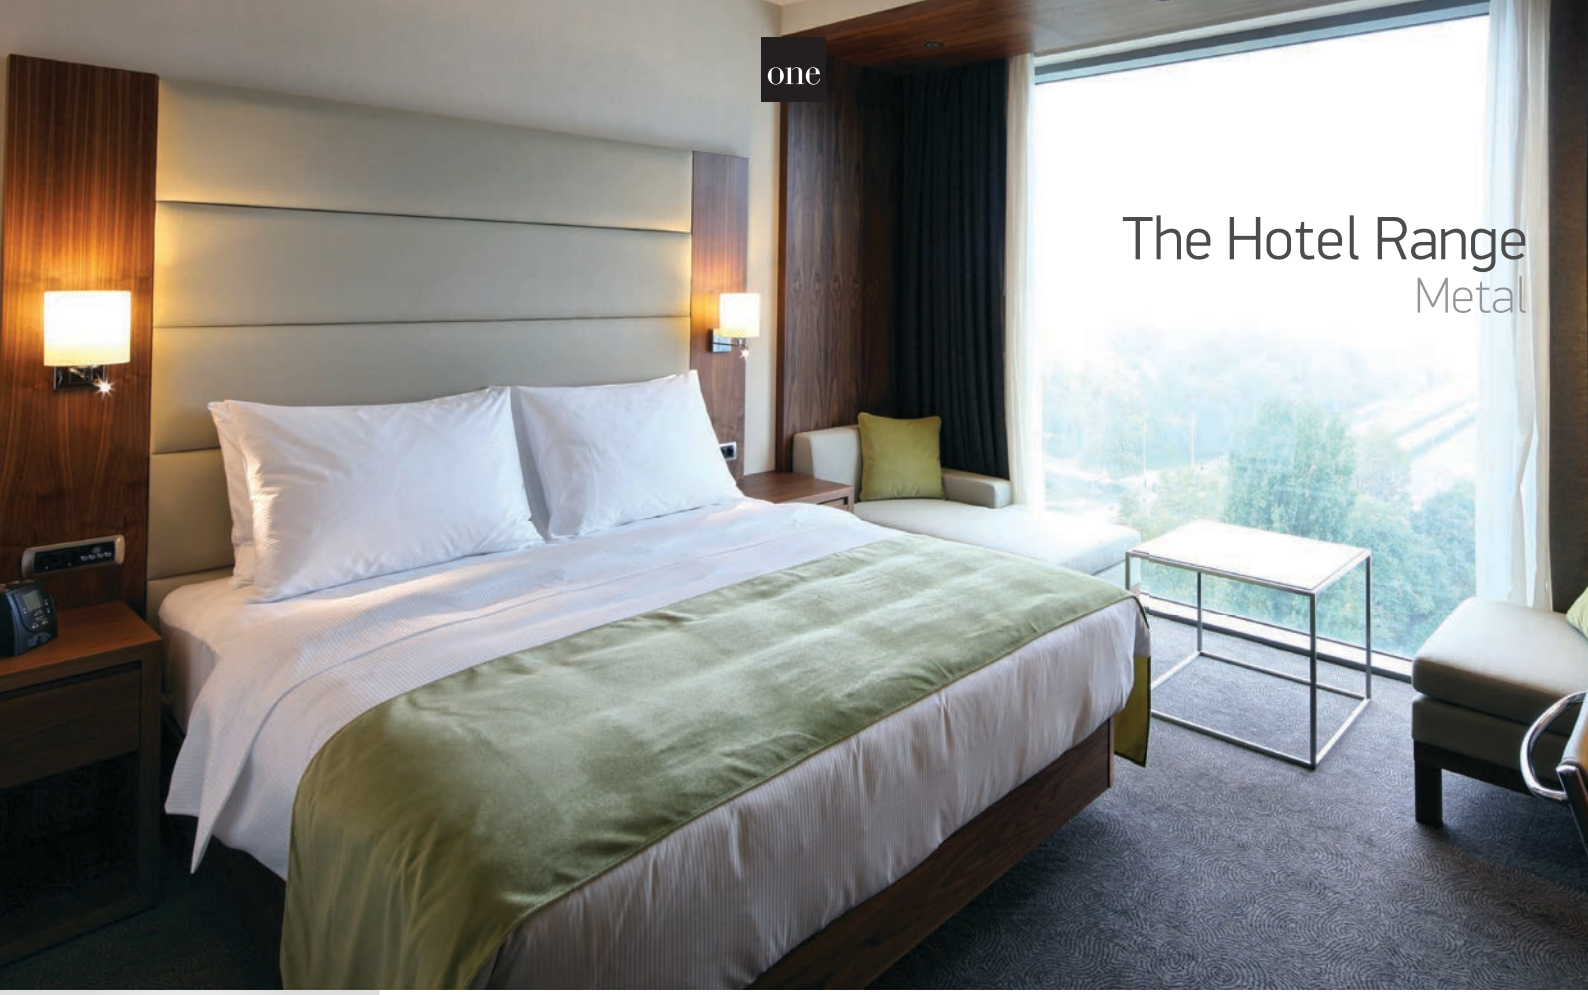

The Hotel Range
Metal



65138 | 3W LED + 12W E27 | Metal + white fabric shade

With 2 x ON/OFF Switches.

LED BUILT IN · ADJUSTABLE · CE · 2 YEAR · IP20



Suitable for E27 LED lamp.





61044 | 3W LED + 12W E27 | Metal + white fabric shade

With 2 x ON/OFF Switches.

LED BUILT IN · ADJUSTABLE · CE · 2 YEAR · IP20



Suitable for E27 LED lamp.





61074 | 3W LED + 12W E27 | Metal + white fabric shade

With 2 x ON/OFF Switches.

LED BUILT IN · ADJUSTABLE · CE · 2 YEAR · IP20



Suitable for E27 LED lamp.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
65138/MC/W	Brushed chrome	Warm white	3000K	3W LED + 12W E27	150lm	230V		6	Complete with 500mA driver
61044/C/W	Chrome	Warm white	3000K	3W LED + 12W E27	150lm	230V		6	Complete with 500mA driver
61074/C/W	Chrome	Warm white	3000K	3W LED + 12W E27	150lm	100-240V		8	Complete with 500mA driver



61124/B/W

The Hotel Range
Metal



61080/C/W

61080 | 3W LED + 12W E27 | USB socket | Metal + white fabric shade

With 2 x ON/OFF Switches.

LED BUILT IN

ADJUSTABLE

2 YEAR

IP20



61080/W/W





61124 | 3W LED + 12W E27 | Metal + white fabric shade

With 2 x ON/OFF Switches.

LED BUILT IN

ADJUSTABLE

2 YEAR

new

IP20



Suitable for E27 LED lamp.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
61080/W/W	White	Warm white	3000K	3W LED + 12W E27	150lm	230V		4	Complete with 700mA driver
61080/C/W	Chrome	Warm white	3000K	3W LED + 12W E27	150lm	230V		4	Complete with 700mA driver
61124/B/W	Black	Warm white	3000K	3W LED + 12W E27	150lm	230V		8	Complete with 500mA driver



The Hotel Range
Metal

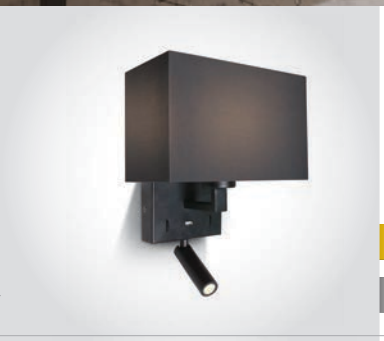

61120 | 3W LED + 12W E27 | Metal + black fabric shade

With 2 x ON/OFF Switches.

LED BUILT IN

ADJUSTABLE CE 2 YEAR

new

IP20



Suitable for E27 LED lamp.





61122 | 3W LED + 8W E14 | Metal + black fabric shade

With 2 x ON/OFF Switches.

LED BUILT IN

ADJUSTABLE CE 2 YEAR

new

IP20



Suitable for E14 LED lamp.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
61120/B/W	Black	Warm white	3000K	3W LED + 12W E27	150lm	230V	⏚	4	Complete with 500mA driver
61122/C/W	Chrome	Warm white	3000K	3W LED + 8W E14	150lm	230V	⏚	4	Complete with 500mA driver



61044A/C/W



61042A/MC

The Hotel Range
Metal



61044A | 3W LED + 12W E27 | Metal + white fabric shade

LED BUILT IN · ADJUSTABLE · CE · 2 YEAR · IP20



Suitable for E27 LED lamp.





61042A | 12W | E27 | Metal + white fabric shade

CE · 2 YEAR · IP20



Suitable for E27 LED lamp.





61038 | 12W | E27 | Metal

CE · 2 YEAR · IP20 · offer



Suitable for E27 LED lamp.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
61044A/C/W	Chrome	Warm white	3000K	3W LED + 12W E27	150lm	230V	⧈	1	Complete with driver
61042A/MC	Brushed chrome	-	-	12W	-	100-240V	⧈	1	-
61038/C	Chrome	-	-	12W	-	100-240V	⧈	1	-

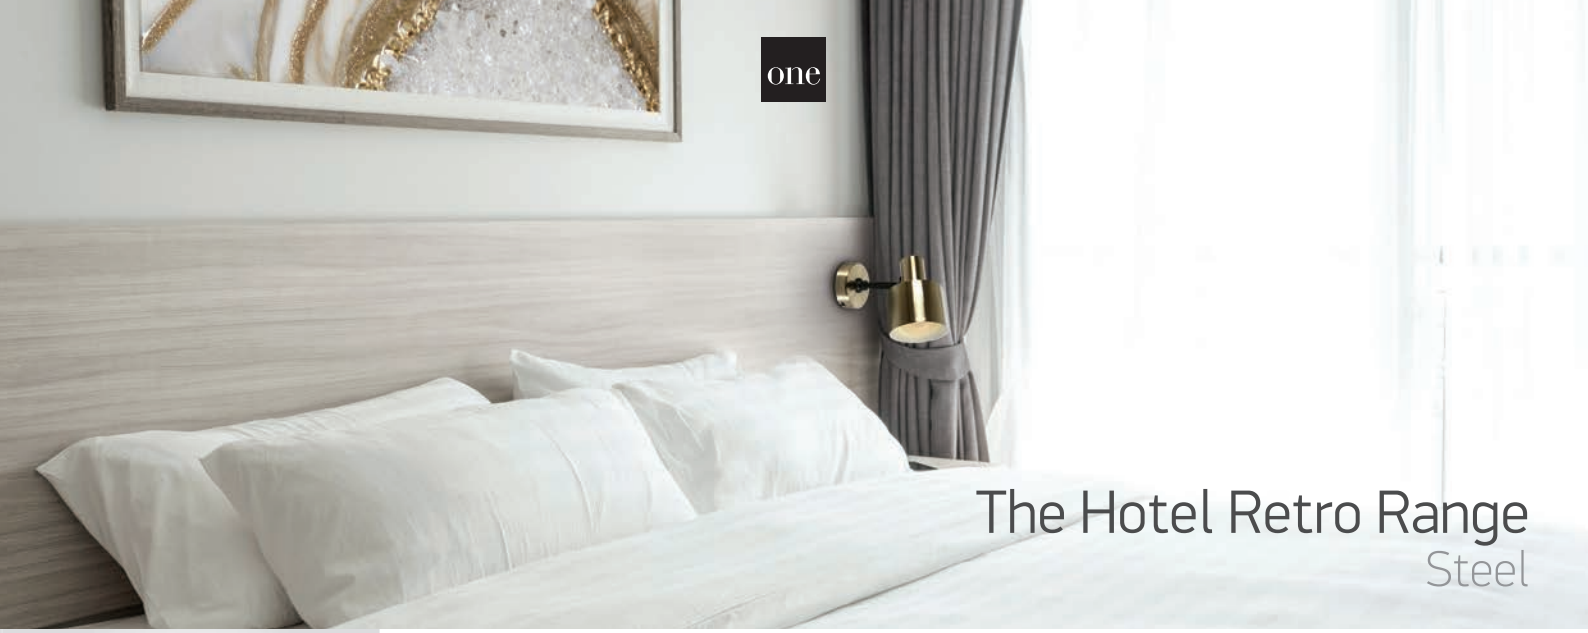

The Hotel Retro Range
Steel

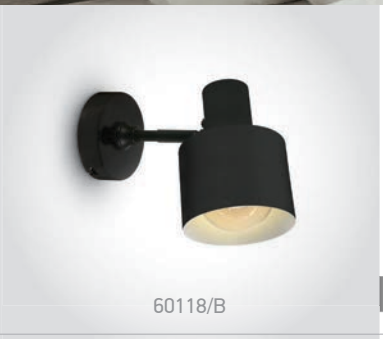

60118/B

60118 | 10W | E27 | Steel

ADJUSTABLE 5 YEAR

IP20



Suitable for E27 LED lamp.





60118/BBS

60118 | 10W | E27 | Steel

ADJUSTABLE 5 YEAR

IP20



Suitable for E27 LED lamp.





61116A/B

61116A | 10W | E27 | Steel

EU Schuko Plug.

ADJUSTABLE 5 YEAR

IP20



Suitable for E27 LED lamp.





61116A/BBS

61116A | 10W | E27 | Steel

EU Schuko Plug.

ADJUSTABLE 5 YEAR

IP20



Suitable for E27 LED lamp.



Order Code	Colour	Watts	Input	Class			Notes
60118/B	Black	10W	100-240V		-	4	-
60118/BBS	Brushed brass	10W	100-240V		-	4	-
61116A/B	Black	10W	100-240V		150cm	4	With ON/OFF Switch
61116A/BBS	Brushed brass	10W	100-240V		150cm	4	With ON/OFF Switch



Reading Spots
Aluminium


65746/W/W

65746 | 3W | LED | Aluminium

With ON/OFF Switch.

LED BUILT IN | 80 CRI ADJUSTABLE | CE | 2 YEAR | IP20


65746/B/W


65746/C/W




65746A/W/W

65746A | 3W | LED | USB | Aluminium

With USB charger and ON/OFF Switch.

LED BUILT IN | 80 CRI ADJUSTABLE | CE | 2 YEAR | IP20


65746A/B/W




65742/W/W

65742 | 3W | COB LED | Aluminium

With USB charger and ON/OFF Switch.

LED BUILT IN | 85 CRI ADJUSTABLE | CE | 2 YEAR | IP20


65742/B/W


USB charging socket.




65746R/W/W

65746R | 3W | LED | Wall recessed | Aluminium

With ON/OFF Switch.

LED BUILT IN | 80 CRI ADJUSTABLE | CE | 2 YEAR | IP20


65746R/B/W



Order Code	Colour	Reflector	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
65746/W/W	White	-	Warm white	3000K	3W	150lm	36°	100-240V		-	-	24	Complete with 700mA driver
65746/B/W	Black	-	Warm white	3000K	3W	150lm	36°	100-240V		-	-	24	Complete with 700mA driver
65746/C/W	Chrome	-	Warm white	3000K	3W	150lm	36°	100-240V		-	-	24	Complete with 700mA driver
65746A/W/W	White	-	Warm white	3000K	3W	150lm	36°	100-240V		-	-	24	Complete with 700mA driver
65746A/B/W	Black	-	Warm white	3000K	3W	150lm	36°	100-240V		-	-	24	Complete with 700mA driver
65742/W/W	White	Black	Warm white	3000K	3W	150lm	36°	230V		-	-	12	Complete with 700mA driver
65742/B/W	Black	Brass	Warm white	3000K	3W	150lm	36°	230V		-	-	12	Complete with 700mA driver
65746R/W/W	White	-	Warm white	3000K	3W	150lm	36°	100-240V		115x50mm	50mm	24	Complete with 700mA driver
65746R/B/W	Black	-	Warm white	3000K	3W	150lm	36°	100-240V		115x50mm	50mm	24	Complete with 700mA driver

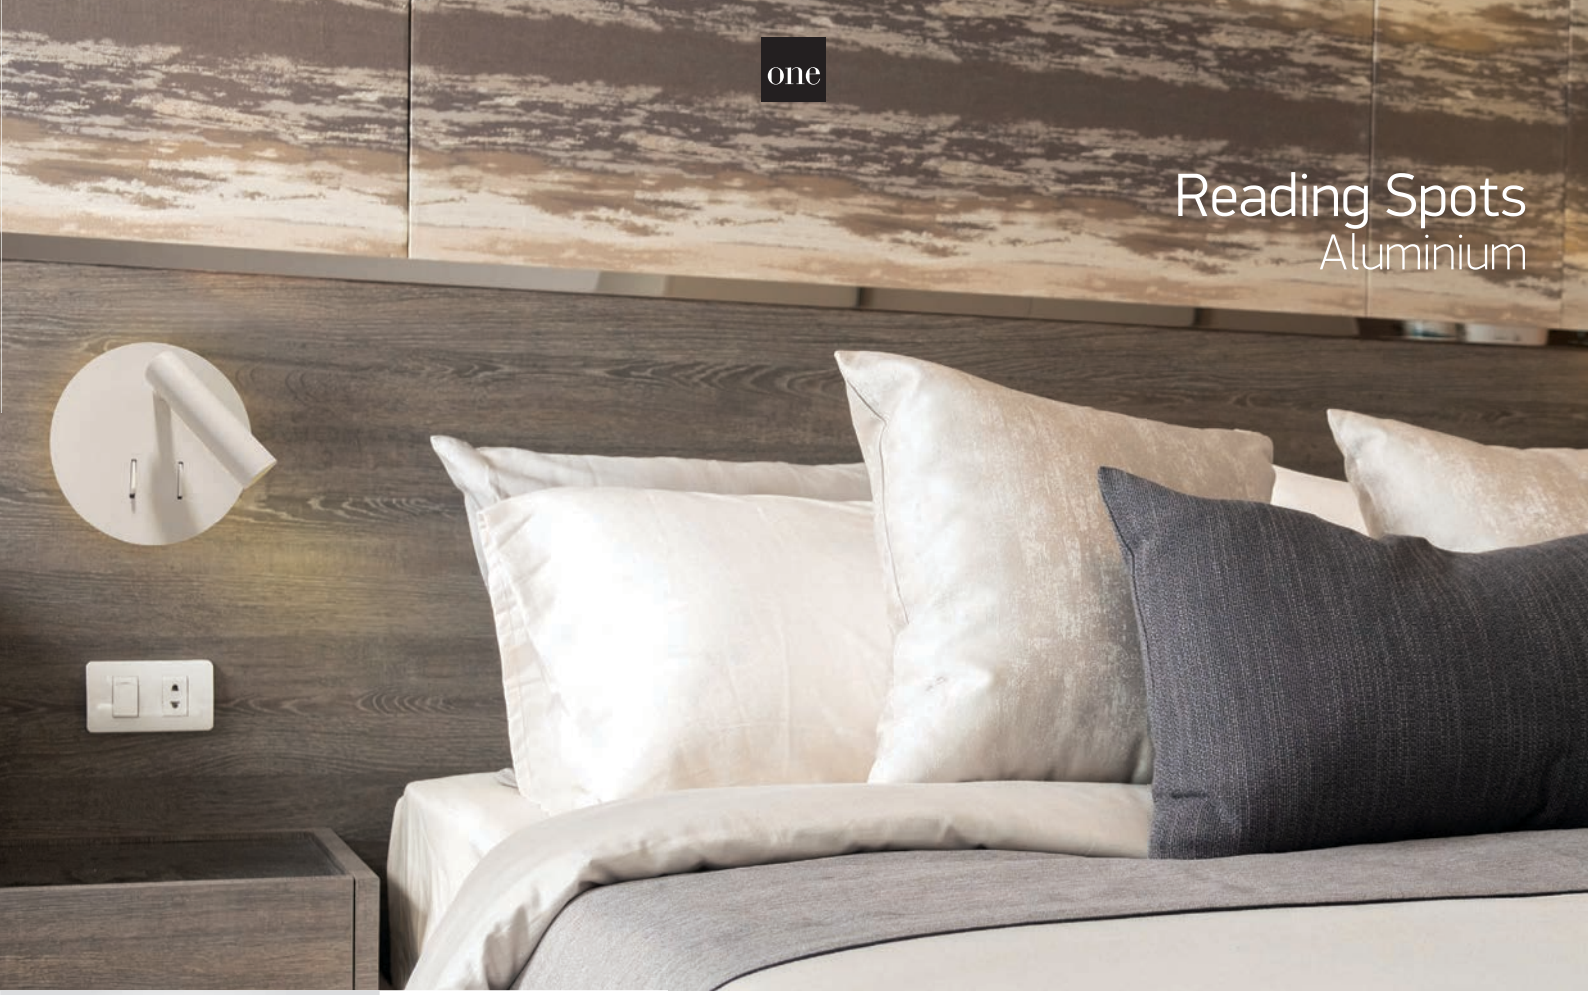

Reading Spots
Aluminium



65746B/W/W

65746B | 3W + 5W Back light | LED | Aluminium — With 2 x ON/OFF Switches.

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · 2 YEAR · IP20









65746B/B/W

65746B | 3W + 5W Back light | LED | Aluminium — With 2 x ON/OFF Switches.

new · LED BUILT IN · 80 CRI · ADJUSTABLE · CE · 2 YEAR · IP20









65142 | 3W | LED | Aluminium — Wall light / Reading light.

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · 3 YEAR · IP20







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65746B/W/W	White	Warm white	3000K	3W+5W	150lm	36°	230V		20	Complete with 700mA + 350mA drivers
65746B/B/W	Black	Warm white	3000K	3W+5W	150lm	36°	230V		20	Complete with 700mA + 350mA drivers
65142/W/W	White	Warm white	3000K	3W	160lm	36°	230V		12	Complete with 700mA driver



Reading Spots
Aluminium



65738/W/W

65738 | 3W | LED | Aluminium — With ON/OFF Switch.

LED BUILT IN · 85 CRI · ADJUSTABLE · CE · 2 YEAR · IP20









65738/B/W

65738 | 3W | LED | Aluminium — With ON/OFF Switch.

new

LED BUILT IN · 85 CRI · ADJUSTABLE · CE · 2 YEAR · IP20









65738/AL/W

65738 | 3W | LED | Aluminium — With ON/OFF Switch.

LED BUILT IN · 85 CRI · ADJUSTABLE · CE · 2 YEAR · IP20









65738/BBS/W

65738 | 3W | LED | Aluminium — With ON/OFF Switch.

LED BUILT IN · 85 CRI · ADJUSTABLE · CE · 2 YEAR · IP20







Order Code	Colour	Reflector	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65738/W/W	White	Black	Warm white	3000K	3W	160lm	36°	230V	⏚	24	Complete with 700mA driver
65738/B/W	Black	Black	Warm white	3000K	3W	160lm	36°	230V	⏚	24	Complete with 700mA driver
65738/AL/W	Aluminium	Black	Warm white	3000K	3W	160lm	36°	230V	⏚	24	Complete with 700mA driver
65738/BBS/W	Brushed brass	Black	Warm white	3000K	3W	160lm	36°	230V	⏚	24	Complete with 700mA driver



Reading Spots
Aluminium



65738A/W/W

65738A | 3W | LED | Aluminium — With ON/OFF Switch.

LED BUILT IN · 85 CRI · ADJUSTABLE · CE · 2 YEAR · IP20



65738A/B/W







65744/W/W

65744 | 3W | COB LED | Aluminium — With USB charger and ON/OFF Switch.

LED BUILT IN · 85 CRI · ADJUSTABLE · CE · 2 YEAR · IP20



USB charging socket.







65744/B/W

65744 | 3W | COB LED | Aluminium — With USB charger and ON/OFF Switch.

LED BUILT IN · 85 CRI · ADJUSTABLE · CE · 2 YEAR · IP20



USB charging socket.





Order Code	Colour	Reflector	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65738A/W/W	White	-	Warm white	3000K	3W	160lm	36°	230V	⏚	24	Complete with 700mA driver
65738A/B/W	Black	-	Warm white	3000K	3W	160lm	36°	230V	⏚	24	Complete with 700mA driver
65744/W/W	White	Black	Warm white	3000K	3W	150lm	36°	230V	⏚	12	Complete with 700mA driver
65744/B/W	Black	Brass	Warm white	3000K	3W	150lm	36°	230V	⏚	12	Complete with 700mA driver



Reading Spots



65146/W/W

65146 | 3W + 6W Side light | LED | Metal + aluminium

With 2 x ON/OFF Switches.

LED BUILT IN

ADJUSTABLE

2 YEAR

new

IP20



65146/B/W





65144/W/W

65144 | 3W + 6W Back light | LED | Metal + aluminium

With 2 x ON/OFF Switches.

LED BUILT IN

ADJUSTABLE

2 YEAR

new

IP20



65144/B/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
65146/W/W	White	Warm white	3000K	3W+6W	480lm	230V		20	Complete with 700mA+500mA drivers
65146/B/W	Black	Warm white	3000K	3W+6W	480lm	230V		20	Complete with 700mA+500mA drivers
65144/W/W	White	Warm white	3000K	3W+6W	530lm	230V		20	Complete with 700mA+500mA drivers
65144/B/W	Black	Warm white	3000K	3W+6W	530lm	230V		20	Complete with 700mA+500mA drivers



Reading Spots



61132A/W/W

61132A | 3W + 6W Base light | LED | Metal + aluminium

EU Plug / With 2 x ON/OFF Switches.

LED BUILT IN · ADJUSTABLE · CE · 2 YEAR

new

IP20



61132A/B/W





61132B/W/W

61132B | 3W + 8W Base light | LED | Metal + aluminium

EU Plug / With 2 x ON/OFF Switches.

LED BUILT IN · ADJUSTABLE · CE · 2 YEAR

new

IP20



61132B/B/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
61132A/W/W	White	Warm white	3000K	3W+6W	510lm	230V		6	Complete with 700mA+350mA drivers
61132A/B/W	Black	Warm white	3000K	3W+6W	510lm	230V		6	Complete with 700mA+350mA drivers
61132B/W/W	White	Warm white	3000K	3W+8W	730lm	230V		1	Complete with 700mA+350mA drivers
61132B/B/W	Black	Warm white	3000K	3W+8W	730lm	230V		1	Complete with 700mA+350mA drivers



Hotel Reading Spots
Aluminium



65740 | 6W | SMD 2835 | Aluminium

LED BUILT IN
80 CRI
ADJUSTABLE
CE
2 YEAR
IP20







65740A | 2x6W | SMD 2835 | Aluminium

LED BUILT IN
80 CRI
ADJUSTABLE
CE
2 YEAR
IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
65740/W/W	White	Warm white	3000K	6W	500lm	230V		12	Complete with 300mA driver
65740A/W/W	White	Warm white	3000K	2x6W	2x500lm	230V		12	Complete with 300mA driver

one

The Retro GU10 Spots
Aluminium



65105NA/W



65105NA/B

65105NA | 10W | MR16 | GU10 | Aluminium — With switch.

ADJUSTABLE

5 YEAR

DARK LIGHT

IP20



65105NA/W





65105NA/BBS

65105NA | 10W | MR16 | GU10 | Aluminium — With switch.

ADJUSTABLE

5 YEAR

new

DARK LIGHT

IP20



65105NA/MG



Order Code	Colour	Reflector	Watts	Input	Class		Notes
65105NA/W	White	Black	10W	100-240V		24	-
65105NA/B	Black	Brass	10W	100-240V		24	-
65105NA/BBS	Brushed brass	Black	10W	100-240V		24	-
65105NA/MG	Metal grey	Black	10W	100-240V		24	-





18

Bathroom

Pages 601-612

G9 | T5 | T8 | E14 | 2G11 | SMD LED

Die cast + acrylic | Aluminium + PC | Metal + glass

IP44

2 YEAR 3 YEAR



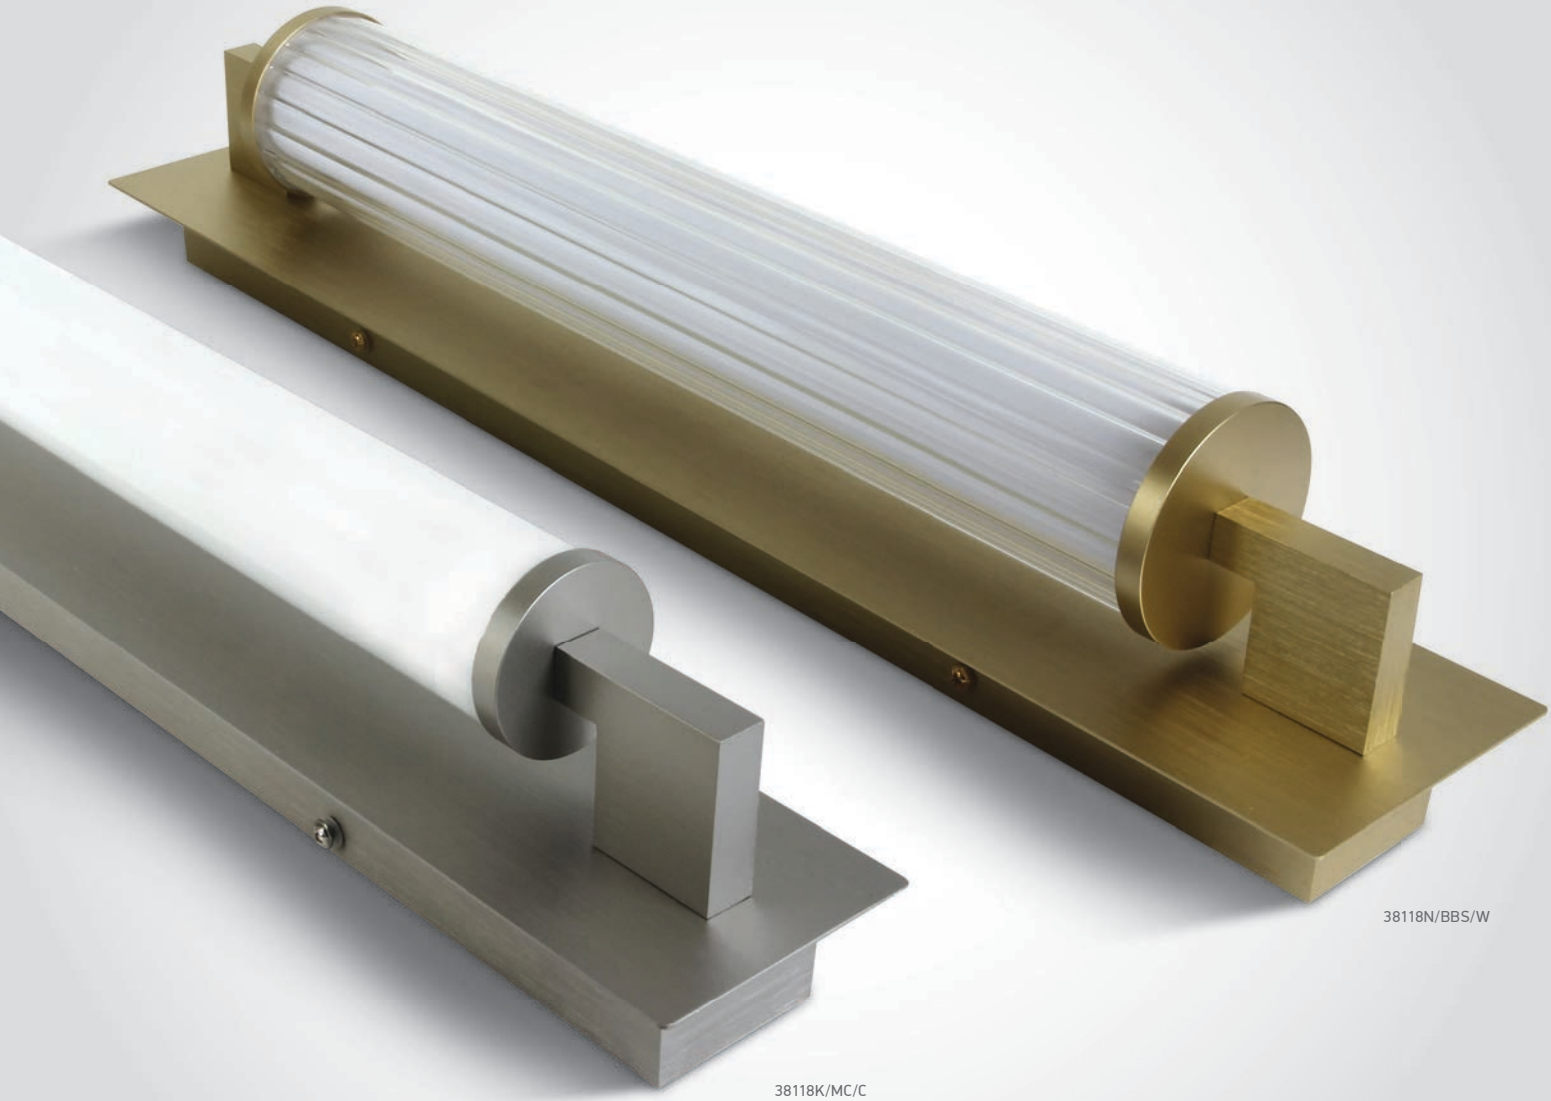

38118N/BBS/W

38118K/MC/C

Classic Mirror Lights



38118K | 18W | SMD 2835 | Aluminium + glass

LED BUILT IN

80 CRI

CE

2 YEAR

IP44





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38118K/C/C	Chrome	Cool white	4000K	18W	1225lm	230V		6	Complete with 700mA driver
38118K/MC/C	Brushed chrome	Cool white	4000K	18W	1225lm	230V		6	Complete with 700mA driver

Classic Mirror Lights



38118N | 18W | SMD 2835 | Aluminium + glass

LED BUILT IN

80 CRI

CE

2 YEAR

IP44





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38118N/C/W	Chrome	Warm white	3000K	18W	1225lm	230V		6	Complete with 700mA driver
38118N/BBS/W	Brushed brass	Warm white	3000K	18W	1225lm	230V		6	Complete with 700mA driver



The Mirror LED Round
Aluminium + PC

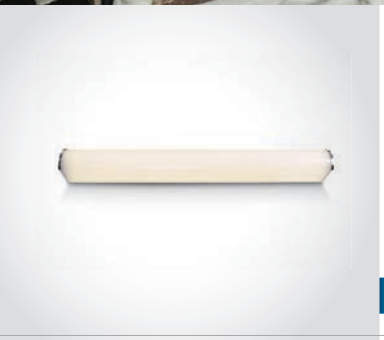

38115C | 15W | SMD 2835 | Aluminium + PC

LED BUILT IN
80 CRI
CE
2 YEAR
IP44







38120C | 20W | SMD 2835 | Aluminium + PC

LED BUILT IN
80 CRI
CE
2 YEAR
IP44





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38115C/C	Chrome	Cool white	4000K	15W	1300lm	230V	⏚	10	Complete with 350mA driver
38115C/W	Chrome	Warm white	3000K	15W	1300lm	230V	⏚	10	Complete with 350mA driver
38120C/C	Chrome	Cool white	4000K	20W	1700lm	230V	⏚	10	Complete with 500mA driver
38120C/W	Chrome	Warm white	3000K	20W	1700lm	230V	⏚	10	Complete with 500mA driver

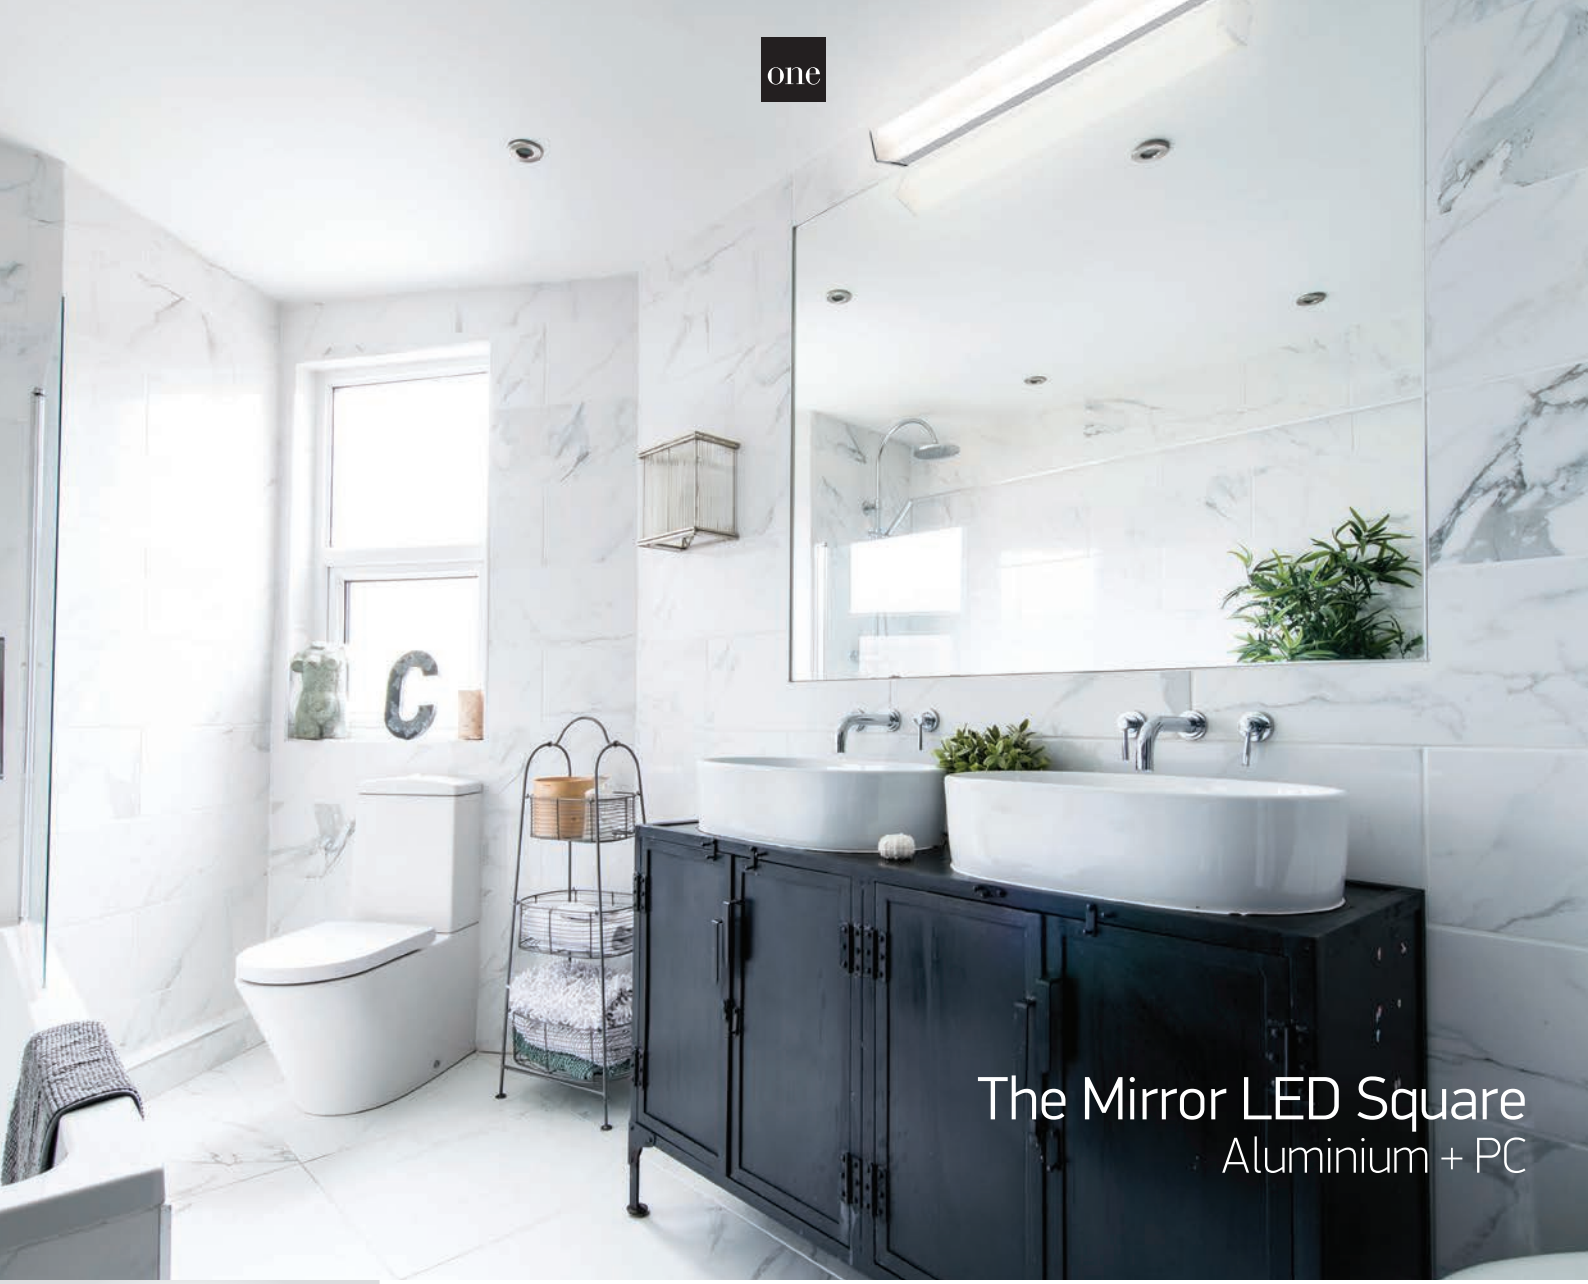

The Mirror LED Square
Aluminium + PC



38114M | 15W | SMD 2835 | Aluminium + PC

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP44







38114MA | 16W | SMD 2835 | Aluminium + PC

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP44





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38114M/C	Chrome	Cool white	4000K	15W	1200lm	230V		12	Complete with 130mA driver
38114M/W	Chrome	Warm white	3000K	15W	1200lm	230V		12	Complete with 130mA driver
38114MA/C	Chrome	Cool white	4000K	16W	1300lm	230V		12	Complete with 120mA driver
38114MA/W	Chrome	Warm white	3000K	16W	1300lm	230V		12	Complete with 120mA driver

The Mirror LED Range





38114EL | 23W | SMD 2835 | Die cast + acrylic

LED BUILT IN

80 CRI

CE

2 YEAR

IP44







38121EL | 23W | SMD 2835 | Die cast + acrylic

LED BUILT IN

80 CRI

CE

2 YEAR

IP44





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38114EL/C	Chrome	Cool white	4000K	23W	1650lm	230V		8	Complete with 700mA driver
38114EL/W	Chrome	Warm white	3000K	23W	1650lm	230V		8	Complete with 700mA driver
38121EL/C	Chrome	Cool white	4000K	23W	1650lm	230V		8	Complete with 700mA driver



The Mirror LED Range



38116F | 16W | SMD 2835 | Aluminium + opal glass

LED BUILT IN

80 CRI

CE

2 YEAR

IP44









38116P/W

38116P | 16W | SMD 2835 | Aluminium + PC

LED BUILT IN

80 CRI

CE

2 YEAR

IP44



38116P/C





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38116F/W	Chrome	Warm white	3000K	16W	1120lm	230V	⏚	6	Complete with 600mA driver
38116P/C	Chrome	Cool white	4000K	16W	1280lm	230V	⏚	12	Complete with 120mA driver
38116P/W	Chrome	Warm white	3000K	16W	1280lm	230V	⏚	12	Complete with 120mA driver



The Mirror T5 Range

For T5 14W/21W Fluorescent



38121D | 21W | T5 | Die cast + acrylic

2 YEAR

IP44 offer







38114C | 14W | T5 | Die cast + acrylic

2 YEAR

IP44 offer





Order Code	Colour	Watts	Input	Class		Notes
38121D/C	Chrome	21W	230V		8	Complete with electronic ballast
38114C/C	Chrome	14W	230V		6	Complete with electronic ballast



The Mirror 60cm Range
For T8 LED Tubes



38114DE | T8 LED 60cm | Die cast + acrylic

Use 9009L lamp.

2 YEAR

IP44



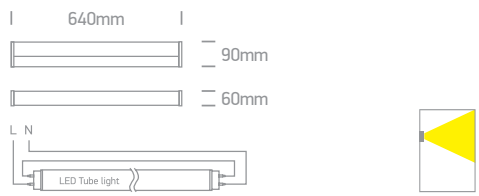



38114EE | T8 LED 60cm | Die cast + acrylic

Use 9009L lamp.

2 YEAR

IP44



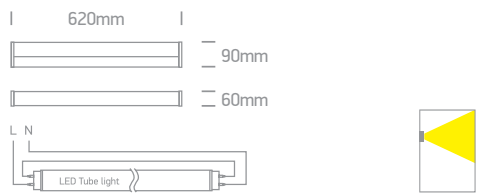



38114GE | T8 LED 60cm | Die cast + acrylic

Use 9009L lamp.

2 YEAR

IP44



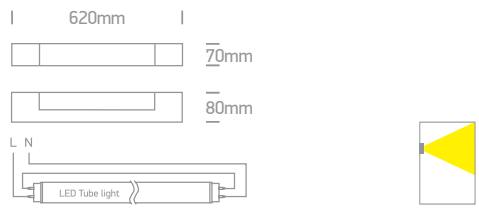



38114CE | T8 LED 60cm | Die cast + acrylic

Use 9009L lamp.

2 YEAR

IP44



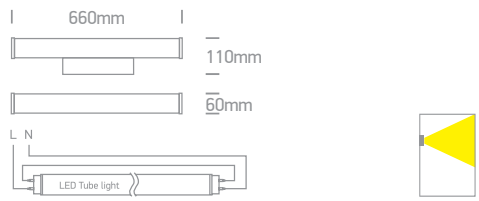

Order Code	Colour	Input	Class		Notes
38114DE/C	Chrome	100-240V	⏚	6	Only suitable for T8 LED tubes
38114EE/C	Chrome	100-240V	⏚	6	Only suitable for T8 LED tubes
38114GE/C	Chrome	100-240V	⏚	6	Only suitable for T8 LED tubes
38114CE/C	Chrome	100-240V	⏚	6	Only suitable for T8 LED tubes

Mirrors





61126 | 7W | SMD 2835 | Touch switch | Variable colour temperature | ABS + glass

Rechargeable USB socket.

LED BUILT IN

DIMMABLE

ADJUSTABLE

CE

2 YEAR

new

IP20



Complete with magnifying mirror.



Charging time: 3Hrs





60204 | 7W | SMD LED | Die cast + Mirror

LED BUILT IN

CE

2 YEAR

IP44



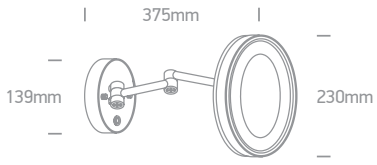

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
61126/W	White	Warm white - Cool white - Daylight	3000K - 4000K - 6000K	7W	-	-		20	1x1500mAh lithium battery
60204/C	Chrome	Cool white	4000K	7W	490lm	100-240V		6	Complete with driver



Mirror Lights



38110BD | 10W | SMD 2835 | Variable colour temperature | PC

LED BUILT IN

80 CRI

DIMMABLE

IP20

3 YEAR

offer







60106 | 40W | E14 | Metal + glass

3 YEAR

IP44



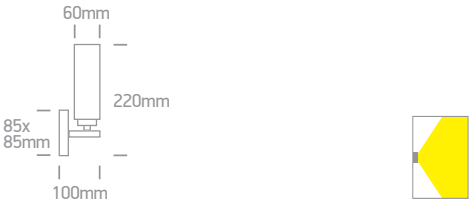



60106A | 2x40W | E14 | Metal + glass

3 YEAR

IP44





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
38110BD	-	Extra warm white - Daylight	2700K - 6500K	10W	700lm	230V		150cm	20	Complete with driver
60106/C	Chrome	-	-	40W	-	100-240V		-	10	-
60106A/C	Chrome	-	-	2x40W	-	100-240V		-	10	-

The Mirror G9 Decorative Globes

Metal + glass



60107C/C

60107B/C

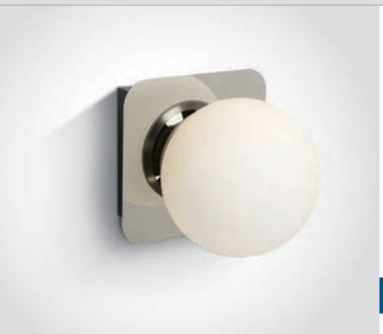

60107A | 10W | G9 | Metal + glass

3 YEAR

IP44



Suitable for G9 LED lamp.





60107B | 2x10W | G9 | Metal + glass

3 YEAR

IP44



Suitable for G9 LED lamps.



Order Code	Colour	Watts	Input	Class		Notes
60107A/C	Chrome	10W	100-240V		12	-
60107B/C	Chrome	2x10W	100-240V		8	-



The Mirror G9 Decorative Globes

Metal + glass

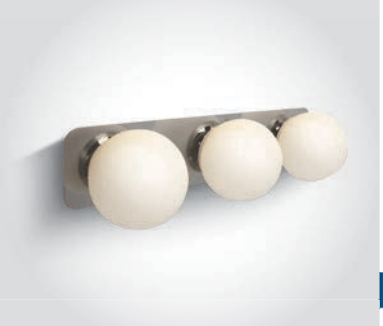

60107C | 3x10W | G9 | Metal + glass

3 YEAR

IP44



Suitable for G9 LED lamps.



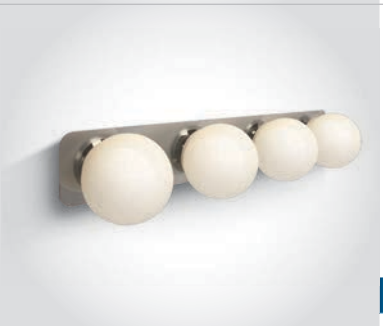

60107D | 4x10W | G9 | Metal + glass

3 YEAR

IP44



Suitable for G9 LED lamps.



Order Code	Colour	Watts	Input	Class		Notes
60107C/C	Chrome	3x10W	100-240V		6	-
60107D/C	Chrome	4x10W	100-240V		6	-





19

Wall Recessed & Inground

Pages 615-648

MR16 | GU10 | GX53 | COB LED | SMD LED | LED

Die cast | Natural aluminium | Stainless steel | Gypsum | Plastic

IP20 IP44 IP54 IP65 IP67

ADJUSTABLE DIMMABLE DARK LIGHT QUICK FIX IK08 IK10 80 CRI 85 CRI 90 CRI 2 YEAR 3 YEAR 5 YEAR



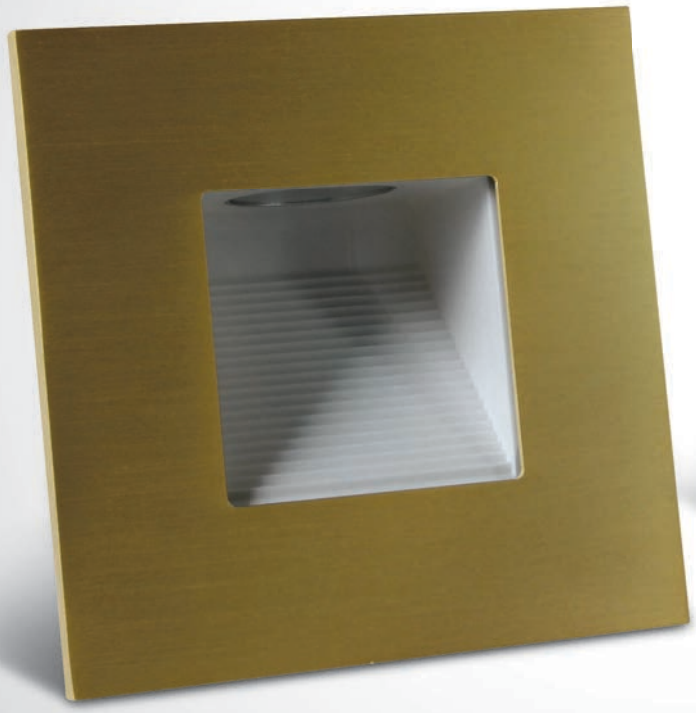

68006N/W + 050176/BBS



68007/W/W

Indoor Square Wall Recessed



68007 | 1,5W | LED | Plastic

Supplied with box for concrete installation.

LED BUILT IN

2 YEAR

DARK LIGHT

IP20







68007 | 1,5W | LED | Plastic

Supplied with box for concrete installation.

new

LED BUILT IN

2 YEAR

DARK LIGHT

IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class				Notes
68007/W/W	White	Warm white	3000K	1,5W	100lm	100-240V		86x86mm	40mm	50	Complete with driver
68007/B/W	Black	Warm white	3000K	1,5W	70lm	100-240V		86x86mm	40mm	50	Complete with driver



Dark Light Wall Recessed



68006N | 1W | SMD 3535 | Die cast

Cover plate must be ordered separately.

LED BUILT IN

90 CRI

3 YEAR

DARK LIGHT

IP44







050176/W White



050176/B Black



050176/G Grey



050176/BBS Brushed brass



68006N/BOX | Suitable for 68006N/W | Plastic

Gypsum installation.

new

78x78mm



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class					Notes
68006N/W	White	Warm white	3000K	1W	80lm	230V		12cm	70x70mm	60mm	1	Complete with 350mA driver



Indoor Dark Light Wall Recessed

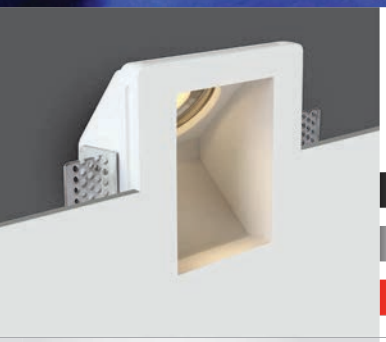

68054 | 10W | MR16 | GU10 | Gypsum

DARK LIGHT
IP20
offer
5 YEAR



Suitable for LED GU10 lamp.





68005/G/BL

68005 | 1W | LED | Die cast

DARK LIGHT
IP20
offer
LED BUILT IN
DIMMABLE
QUICK FIX
2 YEAR



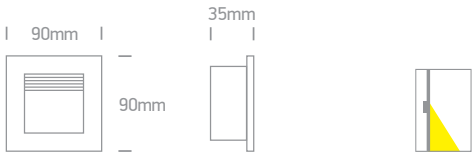



68005/G/GR

68005 | 1W | LED | Die cast

DARK LIGHT
IP20
offer
LED BUILT IN
DIMMABLE
QUICK FIX
2 YEAR



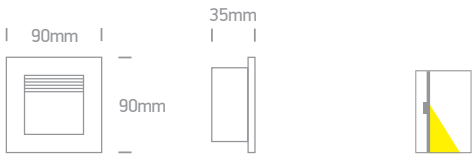

Order Code	Colour	Light Colour	Watts	Input	Class					Notes
68054	White	-	10W	100-240V		15cm	121x121mm	95cm	24	-
68005/G/BL	Grey	Blue	1W	350mA	III	50cm	73x73mm	40mm	50	Requires 350mA driver
68005/G/GR	Grey	Green	1W	350mA	III	50cm	73x73mm	40mm	50	Requires 350mA driver

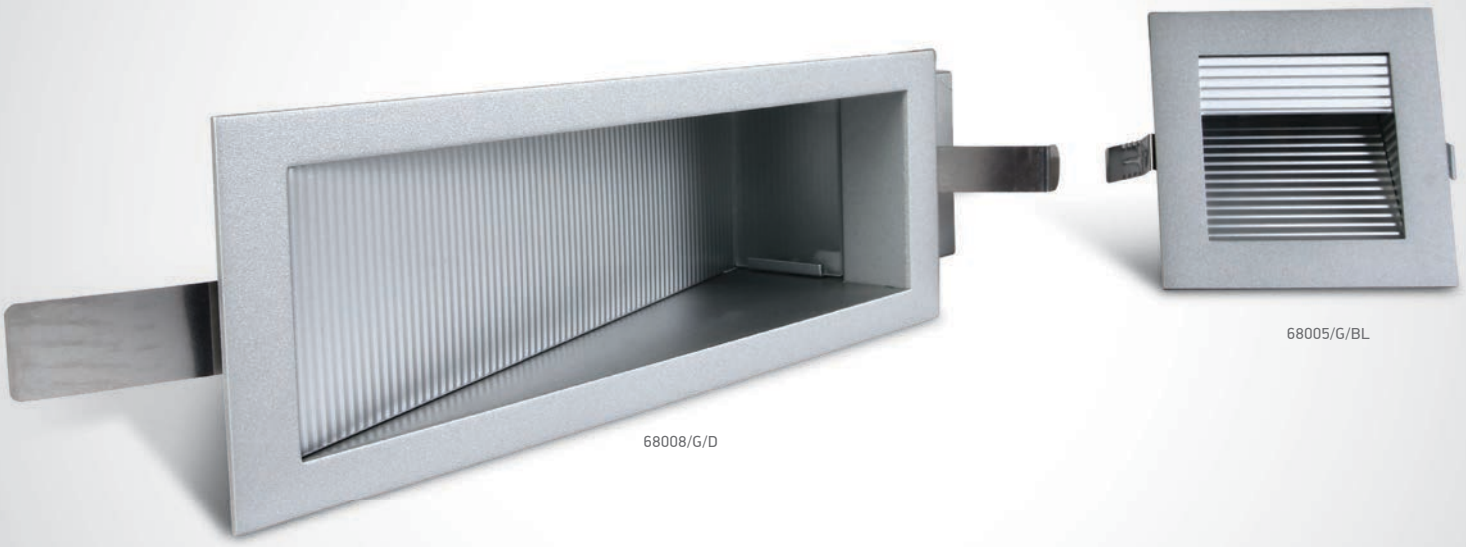

Indoor Dark Light Wall Recessed


68008/G/D

68008 | 1W | LED | Die cast

DARK LIGHT
IP20
offer
LED BUILT IN
DIMMABLE
QUICK FIX
2 YEAR






68008/G/W

68008 | 1W | LED | Die cast

DARK LIGHT
IP20
offer
LED BUILT IN
DIMMABLE
QUICK FIX
2 YEAR






68008/G/BL

68008 | 1W | LED | Die cast

DARK LIGHT
IP20
offer
LED BUILT IN
DIMMABLE
QUICK FIX
2 YEAR





Order Code	Colour	Light Colour	CCT (K)	Watts	Input	Class					Notes
68008/G/D	Grey	Daylight	6000K	1W	350mA		50cm	65x212mm	90mm	20	Requires 350mA driver
68008/G/W	Grey	Warm white	3000K	1W	350mA		50cm	65x212mm	90mm	20	Requires 350mA driver
68008/G/BL	Grey	Blue	-	1W	350mA		50cm	65x212mm	90mm	20	Requires 350mA driver

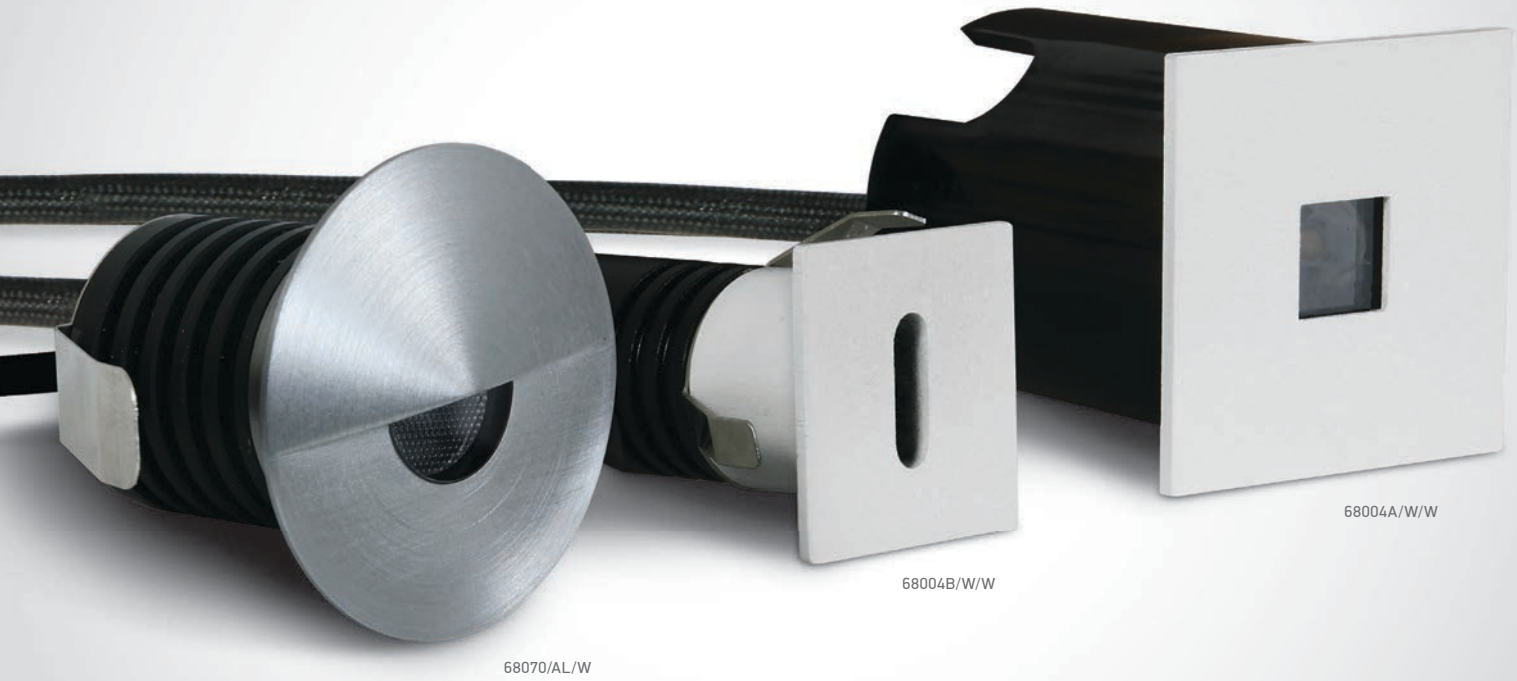

Indoor Decorative Wall Recessed

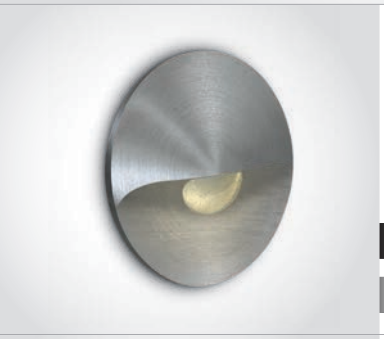

68070A | 1W | LED | Die cast

Driver can not pass through the cutout hole.

LED BUILT IN · 80 CRI · DIMMABLE · QUICK FIX · DARK LIGHT · IP20 · CE · 2 YEAR







68004B/W/W

68004B | 1W | LED | Die cast

Driver can not pass through the cutout hole.

LED BUILT IN · 80 CRI · DIMMABLE · QUICK FIX · DARK LIGHT · IP20 · CE · 2 YEAR



68004B/B/W



68004B/AL/W





68078 | 2W | LED | Aluminium

LED BUILT IN · 80 CRI · DIMMABLE · QUICK FIX · DARK LIGHT · IP20 · CE · 3 YEAR



Suitable for 89004A driver.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class					Notes
68070A/AL/W	Aluminium	Warm white	3000K	1W	60lm	350mA	III	40cm	20mm	45mm	100	Requires 350mA driver
68004B/W/W	White	Warm white	3000K	1W	50lm	350mA	III	40cm	20mm	50mm	100	Requires 350mA driver
68004B/B/W	Black	Warm white	3000K	1W	50lm	350mA	III	40cm	20mm	50mm	100	Requires 350mA driver
68004B/AL/W	Aluminium	Warm white	3000K	1W	50lm	350mA	III	40cm	20mm	50mm	100	Requires 350mA driver
68078/W/W	White	Warm white	3000K	2W	80lm	700mA	III	30cm	80x25mm	60mm	100	Requires 700mA driver



Indoor/Outdoor Decorative Wall Recessed
Aluminium

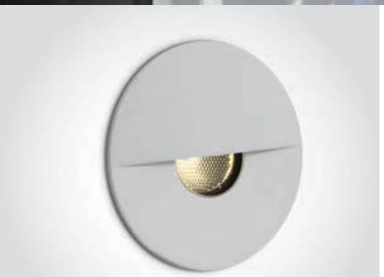

68070/W/W

68070 | 1W | COB LED | Aluminium

LED BUILT IN · 80 CRI · DIMMABLE · QUICK FIX · IP65 · IK08 · CE · 2 YEAR



68070/B/W



68070/AL/W





68004/W/W

68004 | 3W | COB LED | Aluminium

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · DARK LIGHT · IP54 · CE · 2 YEAR



68004/AL/W





68004A/W/W

68004A | 1W | COB LED | Aluminium

Supplied with box for concrete installation.

LED BUILT IN · 85 CRI · DIMMABLE · QUICK FIX · DARK LIGHT · IP54 · CE · 2 YEAR



68004A/AL/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Concrete installation		Gypsum installation			Notes
68070/W/W	White	Warm white	3000K	1W	50lm	36°	350mA		200cm	30mm	60mm	30mm	60mm	100	Requires 350mA driver
68070/B/W	Black	Warm white	3000K	1W	50lm	36°	350mA		200cm	30mm	60mm	30mm	60mm	100	Requires 350mA driver
68070/AL/W	Aluminium	Warm white	3000K	1W	50lm	36°	350mA		200cm	30mm	60mm	30mm	60mm	100	Requires 350mA driver
68004/W/W	White	Warm white	3000K	3W	120lm	24°	350mA		200cm	49mm	110mm	49mm	70mm	36	Requires 350mA driver
68004/AL/W	Aluminium	Warm white	3000K	3W	120lm	24°	350mA		200cm	49mm	110mm	49mm	70mm	36	Requires 350mA driver
68004A/W/W	White	Warm white	3000K	1W	40lm	60°	350mA		200cm	36mm	50mm	33mm	30mm	60	Requires 350mA driver
68004A/AL/W	Aluminium	Warm white	3000K	1W	40lm	60°	350mA		200cm	36mm	50mm	33mm	30mm	60	Requires 350mA driver

Outdoor Decorative Wall Recessed
Die cast





68052 | 4W | SMD 2835 | Die cast

Supplied with box for concrete installation.

LED BUILT IN

80 CRI

CE

2 YEAR

DARK LIGHT

IP65







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	Concrete installation	Gypsum installation			Notes
68052/W/W	White	Warm white	3000K	4W	400lm	100-240V	⏚	100x70mm	95x70mm	80mm	20	Complete with 350mA driver

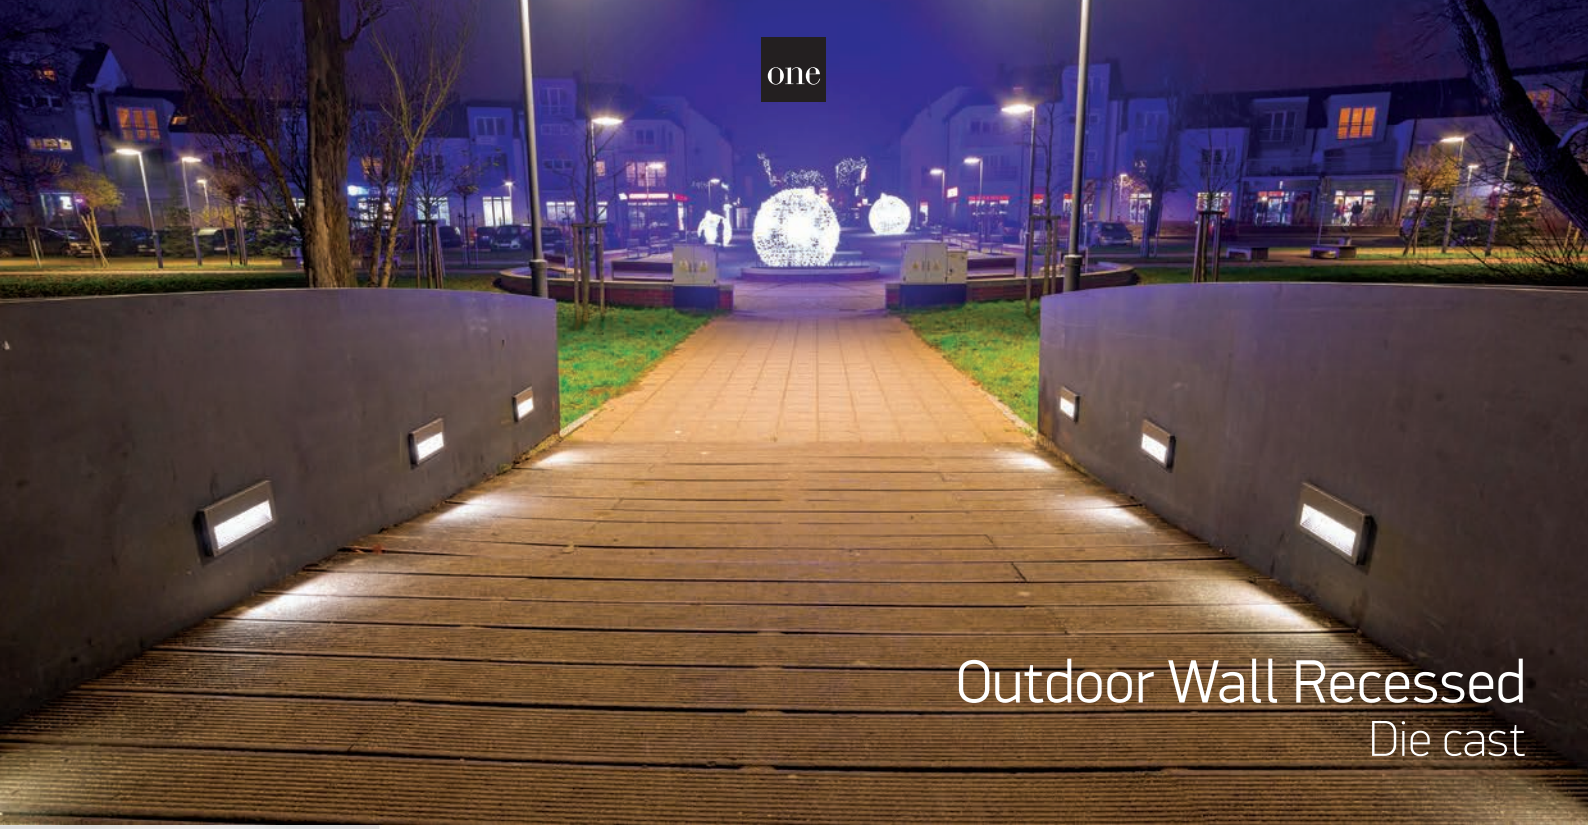

Outdoor Wall Recessed
Die cast



68046 | 2x1W | LED | Die cast

Supplied with box for concrete installation.

LED BUILT IN

CE 2 YEAR

IP65









68048/AN/W

68048 | 4x1W | LED | Die cast

Supplied with box for concrete installation.

LED BUILT IN

CE 2 YEAR

IP65



68048/W/W



68048/G/W







68050/AN/W

68050 | 6x1W | LED | Die cast

Supplied with box for concrete installation.

LED BUILT IN

CE 2 YEAR

IP65



68050/W/W



68050/G/W





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class				Notes
68046/W/W	White	Warm white	3000K	2x1W	140lm	100-240V		100x100mm	100mm	20	Complete with 350mA driver
68048/W/W	White	Warm white	3000K	4x1W	280lm	100-240V		170x90mm	100mm	12	Complete with 350mA driver
68048/AN/W	Anthracite	Warm white	3000K	4x1W	280lm	100-240V		170x90mm	100mm	12	Complete with 350mA driver
68048/G/W	Grey	Warm white	3000K	4x1W	280lm	100-240V		170x90mm	100mm	12	Complete with 350mA driver
68050/W/W	White	Warm white	3000K	6x1W	420lm	100-240V		220x90mm	100mm	8	Complete with 350mA driver
68050/AN/W	Anthracite	Warm white	3000K	6x1W	420lm	100-240V		220x90mm	100mm	8	Complete with 350mA driver
68050/G/W	Grey	Warm white	3000K	6x1W	420lm	100-240V		220x90mm	100mm	8	Complete with 350mA driver

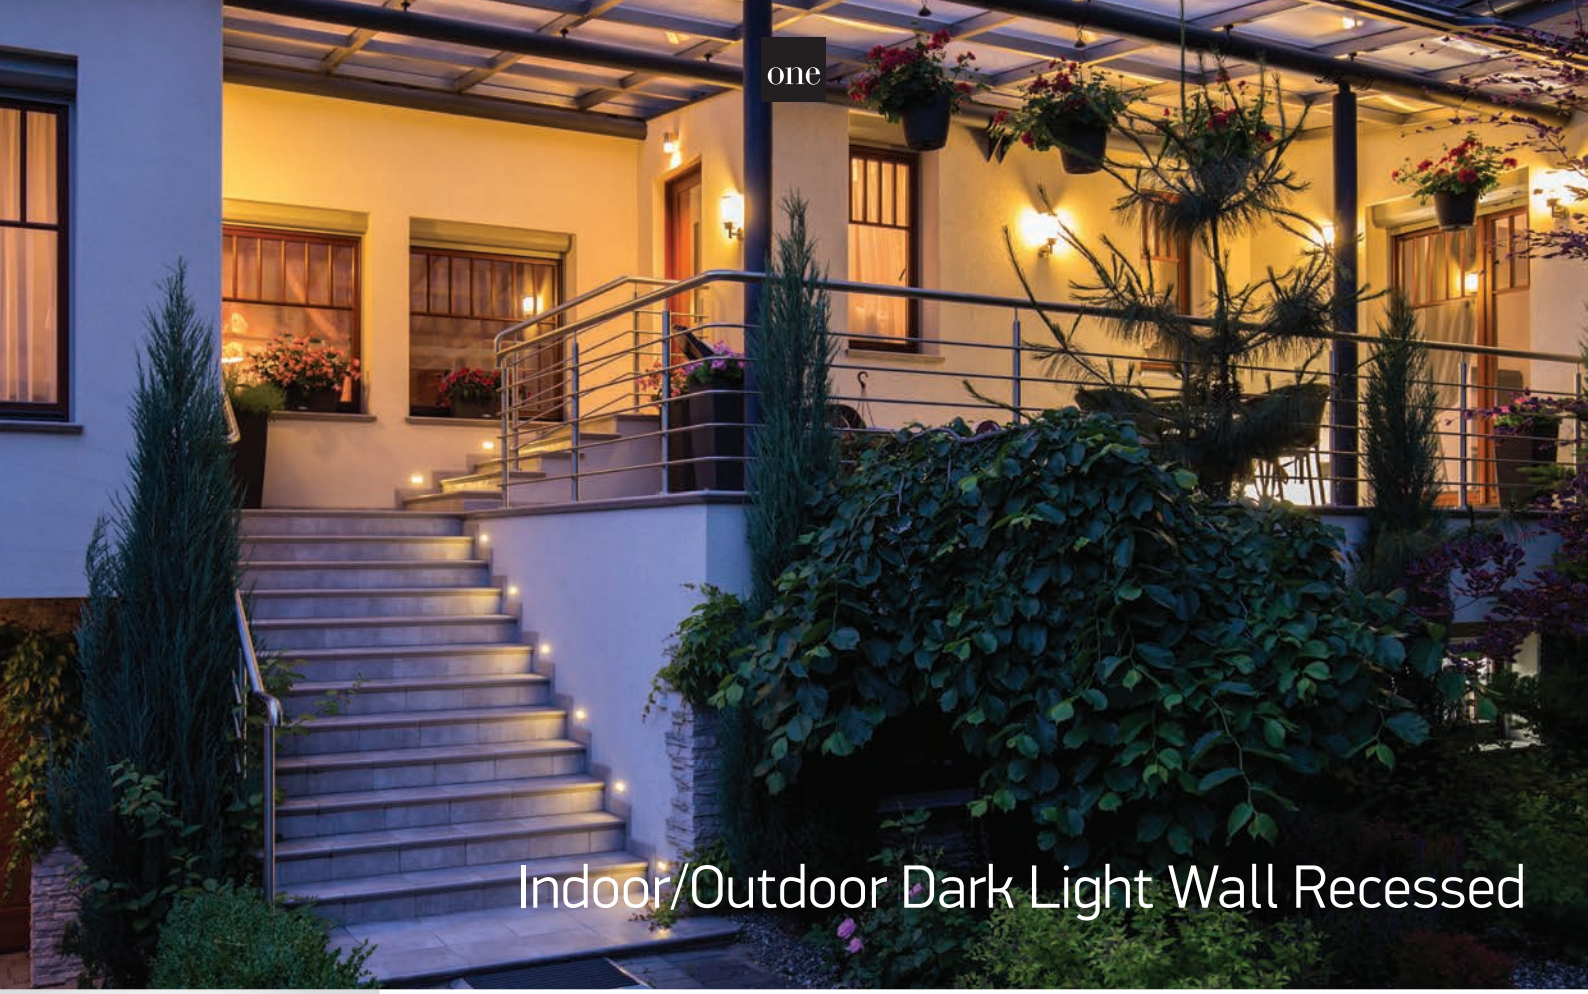

Indoor/Outdoor Dark Light Wall Recessed



68030/W/W

68030 | 3W | LED | Aluminium

LED BUILT IN

2 YEAR

DARK LIGHT

IP54



Supplied with box for concrete installation.





68030/B/W

68030 | 3W | LED | Aluminium

LED BUILT IN

2 YEAR

DARK LIGHT

IP54



Supplied with box for concrete installation.





68030/AL/W

68030 | 3W | LED | Natural aluminium

LED BUILT IN

2 YEAR

DARK LIGHT

IP54



Supplied with box for concrete installation.



Order Code	Colour	Light Colour	CCT (K)	Watts	Input	Class		Concrete installation	Gypsum installation		Notes
68030/W/W	White	Warm white	3000K	3W	100-240V		52mm	110mm	50mm	30	Complete with 700mA driver
68030/B/W	Black	Warm white	3000K	3W	100-240V		52mm	110mm	50mm	30	Complete with 700mA driver
68030/AL/W	Aluminium	Warm white	3000K	3W	100-240V		52mm	110mm	50mm	30	Complete with 700mA driver



68032/G/W



68032/AL/W



68030/AL/W

Indoor/Outdoor Dark Light Wall Recessed



68032/AL/W

68032 | 3W | LED | Die cast

LED BUILT IN

CE 2 YEAR

DARK LIGHT

IP54



Supplied with box for concrete installation.





68032/G/W

68032 | 3W | LED | Die cast

LED BUILT IN

CE 2 YEAR

DARK LIGHT

IP54



Supplied with box for concrete installation.





68032/AL/W

68032 | 3W | LED | Natural aluminium

LED BUILT IN

CE 2 YEAR

DARK LIGHT

IP54



Supplied with box for concrete installation.



Order Code	Colour	Light Colour	CCT (K)	Watts	Input	Class		Concrete installation	Gypsum installation		Notes
68032/B/W	Black	Warm white	3000K	3W	100-240V	⧈	52mm	110mm	50mm	30	Complete with 700mA driver
68032/G/W	Grey	Warm white	3000K	3W	100-240V	⧈	52mm	110mm	50mm	30	Complete with 700mA driver
68032/AL/W	Aluminium	Warm white	3000K	3W	100-240V	⧈	52mm	110mm	50mm	30	Complete with 700mA driver



Dark Light Step Series
Aluminium


68074/B/W

68074 | 2W | COB LED | Aluminium

LED BUILT IN · 85 CRI · DIMMABLE · QUICK FIX · DARK LIGHT · IP65 · IK08 · CE · 2 YEAR


68074/W/W




68074A/B/W

68074A | 2W | COB LED | Aluminium

LED BUILT IN · 85 CRI · DIMMABLE · QUICK FIX · DARK LIGHT · IP65 · IK08 · CE · 2 YEAR


68074A/W/W




68074B/B/W

68074B | 2W | COB LED | Aluminium

LED BUILT IN · 85 CRI · DIMMABLE · QUICK FIX · DARK LIGHT · IP65 · IK08 · CE · 2 YEAR


68074B/W/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class					Notes
68074/W/W	White	Warm white	3000K	2W	100lm	700mA		200cm	35mm	55mm	100	Requires 700mA driver
68074/B/W	Black	Warm white	3000K	2W	100lm	700mA		200cm	35mm	55mm	100	Requires 700mA driver
68074A/W/W	White	Warm white	3000K	2W	100lm	700mA		200cm	35mm	55mm	100	Requires 700mA driver
68074A/B/W	Black	Warm white	3000K	2W	100lm	700mA		200cm	35mm	55mm	100	Requires 700mA driver
68074B/W/W	White	Warm white	3000K	2W	110lm	700mA		200cm	35mm	55mm	100	Requires 700mA driver
68074B/B/W	Black	Warm white	3000K	2W	110lm	700mA		200cm	35mm	55mm	100	Requires 700mA driver





68076/W/W

68076 | 3W | SMD LED | Glass + metal

Supplied with box for concrete installation.

LED BUILT IN

80 CRI

CE

2 YEAR

DARK LIGHT

IP65



68076/B/W









68076A/W/W

68076A | 4W | SMD LED | Glass + metal

Supplied with box for concrete installation.

LED BUILT IN

80 CRI

CE

2 YEAR

DARK LIGHT

IP65



68076A/B/W







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	Concrete installation	Gypsum installation			Notes
68076/W/W	White	Warm white	3000K	3W	200lm	230V	☐	115x70mm	2x68mm	55mm	12	AC LED
68076/B/W	Black	Warm white	3000K	3W	200lm	230V	☐	115x70mm	2x68mm	55mm	12	AC LED
68076A/W/W	White	Warm white	3000K	4W	270lm	230V	☐	160x70mm	3x68mm	55mm	12	AC LED
68076A/B/W	Black	Warm white	3000K	4W	270lm	230V	☐	160x70mm	3x68mm	55mm	12	AC LED



Wall Recessed Pro Range



68072A | 5W | SMD 2835 | Stainless steel 316 + tempered glass

LED BUILT IN · 80 CRI · IK08 · CE · 2 YEAR · IP65



Supplied with box for concrete installation.





68072B | 7W | SMD 2835 | Stainless steel 316 + tempered glass

LED BUILT IN · 80 CRI · IK08 · CE · 2 YEAR · IP65



Supplied with box for concrete installation.



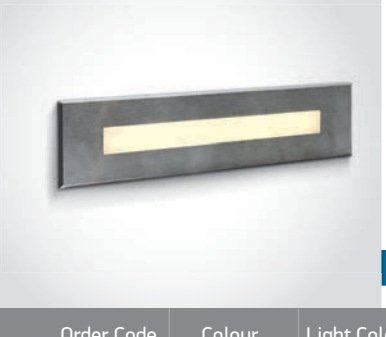

68072C | 10W | SMD 2835 | Stainless steel 316 + tempered glass

LED BUILT IN · 80 CRI · IK08 · CE · 2 YEAR · IP65



Supplied with box for concrete installation.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	Concrete installation	Gypsum installation			Notes
68072A/W	Stainless steel	Warm white	3000K	5W	100lm	230V	⏚	112x42mm	98x35mm	75mm	24	Complete with 350mA driver
68072B/W	Stainless steel	Warm white	3000K	7W	140lm	230V	⏚	182x55mm	164x45mm	75mm	12	Complete with 350mA driver
68072C/W	Stainless steel	Warm white	3000K	10W	200lm	230V	⏚	253x55mm	240x45mm	75mm	12	Complete with 350mA driver



Outdoor Dark Light Wall Recessed
Die cast



68068/W/W

68068 | 3W | SMD 2835 | Die cast

Supplied with box for concrete installation.

LED BUILT IN | 80 CRI | CE | 2 YEAR | DARK LIGHT | IP65



68068/AN/W



68068/G/W





68068A/W/W

68068A | 4W | SMD 2835 | Die cast

Supplied with box for concrete installation.

LED BUILT IN | 80 CRI | CE | 2 YEAR | DARK LIGHT | IP65



68068A/AN/W



68068A/B/W



68068A/G/W





68068C/W/W

68068C | 7W | SMD 2835 | Die cast

Supplied with box for concrete installation.

LED BUILT IN | 80 CRI | CE | 2 YEAR | DARK LIGHT | IP65



68068C/AN/W



68068C/B/W



68068C/G/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	Concrete installation	Gypsum installation			Notes
68068/W/W	White	Warm white	3000K	3W	300lm	100-240V		110mm	100mm	60mm	24	Complete with 350mA driver
68068/AN/W	Anthracite	Warm white	3000K	3W	300lm	100-240V		110mm	100mm	60mm	24	Complete with 350mA driver
68068/G/W	Grey	Warm white	3000K	3W	300lm	100-240V		110mm	100mm	60mm	24	Complete with 350mA driver
68068A/W/W	White	Warm white	3000K	4W	300lm	100-240V		110x110mm	100x100mm	60mm	24	Complete with 350mA driver
68068A/AN/W	Anthracite	Warm white	3000K	4W	300lm	100-240V		110x110mm	100x100mm	60mm	24	Complete with 350mA driver
68068A/B/W	Black	Warm white	3000K	4W	300lm	100-240V		110x110mm	100x100mm	60mm	24	Complete with 350mA driver
68068A/G/W	Grey	Warm white	3000K	4W	300lm	100-240V		110x110mm	100x100mm	60mm	24	Complete with 350mA driver
68068C/W/W	White	Warm white	3000K	7W	550lm	100-240V		220x70mm	210x60mm	80mm	12	Complete with 350mA driver
68068C/AN/W	Anthracite	Warm white	3000K	7W	550lm	100-240V		220x70mm	210x60mm	80mm	12	Complete with 350mA driver
68068C/B/W	Black	Warm white	3000K	7W	550lm	100-240V		220x70mm	210x60mm	80mm	12	Complete with 350mA driver
68068C/G/W	Grey	Warm white	3000K	7W	550lm	100-240V		220x70mm	210x60mm	80mm	12	Complete with 350mA driver

Outdoor Dark Light Wall Recessed
Die cast





68062/AN/W



68064/AN/W



68066/AN/W



68066/AN/W



68064/G/W



68062/G/W

Outdoor Dark Light Wall Recessed

Die cast



68062/W/W

68062 | 3,6W | LED | Die cast

Supplied with box for concrete installation.

LED BUILT IN · 80 CRI · CE · 2 YEAR · DARK LIGHT · IP65



68062/G/W







68064/W/W

68064 | 3,6W | LED | Die cast

Supplied with box for concrete installation.

LED BUILT IN · 80 CRI · CE · 2 YEAR · DARK LIGHT · IP65



68064/G/W







68066/W/W

68066 | 8,5W | SMD LED | Die cast

Supplied with box for concrete installation.

LED BUILT IN · 80 CRI · CE · 2 YEAR · DARK LIGHT · IP65



68066/G/W





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	Concrete installation	Gypsum installation			Notes
68062/W/W	White	Warm white	3000K	3,6W	100lm	53°	100-240V		62x97mm	60x95mm	65mm	24	Complete with 350mA driver
68062/AN/W	Anthracite	Warm white	3000K	3,6W	100lm	53°	100-240V		62x97mm	60x95mm	65mm	24	Complete with 350mA driver
68062/G/W	Grey	Warm white	3000K	3,6W	100lm	53°	100-240V		62x97mm	60x95mm	65mm	24	Complete with 350mA driver
68064/W/W	White	Warm white	3000K	3,6W	85lm	44°	100-240V		97x62mm	95x60mm	65mm	24	Complete with 350mA driver
68064/AN/W	Anthracite	Warm white	3000K	3,6W	85lm	44°	100-240V		97x62mm	95x60mm	65mm	24	Complete with 350mA driver
68064/G/W	Grey	Warm white	3000K	3,6W	85lm	44°	100-240V		97x62mm	95x60mm	65mm	24	Complete with 350mA driver
68066/W/W	White	Warm white	3000K	8,5W	160lm	44°	100-240V		238x74mm	238x74mm	80mm	12	Complete with 500mA driver
68066/AN/W	Anthracite	Warm white	3000K	8,5W	160lm	44°	100-240V		238x74mm	238x74mm	80mm	12	Complete with 500mA driver
68066/G/W	Grey	Warm white	3000K	8,5W	160lm	44°	100-240V		238x74mm	238x74mm	80mm	12	Complete with 500mA driver

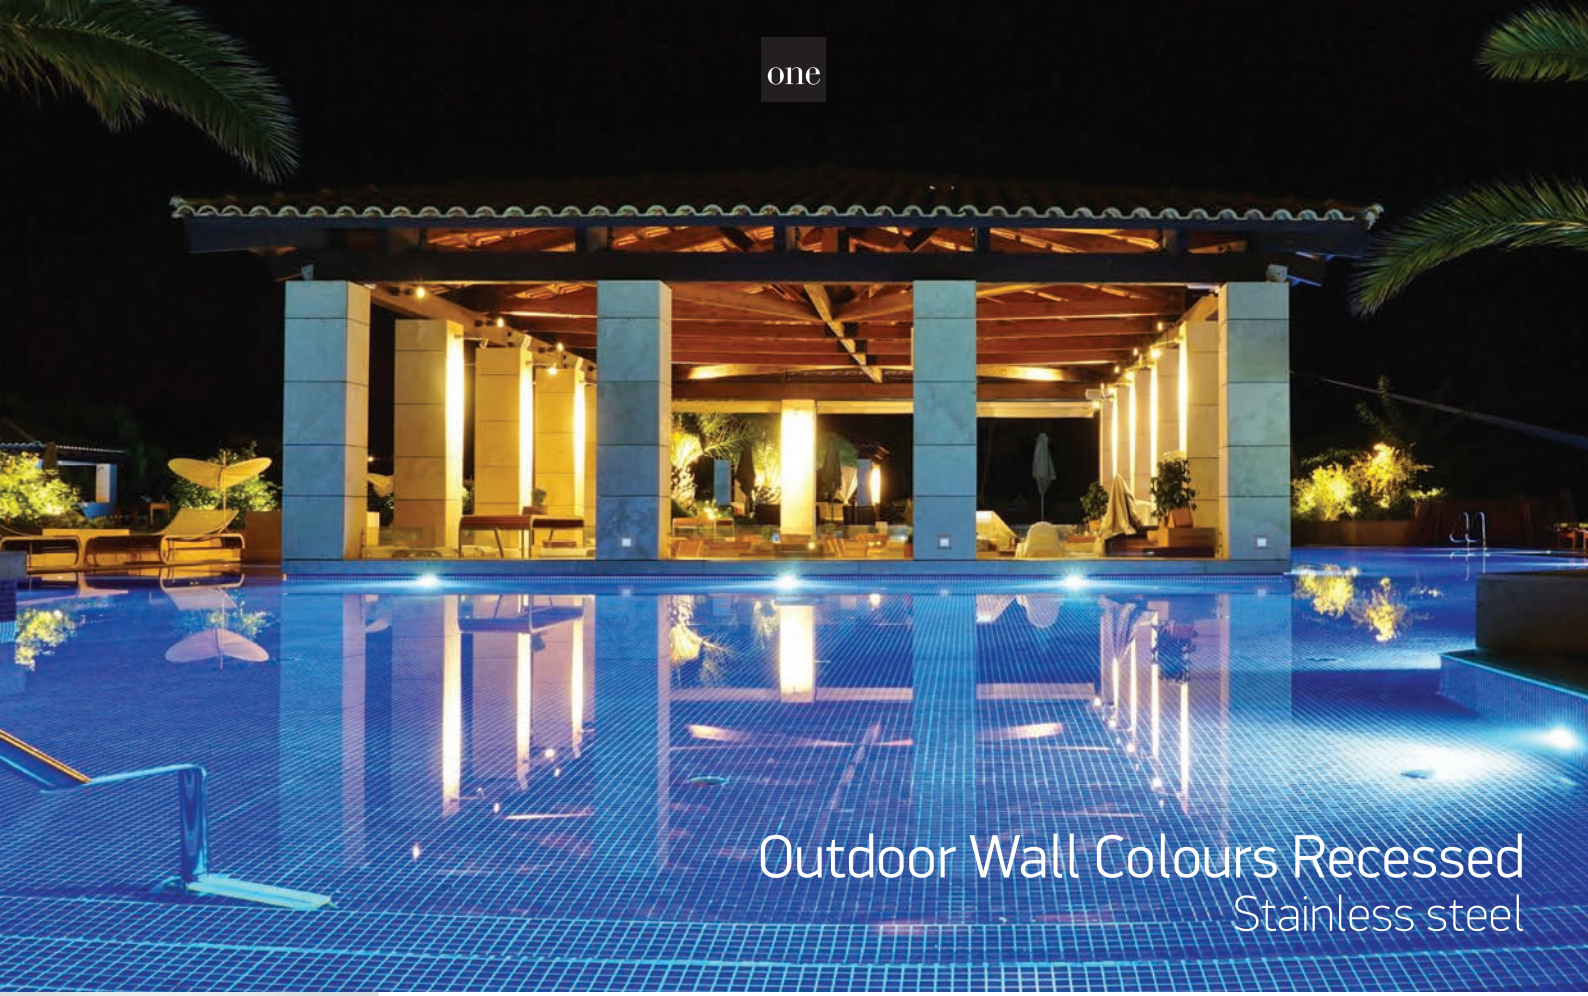

Outdoor Wall Colours Recessed
Stainless steel



68001/BL

68001 | 1,6W | LED | Stainless steel

LED BUILT IN

IP54

CE 2 YEAR

offer



Supplied with box for concrete installation & kit for gypsum installation.





68001/R

68001 | 1,6W | LED | Stainless steel

LED BUILT IN

IP54

CE 2 YEAR

offer



Supplied with box for concrete installation & kit for gypsum installation.





68002 | 1,2W | LED | Stainless steel

LED BUILT IN

IP54

CE 2 YEAR

offer



Supplied with box for concrete installation & kit for gypsum installation.



Order Code	Colour	Light Colour	Watts	Input	Class	Concrete installation	Gypsum installation			Notes
68001/BL	Stainless steel	Blue	1,6W	230V		97x97mm	90x90mm	65mm	18	Complete with driver
68001/R	Stainless steel	Red	1,6W	230V		97x97mm	90x90mm	65mm	18	Complete with driver
68002/R	Stainless steel	Red	1,2W	230V		105x35mm	100x35mm	65mm	40	Complete with driver

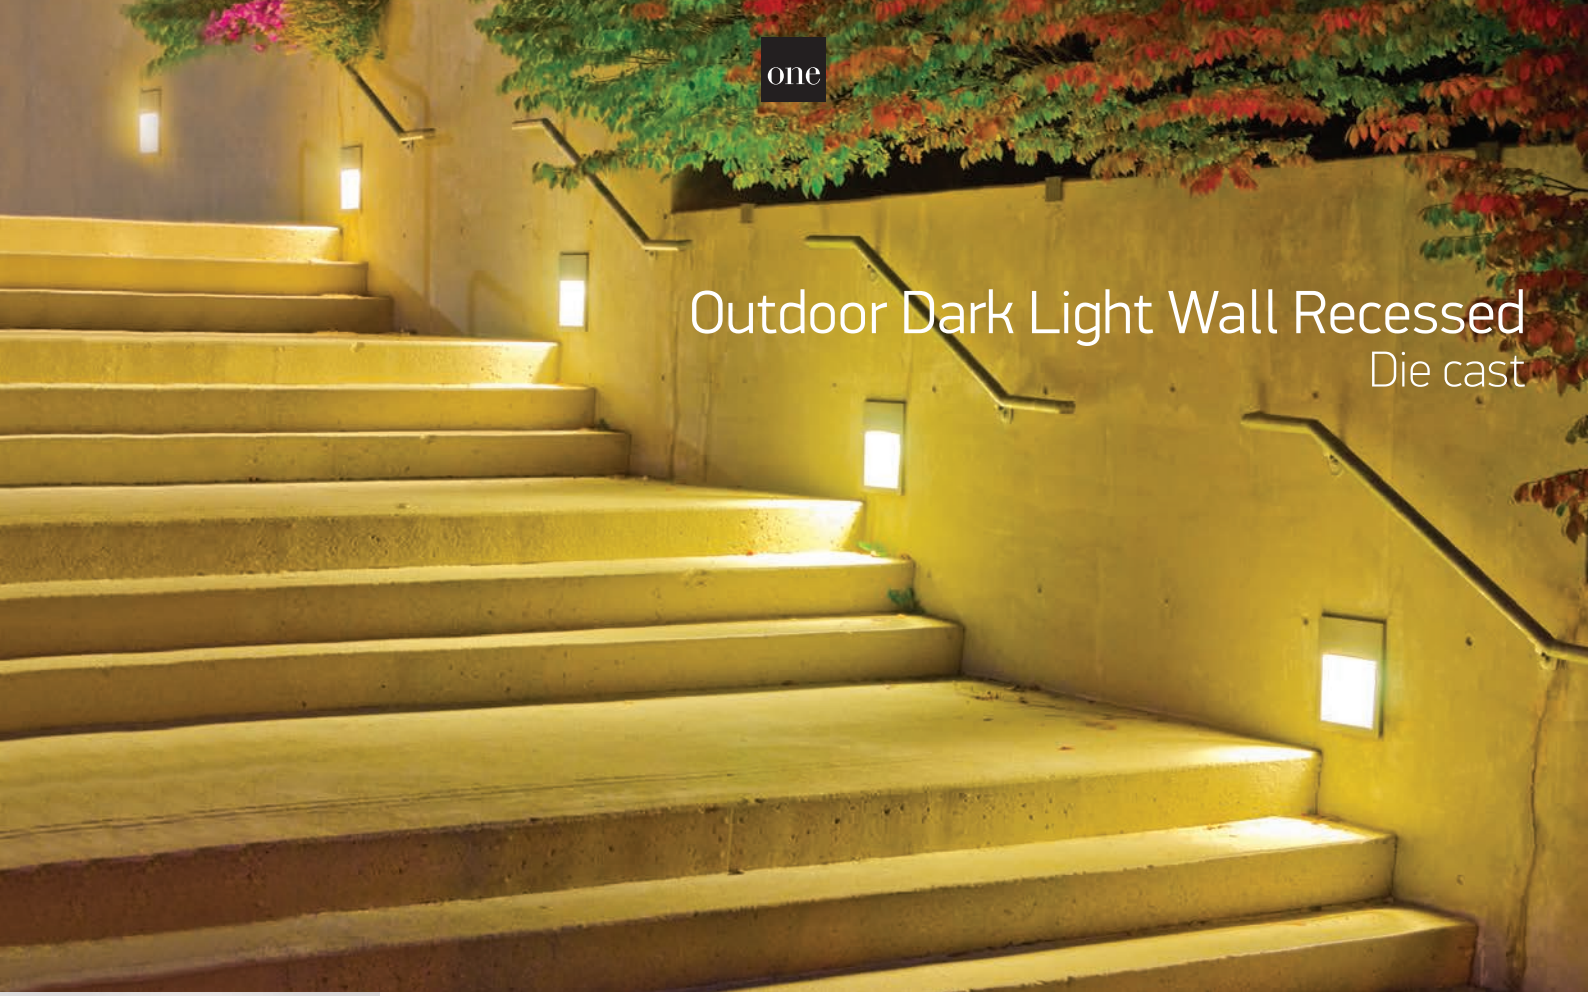

Outdoor Dark Light Wall Recessed
Die cast



68012/G/W

68012 | 1,5W | LED | Die cast

LED BUILT IN

CE 2 YEAR

DARK LIGHT

IP54



Supplied with box for concrete installation & kit for gypsum installation.





68016/B/W

68016 | 2W | LED | Die cast

LED BUILT IN

CE 2 YEAR

DARK LIGHT

IP54



Supplied with box for concrete installation & kit for gypsum installation.





68016/G/W

68016 | 2W | LED | Die cast

LED BUILT IN

CE 2 YEAR

DARK LIGHT

IP54



Supplied with box for concrete installation & kit for gypsum installation.



Order Code	Colour	Light Colour	CCT (K)	Watts	Input	Class				Notes
68012/G/W	Grey	Warm white	3000K	1,5W	230V		80x120mm	90mm	24	AC LED
68016/B/W	Black	Warm white	3000K	2W	230V		170x120mm	90mm	18	AC LED
68016/G/W	Grey	Warm white	3000K	2W	230V		170x120mm	90mm	18	AC LED



The Inground Mini Series
Natural aluminium



69042M | 1W/2W | LED | Aluminium | 1W@350mA / 2W@700mA

Supplied with box for concrete installation.

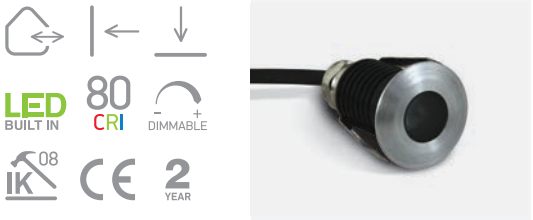

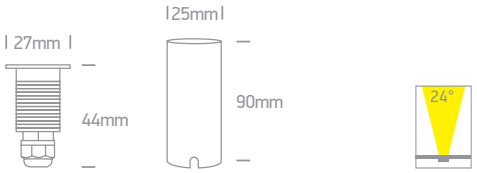



69042 | 1W | SMD LED | Natural aluminium

Supplied with box for concrete installation.





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Gypsum/Decking	Concrete	Decking	Concrete		Notes
69042M/AL/W	Aluminium	Warm white	3000K	1W/2W	150lm	24°	350mA/700mA	III	200cm	22mm	26mm	60mm	95+300mm drainage	50	Requires 350mA/700mA driver
69042/AL/W	Aluminium	Warm white	3000K	1W	80lm	-	350mA	III	200cm	30mm	35mm	80mm	95+300mm drainage	50	Requires 350mA driver



The Inground Mini Series
Natural aluminium

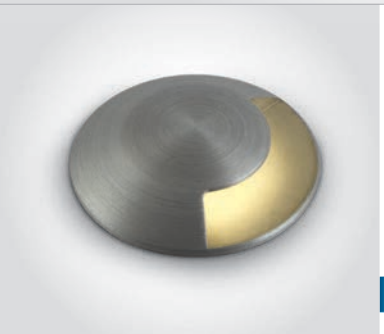

69042A | 1W | SMD LED | Natural aluminium

Supplied with box for concrete installation.

LED BUILT IN · 85 CRI · DIMMABLE · IK08 · IP67 · CE · 2 YEAR



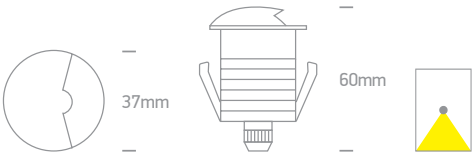

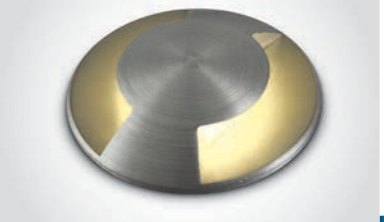

69042B | 1W | SMD LED | Natural aluminium

Supplied with box for concrete installation.

LED BUILT IN · 85 CRI · DIMMABLE · IK08 · IP67 · CE · 2 YEAR



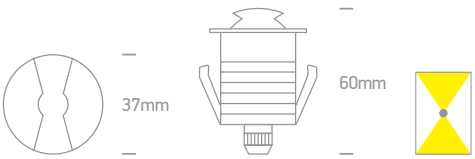

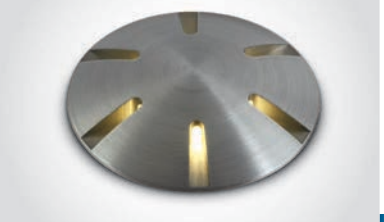

69044 | 1W | LED | Natural aluminium

Supplied with box for concrete installation.

LED BUILT IN · 85 CRI · DIMMABLE · IK08 · IP67 · CE · 2 YEAR





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Decking	Concrete	Decking	Concrete		Notes
69042A/AL/W	Aluminium	Warm white	3000K	1W	30lm	350mA	III	200cm	30mm	35mm	80mm	95mm+300mm drainage	50	Requires 350mA driver
69042B/AL/W	Aluminium	Warm white	3000K	1W	50lm	350mA	III	200cm	30mm	35mm	80mm	95mm+300mm drainage	50	Requires 350mA driver
69044/AL/W	Aluminium	Warm white	3000K	1W	30lm	350mA	III	200cm	30mm	35mm	80mm	95mm+300mm drainage	50	Requires 350mA driver



The Inground Medium Series GU10
Aluminium

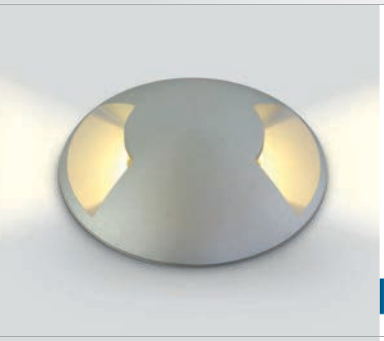

69016G | 10W | MR16 | GU10 | Aluminium



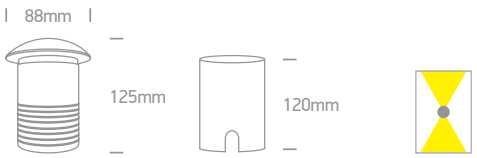



69016AG | 10W | MR16 | GU10 | Aluminium



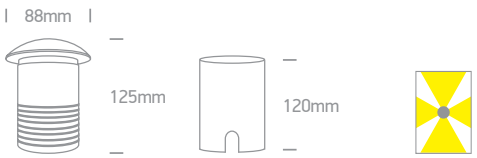

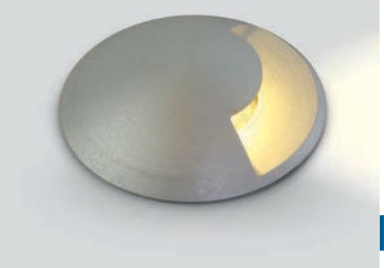

69016BG | 10W | MR16 | GU10 | Aluminium



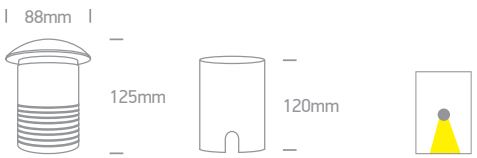

Order Code	Colour	Watts	Input	Class					Notes
69016G	Aluminium	10W	100-240V		200cm	80mm	130mm+300mm drainage	18	1 gland
69016AG	Aluminium	10W	100-240V		200cm	80mm	130mm+300mm drainage	18	1 gland
69016BG	Aluminium	10W	100-240V		200cm	80mm	130mm+300mm drainage	18	1 gland

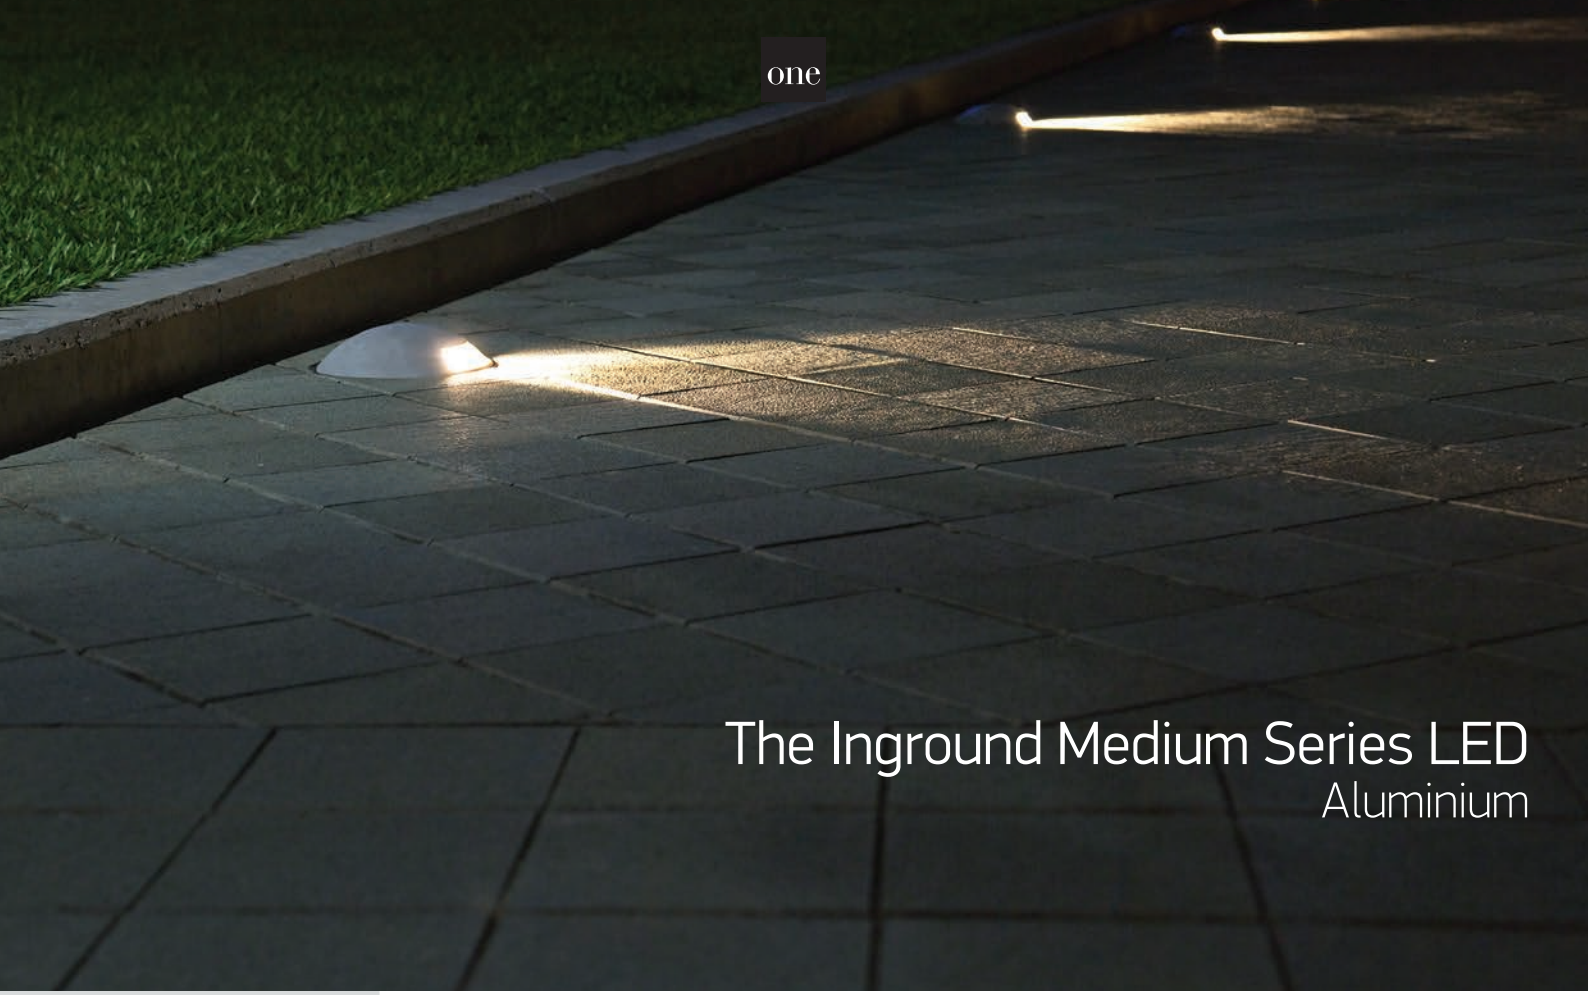

The Inground Medium Series LED
Aluminium



69016 | 3W | LED | Aluminium

LED BUILT IN
80 CRI
IK08
CE
IP67
2 YEAR



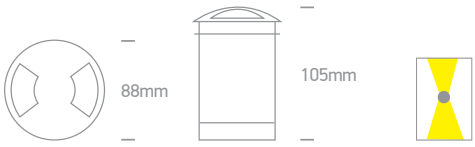



69016A | 3W | LED | Aluminium

LED BUILT IN
80 CRI
IK08
CE
IP67
2 YEAR





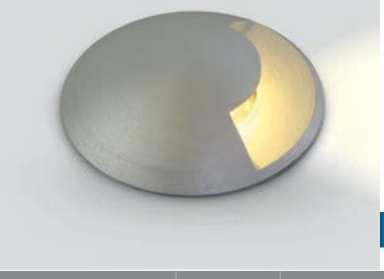

69016B | 3W | LED | Aluminium

LED BUILT IN
80 CRI
IK08
CE
IP67
2 YEAR





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class					Notes
69016/W	Aluminium	Warm white	3000K	3W	120lm	100-240V		200cm	77mm	105mm+300mm drainage	18	Complete with 350mA driver
69016A/W	Aluminium	Warm white	3000K	3W	150lm	100-240V		200cm	77mm	105mm+300mm drainage	18	Complete with 350mA driver
69016B/W	Aluminium	Warm white	3000K	3W	100lm	100-240V		200cm	77mm	105mm+300mm drainage	18	Complete with 350mA driver



The COB Inground Range
Stainless steel



69028 | 2W | LED | Stainless steel 316

LED BUILT IN · 80 CRI · IK08 · CE · IP67 · 2 YEAR



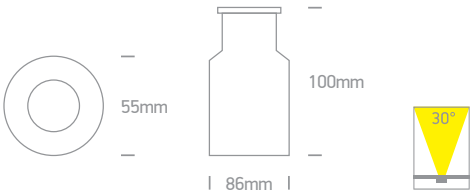



69012 | 3W | COB LED | Stainless steel 316

LED BUILT IN · 80 CRI · IK08 · CE · IP67 · 2 YEAR



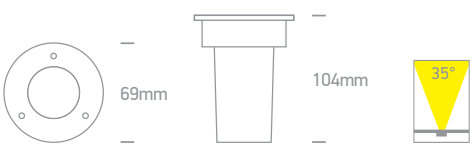

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
69028/W	Stainless steel	Warm white	3000K	2W	65lm	30°	100-240V	⏚	50cm	86mm	100mm+300mm drainage	24	Complete with 600mA driver
69012/C	Stainless steel	Cool white	4000K	3W	240lm	35°	100-240V	⏚	200cm	65mm	120mm+300mm drainage	20	Complete with 350mA driver
69012/W	Stainless steel	Warm white	3000K	3W	240lm	35°	100-240V	⏚	200cm	65mm	120mm+300mm drainage	20	Complete with 350mA driver



69052/W

69052A/W

The COB Honeycomb Range



69052 | 3W | COB LED | Stainless steel 316 + tempered glass

LED BUILT IN · 80 CRI · DIMMABLE · IK08 · IP67 · CE · 2 YEAR



1 gland + Removable honeycomb.

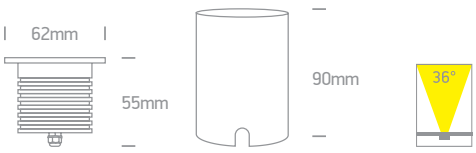



69052A | 13W | COB LED | Aluminium

LED BUILT IN · 80 CRI · DIMMABLE · IK08 · IP67 · CE · 2 YEAR



1 gland + Removable honeycomb.

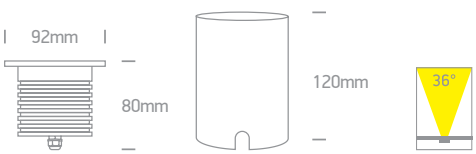

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
69052/C	Stainless steel	Cool white	4000K	3W	240lm	36°	24V DC	III	200cm	52mm	100mm+300mm drainage	50	Requires 24V DC driver
69052/W	Stainless steel	Warm white	3000K	3W	240lm	36°	24V DC	III	200cm	52mm	100mm+300mm drainage	50	Requires 24V DC driver
69052A/W	Aluminium	Warm white	3000K	13W	1000lm	36°	350mA	III	200cm	75mm	140mm+300mm drainage	24	Requires 350mA driver

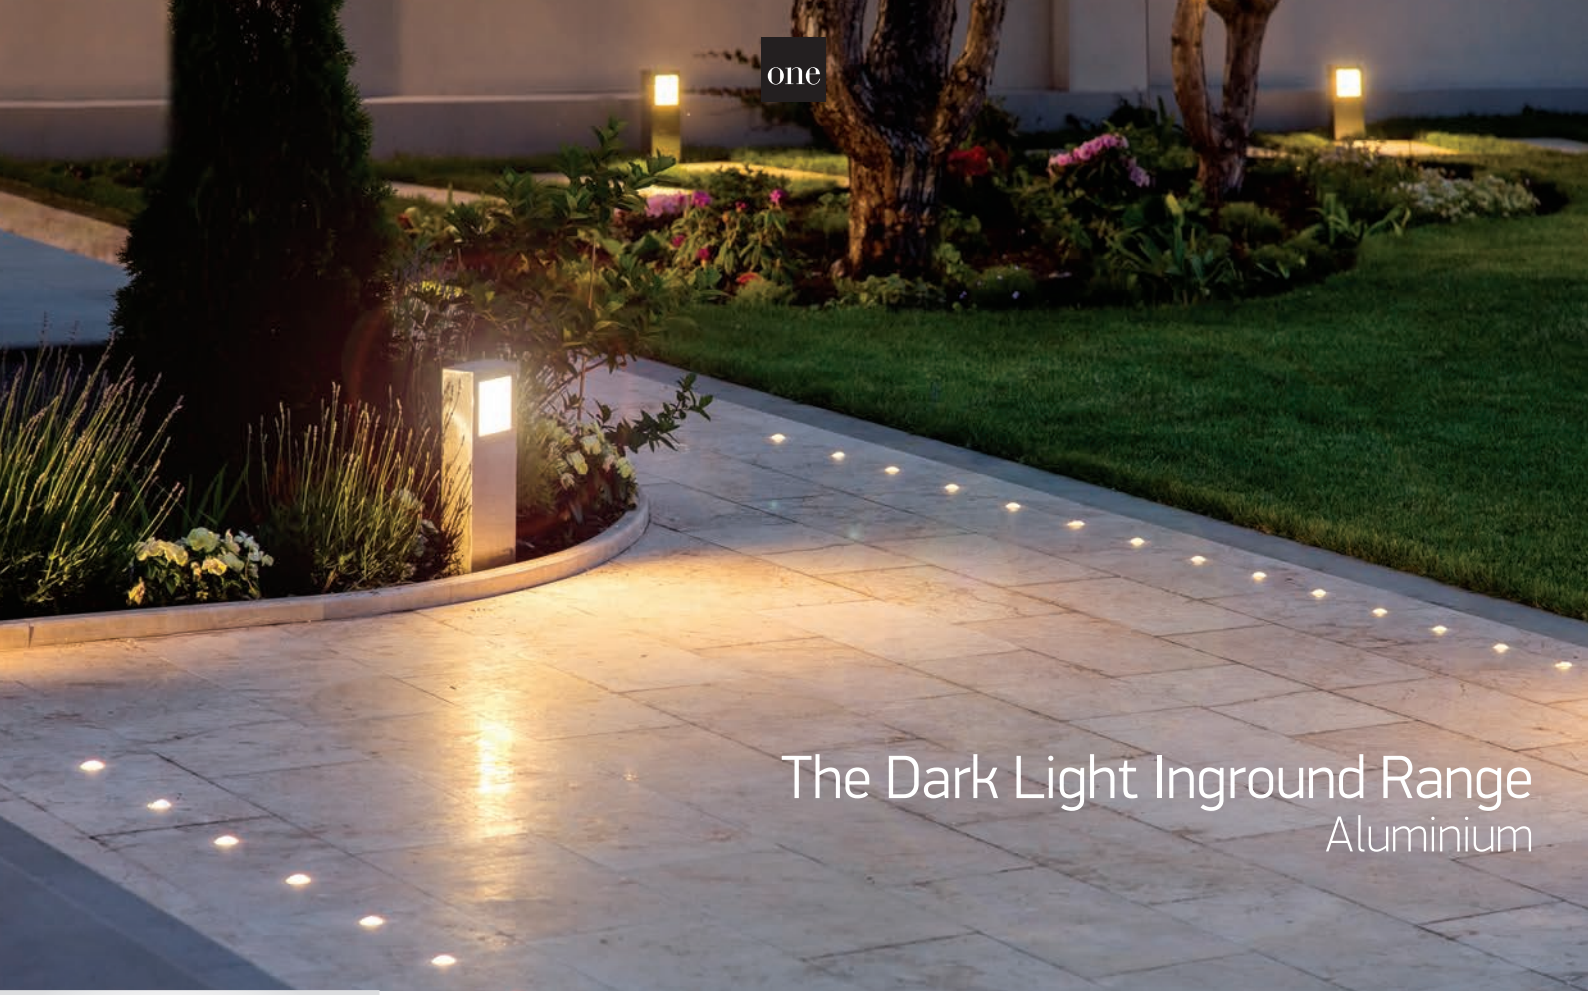

The Dark Light Inground Range
Aluminium

69056A | 3W | COB LED | Aluminium





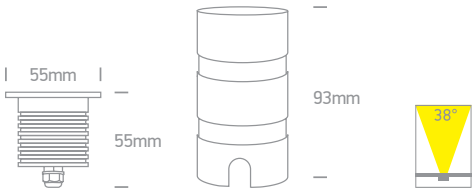

69056B | 7W | COB LED | Aluminium





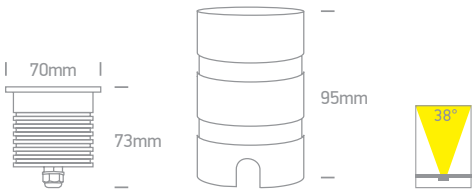

69056C | 9W | COB LED | Aluminium





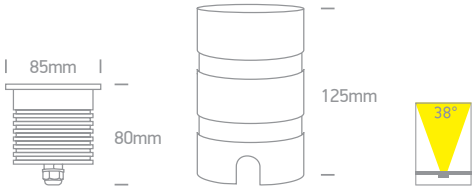

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
69056A/W	Aluminium	Warm white	3000K	3W	240lm	38°	24V DC	III	200cm	50mm	100mm+300mm drainage	50	Requires 24V DC driver
69056B/W	Aluminium	Warm white	3000K	7W	560lm	38°	24V DC	III	200cm	60mm	100mm+300mm drainage	36	Requires 24V DC driver
69056C/W	Aluminium	Warm white	3000K	9W	720lm	38°	24V DC	III	200cm	70mm	135mm+300mm drainage	24	Requires 24V DC driver



The COB Inground Range
Stainless steel



69040 | 10W | COB LED | Stainless steel 316

LED BUILT IN · 80 CRI · IK10 · CE · 2 YEAR · IP67







69050 | 20W | COB LED | Stainless steel 316 + tempered glass

Removable honeycomb / TRIAC Dimmable.

LED BUILT IN · 80 CRI · TRIAC DIMMABLE · IK10 · CE · 2 YEAR · IP67



1 gland + honeycomb ring





69050A | 20W | COB LED | Stainless steel 316 + tempered glass

Removable honeycomb / TRIAC Dimmable.

LED BUILT IN · 80 CRI · TRIAC DIMMABLE · IK10 · CE · 2 YEAR · IP67



1 gland + honeycomb ring



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
69040/W	Stainless steel	Warm white	3000K	10W	700lm	40°	230V		50cm	106mm	185mm+300mm drainage	6	Complete with 250mA driver
69050/C	Stainless steel	Cool white	4000K	20W	1800lm	25°	230V		200cm	132mm	200mm+300mm drainage	6	AC LED
69050/W	Stainless steel	Warm white	3000K	20W	1800lm	25°	230V		200cm	132mm	200mm+300mm drainage	6	AC LED
69050A/W	Stainless steel	Warm white	3000K	20W	1800lm	25°	230V		200cm	132mm	200mm+300mm drainage	6	AC LED



The COB Inground Adjustable Range
Stainless steel



69054 | 15W | COB LED | Stainless steel 316 + tempered glass — TRIAC Dimmable.

LED BUILT IN · 80 CRI · ±15° ADJUSTABLE · TRIAC DIMMABLE · IP67 · IK10 · CE · 2 YEAR



1 gland + connection box.

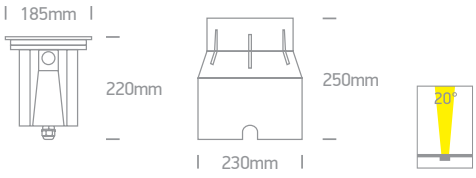



69054A | 30W | COB LED | Stainless steel 316 + tempered glass — TRIAC Dimmable.

LED BUILT IN · 80 CRI · ±15° ADJUSTABLE · TRIAC DIMMABLE · IP67 · IK10 · CE · 2 YEAR



1 gland + connection box.

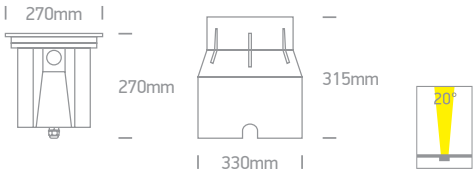

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
69054/W	Stainless steel	Warm white	3000K	15W	840lm	20°	230V	⏚	200cm	230mm	270mm+300mm drainage	2	AC LED
69054A/W	Stainless steel	Warm white	3000K	30W	2000lm	20°	230V	⏚	200cm	330mm	330mm+300mm drainage	1	AC LED

The Trimless Inground Range





69060 | 6W | LED | Trimless | Die cast + Glass

Complete with honeycomb.

LED BUILT IN

80 CRI

IK08

CE

IP67

2 YEAR





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
69060/B/W	Black	Warm white	3000K	6W	460lm	25°	100-240V		200cm	136mm	150mm+300mm drainage	6	Complete with 500mA driver

The Asymmetric Inground
Stainless steel





69062 | 8W | SMD 2835 | Asymmetrical | Stainless steel 316 + Die cast

LED BUILT IN

80 CRI

IK08

CE

IP67

2 YEAR



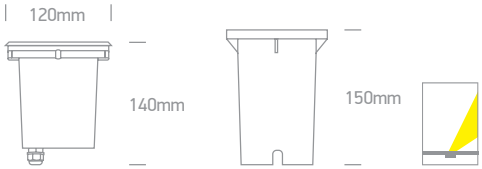

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class					Notes
69062/W	Stainless steel	Warm white	3000K	8W	180lm	230V	⏚	200cm	115mm	170mm+300mm drainage	12	Complete with 350mA driver



69058A/G/W

69058B/G/W

Ground Surface Mounted Range
Die cast



69058A | 6W | COB LED | Die cast

Surface mounted - No hole required.

LED BUILT IN · 80 CRI · IK10 · CE · IP67 · 2 YEAR











69058B | 2x6W | COB LED | Die cast

Surface mounted - No hole required.

LED BUILT IN · 80 CRI · IK10 · CE · IP67 · 2 YEAR











69058C | 4x3W | COB LED | Die cast

Surface mounted - No hole required.

LED BUILT IN · 80 CRI · IK10 · CE · IP67 · 2 YEAR









Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
69058A/G/W	Grey	Warm white	3000K	6W	300lm	230V		12	Complete with 500mA driver
69058B/G/W	Grey	Warm white	3000K	2x6W	600lm	230V		12	Complete with 500mA driver
69058C/G/W	Grey	Warm white	3000K	4x3W	600lm	230V		12	Complete with 300mA driver



The GU10 Inground Range
Stainless steel 316



69006G | 10W | MR16 | GU10 | Stainless steel 316

2 YEAR

IP67







69008G | 10W | MR16 | GU10 | Stainless steel 316

2 YEAR

IP67





Order Code	Colour	Watts	Input	Class				Notes
69006G	Stainless steel	10W	100-240V	⏚	101mm	160mm+300mm drainage	20	2 glands
69008G	Stainless steel	10W	100-240V	⏚	101mm	160mm+300mm drainage	20	2 glands



69048G

69046G

The GU10 Inground Adjustable Range

Stainless steel 316



69046G | 10W | MR16 | GU10 | Stainless steel 316 — Removable light guide.

ADJUSTABLE

CE 2 YEAR

IP67







69048G | 10W | MR16 | GU10 | Stainless steel 316 — Removable light guide.

ADJUSTABLE

CE 2 YEAR

IP67





Order Code	Colour	Watts	Input	Class					Notes
69046G	Stainless steel	10W	100-240V	⏚	200cm	115mm	160mm+300mm drainage	12	2 glands
69048G	Stainless steel	10W	100-240V	⏚	200cm	115mm	160mm+300mm drainage	12	2 glands



The GX53 Inground Range
Stainless steel



69006 | 9W | GX53 | Stainless steel

2 YEAR

IP67



Suitable for GX53 LED lamp.





69008 | 9W | GX53 | Stainless steel

2 YEAR

IP67



Suitable for GX53 LED lamp.



Order Code	Colour	Watts	Input	Class				Notes
69006	Stainless steel	9W	100-240V		110mm	90mm+300mm drainage	20	-
69008	Stainless steel	9W	100-240V		110mm	90mm+300mm drainage	20	-

Inground Decking Sets



69002A | 6x0,5W | SMD 2835 | Stainless steel 316

Decking set lights.

LED BUILT IN

QUICK FIX

CE

2 YEAR

IP67



EU Plug with driver.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class					Notes
69002A/W	Stainless steel	Warm white	3000K	6x0,5W	40lm/LED	230V		2m/2m	30mm	60mm	6	Complete with 12V DC driver


one



20

Garden & Underwater

Pages 651-688

MR16 | GU10 | E27 | LED | COB LED

Die cast | Natural aluminium | Stainless steel | Acrylic | Metal | Teak

IP43 IP44 IP54 IP65 IP68

ADJUSTABLE ADJUSTABLE DARK LIGHT IK08 1m max 2 YEAR 3 YEAR 5 YEAR



LED Garden Spots



7070/W

7070 | 5W | SMD 2835 | Plastic

Supplied with spike & base.

LED BUILT IN · 80 CRI · ADJUSTABLE · IP65 · CE · 2 YEAR



7070/C







7068 | 6W | COB LED | Die cast

Supplied with spike.

LED BUILT IN · 80 CRI · ADJUSTABLE · IP65 · CE · 2 YEAR









67456 | 3W | COB LED | Aluminium

Supplied with spike.

LED BUILT IN · 90 CRI · ADJUSTABLE · DIMMABLE · IP67 · CE · 3 YEAR









67458 | 8W | SMD 2835 | Aluminium

Supplied with spike.

LED BUILT IN · 80 CRI · ADJUSTABLE · DIMMABLE · IP65 · CE · 2 YEAR









67482 | 11W | COB LED | Adjustable beam 20°-60° | Die cast

LED BUILT IN · 80 CRI · ADJUSTABLE · IK06 · IP65 · CE · 2 YEAR



Zoomable lens



Supplied with spike.





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
7070/C	Black	Cool white	4000K	5W	400lm	38°	100-240V		200cm	40	Complete with driver
7070/W	Black	Warm white	3000K	5W	400lm	38°	100-240V		200cm	40	Complete with driver
7068/B/W	Black	Warm white	3000K	6W	380lm	40°	230V		200cm	30	Complete with driver
67456/B/W	Black	Warm white	3000K	3W	170lm	36°	350mA		200cm	36	Requires 350mA driver
67458/B/W	Black	Warm white	3000K	8W	520lm	38°	24V DC		200cm	50	Requires 24V DC driver
67482/AN/W	Anthracite	Warm white	3000K	11W	500lm	20°-60°	100-240V		150cm	6	Complete with 250mA driver



GU10 Garden Spots



67198G | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE · CE · 2 YEAR · IP65



Supplied with spike.





67198AG | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE · CE · 2 YEAR · IP65



Supplied with spike
& 400mm pole stand.





67464G | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE · CE · 2 YEAR · IP65



Supplied with spike.



Order Code	Colour	Watts	Input	Class			Notes
67198G/AN	Anthracite	10W	100-240V		150cm	12	-
67198G/B	Black	10W	100-240V		150cm	12	-
67198AG/AN	Anthracite	10W	100-240V		150cm	6	-
67464G/B	Black	10W	100-240V		200cm	12	-



The 10W COB Garden Spots
Aluminium



7046/W/W

7046 | 10W | COB LED | Aluminium

LED BUILT IN · 80 CRI · ADJUSTABLE · IP65 · IK06 · CE · 2 YEAR



Supplied with spike.







7046/AN/W

7046 | 10W | COB LED | Aluminium

LED BUILT IN · 80 CRI · ADJUSTABLE · IP65 · IK06 · CE · 2 YEAR



Supplied with spike.







7046/AL/W

7046 | 10W | COB LED | Aluminium

LED BUILT IN · 80 CRI · ADJUSTABLE · IP65 · IK06 · CE · 2 YEAR



Supplied with spike.





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
7046/W/W	White	Warm white	3000K	10W	850lm	50°	230V		150cm	12	Complete with 200mA driver
7046/AN/W	Anthracite	Warm white	3000K	10W	850lm	50°	230V		150cm	12	Complete with 200mA driver
7046/AL/W	Aluminium	Warm white	3000K	10W	850lm	50°	230V		150cm	12	Complete with 200mA driver



The 20W COB Garden Spots
Aluminium



7047/W/W

7047 | 20W | COB LED | Aluminium

LED BUILT IN · 80 CRI · ADJUSTABLE · IP65 · CE · 2 YEAR



Supplied with spike.







7047/AN/W

7047 | 20W | COB LED | Aluminium

LED BUILT IN · 80 CRI · ADJUSTABLE · IP65 · CE · 2 YEAR



Supplied with spike.







7047/AL/W

7047 | 20W | COB LED | Aluminium

LED BUILT IN · 80 CRI · ADJUSTABLE · IP65 · CE · 2 YEAR



Supplied with spike.





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
7047/W/W	White	Warm white	3000K	20W	1800lm	50°	230V		150cm	8	Complete with 500mA driver
7047/AN/W	Anthracite	Warm white	3000K	20W	1800lm	50°	230V		150cm	8	Complete with 500mA driver
7047/AL/W	Aluminium	Warm white	3000K	20W	1800lm	50°	230V		150cm	8	Complete with 500mA driver



The GU10 Garden Round Spots

Die cast



67196BG/W

67196BG | 10W | MR16 | GU10 | Die cast

ADJUSTABLE | CE | 2 YEAR

IP65



Supplied with spike.





67196BG/AN

67196BG | 10W | MR16 | GU10 | Die cast

ADJUSTABLE | CE | 2 YEAR

IP65



Supplied with spike.



Order Code	Colour	Watts	Input	Class			Notes
67196BG/W	White	10W	100-240V		150cm	6	-
67196BG/AN	Anthracite	10W	100-240V		150cm	6	-



The COB Garden Round Spots
Die cast



67196A | 3W | COB LED | Die cast

LED BUILT IN · 85 CRI · ADJUSTABLE · IP65 · IK06 · CE · 2 YEAR



Supplied with spike.







67196B | 6W | COB LED | Die cast

LED BUILT IN · 85 CRI · ADJUSTABLE · IP65 · IK06 · CE · 2 YEAR



Supplied with spike.







67196C | 9W | COB LED | Die cast

LED BUILT IN · 85 CRI · ADJUSTABLE · IP65 · IK06 · CE · 2 YEAR



Supplied with spike.





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
67196A/AN/W	Anthracite	Warm white	3000K	3W	240lm	35°	100-240V	⏚	150cm	12	Complete with 350mA driver
67196B/AN/W	Anthracite	Warm white	3000K	6W	450lm	35°	230V	⏚	150cm	6	Complete with 500mA driver
67196C/AN/W	Anthracite	Warm white	3000K	9W	700lm	35°	230V	⏚	150cm	6	Complete with 250mA driver



The Garden Round Spots



67488A | 5W | COB LED | Die cast

LED BUILT IN · 80 CRI · ADJUSTABLE · IP65 · IK06 · CE · 2 YEAR



Supplied with spike.







67488B | 11W | COB LED | Die cast

LED BUILT IN · 80 CRI · ADJUSTABLE · IP65 · IK06 · CE · 2 YEAR



Supplied with spike.







67488C | 14W | COB LED | Die cast

LED BUILT IN · 80 CRI · ADJUSTABLE · IP65 · IK06 · CE · 2 YEAR



Supplied with spike.





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
67488A/AN/W	Anthracite	Warm white	3000K	5W	200lm	30°	100-240V		150cm	12	Complete with 350mA driver
67488B/AN/W	Anthracite	Warm white	3000K	11W	680lm	20°	230V		150cm	8	Complete with 250mA driver
67488C/AN/W	Anthracite	Warm white	3000K	14W	800lm	20°	230V		150cm	4	Complete with 300mA driver



The Garden Square Spots

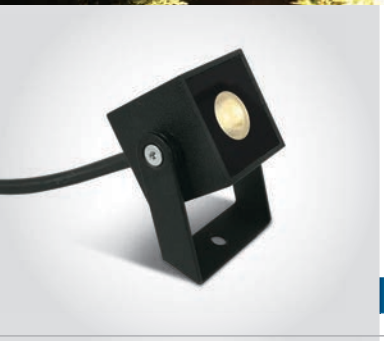

7052B | 1W | COB LED | Die cast

LED BUILT IN · 80 CRI · ADJUSTABLE · IP65 · CE · 2 YEAR



Optional spike.
Order code 7010P.







67514 | 6W | SMD 2835 | Aluminium

new · LED BUILT IN · 80 CRI · ADJUSTABLE · IP65 · IK07 · CE · 2 YEAR



Supplied with spike.







7052 | 7W | COB LED | Die cast

LED BUILT IN · 80 CRI · ADJUSTABLE · IP65 · CE · 2 YEAR



Supplied with spike.





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
7052B/AN/W	Anthracite	Warm white	3000K	1W	80lm	40°	24V DC		100cm	36	Requires 24V DC driver
67514/AN/W	Anthracite	Warm white	3000K	6W	550lm	30°	230V		200cm	12	Complete with 700mA driver
7052/AN/W	Anthracite	Warm white	3000K	7W	550lm	47°	100-240V		100cm	12	Complete with 700mA driver



Garden Spots
Stainless steel



7008A | 10W | MR16 | GU10 | Stainless steel 316

ADJUSTABLE · CE · 2 YEAR · IP65



Supplied with base & spike.





7010 | 80W | PAR38 | E27 | Stainless steel 304

ADJUSTABLE · CE · 2 YEAR · IP65



Supplied with base & spike.





7010A | 80W | PAR38 | E27 | Stainless steel 316

ADJUSTABLE · CE · 2 YEAR · IP65



Supplied with base & spike.



Order Code	Colour	Watts	Input	Class			Notes
7008A	Stainless steel	10W	100-240V	⏚	200cm	20	-
7010	Stainless steel	80W	100-240V	⏚	200cm	8	-
7010A	Stainless steel	80W	100-240V	⏚	200cm	8	-



Charging Sockets Bollards



67494 | Bollard with 2xSchuko Sockets 1000W each | Die cast

2 YEAR

IP44







67494A | 3W | SMD LED | LED Bollard with 2xSchuko Sockets 1000W each | Die cast

LED BUILT IN

80 CRI

2 YEAR

IP44





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67494/AN	Anthracite	-	-	-	-	230V	⏚	4	-
67494A/AN/W	Anthracite	Warm white	3000K	3W	240lm	230V	⏚	4	Complete with 350mA driver



The E27 Tube Lights
Die cast


67094/AN

67094 | 20W | E27 | Die cast


67094/B | 67094/G | 67094/BR




67098/AN

67098 | 2x20W | E27 | Die cast


67098/G | 67098/BR



Order Code	Colour	Watts	Input	Class		Notes
67094/AN	Anthracite	20W	100-240V		12	-
67094/B	Black	20W	100-240V		12	-
67094/G	Grey	20W	100-240V		12	-
67094/BR	Rust brown	20W	100-240V		12	-
67098/AN	Anthracite	2x20W	100-240V		12	-
67098/G	Grey	2x20W	100-240V		12	-
67098/BR	Rust brown	2x20W	100-240V		12	-

The E27 Tube Lights
Die cast



67090 | 15W | E27 | Die cast

2 YEAR

IP54







67092 | 15W | E27 | Die cast

2 YEAR

IP54







67100/B

67100 | 20W | E27 | Die cast

2 YEAR

IP54



67100/AN



67100/G



67100/BR





67102/B

67102 | 20W | E27 | Die cast

2 YEAR

IP54



67102/AN



67102/G



67102/BR



Order Code	Colour	Watts	Input	Class		Notes
67090/G	Grey	15W	100-240V		12	-
67092/G	Grey	15W	100-240V		6	-
67100/AN	Anthracite	20W	100-240V		4	-
67100/B	Black	20W	100-240V		4	-
67100/G	Grey	20W	100-240V		4	-
67100/BR	Rust brown	20W	100-240V		4	-
67102/AN	Anthracite	20W	100-240V		4	-
67102/B	Black	20W	100-240V		4	-
67102/G	Grey	20W	100-240V		4	-
67102/BR	Rust brown	20W	100-240V		4	-

The Natural Aluminium Bollards



67236A/AL



67236/AL



67236 | 15W | E27 | Natural aluminium

2 YEAR

IP54



Suitable for E27 LED lamp.





67236A | 15W | E27 | Natural aluminium

2 YEAR

IP54



Suitable for E27 LED lamp.



Order Code	Colour	Watts	Input	Class		Notes
67236/AL	Aluminium	15W	100-240V	⏚	4	-
67236A/AL	Aluminium	15W	100-240V	⏚	4	-



The LED Bollards Range
Die cast



67036 | 12W | COB LED | Die cast

LED BUILT IN

80 CRI

CE

2 YEAR

IP54









67034/G/W

67034 | 15W | COB LED | Die cast

LED BUILT IN

80 CRI

CE

2 YEAR

IP54



67034/AN/W





Order Code	Colour	Light Colour	CCT (K)	Watts	Beam Angle	Lumen (lm)	Input	Class		Notes
67036/G/W	Grey	Warm white	3000K	12W	50°	450lm	100-240V		4	Complete with driver
67034/AN/W	Anthracite	Warm white	3000K	15W	50°	450lm	100-240V		4	Complete with driver
67034/G/W	Grey	Warm white	3000K	15W	50°	450lm	100-240V		4	Complete with driver



LED Garden Path Lights
Die cast



67470 | 10W | LED | Die cast









67470A | 10W | LED | Die cast







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67470/B/W	Black	Warm white	3000K	10W	500lm	100-240V		6	Complete with 250mA driver
67470A/B/W	Black	Warm white	3000K	10W	500lm	100-240V		6	Complete with 250mA driver

LED Garden Path Lights
Die cast





67460A | 8W | LED | Aluminium — 1-side light.

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP54







67460B | 2x6W | LED | Aluminium — 2-side light.

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP54





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67460A/AN/W	Anthracite	Warm white	3000K	8W	640lm	100-240V	⏚	4	Complete with 350mA driver
67460B/AN/W	Anthracite	Warm white	3000K	2x6W	2x500lm	100-240V	⏚	4	Complete with 300mA driver



LED Path Lights
Die cast



67508/AN/C

67508 | 6W | COB LED | Die cast

new

IP65

LED BUILT IN

80 CRI

IK06

CE

2 YEAR



67508/AN/W





67358 | 7W | COB LED | Die cast

LED BUILT IN

80 CRI

CE

2 YEAR

IP65





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67508/AN/C	Anthracite	Cool white	4000K	6W	480lm	230V		2	Complete with 500mA driver
67508/AN/W	Anthracite	Warm white	3000K	6W	480lm	230V		2	Complete with 500mA driver
67358/AN/W	Anthracite	Warm white	3000K	7W	262lm	100-240V		8	Complete with 700mA driver

LED Mushroom Bollards
ABS + PC



67490A/B/W



67490/B/W



67490 | 6,5W | SMD LED | ABS + PC

LED BUILT IN

80 CRI CE 2 YEAR

IP54









67490A | 6,5W | SMD LED | ABS + PC

LED BUILT IN

80 CRI CE 2 YEAR

IP54







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67490/B/W	Black	Warm white	3000K	6,5W	600lm	230V		6	Complete with 300mA driver
67490A/B/W	Black	Warm white	3000K	6,5W	600lm	230V		6	Complete with 300mA driver



The Cage Light Bollards
Die cast



67506/AN/C

67506 | 22W | SMD 2835 | Die cast

LED BUILT IN

80 CRI

IK10

CE

new

IP65

2 YEAR



67506/AN/W





67506A/AN/C

67506A | 22W | SMD 2835 | Die cast

LED BUILT IN

80 CRI

IK10

CE

new

IP65

2 YEAR



67506A/AN/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67506/AN/C	Anthracite	Cool white	4000K	22W	1900lm	230V		1	Complete with 500mA driver
67506/AN/W	Anthracite	Warm white	3000K	22W	1900lm	230V		1	Complete with 500mA driver
67506A/AN/C	Anthracite	Cool white	4000K	22W	1900lm	230V		1	Complete with 500mA driver
67506A/AN/W	Anthracite	Warm white	3000K	22W	1900lm	230V		1	Complete with 500mA driver



The Cage Light Bollards
Die cast



67504/AN/C

67504 | 22W | SMD 2835 | Die cast

new

IP65

LED BUILT IN

80 CRI

IK10

CE

2 YEAR



67504/AN/W





67504A/AN/C

67504A | 22W | SMD 2835 | Die cast

new

IP65

LED BUILT IN

80 CRI

IK10

CE

2 YEAR



67504A/AN/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67504/AN/C	Anthracite	Cool white	4000K	22W	1900lm	230V		1	Complete with 500mA driver
67504/AN/W	Anthracite	Warm white	3000K	22W	1900lm	230V		1	Complete with 500mA driver
67504A/AN/C	Anthracite	Cool white	4000K	22W	1900lm	230V		1	Complete with 500mA driver
67504A/AN/W	Anthracite	Warm white	3000K	22W	1900lm	230V		1	Complete with 500mA driver

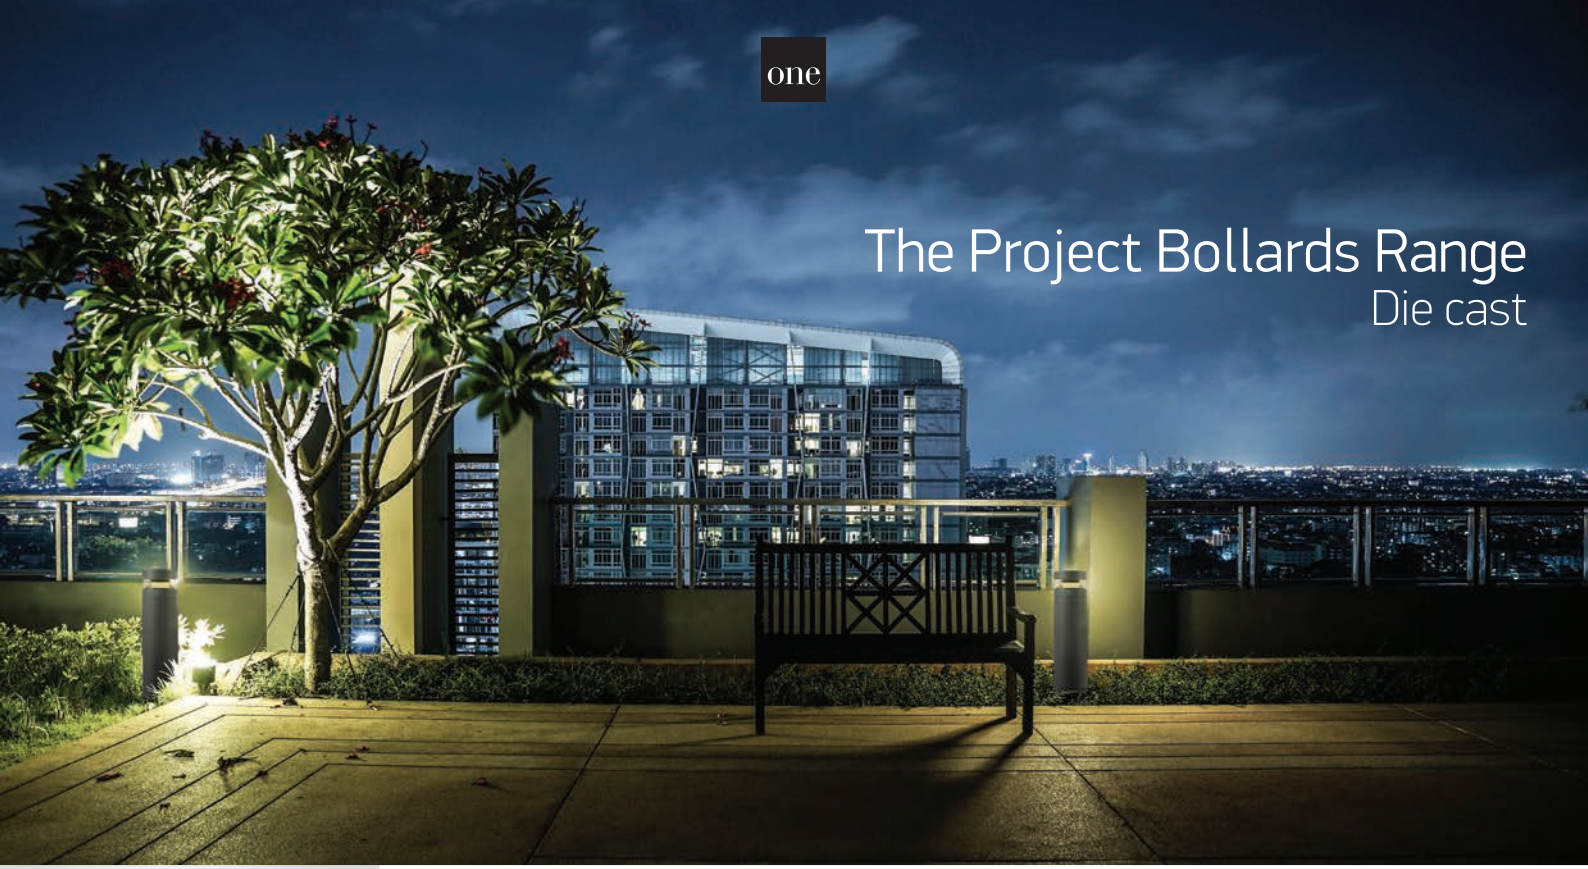

The Project Bollards Range
Die cast



67510 | 20W | SMD 2835 | Die cast

new

IP65

LED BUILT IN

80 CRI

IK10

CE

2 YEAR



Light stop accessory.
Order code 050210/AN.







67510A | 20W | SMD 2835 | Die cast

new

IP65

LED BUILT IN

80 CRI

IK10

CE

2 YEAR



Light stop accessory.
Order code 050210/AN.







67510B | 20W | SMD 2835 | Die cast

new

IP65

LED BUILT IN

80 CRI

IK10

CE

2 YEAR



Light stop accessory.
Order code 050210/AN.





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67510/AN/C	Anthracite	Cool white	4000K	20W	2000lm	230V		4	Complete with 500mA driver
67510/AN/W	Anthracite	Warm white	3000K	20W	2000lm	230V		4	Complete with 500mA driver
67510A/AN/C	Anthracite	Cool white	4000K	20W	2000lm	230V		2	Complete with 500mA driver
67510A/AN/W	Anthracite	Warm white	3000K	20W	2000lm	230V		2	Complete with 500mA driver
67510B/AN/C	Anthracite	Cool white	4000K	20W	2000lm	230V		1	Complete with 500mA driver
67510B/AN/W	Anthracite	Warm white	3000K	20W	2000lm	230V		1	Complete with 500mA driver



The LED Bollards Range

Cone reflector



67410 | 12W | SMD 2835 | Die cast

LED BUILT IN · 80 CRI · IK08 · CE · IP65 · 2 YEAR









67410A | 20W | SMD 2835 | Die cast

LED BUILT IN · 80 CRI · IK08 · CE · IP65 · 2 YEAR







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67410/AN/C	Anthracite	Cool white	4000K	12W	1000lm	230V		2	Complete with 250mA driver
67410/AN/W	Anthracite	Warm white	3000K	12W	1000lm	230V		2	Complete with 250mA driver
67410A/AN/C	Anthracite	Cool white	4000K	20W	1600lm	230V		2	Complete with 250mA driver
67410A/AN/W	Anthracite	Warm white	3000K	20W	1600lm	230V		2	Complete with 250mA driver

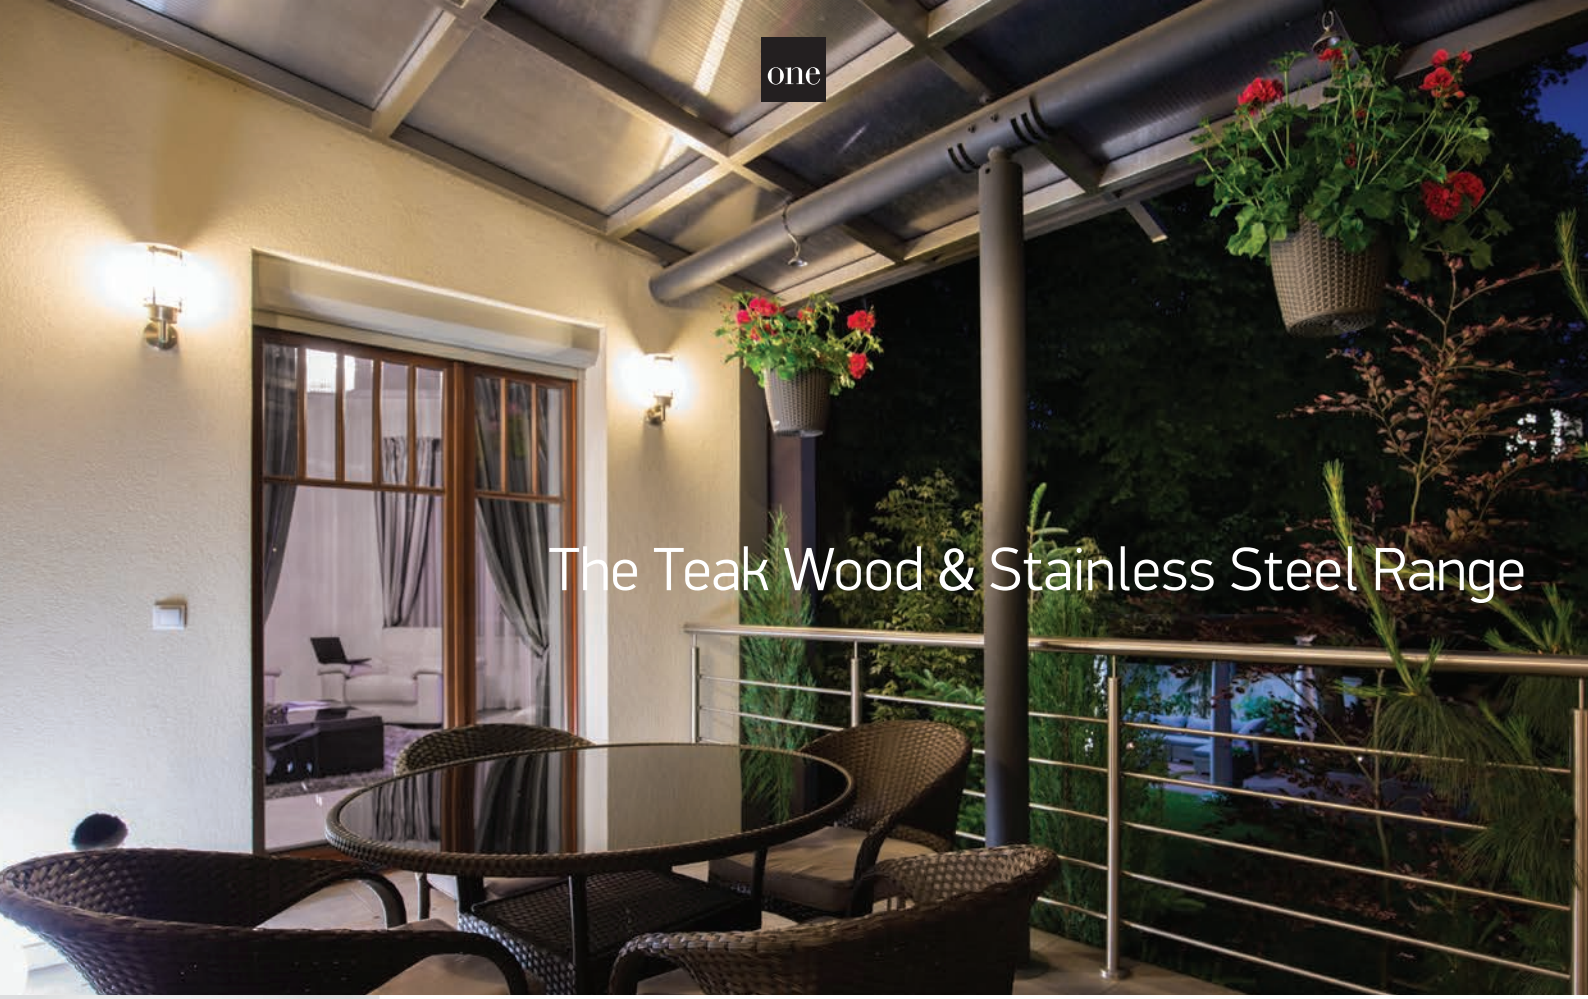

The Teak Wood & Stainless Steel Range



67286 | 15W | E27 | Teak + stainless steel 316

2 YEAR

IP44 offer







67002 | 15W | E27 | Stainless steel 201

2 YEAR

IP44 offer







67050 | 15W | E27 | Stainless steel 304

2 YEAR

IP44 offer





Order Code	Colour	Watts	Input	Class		Notes
67286	Teak + stainless steel	15W	100-240V		4	-
67002	Stainless steel	15W	100-240V		6	-
67050	Stainless steel	15W	100-240V		6	-

Retro Wall Lantern



67408 | 12W | E27 | Metal + glass

2 YEAR

IP44



Suitable for E27 LED lamp.



Order Code	Colour	Watts	Input	Class		Notes
67408/B	Black	12W	100-240V	⏚	4	-



The Romantic Outdoor Range


67406/B

67406 | 12W | E27 | Stainless steel 201 + tempered glass

IP43


Suitable for E27 LED lamps.





67406A | 12W | E27 | Stainless steel 201 + tempered glass

IP43


Suitable for E27 LED lamp.





67406B | 2x12W | E27 | Stainless steel 201 + tempered glass

IP43


Suitable for E27 LED lamps.




67406C/B

67406C | 12W | E27 | Stainless steel 201 + tempered glass

IP43


Suitable for E27 LED lamps.



Order Code	Colour	Watts	Input	Class		Notes
67406/B	Black	12W	100-240V		4	-
67406A/B	Black	12W	100-240V		4	-
67406B/B	Black	2x12W	100-240V		4	-
67406C/B	Black	12W	100-240V		4	-





67406D/B

67406D | 2x12W | E27 | Stainless steel 201 + tempered glass





IP43



67406D/W







67406E/B

67406E | 12W | E27 | Stainless steel 201 + tempered glass





IP43



Suitable for E27 LED lamp.





Order Code	Colour	Watts	Input	Class		Notes
67406D/W	White	2x12W	100-240V		2	-
67406D/B	Black	2x12W	100-240V		2	-
67406E/B	Black	12W	100-240V		4	-

Rechargeable Path Light



67462 | 3W | LED | Rechargeable | Die cast

EU charger included.

LED BUILT IN

80 CRI

IP54

2 YEAR





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Class		Notes
67462/B/W	Black	Warm white	3000K	3W	190lm	III	4	2x2200mAh lithium battery

Solar Path Lights


67462/B/W


67428/AN/W



67520 | 2,2W | SMD 2835 | Solar powered | Night sensor | Die cast

Hybrid charging (USB & Solar).

new Solar IP65

LED BUILT IN · DIMMABLE · 80 CRI · IK06 · CE · 2 YEAR





Night Sensor (ON/OFF)
Dimmer switch: 5-100%
Solar charging time: 20Hrs
USB charging time: 6Hrs

Working time:
9Hrs in 100% Light intensity
20Hrs in 50% Light intensity



67520A | 2,2W | SMD 2835 | Solar powered | Night sensor | Die cast

Hybrid charging (USB & Solar).

new Solar IP65

LED BUILT IN · DIMMABLE · 80 CRI · IK06 · CE · 2 YEAR





Night Sensor (ON/OFF)
Dimmer switch: 5-100%
Solar charging time: 20Hrs
USB charging time: 6Hrs

Working time:
9Hrs in 100% Light intensity
20Hrs in 50% Light intensity



050250 | Wall bracket for 67520 & 67520A | Die cast

CE

new





24



67428 | 2,2W | LED | Solar powered | Sensor | Die cast

Solar IP54

LED BUILT IN · 80 CRI · CE · 2 YEAR



Supplied with spike.



LED 100% when movement detected.
LED 15% when no movement detected.

PIR Sensor: Distance up to 6m and within angle 120°
Charging time: 6-8Hrs (solar)
Working time: 2,5-3Hrs in 100% LED brightness
20-25Hrs in 15% LED brightness

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Class		Notes
67520/B/W	Black	Warm white	3000K	2,2W	150lm	III	4	2x2200mAh lithium battery
67520A/B/W	Black	Warm white	3000K	2,2W	150lm	III	2	2x2200mAh lithium battery
67428/AN/W	Anthracite	Warm white	3000K	2,2W	200lm	-	4	1x2200mAh lithium battery





67496 | 2W | LED | Solar powered | Sensor | Aluminium

3 Modes operation.

LED BUILT IN · 80 CRI · Solar · IP65 · 2 YEAR







67496A | 2W | LED | Solar powered | Sensor | Aluminium

3 Modes operation.

LED BUILT IN · 80 CRI · Solar · IP65 · 2 YEAR





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)		Notes
67496/B/EW	Black	Extra warm white	2700K	2W	120lm	4	1x2200mAh lithium battery
67496A/B/EW	Black	Extra warm white	2700K	2W	120lm	4	1x2200mAh lithium battery



Solar Mushrooms

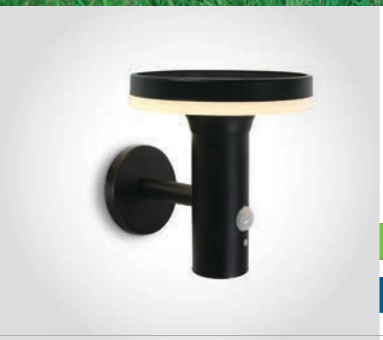

67500 | 6W | LED | Solar powered | Sensor | Aluminium — 3 Modes operation.











67500A | 6W | LED | Solar powered | Sensor | Aluminium — 3 Modes operation.









Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)		Notes
67500/B/EW	Black	Extra warm white	2700K	6W	480lm	6	1x2200mAh lithium battery
67500A/B/EW	Black	Extra warm white	2700K	6W	480lm	6	1x2200mAh lithium battery



Moonlights
PC



63028 | 15W | E27 | PC

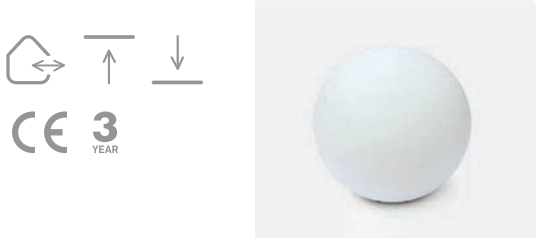



l380mml





63028A | 20W | E27 | PC

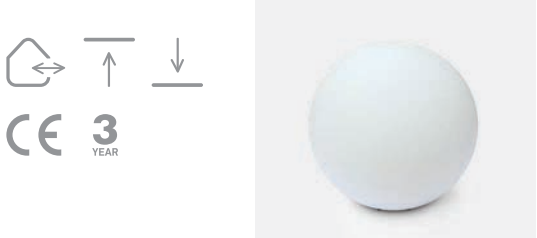



l450mml





63028B | 30W | E27 | PC





l560mml



Order Code	Colour	Watts	Input	Class		Notes
63028	White	15W	100-240V		1	Pendant / Ground / Spike
63028A	White	20W	100-240V		1	Pendant / Ground / Spike
63028B	White	30W	100-240V		1	Pendant / Ground / Spike



Stone Moonlights



7072 | 20W | E27 | Plastic

Complete with SCHUKO plug.

3 YEAR

new

IP65



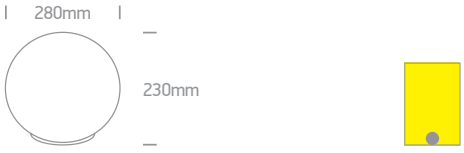



7072A | 20W | E27 | Plastic

Complete with SCHUKO plug.

3 YEAR

new

IP65



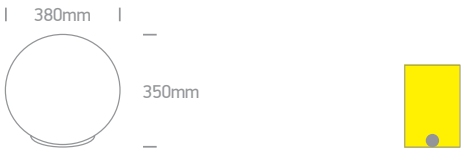

Order Code	Colour	Lampholder	Watts	Input	Class			Notes
7072	Stone	E27	20W	100-240V	☐	200cm	4	-
7072A	Stone	E27	20W	100-240V	☐	200cm	1	-

Outdoor E27 String Lights



0994 | 12W | E27 | 15xT-lampholders

2 YEAR

IP44



Order Code	Colour	Watts	Input	Class			Notes
0994/B	Black	12W	100-240V		850cm	8	50cm spacing

Outdoor Floor Lamp

Die cast + PC



61040 | 20W | E27 | Die cast + PC

2 YEAR

IP65



Suitable for E27 LED lamp.



Order Code	Colour	Watts	Input	Class			Notes
61040/AN	Anthracite	20W	100-240V		300cm	1	-

one

The LED Underwater Range
Stainless steel



69064A/C



69064B/C



69064C/C



The LED Underwater Range

Stainless steel



69064A | 3x1W | LED | Stainless steel 316

Underwater only / 2m max depth.







69064B | 6x1W | LED | Stainless steel 316

Underwater only / 2m max depth.







69064C | 9x1W | LED | Stainless steel 316

Underwater only / 2m max depth.





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
69064A/C	Stainless steel	Cool white	4000K	3x1W	200lm	24V DC	III	500cm	18	Requires 24V DC driver
69064B/C	Stainless steel	Cool white	4000K	6x1W	400lm	24V DC	III	500cm	10	Requires 24V DC driver
69064B/W	Stainless steel	Warm white	3000K	6x1W	400lm	24V DC	III	500cm	10	Requires 24V DC driver
69064C/C	Stainless steel	Cool white	4000K	9x1W	600lm	24V DC	III	500cm	8	Requires 24V DC driver
69064C/W	Stainless steel	Warm white	3000K	9x1W	600lm	24V DC	III	500cm	8	Requires 24V DC driver



The LED Underwater Range
Stainless steel

69066 | 1W | SMD 3030 | Stainless steel 316

Underwater only / 2m max depth.



69066/C

2m max · LED BUILT IN · 80 CRI · DIMMABLE · IP68 · IK10 · CE · 2 YEAR



69066/BL



69066A | 3x1W | SMD 3030 | Stainless steel 316

Underwater only / 2m max depth.



69066A/C

2m max · LED BUILT IN · 80 CRI · DIMMABLE · IP68 · IK10 · CE · 2 YEAR



69066A/BL



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class					Notes
69066/C	Stainless steel	Cool white	4000K	1W	70lm	24V DC	III	500cm	46mm	90mm	20	Requires 24V DC driver
69066/W	Stainless steel	Warm white	3000K	1W	70lm	24V DC	III	500cm	46mm	90mm	20	Requires 24V DC driver
69066/BL	Stainless steel	Blue	-	1W	-	24V DC	III	500cm	46mm	90mm	20	Requires 24V DC driver
69066A/C	Stainless steel	Cool white	4000K	3x1W	210lm	24V DC	III	500cm	88mm	85mm	20	Requires 24V DC driver
69066A/W	Stainless steel	Warm white	3000K	3x1W	210lm	24V DC	III	500cm	88mm	85mm	20	Requires 24V DC driver
69066A/BL	Stainless steel	Blue	-	3x1W	-	24V DC	III	500cm	88mm	85mm	20	Requires 24V DC driver





69066B/C

69066B | 6x1W | SMD 3030 | Stainless steel 316

Underwater only / 2m max depth.

2m max · LED BUILT IN · 80 CRI · DIMMABLE · IP68 · IK10 · CE · 2 YEAR



69066B/BL





69066D/C

69066D | 12x1W | SMD 3030 | Stainless steel 316

Underwater only / 2m max depth.

2m max · LED BUILT IN · 80 CRI · DIMMABLE · IP68 · IK10 · CE · 2 YEAR



69066D/BL



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class					Notes
69066B/C	Stainless steel	Cool white	4000K	6x1W	420lm	24V DC	III	500cm	140mm	110mm	8	Requires 24V DC driver
69066B/W	Stainless steel	Warm white	3000K	6x1W	420lm	24V DC	III	500cm	140mm	110mm	8	Requires 24V DC driver
69066B/BL	Stainless steel	Blue	-	6x1W	-	24V DC	III	500cm	140mm	110mm	8	Requires 24V DC driver
69066D/C	Stainless steel	Cool white	4000K	12x1W	850lm	24V DC	III	500cm	175mm	130mm	6	Requires 24V DC driver
69066D/BL	Stainless steel	Blue	-	12x1W	-	24V DC	III	500cm	175mm	130mm	6	Requires 24V DC driver





21

Industrial & Floodlights

Pages 691-716

T8 | Rx7s | COB LED | SMD LED | LED

Die cast | Aluminium | Metal

IP20 IP44 IP65 IP67

ADJUSTABLE ADJUSTABLE IK06 IK08 70 CRI 75 CRI 80 CRI 2 YEAR 3 YEAR 5 YEAR







The T8 IP65 Fluo Range
PC + PC



38136P | 36W | T8 | PC + PC

IP65 offer

2 YEAR





38218P | 2x18W | T8 | PC + PC

IP65 offer

2 YEAR



Order Code	Colour	Watts	Input	Class		Notes
38136P	Grey	36W	230V		9	Complete with electronic ballast
38218P	Grey	2x18W	230V		9	Complete with electronic ballast



The IP65 Range For T8 LED Tubes

PC + PC



38118E | T8 LED 60cm | PC + PC

38136E | T8 LED 120cm | PC + PC

38158E | T8 LED 150cm | PC + PC

IK08

CE 5 YEAR

IP65



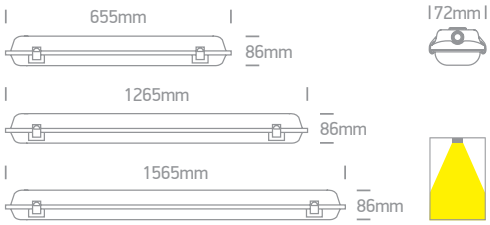



38218E | 2xT8 LED 60cm | PC + PC

38236E | 2xT8 LED 120cm | PC + PC

38258E | 2xT8 LED 150cm | PC + PC

IK08

CE 5 YEAR

IP65



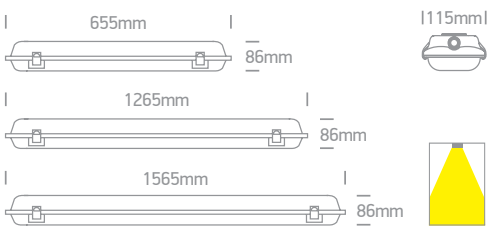

Order Code	Colour	Input	Class		Notes
38118E	Grey	100-240V		15	Only suitable for T8 LED tubes
38136E	Grey	100-240V		9	Only suitable for T8 LED tubes
38158E	Grey	100-240V		9	Only suitable for T8 LED tubes
38218E	Grey	100-240V		9	Only suitable for T8 LED tubes
38236E	Grey	100-240V		6	Only suitable for T8 LED tubes
38258E	Grey	100-240V		6	Only suitable for T8 LED tubes



The High Power IP65 LED Range
Single



38118M | 15W | SMD 2835 | PC + opal PC diffuser

LED BUILT IN | 80 CRI | IK08 | CE | IP65 | 3 YEAR





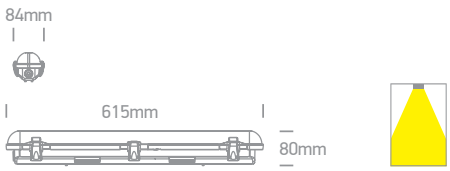



38136M | 30W | SMD 2835 | PC + opal PC diffuser

LED BUILT IN | 80 CRI | IK08 | CE | IP65 | 3 YEAR





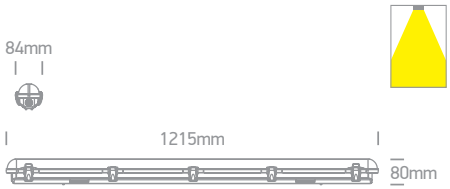



38158M | 40W | SMD 2835 | PC + opal PC diffuser

LED BUILT IN | 80 CRI | IK08 | CE | IP65 | 3 YEAR





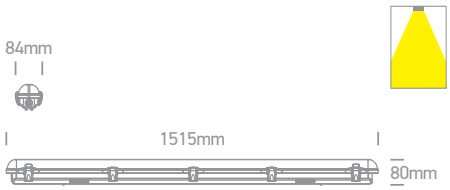

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38118M/C	Grey	Cool white	4000K	15W	1500lm	230V		12	Complete with 350mA driver / Stainless steel clips
38136M/C	Grey	Cool white	4000K	30W	3000lm	230V		9	Complete with 500mA driver / Stainless steel clips
38158M/C	Grey	Cool white	4000K	40W	4000lm	230V		9	Complete with 700mA driver / Stainless steel clips



The High Power IP65 LED Range
Double



38236M | 60W | SMD 2835 | PC + opal PC diffuser

LED BUILT IN · 80 CRI · IK08 · CE · IP65 · 3 YEAR





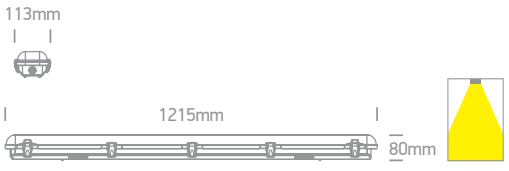



38258M | 70W | SMD 2835 | PC + opal PC diffuser

LED BUILT IN · 80 CRI · IK08 · CE · IP65 · 3 YEAR





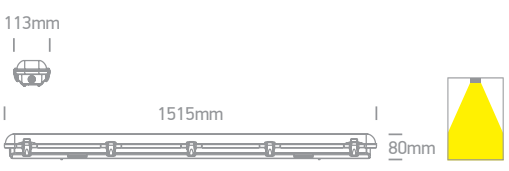

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38236M/C	Grey	Cool white	4000K	60W	6000lm	230V	⏚	6	Complete with 1050mA driver / Stainless steel clips
38258M/C	Grey	Cool white	4000K	70W	7000lm	230V	⏚	6	Complete with 1400mA driver / Stainless steel clips



The IP65 LED Connectable Range
Single



38118LC | 18W | SMD 2835 | Connectable | PC

Supermarket linear range.

LED BUILT IN · 80 CRI · IK08 · CE · IP65 · 2 YEAR



Optional suspension kit. Order code 050084.



Connect 20 fittings maximum.





38136LC | 36W | SMD 2835 | Connectable | PC

Supermarket linear range.

LED BUILT IN · 80 CRI · IK08 · CE · IP65 · 2 YEAR



Optional suspension kit. Order code 050084.



Connect 10 fittings maximum.





38145LC | 45W | SMD 2835 | Connectable | PC

Supermarket linear range.

LED BUILT IN · 80 CRI · IK08 · CE · IP65 · 2 YEAR



Optional suspension kit. Order code 050084.



Connect 10 fittings maximum.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	S		Notes
38118LC/C	White	Cool white	4000K	18W	1550lm	100-240V	⧈	50cm	20	Complete with driver
38118LC/W	White	Warm white	3000K	18W	1500lm	100-240V	⧈	50cm	20	Complete with driver
38136LC/C	White	Cool white	4000K	36W	3100lm	100-240V	⧈	50cm	20	Complete with driver
38136LC/W	White	Warm white	3000K	36W	3000lm	100-240V	⧈	50cm	20	Complete with driver
38145LC/C	White	Cool white	4000K	45W	4000lm	100-240V	⧈	50cm	20	Complete with driver



The IP65 LED Connectable Range
Double



38236LC | 36W | SMD 2835 | Connectable | PC

Supermarket linear range.

LED BUILT IN | 80 CRI | IK08 | CE | IP65 | 2 YEAR



Optional suspension kit. Order code 050084.



Connect 10 fittings maximum.





38245LC | 45W | SMD 2835 | Connectable | PC

Supermarket linear range.

LED BUILT IN | 80 CRI | IK08 | CE | IP65 | 2 YEAR



Optional suspension kit. Order code 050084.



Connect 10 fittings maximum.

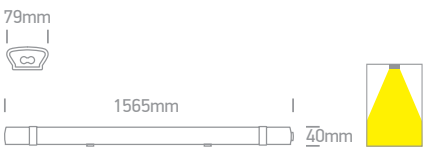

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
38236LC/D	White	Daylight	6000K	36W	3100lm	100-240V	☐	50cm	10	Complete with driver
38236LC/C	White	Cool white	4000K	36W	3100lm	100-240V	☐	50cm	10	Complete with driver
38245LC/D	White	Daylight	6000K	45W	4000lm	100-240V	☐	50cm	10	Complete with driver
38245LC/C	White	Cool white	4000K	45W	4000lm	100-240V	☐	50cm	10	Complete with driver

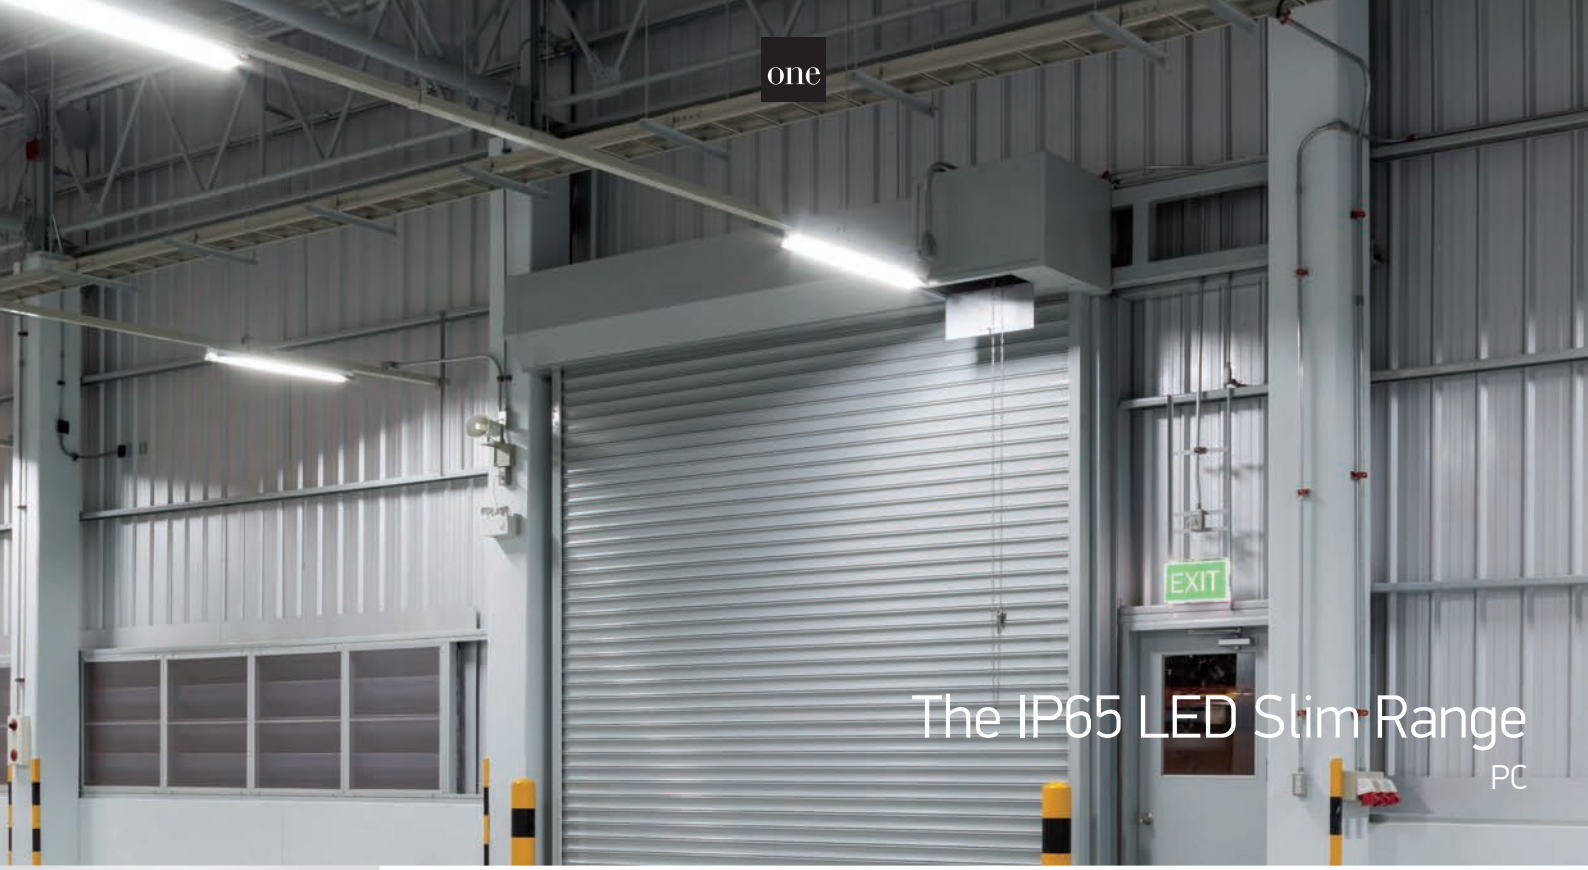

The IP65 LED Slim Range

PC



38118LA | 18W | SMD 2835 | PC

LED BUILT IN · 80 CRI · IK08 · CE · IP65 · 2 YEAR



Optional suspension kit. Order code 050084.



Complete with 2pcs fixing clips.

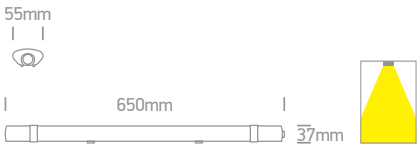



38136LA | 36W | SMD 2835 | PC

LED BUILT IN · 80 CRI · IK08 · CE · IP65 · 2 YEAR



Optional suspension kit. Order code 050084.



Complete with 3pcs fixing clips.

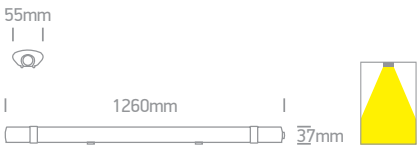



38145LA | 45W | SMD 2835 | PC

LED BUILT IN · 80 CRI · IK08 · CE · IP65 · 2 YEAR



Optional suspension kit. Order code 050084.



Complete with 4pcs fixing clips.

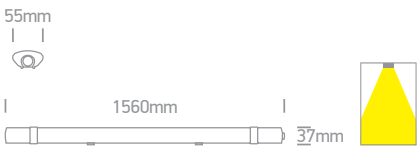

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
38118LA/D	White	Daylight	6000K	18W	1600lm	100-240V	☐	50cm	20	Complete with driver
38118LA/C	White	Cool white	4000K	18W	1600lm	100-240V	☐	50cm	20	Complete with driver
38136LA/D	White	Daylight	6000K	36W	3200lm	100-240V	☐	50cm	20	Complete with driver
38136LA/C	White	Cool white	4000K	36W	3200lm	100-240V	☐	50cm	20	Complete with driver
38145LA/D	White	Daylight	6000K	45W	4100lm	100-240V	☐	50cm	20	Complete with driver
38145LA/C	White	Cool white	4000K	45W	4100lm	100-240V	☐	50cm	20	Complete with driver

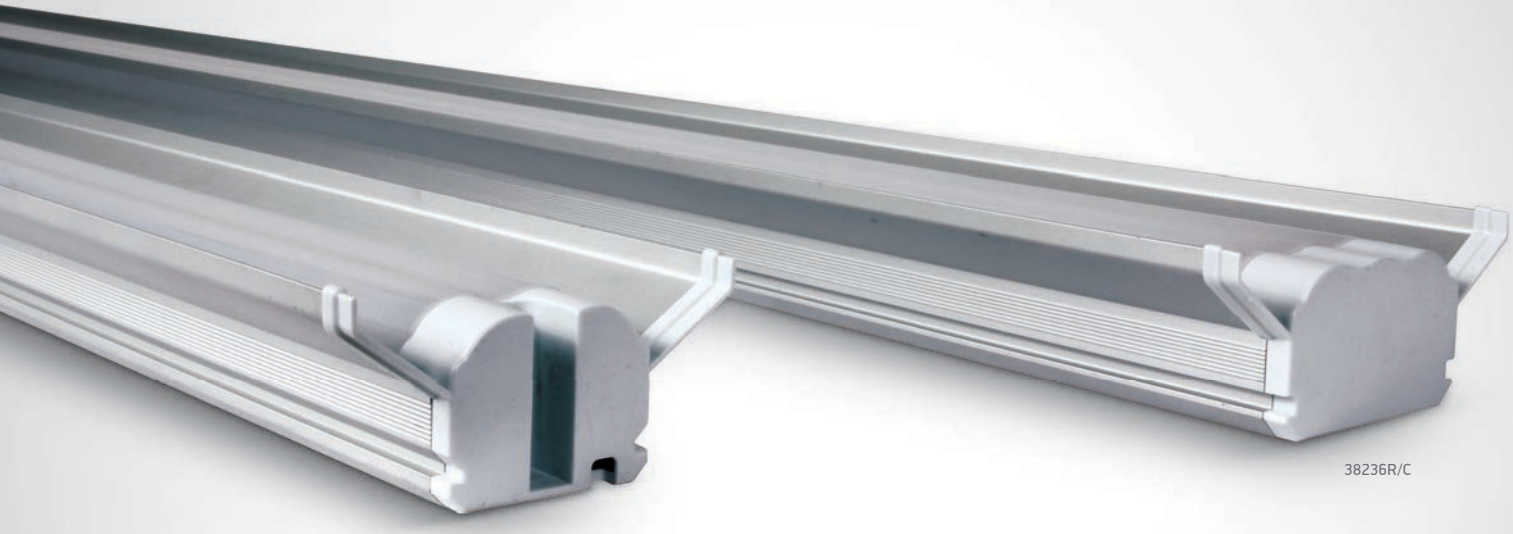

38136R/C

38236R/C

The Supermarket LED Linear Range

Aluminium + PC



38136R | 22W | SMD LED | Single | Aluminium + PC

IP20 offer

LED BUILT IN | 80 CRI | CE | 2 YEAR







38236R | 43W | SMD LED | Double | Aluminium + PC

IP20 offer

LED BUILT IN | 80 CRI | CE | 2 YEAR





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
38136R/C	Grey	Cool white	4000K	22W	1880lm	120°	100-240V		100cm	10	Complete with driver
38236R/C	Grey	Cool white	4000K	43W	3800lm	120°	100-240V		100cm	10	Complete with driver



The Batten For T8 LED



38120E | 1xT8 LED 60cm | Metal

5 YEAR

IP20



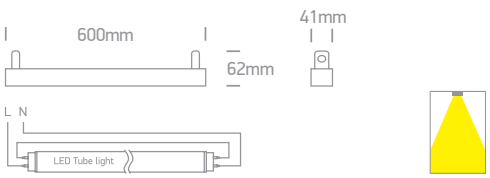



38220E | 2xT8 LED 60cm | Metal

5 YEAR

IP20



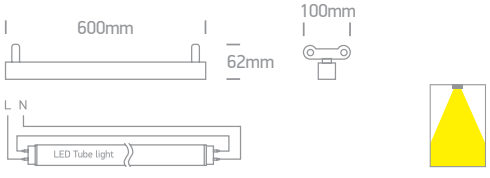

Order Code	Colour	Input	Class		Notes
38120E	White	100-240V	⏚	20	Only suitable for T8 LED tubes
38220E	White	100-240V	⏚	20	Only suitable for T8 LED tubes



The Industrial LED Lights
Die cast



7056 | 50W | COB LED | Die cast

LED BUILT IN
70 CRI
CE
3 YEAR
IP65







7056A | 50W | SMD LED | Die cast

LED BUILT IN
80 CRI
CE
3 YEAR
IP65



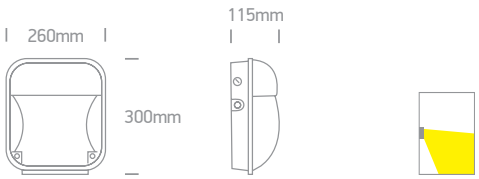

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7056/C	Black	Cool white	4000K	50W	4000lm	100-240V	⏚	4	Complete with driver
7056A/C	Black	Cool white	4000K	50W	4250lm	230V	⏚	6	Complete with driver

The Industrial LED High Bay
Aluminium



63100E | 100W | SMD 3030 | High bay | Aluminium

LED BUILT IN

80 CRI

CE

5 YEAR

IP20







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
63100E/C	Black	Cool white	4000K	100W	10000lm	100°	100-240V	⏚	4	Complete with 2700mA driver





63100N/C

63200N/C

The Industrial IP65 LED UFO Range

Aluminium



63100N | 100W | SMD 2835 | Aluminium — Dimmable.

LED BUILT IN · 80 CRI · 1-10V DIMMABLE · CE · 5 YEAR · IP65





180mm

250mm





63150N | 150W | SMD 2835 | Aluminium — Dimmable.

LED BUILT IN · 80 CRI · 1-10V DIMMABLE · CE · 5 YEAR · IP65





180mm

270mm





63200N | 200W | SMD 2835 | Aluminium — Dimmable.

LED BUILT IN · 80 CRI · 1-10V DIMMABLE · CE · 5 YEAR · IP65





180mm

340mm





22002 | Microwave sensor | DIP switch settings

Sensitivity	1	2	3
100%	●	●	●
75%	○	●	●
50%	●	○	●
25%	○	○	●
10%	○	○	○

ON Time	4	5	6
5sec	●	●	●
30sec	○	●	●
90sec	●	○	●
3min	○	○	●
20min	●	●	○
30min	○	○	○

Daylight Sensor	7	8	9
Disabled	●	●	●
200Lux	○	●	○
100Lux	●	○	○
50Lux	○	○	○

● ON
○ OFF

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
63100N/C	Black	Cool white	4000K	100W	13000lm	90°	230V		150cm	1	Complete with 400mA driver
63150N/C	Black	Cool white	4000K	150W	19500lm	90°	230V		150cm	1	Complete with 620mA driver
63200N/C	Black	Cool white	4000K	200W	26000lm	90°	230V		150cm	1	Complete with 800mA driver

The Rx7s Floodlight



7020 | 150W | Rx7s 76mm | Die cast

IP54 offer

ADJUSTABLE

CE

2 YEAR





Order Code	Colour	Watts	Input	Class		Notes
7020/G/5	Grey	150W	230V	⏚	8	-



7022/G/D



7030/AN/C

The LED Floodlights



7030 | 8x1W | LED | Die cast

IP54 offer

LED BUILT IN · ADJUSTABLE · CE · 2 YEAR









7022 | 15x1W | LED | Die cast

IP65 offer

LED BUILT IN · ADJUSTABLE · CE · 2 YEAR







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
7030/AN/C	Anthracite	Cool white	4000K	8x1W	600lm	20°	230V	⏚	-	12	Complete with driver
7022/G/D	Grey	Daylight	6000K	15x1W	1125lm	40°	100-240V	⏚	200cm	4	Complete with driver

The Rechargeable LED Floodlights
Die cast

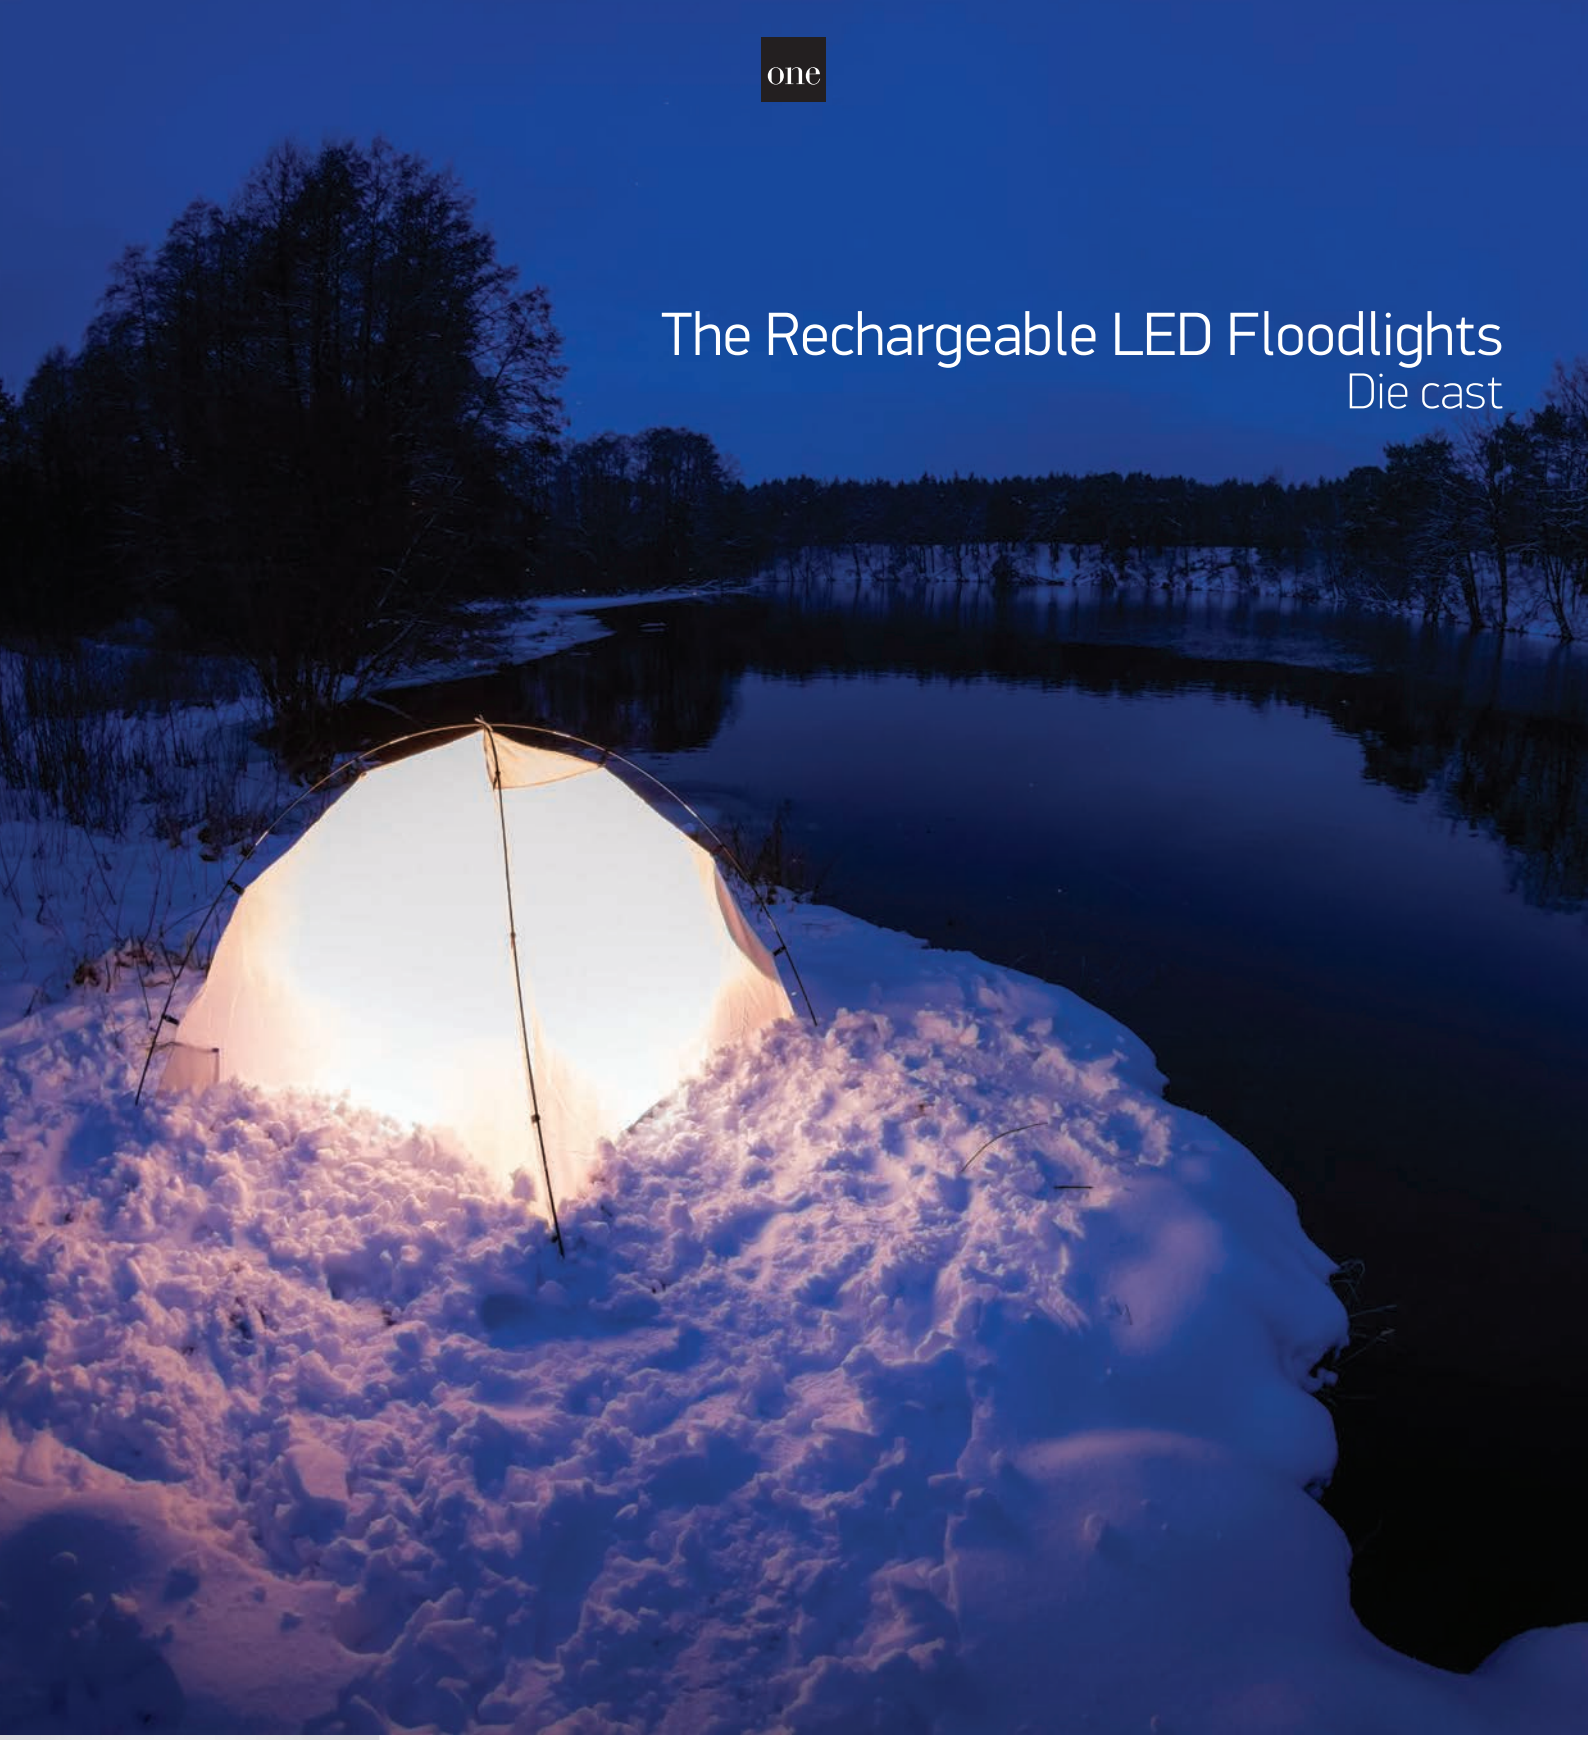



7028AR | 10W | COB LED | Rechargeable 5Hrs | 3Hrs operation

IP65 offer

LED BUILT IN

75 CRI

ADJUSTABLE

2 YEAR



Supplied with AC charger 100-240V, EU/BS plug and car charger 12V.





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
7028AR/G/C	Grey	Cool white	4000K	10W	700lm	120°	8,4V DC		12	Complete with driver and batteries

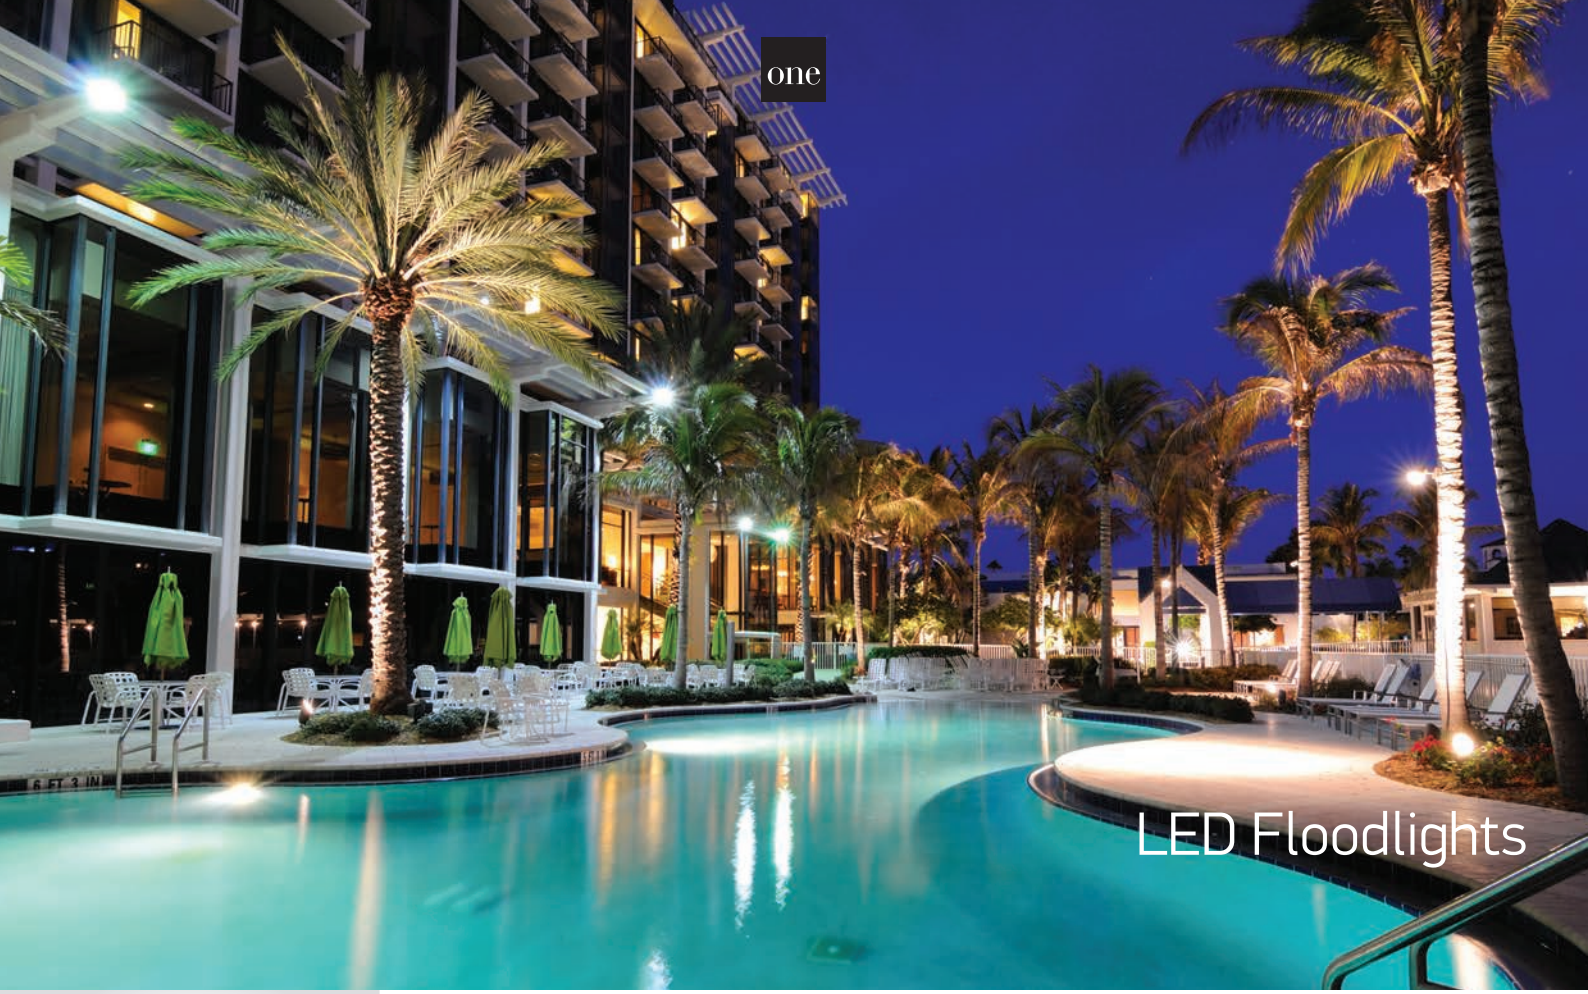



7064 | 10W | COB LED | Die cast + plastic









7040 | 30W | COB LED | Die cast





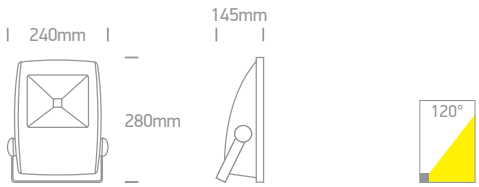



7032 | 150W | COB LED | Die cast







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
7064/W/C	White	Cool white	4000K	10W	1135lm	100°	100-240V		100cm	8	Complete with driver
7040/G/D	Grey	Daylight	6000K	30W	2100lm	120°	100-240V		100cm	5	Complete with driver
7032/AN/C	Anthracite	Cool white	4000K	3x50W	12000lm	120°	100-240V		200cm	1	Complete with driver

The COB LED Slim Line
Die cast





7034B | 50W | COB LED | Die cast

IP65 offer | LED BUILT IN | 75 CRI | ADJUSTABLE | CE | 3 YEAR







7034C | 70W | COB LED | Die cast

IP65 offer | LED BUILT IN | 75 CRI | ADJUSTABLE | CE | 3 YEAR







7034D | 100W | COB LED | Die cast

IP65 offer | LED BUILT IN | 75 CRI | ADJUSTABLE | CE | 3 YEAR





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
7034B/G/C	Grey	Cool white	4000K	50W	4050lm	130°	100-240V		100cm	10	Complete with driver
7034C/G/C	Grey	Cool white	4000K	70W	5600lm	130°	100-240V		100cm	6	Complete with driver
7034D/G/C	Grey	Cool white	4000K	2x50W	8000lm	130°	100-240V		100cm	4	Complete with driver





7028A | 10W | COB LED | Die cast





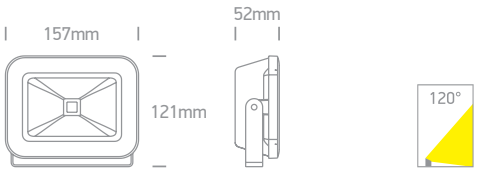



7028E | 100W | COB LED | Die cast





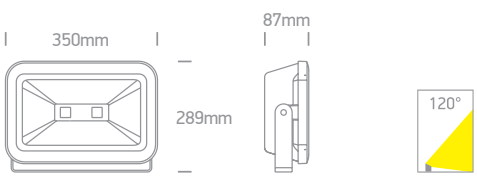

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
7028A/AN/C	Anthracite	Cool white	4000K	10W	700lm	120°	100-240V		100cm	20	Complete with driver
7028A/AN/W	Anthracite	Warm white	3000K	10W	700lm	120°	100-240V		100cm	20	Complete with driver
7028E/AN/C	Anthracite	Cool white	4000K	100W	7000lm	120°	100-240V		100cm	3	Complete with driver



AC LED Floodlights
10-50W



7028CA/W/C

7028CA | 10W | SMD 2835 | Die cast + tempered glass

LED BUILT IN · 80 CRI · ADJUSTABLE · IP65 · CE · 2 YEAR

offer



7028CA/B/D

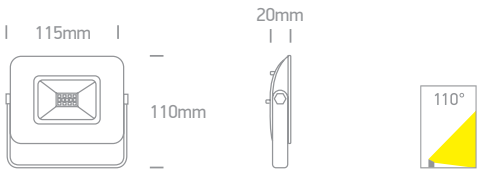



7028CB/B/C

7028CB | 30W | SMD 2835 | Die cast + tempered glass

LED BUILT IN · 80 CRI · ADJUSTABLE · IP65 · CE · 2 YEAR



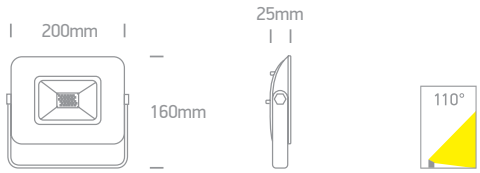



7028CC/B/D

7028CC | 50W | SMD 2835 | Die cast + tempered glass

LED BUILT IN · 80 CRI · ADJUSTABLE · IP65 · CE · 2 YEAR



7028CC/B/C

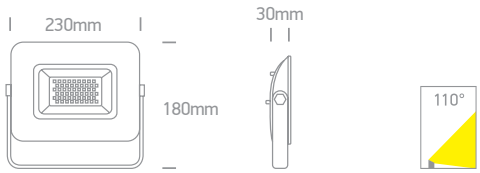

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
7028CA/W/C	White	Cool white	4000K	10W	900lm	110°	230V		30cm	60	AC LED
7028CA/B/D	Black	Daylight	6000K	10W	900lm	110°	230V		30cm	60	AC LED
7028CA/B/C	Black	Cool white	4000K	10W	900lm	110°	230V		30cm	60	AC LED
7028CB/B/C	Black	Cool white	4000K	30W	2700lm	110°	230V		30cm	30	AC LED
7028CC/B/D	Black	Daylight	6000K	50W	4500lm	110°	230V		30cm	20	AC LED
7028CC/B/C	Black	Cool white	4000K	50W	4500lm	110°	230V		30cm	20	AC LED



AC LED Floodlights
100-250W



7028CD/B/C

7028CD | 100W | SMD 2835 | Die cast + tempered glass

LED BUILT IN · 80 CRI · ADJUSTABLE · IP65 · CE · 2 YEAR



7028CD/W/C

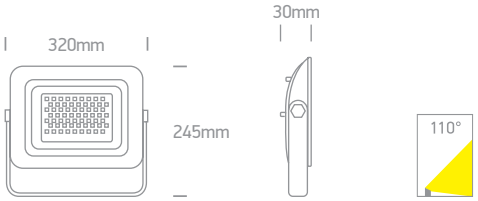



7028CE | 150W | SMD 2835 | Die cast + tempered glass

LED BUILT IN · 80 CRI · ADJUSTABLE · IP65 · CE · 2 YEAR



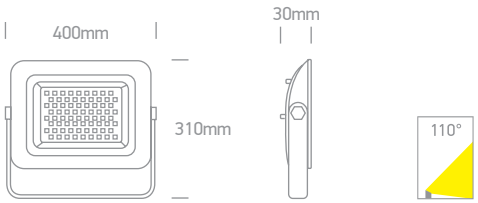



7028CF/B/D

7028CF | 250W | SMD 2835 | Die cast + tempered glass

new · LED BUILT IN · 80 CRI · ADJUSTABLE · IP65 · CE · 2 YEAR



7028CF/B/C

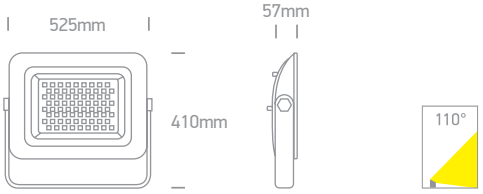

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
7028CD/W/C	White	Cool white	4000K	100W	9000lm	110°	230V		30cm	10	AC LED
7028CD/B/C	Black	Cool white	4000K	100W	9000lm	110°	230V		30cm	10	AC LED
7028CE/B/C	Black	Cool white	4000K	150W	13500lm	110°	230V		30cm	4	AC LED
7028CF/B/C	Black	Cool white	4000K	250W	22500lm	110°	230V		30cm	4	AC LED
7028CF/B/D	Black	Daylight	6000K	250W	22500lm	110°	230V		30cm	4	AC LED



The Glass Face AC LED Floodlights



7028AG/B/C

7028AG | 10W | SMD 3030 | Die cast + tempered glass

IP65 offer

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · 2 YEAR

offer



7028AG/W/C

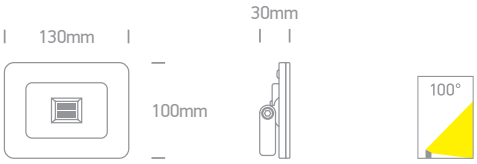



7028BG | 30W | SMD 3030 | Die cast + tempered glass

IP65 offer

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · 2 YEAR



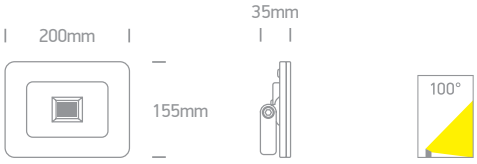



7028CG | 50W | SMD 3030 | Die cast + tempered glass

IP65 offer

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · 2 YEAR



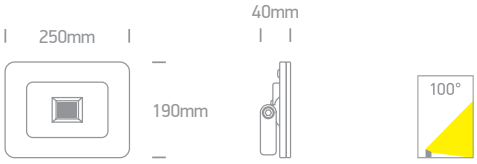

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	S		Notes
7028AG/W/C	White	Cool white	4000K	10W	800lm	100°	230V		50cm	20	AC LED
7028AG/B/C	Black	Cool white	4000K	10W	800lm	100°	230V		50cm	20	AC LED
7028BG/B/C	Black	Cool white	4000K	30W	2400lm	100°	230V		50cm	12	AC LED
7028CG/B/C	Black	Cool white	4000K	50W	4000lm	100°	230V		50cm	8	AC LED



The LED Wall Washers
Aluminium



7055A | 12x1W | LED | Aluminium

Connect maximum 10pcs.

LED BUILT IN · 80 CRI · DIMMABLE · IP66 · ADJUSTABLE · CE · 5 YEAR







7055B | 24x1W | LED | Aluminium

Connect maximum 5pcs.

LED BUILT IN · 80 CRI · DIMMABLE · IP66 · ADJUSTABLE · CE · 5 YEAR







7055B/RGB | 24x1,5W | LED | RGB | Aluminium

Connect maximum 5pcs.

LED BUILT IN · DIMMABLE · ADJUSTABLE · IP66 · CE · 5 YEAR



89100LP
DALI LED Controller 4 channel.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
7055A/C	Grey	Cool white	4000K	12x1W	850lm	60°x20°	24V DC		100cm	15	Requires 24V DC driver
7055A/W	Grey	Warm white	3000K	12x1W	850lm	60°x20°	24V DC		100cm	15	Requires 24V DC driver
7055B/C	Grey	Cool white	4000K	24x1W	1700lm	60°x20°	24V DC		100cm	15	Requires 24V DC driver
7055B/W	Grey	Warm white	3000K	24x1W	1700lm	60°x20°	24V DC		100cm	15	Requires 24V DC driver
7055B/RGB	Grey	RGB	-	24x1,5W	-	30°	24V DC		100cm	12	Requires 24V DC driver



The LED High Power Box
Aluminium



7058 | 120W | SMD 3030 | Surface mounted | Aluminium

Ideal for petrol stations, showrooms & warehouses.

LED BUILT IN

70 CRI

CE

5 YEAR

IP65



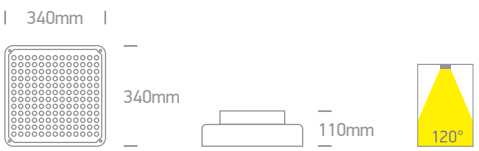

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
7058/W/D	White	Daylight	6000K	120W	10800lm	120°	100-240V	⏚	1	Complete with driver
7058/W/C	White	Cool white	4000K	120W	10200lm	120°	100-240V	⏚	1	Complete with driver

The COB LED Street Light
Die cast



70080 | 20W | COB LED | Die cast

LED BUILT IN 70 CRI

IP65 offer

CE 3 YEAR



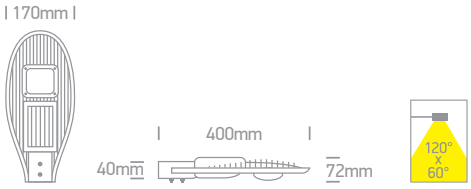

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
70080/AN/C	Anthracite	Cool white	4000K	20W	1500lm	120°x60°	230V	⏚	60cm	2	Complete with driver



The LED Park Light
Die cast



70104 | 30W | COB LED | Die cast

LED BUILT IN

70 CRI

5 YEAR

IP65









70112 | 75W | LED | Die cast

LED BUILT IN

80 CRI

IK 08

5 YEAR

IP66







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
70104/G/C	Grey	Cool white	4000K	30W	2700lm	120°	100-240V		500cm	1	Complete with driver
70112/B/C	Black	Cool white	4000K	75W	9000lm	-	100-240V		150cm	1	Complete with 2400mA driver





70110 | 60W | LED | Die cast

LED BUILT IN
70 CRI
CE
5 YEAR
IP66









70105 | 50W | COB LED | Die cast

LED BUILT IN
70 CRI
CE
5 YEAR
IP65







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
70110/AN/C	Anthracite	Cool white	4000K	60W	4500lm	Assymetric	100-240V	⏚	100cm	1	Complete with driver
70105/AN/C	Anthracite	Cool white	4000K	50W	4000lm	60°	100-240V	⏚	500cm	1	Complete with driver



22

Emergency Lights

Pages 719-728

LED | Emergency 3Hrs Maintained | Recessed

PC | Plastic + aluminium

IP20 IP22 IP44 IP65

80 CRI

2 YEAR



Emergency LED Plafo





67366E/W/C

67366E | 12W | SMD 2835 | Emergency 3Hrs Maintained | PC

LED BUILT IN

80 CRI

IK08

CE

IP54

2 YEAR



67366E/W/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	Battery Duration		Notes
67366E/W/C	White	Cool white	4000K	12W	960lm	-	230V	⧈	3Hrs	20	Supplied with battery
67366E/W/W	White	Warm white	3000K	12W	960lm	-	230V	⧈	3Hrs	20	Supplied with battery





67284LE | 25W/5W | SMD 2835 | Emergency 3Hrs Maintained | PC

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP65









67280ANE | 15W | SMD 2835 | Emergency 3Hrs Maintained | Plastic

LED BUILT IN · 80 CRI · IK08 · CE · 2 YEAR · IP65









67282ANE | 16W | SMD 2835 | Emergency 3Hrs Maintained | Plastic

LED BUILT IN · 80 CRI · IK08 · CE · 2 YEAR · IP65







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	Battery Duration		Notes
67284LE/W/W	White	Warm white	3000K	25W/5W	1900lm	230V	⧈	3Hrs	12	Supplied with battery
67280ANE/G/W	Grey	Warm white	3000K	15W	1000lm	230V	⧈	3Hrs	10	Supplied with battery
67282ANE/G/W	Grey	Warm white	3000K	16W	1280lm	230V	⧈	3Hrs	10	Supplied with battery

Emergency LED Ceiling Plexiglass Signs



89406 | 1W | LED | Emergency 3Hrs Maintained

Ceiling/Wall mounted

LED BUILT IN

2 YEAR

IP44



Supplied with 3 stickers.





89406R | 1W | LED | Emergency 3Hrs Maintained | Recessed

Ceiling recessed

LED BUILT IN

2 YEAR

IP44



Supplied with 3 stickers.



Order Code	Colour	Watts	Input	Class	Battery Type	Battery Duration				Notes
89406/W	White	1W	230V	⧈	Ni-Cd 3,6V 1,5Ah	3Hrs	-	-	12	Supplied with battery
89406R/W	White	1W	230V	⧈	Ni-Cd 3,6V 1,5Ah	3Hrs	300x45mm	120mm	16	Supplied with battery

Emergency LED Wall & Ceiling



89404 | 7W | LED | Emergency 3Hrs Maintained | PC

LED BUILT IN

2 YEAR

IP65





Order Code	Colour	Light Colour	CCT (K)	Watts	Input	Class	Battery Type	Battery Duration		Notes
89404	White	Daylight	6000K	7W	230V	⏚	Ni-Cd 3,6V 1,5Ah	3Hrs	12	Supplied with battery

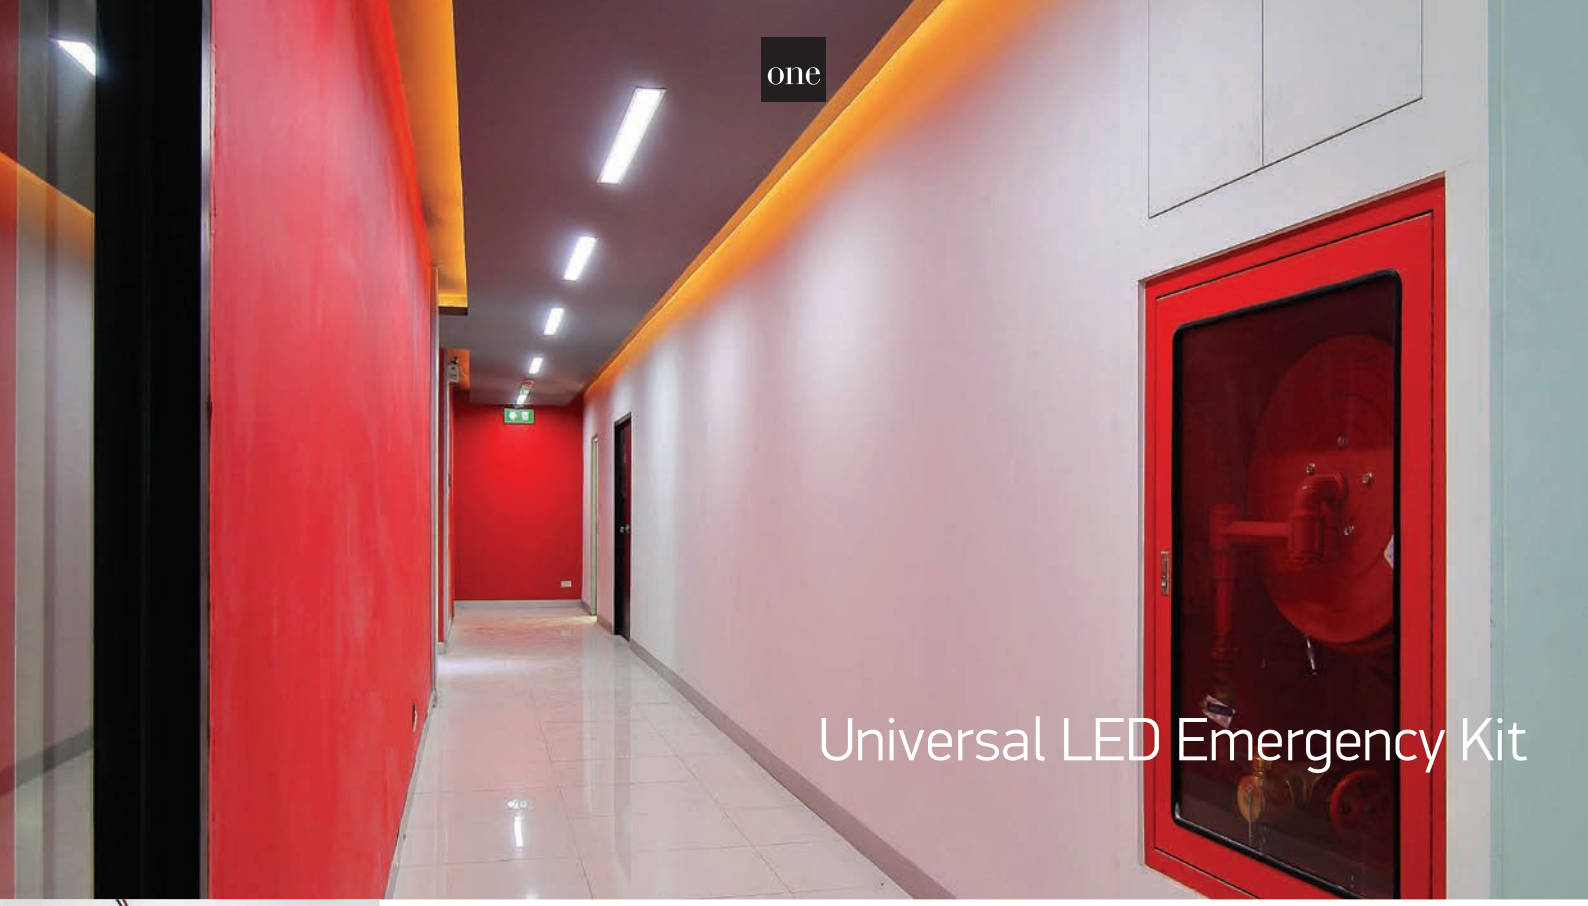

Universal LED Emergency Kit



89005A/EME | 5-50W | Built-in Emergency kit for LED fittings | Emergency 3Hrs Maintained

Use inside fittings.

2 YEAR

IP20



WIRING DIAGRAM

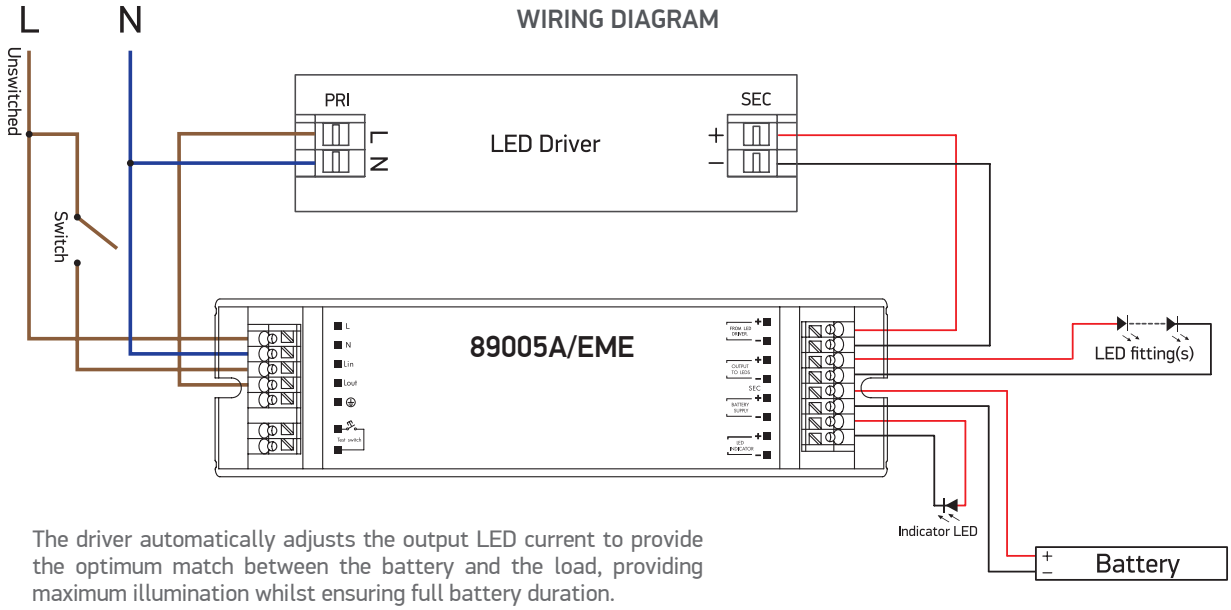

The driver automatically adjusts the output LED current to provide the optimum match between the battery and the load, providing maximum illumination whilst ensuring full battery duration.

Emergency mode light output compared with normal operation:

Luminaire Power	5W	7W	10W	12W	15W	20W	25W	30W	35W	40W	45W	50W
	60%	43%	30%	25%	20%	15%	12%	10%	9%	8%	7%	6%

Order Code	Input	Watts	Class	Battery Type	Charge Period	Battery Duration		Notes
89005A/EME	230V	5-50W		Ni-Cd 3,6V 4,0Ah	24Hrs	3Hrs	12	Supplied with battery



Universal LED Emergency Kit



89005/EME | 5-50W | Emergency kit for LED Downlights and LED strips | Emergency 3Hrs Maintained

2 YEAR

IP20



WIRING DIAGRAM

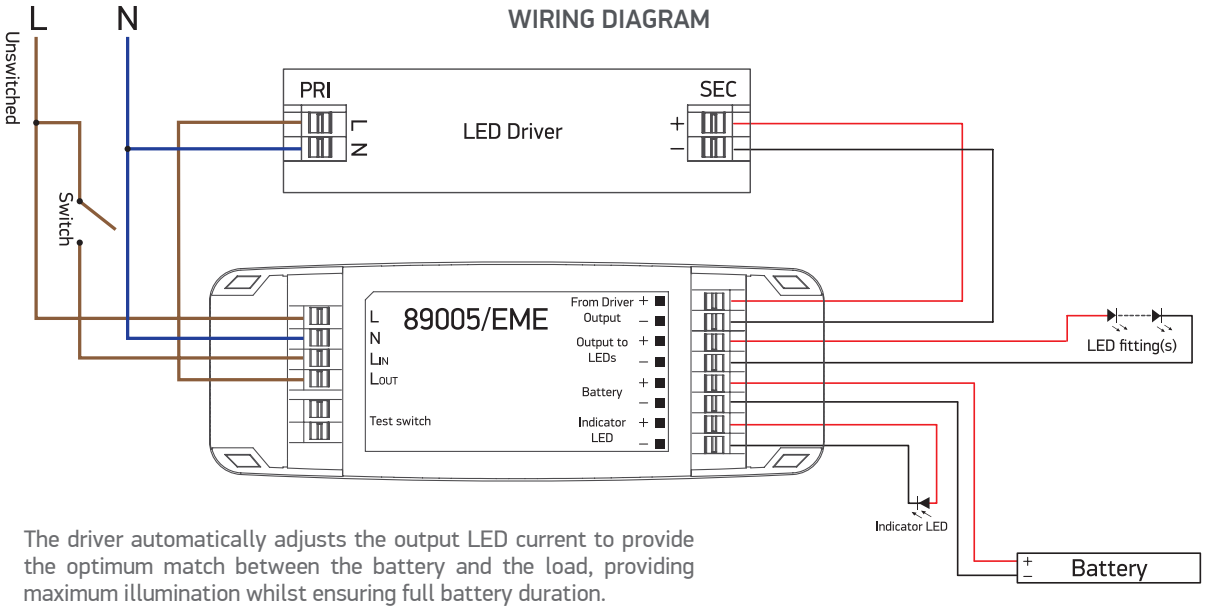

The driver automatically adjusts the output LED current to provide the optimum match between the battery and the load, providing maximum illumination whilst ensuring full battery duration.

Emergency mode light output compared with normal operation:

Luminaire Power	5W	7W	10W	12W	15W	20W	25W	30W	35W	40W	45W	50W
	60%	43%	30%	25%	20%	15%	12%	10%	9%	8%	7%	6%

Order Code	Input	Watts	Class	Battery Type	Charge Period	Battery Duration		Notes
89005/EME	230V	5-50W	⧈	Ni-Mh 3,6V 4,0Ah	24Hrs	3Hrs	12	Supplied with battery



GU10/E27 LED Emergency Kit



89009/EME | 3-7W | Emergency kit for GU10/E27 LED | Emergency 3Hrs Maintained | Suitable for 7306CG lamp

2 YEAR

IP20

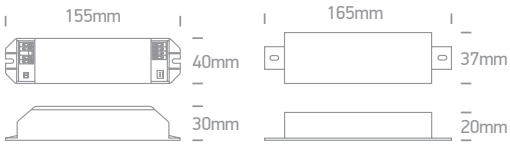

WIRING DIAGRAM

Maintained mode (Controlled by a switch)

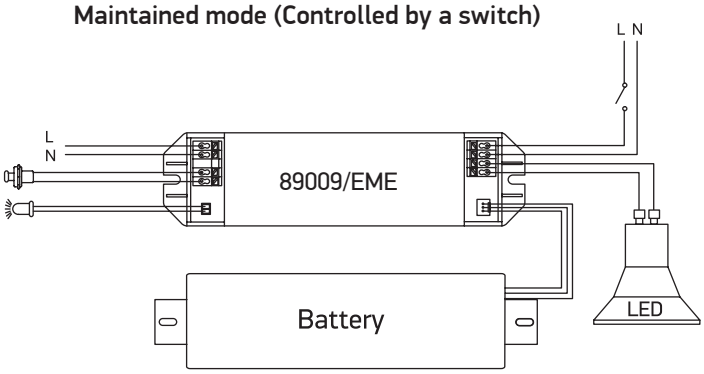

Non-maintained mode (Emergency only)

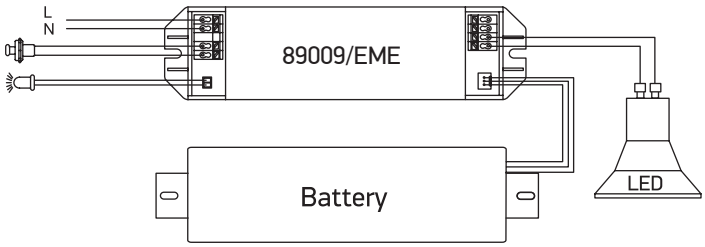

* This kit will only operate with GU10 & E27 LED lamps suitable for 180V DC power supply. Most of the lamps in the market today are compatible however we recommend to test suitability before purchasing the lamps. Suitable for 7306CG lamp.

Order Code	Input	Watts	Class	Battery Type	Charge Period	Battery Duration		Notes
89009/EME	230V	3-7W	⧈	Ni-Cd 6,4V 3,0Ah	Max. 24Hrs	3Hrs	24	Supplied with battery



MR16 LED Emergency Kit



89002A | 3W | Emergency kit with MR16 LED module | Emergency 3Hrs Maintained

2 YEAR

IP20

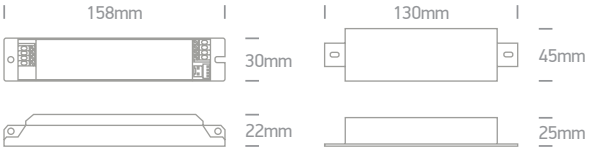

MAINTAINED MODE

* Driver 89004 must be ordered separately

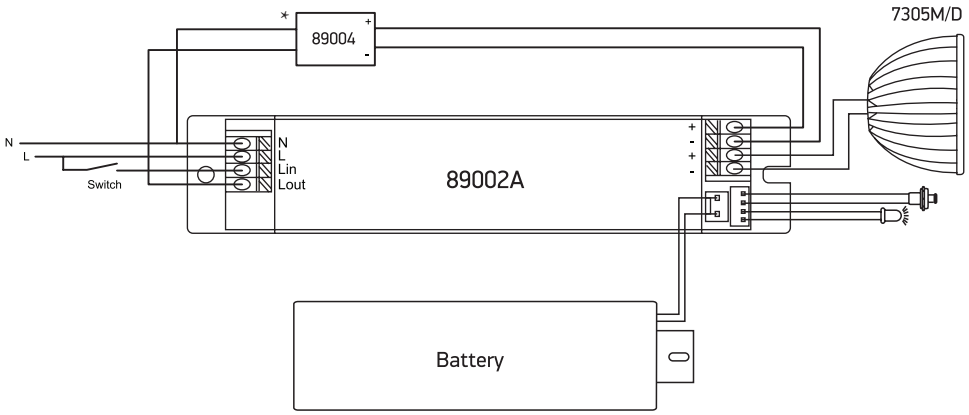

NON-MAINTAINED MODE

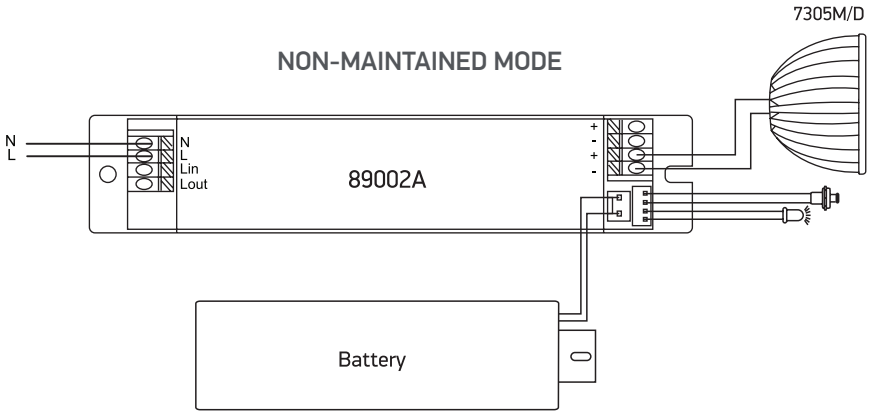

Order Code	Light Colour	CCT (K)	Watts	Input	Battery Type	Charge Period	Battery Duration		Notes
89002A	Daylight	6000K	3W	230V	Ni-Cd 4,8V 2,0Ah	24Hrs	3Hrs	24	Supplied with battery & MR16 LED module 7305M/D.



LED Panels Emergency Kit



89143F | 5-60W | Emergency pack for LED Panels and LED Downlights | Emergency 3Hrs Maintained

2 YEAR

IP20



WIRING DIAGRAM

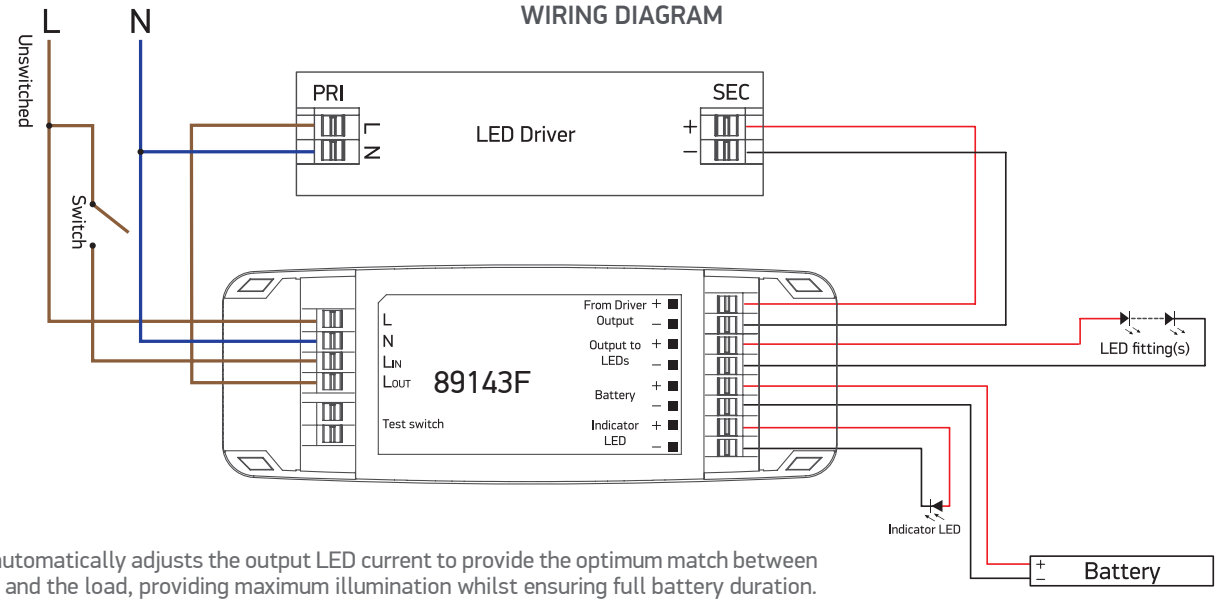

The driver automatically adjusts the output LED current to provide the optimum match between the battery and the load, providing maximum illumination whilst ensuring full battery duration.

Emergency mode light output compared with normal operation:

3W Luminaire Power	5W	7W	10W	12W	15W	20W	25W	30W	35W	40W	45W	50W
	60%	43%	30%	25%	20%	15%	12%	10%	9%	8%	7%	6%
6W Luminaire Power	7W	10W	12W	15W	20W	25W	30W	35W	40W	45W	50W	60W
	85%	60%	50%	40%	30%	24%	20%	18%	16%	14%	12%	10%



Order Code	Input	Watts	Class	Battery Type	Charge Period	Battery Duration		Notes
89143F	230V	5-60W		Ni-Cd 7,2V 4,0Ah	24Hrs	3Hrs	9	Supplied with battery

Emergency LED Recessed Spot





89002 | 3W | LED | Emergency 3Hrs Maintained | Recessed | Plastic + aluminium

LED BUILT IN

2 YEAR

IP20





asymmetric for corridors

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	Battery Duration				Notes
89002	White	Daylight	6000K	3W	150lm	230V	⏚	3Hrs	72mm	120mm	12	Supplied with battery





23

Drivers

Pages 731-754

Constant voltage | Constant current

IP20 IP66 IP67

TRIAC DIMMABLE · 1-10V DIMMABLE · DALI DIMMABLE · PUSH TO DIM · QUICK FIX · DALI · CE · 3 YEAR · 5 YEAR





Mini Series Drivers
Constant current



89004 | 1-4W | 350mA

QUICK FIX · CE · 5 YEAR

IP66

55mm · 30mm · 24mm



89004T | 2-4W | 350mA | TRIAC | Dimmable

TRIAC DIMMABLE · QUICK FIX · CE · 5 YEAR

IP66

55mm · 30mm · 24mm

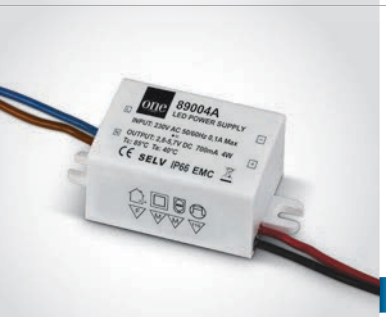

89004A | 2-4W | 700mA

QUICK FIX · CE · 5 YEAR

IP66

55mm · 30mm · 24mm



89004AT | 2-4W | 700mA | TRIAC | Dimmable

TRIAC DIMMABLE · QUICK FIX · CE · 5 YEAR

IP66

55mm · 30mm · 24mm

Order Code	Input	Power	Output	Class	Dimmable		Notes
89004	230V	1-4W	350mA	⧈	NO	200	-
89004T	230V	2-4W	350mA	⧈	YES	200	Use TRIAC dimmer
89004A	230V	2-4W	700mA	⧈	NO	200	-
89004AT	230V	2-4W	700mA	⧈	YES	200	Use TRIAC dimmer



Mini Series Drivers
Constant current



89006P | 2-6W | 350mA

QUICK FIX 5 YEAR

55mm | 30mm | 24mm



89006PC | 1,5-6W | 500mA

QUICK FIX 5 YEAR

55mm | 30mm | 24mm



89006PA | 2-6W | 700mA

QUICK FIX 5 YEAR

55mm | 30mm | 24mm

Order Code	Input	Power	Output	Class	Dimmable		Notes
89006P	230V	2-6W	350mA	⧈	NO	100	-
89006PC	230V	1,5-6W	500mA	⧈	NO	100	-
89006PA	230V	2-6W	700mA	⧈	NO	100	-



89020

89015

The 350mA Range

Constant current



89008 | 4-8W | 350mA

QUICK FIX · CE · 5 YEAR

IP20





89015 | 7-15W | 350mA

QUICK FIX · CE · 5 YEAR

IP20





89020 | 13-20W | 350mA

QUICK FIX · CE · 5 YEAR

IP20



Order Code	Input	Power	Output	Class	Dimmable		Notes
89008	230V	4-8W	350mA	⧈	NO	100	-
89015	230V	7-15W	350mA	⧈	NO	100	-
89020	230V	13-20W	350mA	⧈	NO	100	-



The 500mA Range
Constant current



89015C | 7,5-15W | 500mA

QUICK FIX · CE · 5 YEAR

new

IP20





89020C | 12,5-20W | 500mA

QUICK FIX · CE · 5 YEAR

new

IP20





89030C | 20-30W | 500mA

QUICK FIX · CE · 5 YEAR

IP20



Order Code	Input	Power	Output	Class	Dimmable		Notes
89015C	230V	7,5-15W	500mA	⧈	NO	100	-
89020C	230V	12,5-20W	500mA	⧈	NO	100	-
89030C	230V	20-30W	500mA	⧈	NO	100	-

The 700mA Range
Constant current





89008A | 4-8W | 700mA

QUICK FIX · CE · 5 YEAR

IP20





89015A | 7-15W | 700mA

QUICK FIX · CE · 5 YEAR

IP20





89030A | 15-30W | 700mA

QUICK FIX · CE · 5 YEAR

IP20



Order Code	Input	Power	Output	Class	Dimmable		Notes
89008A	230V	4-8W	700mA	⧈	NO	100	-
89015A	230V	7-15W	700mA	⧈	NO	100	-
89030A	230V	15-30W	700mA	⧈	NO	100	-

High Power 1200mA
Dimmable



89048T | 32-50W | 1200mA | TRIAC | Dimmable

TRIAC
DIMMABLE
QUICK FIX
5 YEAR

IP20



Order Code	Input	Power	Output	Class	Dimmable		Notes
89048T	230V	32-50W	1200mA	⧈	YES	1	Use TRIAC dimmer

The TRIAC Dimmable Range
Constant current



89008UT | TRIAC | Dimmable

Adjustable output using DIP switch.

TRIAC DIMMABLE · CE · 2 YEAR

IP20



Output Current	300mA	350mA
Output Power	3,6-6,6W	4,2-7,7W



89016UT | TRIAC | Dimmable

Adjustable output using DIP switch.

TRIAC DIMMABLE · CE · 2 YEAR

IP20



Output Current	200mA	250mA	300mA	350mA
Output Power	5-8W	6,25-10W	7,5-12W	8,75-14W



89024UT | TRIAC | Dimmable

Adjustable output using DIP switches.

TRIAC DIMMABLE · CE · 2 YEAR

IP20



Output Current	400mA	450mA	500mA	550mA
Output Power	10-16W	11,25-18W	12,5-20W	13,75-22W



89030UT | TRIAC | Dimmable

Adjustable output using DIP switch.

TRIAC DIMMABLE · CE · 2 YEAR

IP20



Output Current	550mA	600mA	650mA	700mA
Output Power	13,75-22W	15-24W	16,25-26W	17,5-28W

Order Code	Input	Power	Output	Class	Dimmable		Notes
89008UT	230V	Refer to table	Adjustable	⧈	YES	90	Use TRIAC dimmer
89016UT	230V	Refer to table	Adjustable	⧈	YES	90	Use TRIAC dimmer
89024UT	230V	Refer to table	Adjustable	⧈	YES	72	Use TRIAC dimmer
89030UT	230V	Refer to table	Adjustable	⧈	YES	72	Use TRIAC dimmer

The 350mA TRIAC Dimmable Range
Constant current



89015T | 7-15W | 350mA | TRIAC | Dimmable

TRIAC DIMMABLE · QUICK FIX · CE · 5 YEAR

IP20



The 500mA TRIAC Dimmable Range
Constant current



89015CT | 7,5-15W | 500mA | TRIAC | Dimmable

TRIAC DIMMABLE · QUICK FIX · CE · 5 YEAR

IP20



The 700mA TRIAC Dimmable Range
Constant current



89006AT | 3,5-6W | 700mA | TRIAC | Dimmable

TRIAC DIMMABLE · QUICK FIX · CE · 5 YEAR

IP20





89015AT | 7-15W | 700mA | TRIAC | Dimmable

TRIAC DIMMABLE · QUICK FIX · CE · 5 YEAR

IP20





89040AT | 21-40W | 700mA | TRIAC | Dimmable

TRIAC DIMMABLE · QUICK FIX · CE · 5 YEAR

new

IP20



Order Code	Input	Power	Output	Class	Dimmable		Notes
89015T	230V	7-15W	350mA	⧈	YES	100	Use TRIAC dimmer
89015CT	230V	7,5-15W	500mA	⧈	YES	100	Use TRIAC dimmer
89006AT	230V	3,5-6W	700mA	⧈	YES	100	Use TRIAC dimmer
89015AT	230V	7-15W	700mA	⧈	YES	100	Use TRIAC dimmer
89040AT	230V	21-40W	700mA	⧈	YES	50	Use TRIAC dimmer



Marine Drivers for Yachts

Constant current

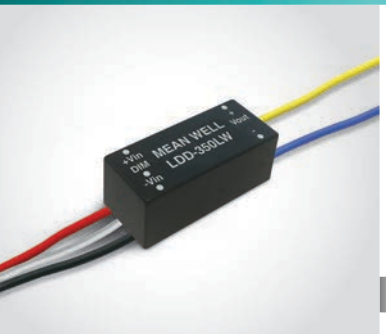

89028M | 9-36V DC | LED Marine driver | 350mA | PWM Dimmable

DIMMABLE 3 YEAR

IP20



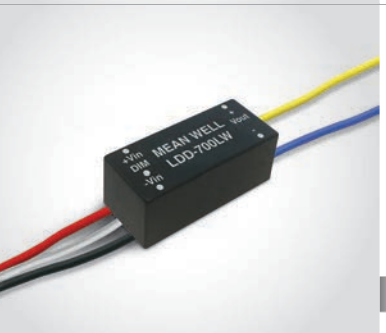

89028AM | 9-36V DC | LED Marine driver | 700mA | PWM Dimmable

DIMMABLE 3 YEAR

IP20



Order Code	Input	Power	Output	Class	Dimmable		Notes
89028M	9-36V DC	4,2W@12V / 8,4W@24V / 11,2W@36V	350mA	III	YES	240	-
89028AM	9-36V DC	8,4W@12V / 16,8W@24V / 22,4W@36V	700mA	III	YES	240	-

The 12V DC Range
Constant voltage



89075W

89030W



89008W | 8W | 12V DC

5 YEAR

IP20





89015W | 15W | 12V DC

5 YEAR

IP20





89030W | 30W | 12V DC

5 YEAR

IP20





89075W | 75W | 12V DC

5 YEAR

IP20



Order Code	Input	Power	Output	Class	Dimmable		Notes
89008W	230V	8W	12V DC	⧈	NO	200	-
89015W	230V	15W	12V DC	⧈	NO	100	-
89030W	230V	30W	12V DC	⧈	NO	50	-
89075W	230V	75W	12V DC	⧈	NO	25	-



The 24V DC Range
Constant voltage



89015V | 15W | 24V DC

5 YEAR

IP20





89030V | 30W | 24V DC

5 YEAR

IP20





89075V | 75W | 24V DC

5 YEAR

IP20



Order Code	Input	Power	Output	Class	Dimmable		Notes
89015V	230V	15W	24V DC	⧈	NO	100	-
89030V	230V	30W	24V DC	⧈	NO	50	-
89075V	230V	75W	24V DC	⧈	NO	25	-

The 24V DC Range High Power
Constant voltage





89100V | 100W | 24V DC

5 YEAR

IP20





89150V | 150W | 24V DC

5 YEAR

IP20





89200V | 200W | 24V DC

5 YEAR

IP20





89320V | 320W | 24V DC

5 YEAR

new

IP20



Order Code	Input	Power	Output	Class	Dimmable		Notes
89100V	230V	100W	24V DC	⧈	NO	20	-
89150V	230V	150W	24V DC	⧈	NO	25	-
89200V	230V	200W	24V DC	⧈	NO	20	-
89320V	230V	320W	24V DC	⧈	NO	20	-



The 12V DC Dimmable Range
Constant voltage



89060WD | 3 Channels 20W each | 12V DC | 1-10V | Dimmable

1-10V DIMMABLE · CE · 5 YEAR

IP20

offer



Order Code	Input	Power	Output	Class	Dimmable		Notes
89060WD	230V	3x20W	12V DC	⏚	YES	18	Use 1-10V dimmer



89100VT

89040VT

The 24V DC TRIAC Dimmable Range

Constant voltage



89040VT | 40W | 24V DC | TRIAC | Dimmable

TRIAC DIMMABLE · CE · 5 YEAR

IP20





89075VT | 75W | 24V DC | TRIAC | Dimmable

TRIAC DIMMABLE · CE · 5 YEAR

IP20





89100VT | 100W | 24V DC | TRIAC | Dimmable

TRIAC DIMMABLE · CE · 5 YEAR

IP20



Order Code	Input	Power	Output	Class	Dimmable		Notes
89040VT	230V	40W	24V DC	⧈	YES	50	Use TRIAC dimmer
89075VT	230V	75W	24V DC	⧈	YES	20	Use TRIAC dimmer
89100VT	230V	100W	24V DC	⧈	YES	20	Use TRIAC dimmer

The 24V DC Slim Range
Constant voltage



89030VL | 30W | 24V DC

Suitable for LED profiles on page 264, 266, 267.

5 YEAR

IP20





89060VL | 60W | 24V DC

Suitable for LED profiles on page 264, 266, 267.

5 YEAR

IP20





89075VL | 75W | 24V DC

Suitable for LED profiles on page 264, 266, 267.

5 YEAR

IP20





89100VL | 100W | 24V DC

Suitable for LED profiles on page 264, 266, 267.

5 YEAR

IP20





89150VL | 150W | 24V DC

Suitable for LED profiles on page 264, 266, 267.

5 YEAR

IP20



Order Code	Input	Power	Output	Class	Dimmable		Notes
89030VL	230V	30W	24V DC	⧈	NO	100	-
89060VL	230V	60W	24V DC	⧈	NO	50	-
89075VL	230V	75W	24V DC	⧈	NO	50	-
89100VL	230V	100W	24V DC	⧈	NO	50	-
89150VL	230V	150W	24V DC	⧈	NO	25	-

The 24V DC Slim Range Dimmable
Constant voltage



89060VLD | 60W | 24V DC | Push to DIM | Dimmable

Suitable for LED profiles on page 264, 266, 267.

PUSH TO DIM · CE · 5 YEAR · IP20





89100VLD | 100W | 24V DC | Push to DIM | Dimmable

Suitable for LED profiles on page 264, 266, 267.

PUSH TO DIM · CE · 5 YEAR · IP20





89150VLD | 150W | 24V DC | Push to DIM | Dimmable

Suitable for LED profiles on page 264, 266, 267.

PUSH TO DIM · CE · 5 YEAR · IP20



Order Code	Input	Power	Output	Dimmable		Notes
89060VLD	230V	60W	24V DC	YES	50	Push to DIM
89100VLD	230V	100W	24V DC	YES	50	Push to DIM
89150VLD	230V	150W	24V DC	YES	20	Push to DIM

DALI Dimmable



89100VLL | 100W | 24V DC | DALI & Push to DIM | Dimmable

Suitable for LED profiles on page 264, 266, 267.

PUSH TO DIM · DALI DIMMABLE · CE · 5 YEAR · DALI · IP20





89150VLL | 150W | 24V DC | DALI & Push to DIM | Dimmable

Suitable for LED profiles on page 264, 266, 267.

PUSH TO DIM · DALI DIMMABLE · CE · 5 YEAR · DALI · new · IP20



Order Code	Input	Power	Output	Class	Dimmable		Notes
89100VLL	230V	100W	24V DC	⧈	YES	20	DALI & Push to DIM
89150VLL	230V	150W	24V DC	⧈	YES	20	DALI & Push to DIM

The 24V DC Open Range
Constant voltage



89060VN | 60W | 24V DC

3 YEAR

IP20





89100VN | 100W | 24V DC

3 YEAR

IP20





89150VN | 150W | 24V DC

3 YEAR

IP20





89200VN | 200W | 24V DC

3 YEAR

IP20





89350VN | 350W | 24V DC

3 YEAR

IP20



Order Code	Input	Power	Output	Class	Dimmable		Notes
89060VN	100-240V	60W	24V DC	⏚	NO	66	-
89100VN	100-240V	100W	24V DC	⏚	NO	42	-
89150VN	100-240V	150W	24V DC	⏚	NO	40	-
89200VN	230V	200W	24V DC	⏚	NO	40	-
89350VN	230V	350W	24V DC	⏚	NO	27	Cooling fan



The 24V Open Range Dimmable
Constant voltage



89100VND | 100W | 24V DC | TRIAC & 1-10V | Dimmable

TRIAC DIMMABLE · 1-10V DIMMABLE · CE · 3 YEAR

IP20





89200VND | 200W | 24V DC | TRIAC & 1-10V | Dimmable

TRIAC DIMMABLE · 1-10V DIMMABLE · CE · 3 YEAR

IP20



Order Code	Input	Power	Output	Class	Dimmable		Notes
89100VND	230V	100W	24V DC	⏚	YES	60	TRIAC & 1-10V
89200VND	230V	200W	24V DC	⏚	YES	40	TRIAC & 1-10V



The DIN RAIL Drivers



89060AR | 1,25A | DIN RAIL Transformer 12 & 24V AC

3 YEAR

IP20





89060VR | 60W | DIN RAIL driver 24V DC

3 YEAR

IP20





89090VR | 90W | DIN RAIL driver 24V DC

3 YEAR

IP20



Order Code	Input	Power	Output	Class	Dimmable		Notes
89060AR	230V	15W@12V AC & 30W@24V AC	12V AC & 24V AC	⧈	NO	20	-
89060VR	100-240V	60W	24V DC	⧈	NO	50	-
89090VR	100-240V	90W	24V DC	⧈	NO	50	-



The 24V DC Waterproof IP67 Range

Constant voltage



89100VP | 100W | 24V DC

3 YEAR

IP67





89150VP | 150W | 24V DC

3 YEAR

IP67





89200VP | 200W | 24V DC

3 YEAR

IP67



Order Code	Input	Power	Output	Class		Dimmable		Notes
89100VP	100-240V	100W	24V DC	⏚	100cm	NO	36	-
89150VP	100-240V	150W	24V DC	⏚	100cm	NO	35	-
89200VP	100-240V	200W	24V DC	⏚	100cm	NO	32	-



The 24V DC Dimmable Range

Push to DIM & 1-10V



89030VD | 30W | 24V DC | Push to DIM & 1-10V | Dimmable

PUSH TO DIM · 1-10V DIMMABLE · CE · 5 YEAR

IP20



Order Code	Input	Power	Output	Class	Dimmable		Notes
89030VD	230V	30W	24V DC	⧈	YES	20	Push to DIM & 1-10V

The 24V DC DALI Dimmable Range

DALI, Push to DIM, 1-10V



89075L | 75W | 24V DC | DALI, Push to DIM, 1-10V | Dimmable

PUSH TO DIM · DALI DIMMABLE · 1-10V DIMMABLE · CE · 5 YEAR · DALI

IP20



Order Code	Input	Power	Output	Class	Dimmable		Notes
89075L	230V	75W	24V DC	⧈	YES	18	DALI, Push to DIM & 1-10V



Adjustable Constant Current Dimmable Range

Push to DIM & 1-10V



89027D | Push to DIM & 1-10V | Dimmable

Adjustable output using DIP switches.

PUSH TO DIM

1-10V DIMMABLE

5 YEAR

IP20

LED Current Selection

900mA ● ● ●
700mA ● ● ○
500mA ● ○ ○
350mA ○ ○ ○
1 2 3



Output Current	350mA	500mA	700mA	900mA
Output Power	2-15W	3-20W	4-27W	6-24W

Order Code	Input	Power	Output	Class	Dimmable		Notes
89027D	230V	Refer to table	Adjustable	⧈	YES	40	Push to DIM & 1-10V



Adjustable Constant Current DALI Dimmable Range

DALI & Push to DIM



89020L | DALI & Push to DIM | Dimmable

Adjustable output using DIP switches.

PUSH TO DIM · DALI DIMMABLE · 5 YEAR · IP20

LED Current Selection and Voltage Selection

	1	2	3	4	5
24V	○	●	●	●	●
12V	●	○	●	●	●
900mA	○	○	●	●	●
700mA	○	○	●	●	○
500mA	○	○	●	○	○
350mA	○	○	○	○	○



Output Current / Voltage	350mA	500mA	700mA	900mA	12V DC	24V DC
Output Power (Max.)	3,2-15W	4,5-20W	6,3-20W	8,1-20W	10W	20W



89025L | DALI & Push to DIM | Dimmable

Adjustable output using DIP switches.

PUSH TO DIM · DALI DIMMABLE · 5 YEAR · IP20

LED Current Selection

	1	2	3
450mA	●	●	●
400mA	○	●	●
350mA	●	○	●
300mA	○	○	●
250mA	○	●	○
200mA	●	○	○
150mA	○	○	○



Output Current / Voltage	150mA	200mA	250mA	300mA	350mA	400mA	450mA
Output Power (Max.)	1-8,4W	1,2-11,2W	1,5-14W	1,8-16,8W	2,1-19,6W	2,4-22,4W	2,7-25,2W

Order Code	Input	Power	Output	Class	Dimmable		Notes
89020L	230V	Refer to table	Adjustable	⧈	YES	40	DALI & Push to DIM
89025L	230V	Refer to table	Adjustable	⧈	YES	40	DALI & Push to DIM



Adjustable Constant Current DALI Dimmable Range

DALI, Push to DIM & 1-10V



89042L | DALI & Push to DIM | Dimmable

Adjustable output using DIP switches.

PUSH TO DIM · DALI DIMMABLE · 5 YEAR · new · IP20

LED Current Selection

1050mA ●●●●●
1000mA ●●●●○
950mA ●○●●●
900mA ●○●●○
800mA ●●●○○
700mA ●○●○○
600mA ●●○○○
500mA ●○○○○
350mA ○○○○○
1 2 3 4 5



Output Current	350mA	500mA	600mA	700mA	800mA	900mA	950mA	1000mA	1050mA
Output Power	3,5-19W	5-27W	6-32W	7-38W	8-42W	9-45W	9,5-45W	10-45W	10,5-44W



89050TLD | DALI, Push to DIM, 1-10V, TRIAC | Dimmable

Adjustable output using DIP switches.

PUSH TO DIM · DALI DIMMABLE · 1-10V DIMMABLE · TRIAC DIMMABLE · 3 YEAR · new · IP20

LED Current Selection

	1	2	3	4
180mA	●	●	●	●
200mA	●	●	●	●
250mA	●	●	●	●
300mA	●	●	●	○
350mA	●	●	○	●
400mA	●	●	○	○
450mA	●	○	●	●
500mA	●	○	●	○

	1	2	3	4
600mA	○	●	●	●
700mA	○	●	●	○
900mA	○	●	○	●
1000mA	○	●	○	○
1050mA	○	○	●	●
1200mA	○	○	●	○
1400mA	○	○	○	●
1500mA	○	○	○	○

Operation Current Selection

1 2 3 4 5



Output Current	180mA	200mA	250mA	300mA	350mA	400mA	450mA	500mA	600mA	700mA	900mA	1000mA	1050mA	1200mA	1400mA	1500mA
Output Power	8W	9W	12W	14W	16W	19W	21W	24W	28W	33W	43W	48W	50W	50W	50W	50W

Order Code	Input	Power	Output	Class	Dimmable		Notes
89042L	230V	Refer to table	Adjustable	⧈	YES	18	DALI, Push to DIM, 1-10V
89050TLD	230V	Refer to table	Adjustable	⧈	YES	36	DALI, Push to DIM, 1-10V, TRIAC Dimmer





24

Control & Dimming

Pages 757-764

RGB Controllers | Remote Controllers | Sensors

IP20 IP44

DIMMABLE 0/1-10V DIMMABLE DALI DIMMABLE PUSH TO DIM 2 YEAR 3 YEAR







22006 | 400W (LED) / 800W (Incandescent) | Infrared motion sensor



IP44

Detection Angle: 180°
Detection Distance: Max. 12m (<24°C)
Time Delay: 10sec ± 3sec to 15min ± 2 min (adjustable)
Ambient Light: <3-2000lux (adjustable)
Installation height: 1,8-2,5m





22010 | 200W (LED) / 500W (Incandescent) | Infrared switch motion sensor

Compatible with BS/EU Box.



IP20

Detection Angle: 160°
Detection Distance: Max. 9m (<24°C)
Time Delay: 10sec ± 3sec to 7min ± 2 min (adjustable)
Ambient Light: <3 ± 2000lux (adjustable)
Installation height: 1-1,8m



Order Code	Colour	Power	Input	Class		Notes
22006	White	400W (LED) / 800W (Incandescent)	230V	⧈	50	-
22010	White	200W (LED) / 500W (Incandescent)	230V	⧈	100	-

Infrared Ceiling Sensors



22008



22008 | 200W (LED) / 800W (Incandescent) | Recessed infrared motion sensor



IP20

Detection Angle: 360°
Detection Distance: Max. 6m (<24°C)
Time Delay: 10sec ± 3sec to 15min ± 2 min (adjustable)
Ambient Light: <3-2000lux (adjustable)
Installation height: 2,2-4m





22004 | 300W (LED) / 800W (Incandescent) | Surface infrared motion sensor



IP20

Detection Range: 360°
Detection Distance: Max. 6m (<24°C)
Time Delay: 10sec ± 3sec to 15min ± 2 min (adjustable)
Ambient Light: <3-2000lux (adjustable)
Installation height: 2,2-4m





22012 | 300W (LED) / 1200W (Incandescent) | Surface infrared motion sensor



IP20

Detection Angle: 360°
Detection Distance: Max. 6m (<24°C)
Time Delay: 10sec ± 3sec to 7min ± 2 min (adjustable)
Ambient Light: <3-2000lux (adjustable)
Installation height: 2-2,4m





22014 | 1000W (LED) / 2000W (Incandescent) | Surface infrared presence sensor

ON when detecting presence.



IP20

Detection Angle: 360°
Detection Distance: Max. 10m (<24°C)
Time Delay: 10sec ± 3sec to 30min ± 2 min (adjustable)
Ambient Light: <3-2000lux (adjustable)
Installation height: 2,2-6m



Order Code	Colour	Power	Input	Class		Notes
22008	White	200W (LED) / 800W (Incandescent)	230V	☐	100	-
22004	White	300W (LED) / 800W (Incandescent)	230V	☐	50	-
22012	White	300W (LED) / 1200W (Incandescent)	230V	☐	50	
22014	White	1000W (LED) / 2000W (Incandescent)	230V	☐	50	





89024D | 24V DC | RGB+W controller | 31W/channel | 24V output

DIMMABLE

2 YEAR

IP20

offer

RGB+W controller with 8 programs.
Maximum total output 124W (31Wx4).
Colour and timing can be changed by remote bell push.





89024E | 100-240V | 0/1-10V output | RGB+W controller

0/1-10V

DIMMABLE

2 YEAR

IP20

offer

RGB+W controller with 8 programs.
0/1-10V output for connecting devices controlled by 0/1-10V input.
Colour and timing can be changed by remote bell push.



Order Code	Input	Power	Output	Class	Dimmable		Notes
89024D	24V DC	4x31W	24V DC	III	YES	96	-
89024E	100-240V	-	0/1-10V	II	YES	96	-



12-24V 1-10V Controller



89010D | Dimmer controller for 12-24V | 180W@12V / 360W@24V | 1-10V | 1 channel

1-10V DIMMABLE

CE

2 YEAR

IP20



Order Code	Input	Power	Output	Class	Dimmable		Notes
89010D	12-24V DC	180W@12V / 360W@24V	12-24V	III	YES	64	Use 1-10V dimmer

12-24V DALI, Push to DIM Controller



89100L | DALI & Push to DIM Dimmer 12-24V | 75W@12V / 150W@24V | PWM dimming only

PUSH TO DIM

DALI DIMMABLE

CE

2 YEAR

DALI

IP20

DALI to PWM
- Built-in push dimming
- Dimming range 0,1-100%

PUSH TO DIM
- No status changing < 0,05sec
- Push ON/OFF 0,1-1sec
- Dimming up or down 1,5-10sec
- Set 100% brightness > 11sec

DALI
- DALI agreement includes 16 groups & 64 addresses
- DALI agreement can be divided into 16 scenarios



Order Code	Input	Power	Output	Class	Dimmable		Notes
89100L	12-24V DC	75W@12V / 150W@24V	12-24V	II	YES	200	DALI & Push to DIM

DALI & Push to DIM To TRIAC



89104LT | DALI / Push to DIM to TRIAC Dimmer | 100W@110V / 200W@240V

PUSH TO DIM

DALI DIMMABLE

new

CE

3 YEAR

DALI

IP20



Order Code	Input	Power	Output	Dimmable		Notes
89104LT	100-240V	100W@110V / 200W@240V	100-240V	YES	50	-



12-36V RGB+W Repeater



89302 | 12-36V DC | Constant voltage RGB+W data repeater | 4 channels x 5A | PWM dimming only

DIMMABLE

2 YEAR

IP20

Repeats the signal when dimming constant voltage fittings e.g. LED strips.



Order Code	Input	Power	Output	Class	Dimmable		Notes
89302	12-36V DC	60W@12V / 120W@24V	12-36V	III	YES	100	-

350mA Signal Repeater



89302A | 12-36V DC | 350mA RGB+W constant current data repeater | 4 channels x 4,2-12,6W | PWM dimming only

DIMMABLE

2 YEAR

IP20

Repeats the signal when dimming constant current 350mA fittings e.g. LED spots.



Order Code	Input	Power	Output	Class	Dimmable		Notes
89302A	12-36V DC	4x4,2-12,6W	350mA	III	YES	100	-

12-36V DALI & Push to DIM Dimmer



89100LP | DALI & Push to DIM Dimmer 12-36V | 4x60W@12V / 4x120W@24V / 4x180W@36V | 4 channels x 5A

PUSH TO DIM

DALI DIMMABLE

3 YEAR

DALI

new

IP67



Order Code	Input	Power	Output	Class	Dimmable		Notes
89100LP	12-36V DC	4x60W@12V / 4x120W@24V / 4x180W@36V	12-36V		YES	18	DALI & Push to DIM



Microwave Motion Sensor



22000 | 300W | Microwave motion sensor

Can be installed inside fittings.

2 YEAR

IP20

- Can be installed inside fittings
- Adjustable sensitivity 20%-100%
- ON TIME 5s-30mins
- Daylight sensor 2-50lux



Order Code	Input	Power	Output	Class		Notes
22000	230V	300W	230V		100	-

Day/Night Photocell Sensor



22020 | 1000W | Photocell Day/Night Sensor | Plastic

Ambient Light:<5-15lux.

2 YEAR

IP44

Automatic day/night operation.



Order Code	Colour	Input	Power	Output	Class		Notes
22020	Black	100-240V	1000W	100-240V		50	-



Remote Controllers



20030 | 12-24V DC | Constant voltage wireless dimmer | 3 channels x 3A

DIMMABLE

2 YEAR

IP20

Remote controller for dimming any constant voltage 12-24V LED fitting including LED strips, LED lamps, LED modules. 50 meters range, 2 memory settings, dimming by touch.

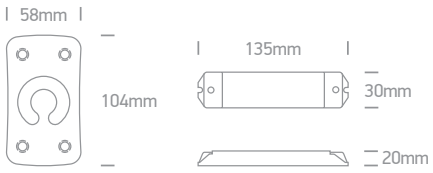



20032 | 12-24V DC | Variable colour temperature controller & dimmer | 2 channels x 3A

DIMMABLE

2 YEAR

IP20

Remote controller for changing colour temperature from daylight to extra warm white. Suitable for use with LED strips 7835/DEW. 50 meters range, includes dimmer control and programme mode.

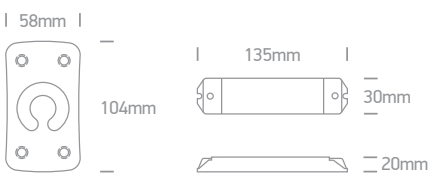

Order Code	Colour	Input	Power	Output	Class	Dimmable		Notes
20030	White	12-24V DC	36W/ch@12V 72W/ch@24V	12-24V DC	III	YES	50	-
20032	White	12-24V DC	36W/ch@12V 72W/ch@24V	12-24V DC	III	YES	50	-



Remote Controllers
RGB & RGB+W



20034 | 12-24V DC | RGB wireless controller & dimmer | 3 channels x 3A

DIMMABLE

2 YEAR

IP20

Remote controller for changing colours (RGB). Suitable for use with LED strips 7830/RGB. 50 meters range, includes dimmer control and programme modes.

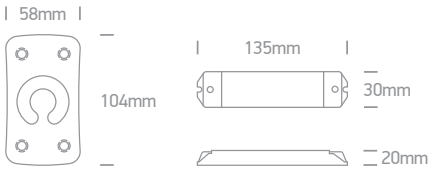



20036 | 12-24V DC | RGB+W wireless controller & dimmer | 4 channels x 3A

DIMMABLE

2 YEAR

IP20

Remote controller for changing colours (RGB+W). Suitable for use with LED strips 7830/RGBW. 50 meters range, includes dimmer control and programme modes.

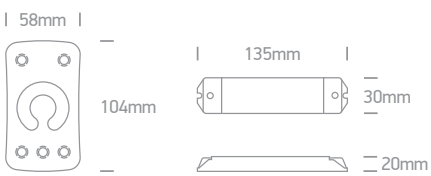

Order Code	Colour	Input	Power	Output	Class	Dimmable		Notes
20034	White	12-24V DC	36W/ch@12V 72W/ch@24V	12-24V DC	III	YES	50	-
20036	White	12-24V DC	36W/ch@12V 72W/ch@24V	12-24V DC	III	YES	50	-


save energy now!
ecolamp
10,5w LED
shrink the energy bills!
ecolamp
3 Step dimming LED
12w LED
one LIGHT
give me light!
ecolamp
5,5w LED
one
shrink the energy bills!
ecolamp
7,5w LED
one
ecolamp
4w LED
G9 LED
Cool white
7103ALG/C
90% savings
eco lamp
4w LED
one
ecolamp
6w LED
G9 LED
Cool white
7106ALG/C
550 lumens



25

Lamps

Pages 767-802

COB LED | SMD LED | MR11 | MR16 | R111 | G9 | GU5,3 | GU10
PAR38 | GX53 | E27 | E14 | B22

LED FLUO

DIMMABLE TRIAC DIMMABLE 80 CRI 85 CRI 2 YEAR 3 YEAR







7101AL/W

G4 Lamp



7101AL | 2W | COB LED | G4 | Silicone

LED 80 CRI

CE 2 YEAR





Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Dimmable	
7101AL/W	G4	Warm white	3000K	2W	200lm	12V AC/DC	NO	100



G9 Lamps



7106GPH | 60W | G9 | Dimmable | PHILIPS

HALO · DIMMABLE · CE · 2 YEAR · offer







7102LG | 2W | COB LED | G9

LED · 80 CRI · CE · 2 YEAR · offer







7103LG | 2,5W | SMD LED | G9

LED · 80 CRI · CE · 2 YEAR · offer





Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Dimmable	
7106GPH	G9	Extra warm white	2700K	60W	-	230V	YES	100
7102LG/W	G9	Warm white	3000K	2W	100lm	230V	NO	200
7103LG/W	G9	Warm white	3000K	2,5W	190lm	230V	NO	200



7103ALG/C

7106ALG/C

7109ALG/W

G9 LED



7103ALG | 4W | SMD LED | G9

LED 80 CRI

CE 2 YEAR







7106ALG | 6W | SMD LED | G9

LED 80 CRI

CE 2 YEAR







7109ALG | 9W | SMD LED | G9

LED 80 CRI

CE 2 YEAR





Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Dimmable	
7103ALG/C	G9	Cool white	4000K	4W	400lm	230V	NO	100
7103ALG/W	G9	Warm white	3000K	4W	400lm	230V	NO	100
7106ALG/C	G9	Cool white	4000K	6W	600lm	230V	NO	100
7106ALG/W	G9	Warm white	3000K	6W	600lm	230V	NO	100
7109ALG/C	G9	Cool white	4000K	9W	900lm	230V	NO	100
7109ALG/W	G9	Warm white	3000K	9W	900lm	230V	NO	100



G9 LED Dimmable & CCT Variable



7103ALGD | 3,5W | SMD LED | G9 | Dimmable

LED 80 CRI TRIAC DIMMABLE

CE 2 YEAR







7103ALGT | 3W | SMD LED | G9 | 3-Step dimming

LED 80 CRI 3-STEP DIMMABLE

CE 2 YEAR

offer









7106ALGD | 5W | SMD LED | G9 | Dimmable

LED 80 CRI TRIAC DIMMABLE

CE 2 YEAR







7103ALG/DW | 3W | SMD LED | G9 | Variable colour temperature

LED 80 CRI

CE 2 YEAR

offer







Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Dimmable	
7103ALGD/W	G9	Warm white	3000K	3,5W	300lm	230V	YES	100
7103ALGT/W	G9	Warm white	3000K	3W	250lm	230V	YES	100
7106ALGD/W	G9	Warm white	3000K	5W	450lm	230V	YES	100
7103ALG/DW	G9	Warm white-Cool white-Daylight	3000K-4000K-6000K	3W	250lm	230V	NO	100



7201G/D

MR11 GU10



7201G | 2W | COB LED | MR11 | GU10

LED 80 CRI

CE 2 YEAR

offer







Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
7201G/D	GU10	Daylight	6000K	2W	110lm	30°	230V	NO	100

MR16 GU10 LED



7303G | 3W | LED | MR16 | GU10

LED 75 CRI | CE 2 YEAR | offer









7304G | 3W | LED | MR16 | GU10

LED 75 CRI | CE 2 YEAR | offer









7304AG | 4,5W | LED | MR16 | GU10

LED 75 CRI | CE 2 YEAR | offer









7305AG | 5,5W | SMD LED | MR16 | GU10

LED 80 CRI | CE 2 YEAR | offer









7308G | 7W | LED | MR16 | GU10

LED 80 CRI | CE 2 YEAR | offer







Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
7303G/D/30	GU10	Daylight	6000K	3W	-	30°	100-240V	NO	100
7304G/D/30	GU10	Daylight	6000K	3W	-	30°	100-240V	NO	100
7304AG/D/36	GU10	Daylight	6000K	4,5W	375lm	36°	100-240V	NO	100
7305AG/W/38	GU10	Warm white	3000K	5,5W	380lm	38°	230V	NO	100
7308G/D/45	GU10	Daylight	6000K	7W	330lm	45°	100-240V	NO	100



MR16 Colours


7301/GR

7301 | 1,5W | LED | MR16 | GU5,3

LED

CE 2 YEAR

offer








7301/Y

7301 | 1,5W | LED | MR16 | GU5,3

LED

CE 2 YEAR

offer









7306CG/BL | 5W | COB LED | MR16 | GU10

LED

CE 2 YEAR







Order Code	Lampholder	Light Colour	Watts	Input	Dimmable	
7301/GR	GU5,3	Green	1,5W	12V AC	NO	100
7301/Y	GU5,3	Yellow	1,5W	12V AC	NO	100
7306CG/BL	GU10	Blue	5W	230V	NO	100

MR16 Wide Beam





7307BG | 7W | SMD LED | MR16 | GU10

LED 80 CRI

CE 2 YEAR







Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
7307BG/C	GU10	Cool white	4000K	7W	550lm	90°	230V	NO	100
7307BG/W	GU10	Warm white	3000K	7W	550lm	90°	230V	NO	100



7306CG/W

7306CBG/W

MR16 GU10 COB LED



7306CG | 6W | COB LED | MR16 | GU10

LED 85 CRI

CE 3 YEAR









7306CBG | 6W | COB LED | MR16 | GU10

Black body.

LED 85 CRI

CE 3 YEAR







Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
7306CG/C	GU10	Cool white	4000K	6W	520lm	60°	230V	NO	100
7306CG/W	GU10	Warm white	3000K	6W	500lm	60°	230V	NO	100
7306CG/EW	GU10	Extra warm white	2700K	6W	480lm	60°	230V	NO	100
7306CBG/W	GU10	Warm white	3000K	6W	500lm	60°	230V	NO	100



Honeycomb MR16 GU10 COB LED



7306CHG | 6W | COB LED | MR16 | GU10 | Honeycomb

LED 85 CRI

new DARK LIGHT

CE 3 YEAR







Dimmable MR16 GU10 COB LED



7306CGD | 6W | COB LED | MR16 | GU10 | Dimmable

LED 85 CRI TRIAC DIMMABLE

CE 3 YEAR







Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
7306CHG/W	GU10	Warm white	3000K	6W	330lm	60°	230V	NO	100
7306CGD/C	GU10	Cool white	4000K	6W	520lm	60°	230V	YES	100
7306CGD/W	GU10	Warm white	3000K	6W	500lm	60°	230V	YES	100
7306CGD/EW	GU10	Extra warm white	2700K	6W	480lm	60°	230V	YES	100



Dimmable MR16 GU10 LED



7306KGD | 6,5W | COB LED | MR16 | GU10 | Dimmable

LED · 80 CRI · TRIAC DIMMABLE · CE · 2 YEAR

offer









7308GD | 7W | LED | MR16 | GU10 | Dimmable

LED · TRIAC DIMMABLE · CE · 2 YEAR

offer







Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
7306KGD/C/45	GU10	Cool white	4000K	6,5W	500lm	45°	230V	YES	50
7308GD/D/45	GU10	Daylight	6000K	7W	330lm	45°	230V	YES	100



7306GC/W

7306GCD/EW

Full Spectrum CRI97



7306GC | 7W | COB LED | MR16 | GU10 — Full spectrum CRI97.

LED 97 CRI

CE 2 YEAR









7306GCD | 7,5W | COB LED | MR16 | GU10 | Dimmable — Full spectrum CRI97.

LED 97 CRI TRIAC DIMMABLE

CE 2 YEAR







Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
7306GC/W	GU10	Warm white	3000K	7W	500lm	36°	230V	NO	100
7306GCD/EW	GU10	Extra warm white	2700K	7,5W	500lm	36°	230V	YES	100



MR16 LED
Dimmable



7312M/AL/W | 12W | COB LED | 350mA | Dimmable

LED module suitable for MR16 fittings.

LED · 80 CRI · DIMMABLE · QUICK FIX · CE · 3 YEAR



Optional rings.
Order code 050136/W
& 050136/B.





7312M/D/30 | 4x3W | CREE LED | 700mA | Dimmable

LED module suitable for MR16 fittings.

LED · 75 CRI · DIMMABLE · QUICK FIX · CE · 2 YEAR

offer





Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input		Dimmable		Notes
7312M/AL/W	Warm white	3000K	12W	850lm	38°	350mA	40cm	YES	100	Requires 350mA driver
7312M/D/30	Daylight	6000K	4x3W	600lm	30°	700mA	-	YES	100	Requires 700mA driver

Dim To Warm GU10
Dimmable

2800K

2200K



7306GDV | 5,5W | SMD 2835 | MR16 | GU10 | Dim to warm

Leading & Trailing edge dimmer.

LED 90 CRI DIMMABLE

CE 2 YEAR

new







Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
7306GDV/EWW	GU10	Extra warm white	2800K-2200K	5,5W	350lm	38°	230V	YES	100



PAR30 COB LED



7310H/C

7310H/C | 10W | COB LED | PAR30 | E27

LED 90 CRI

CE 2 YEAR









7310H/W

7310H/W | 10W | COB LED | PAR30 | E27

LED 90 CRI

CE 2 YEAR







Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
7310H/C	E27	Cool white	4000K	10W	750lm	40°	230V	NO	20
7310H/W	E27	Warm white	3000K	10W	750lm	40°	230V	NO	20



R111 GU10 LED

7315GB/W/45



7315G | 13W | SMD LED | R111 | GU10

LED 80 CRI

CE 2 YEAR









7315GB | 13W | LED | R111 | GU10 — Black body.

LED 80 CRI

CE 2 YEAR







Dimmable R111 GU10 LED



7315GD | 15W | SMD LED | R111 | GU10 | Dimmable

LED 80 CRI TRIAC DIMMABLE

CE 2 YEAR







Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
7315G/C/45	GU10	Cool white	4000K	13W	1250lm	45°	230V	NO	20
7315G/W/45	GU10	Warm white	3000K	13W	1250lm	45°	230V	NO	20
7315GB/C/45	GU10	Cool white	4000K	13W	1250lm	45°	230V	NO	20
7315GB/W/45	GU10	Warm white	3000K	13W	1250lm	45°	230V	NO	20
7315GD/W/45	GU10	Warm white	3000K	15W	1250lm	45°	230V	YES	20



10106NA/W/D/35



10106NA/AL/D/35

Dimmable R111 LED



10106NA/W | 6x1W@350mA / 6x3W@700mA | LED | R111 | Dimmable

LED | DIMMABLE | 85 CRI | QUICK FIX | CE | 2 YEAR

offer



LED module suitable for R111 fittings.



Use driver 89030A. (non-dimmable).





10106NA/AL | 6x1W@350mA / 6x3W@700mA | LED | R111 | Dimmable

LED | DIMMABLE | 85 CRI | QUICK FIX | CE | 2 YEAR

offer



LED module suitable for R111 fittings.



Use driver 89030A. (non-dimmable).



Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
10106NA/W/D/35	Daylight	6000K	6x1W/6x3W	1100lm@3W	35°	350mA/700mA	YES	20
10106NA/AL/D/35	Daylight	6000K	6x1W/6x3W	1100lm@3W	35°	350mA/700mA	YES	20
10106NA/AL/W/35	Warm white	3000K	6x1W/6x3W	1100lm@3W	35°	350mA/700mA	YES	20



7524D/W/30

7512D/D/30

Dimmable R111 LED



7512D | 12x1W | CREE LED | 350mA | R111 | Dimmable

Requires 350mA driver.

LED | DIMMABLE | 80 CRI | QUICK FIX | CE | 2 YEAR

offer



LED module suitable for R111 fittings.



Use driver 89015. (non-dimmable).





7524D | 12x2W | CREE LED | 500mA | R111 | Dimmable

Requires 500mA driver.

LED | DIMMABLE | 80 CRI | QUICK FIX | CE | 2 YEAR

offer



LED module suitable for R111 fittings.



Use driver 89030C. (non-dimmable).





7524BD | 12x2W | LED | 500mA | R111 | Dimmable

Requires 500mA driver.

LED | DIMMABLE | 80 CRI | QUICK FIX | CE | 2 YEAR

offer



LED module suitable for R111 fittings.



Use driver 89030C. (non-dimmable).



Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
7512D/D/30	Daylight	6000K	12x1W	710lm	30°	350mA	YES	40
7512D/W/30	Warm white	3000K	12x1W	560lm	30°	350mA	YES	40
7524D/W/30	Warm white	3000K	12x2W	830lm	30°	500mA	YES	40
7524BD/W/30	Warm white	3000K	12x2W	860lm	30°	500mA	YES	20



12V R111 G53 LED



7513A | 13W | SMD LED | R111 | G53

LED 80 CRI

CE 2 YEAR

offer







Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
7513A/W	G53	Warm white	3000K	13W	850lm	24°	12V AC/DC	NO	24



9F01/D

9F01 | 1,5W | LED | GX53

LED

CE 2 YEAR

offer





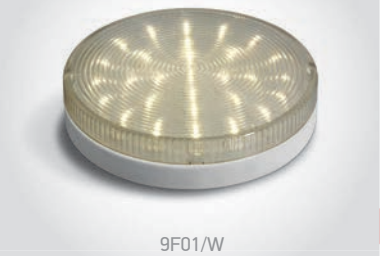

9F01/W

9F01 | 1,5W | LED | GX53

LED

CE 2 YEAR

offer





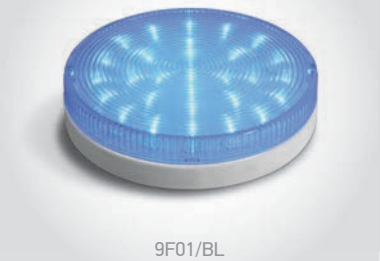

9F01/BL

9F01 | 1,5W | LED | GX53

LED

CE 2 YEAR

offer







9F07L | 7W | SMD LED | GX53

LED 80 CRI

CE 2 YEAR







9F07LD | 7W | SMD LED | GX53 | Dimmable

LED 80 CRI TRIAC DIMMABLE

CE 2 YEAR





Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Dimmable	
9F01/D	GX53	Daylight	6000K	1,5W	-	230V	NO	100
9F01/W	GX53	Warm white	3000K	1,5W	-	230V	NO	100
9F01/BL	GX53	Blue	-	1,5W	-	230V	NO	100
9F07L/C	GX53	Cool white	4000K	7W	600lm	230V	NO	100
9F07L/W	GX53	Warm white	3000K	7W	600lm	230V	NO	100
9F07LD/C	GX53	Cool white	4000K	7W	480lm	230V	YES	100
9F07LD/W	GX53	Warm white	3000K	7W	480lm	230V	YES	100



9G10M/EW/E

9G09/RGBW

Classic A60 Special Functions



9G10L | 10W | SMD LED | E27 | Night operating

ON when < 5lux, OFF when >300lux

LED 80 CRI CE 2 YEAR

offer



120mm

60mm

Automatic day/night operation



9G10M | 10W | SMD LED | E27 | Microwave motion sensor

Operates only when <5lux

LED 80 CRI CE 2 YEAR



120mm

60mm



9G10V | 10W | SMD LED | E27 | 3-Step colour temperature changing

LED 80 CRI CE 2 YEAR

offer



ON OFF ON OFF ON

2700K 4000K 6000K

120mm

60mm



9G09/RGBW | 9W | SMD LED | E27 | RGBW + Remote

LED 80 CRI DIMMABLE CE 2 YEAR



Supplied with remote control.

110mm

60mm

Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Dimmable	
9G10L/EW/E	E27	Extra warm white	2700K	10W	800lm	230V	NO	100
9G10M/EW/E	E27	Extra warm white	2700K	10W	800lm	230V	NO	100
9G10V/E	E27	Extra warm white - Cool white - Daylight	2700K - 4000K - 6000K	10W	800lm	230V	NO	100
9G09/RGBW	E27	RGB + Warm white	RGB + 3000K	9W	720lm (3000K)	100-240V	YES	100





Classic Lamps LED



9G07B | 7W | SMD LED | E27

LED 80 CRI

CE 2 YEAR







9G12B | 10W | SMD LED | E27

LED 80 CRI

CE 2 YEAR







9G12BD | 10,5W | SMD LED | E27 | Dimmable

LED 80 CRI TRIAC DIMMABLE

CE 2 YEAR







9G12D | 12W | SMD LED | E27 | 3-Step dimming | Dimmable

LED 80 CRI DIMMABLE

CE 2 YEAR

offer





Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Dimmable	
9G07B/W/E	E27	Warm white	3000K	7W	600lm	230V	NO	50
9G07B/EW/E	E27	Extra warm white	2700K	7W	570lm	230V	NO	50
9G12B/C/E	E27	Cool white	4000K	10W	1055lm	230V	NO	100
9G12B/W/E	E27	Warm white	3000K	10W	1010lm	230V	NO	100
9G12B/EW/E	E27	Extra warm white	2700K	10W	980lm	230V	NO	100
9G12BD/EW/E	E27	Extra warm white	2700K	10,5W	850lm	230V	YES	50
9G12D/EW/E	E27	Extra warm white	2700K	12W	1050lm	230V	YES	100



9G80N/C/LE

High Power LED



9G80N | 80W | SMD 2835 | E40

LED 80 CRI

CE 2 YEAR



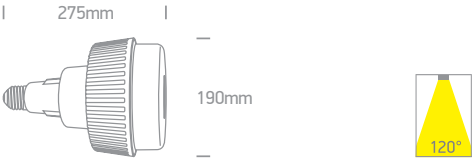

Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
9G80N/C/LE	E40	Cool white	4000K	80W	8800lm	120°	230V	NO	4

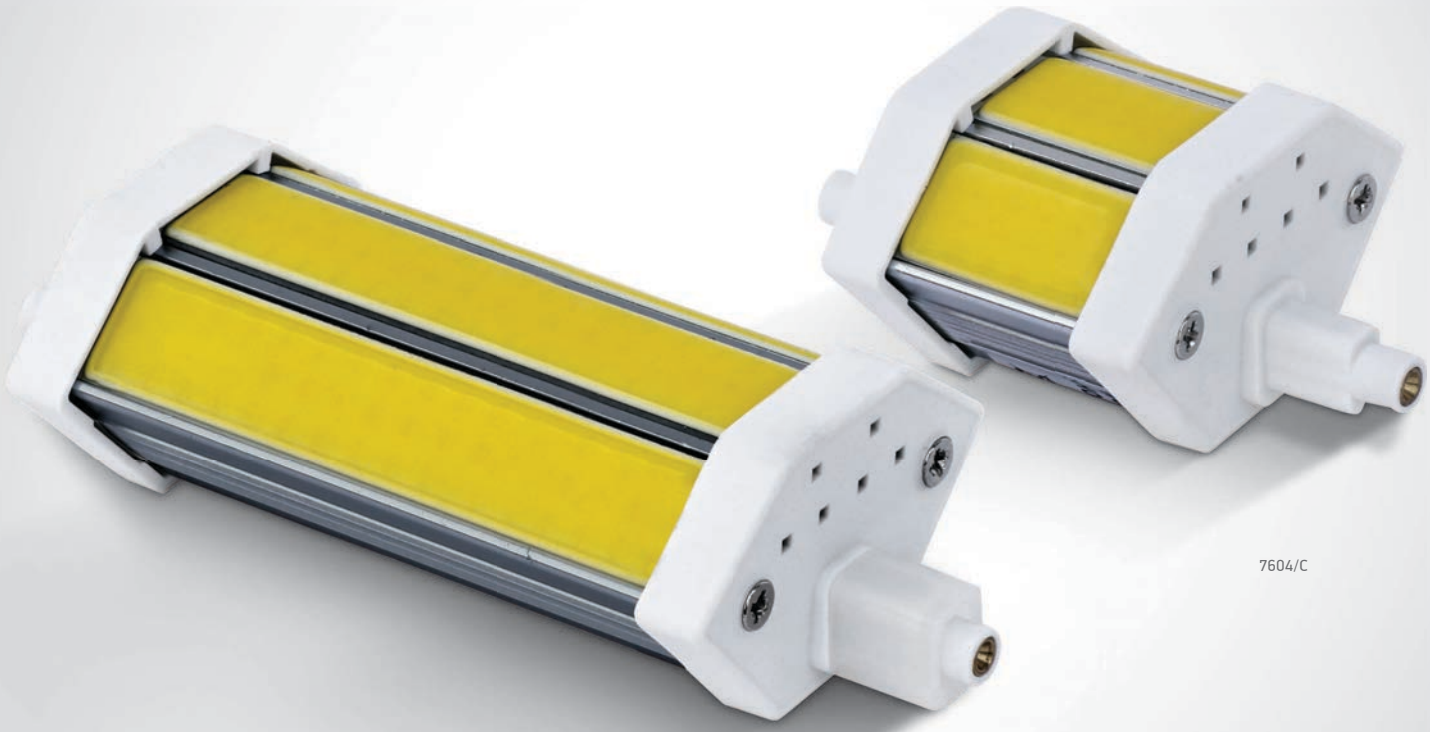

R7s LED



7604 | 4,5W | COB LED | R7s — Halogen 78mm replacement.

LED 80 CRI

CE 2 YEAR

offer









7610A | 10W | COB LED | R7s — 150W HQI replacement.

LED 80 CRI

CE 2 YEAR

offer







Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
7604/C	R7s	Cool white	4000K	4,5W	350lm	180°	100-240V	NO	100
7610A/C	R7s	Cool white	4000K	10W	850lm	180°	100-240V	NO	50



9T05RD/A/E

9G04RAD/A/E

Retro Amber Lamps LED
Dimmable



9G03RAD | 6,5W | LED | E27 | Dimmable

LED 80 CRI TRIAC DIMMABLE

CE 2 YEAR







9T05RD | 5W | LED | T28 | E27 | Dimmable

LED 80 CRI TRIAC DIMMABLE

CE 2 YEAR







9G04RAD | 7W | LED | E27 | Dimmable

LED 80 CRI TRIAC DIMMABLE

CE 2 YEAR







9G06RD | 7W | LED | G125 | E27 | Dimmable

LED 80 CRI TRIAC DIMMABLE

CE 2 YEAR





Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Dimmable	
9G03RAD/A/E	E27	Amber	2200K	6,5W	550lm	230V	YES	100
9T05RD/A/E	E27	Amber	2200K	5W	380lm	230V	YES	100
9G04RAD/A/E	E27	Amber	2200K	7W	520lm	230V	YES	50
9G06RD/A/E	E27	Amber	2200K	7W	520lm	230V	YES	20



Retro Lamps LED



9C02R | 2W | LED | E14

LED 80 CRI

CE 2 YEAR



95mm

35mm



9G03R | 4W | LED | E27

LED 80 CRI

CE 2 YEAR



105mm

60mm



9G06R | 6W | LED | G125 | E27

LED 80 CRI

CE 2 YEAR



175mm

125mm



9G06RD | 5W | LED | G125 | E27 | Dimmable

LED 80 CRI TRIAC DIMMABLE

CE 2 YEAR



175mm

125mm

Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Dimmable	
9C02R/EW/SE	E14	Extra warm white	2700K	2W	250lm	230V	NO	100
9G03R/EW/E	E27	Extra warm white	2700K	4W	470lm	230V	NO	100
9G06R/EW/E	E27	Extra warm white	2700K	6W	800lm	230V	NO	20
9G06RD/EW/E	E27	Extra warm white	2700K	5W	600lm	230V	YES	20



Decorative Lamps



9G04A | 4W | LED | E27

Decorative lamps.

LED

CE 2 YEAR





9G04H/A

9G04H | 4W | LED | E27

Decorative lamps.

LED

CE 2 YEAR



9G04H/DC





9G02H/RGB | 2W | LED | E27

Decorative lamps.

LED

CE 2 YEAR



Order Code	Lampholder	Glass Colour	Watts	Input	Dimmable	
9G04A/DC	E27	Dark chrome	4W	230V	NO	50
9G04H/A	E27	Amber	4W	230V	NO	25
9G04H/DC	E27	Dark chrome	4W	230V	NO	25
9G02H/RGB	E27	RGB	2W	230V	NO	50



Decorative Lamps



9G04F | 4W | LED | E27

Decorative lamps.

LED

CE 2 YEAR





9G08B | 8W | LED | E27

Decorative lamps.

LED

CE 2 YEAR





9G08C/A

9G08C | 8W | LED | E27

Decorative lamps.

LED

CE 2 YEAR



9G08C/DC





9G08K/A

9G08K | 8W | LED | E27

Decorative lamps.

LED

CE 2 YEAR



9G08K/DC



Order Code	Lampholder	Glass Colour	Watts	Input	Dimmable	
9G04F/DC	E27	Dark chrome	4W	230V	NO	6
9G08B/DC	E27	Dark chrome	8W	230V	NO	4
9G08C/A	E27	Amber	8W	230V	NO	6
9G08C/DC	E27	Dark chrome	8W	230V	NO	6
9G08K/A	E27	Amber	8W	230V	NO	6
9G08K/DC	E27	Dark chrome	8W	230V	NO	6



Decorative Lamps



9G04E/A

9G04E | 4W | LED | E27

Decorative lamps.

LED

CE 2 YEAR





9G08D/A

9G08D | 8W | LED | E27

Decorative lamps.

LED

CE 2 YEAR





9G08E/A

9G08E | 8W | LED | E27

Decorative lamps.

LED

CE 2 YEAR



Order Code	Lampholder	Glass Colour	Watts	Input	Dimmable	
9G04E/A	E27	Amber	4W	230V	NO	8
9G08D/A	E27	Amber	8W	230V	NO	6
9G08E/A	E27	Amber	8W	230V	NO	8

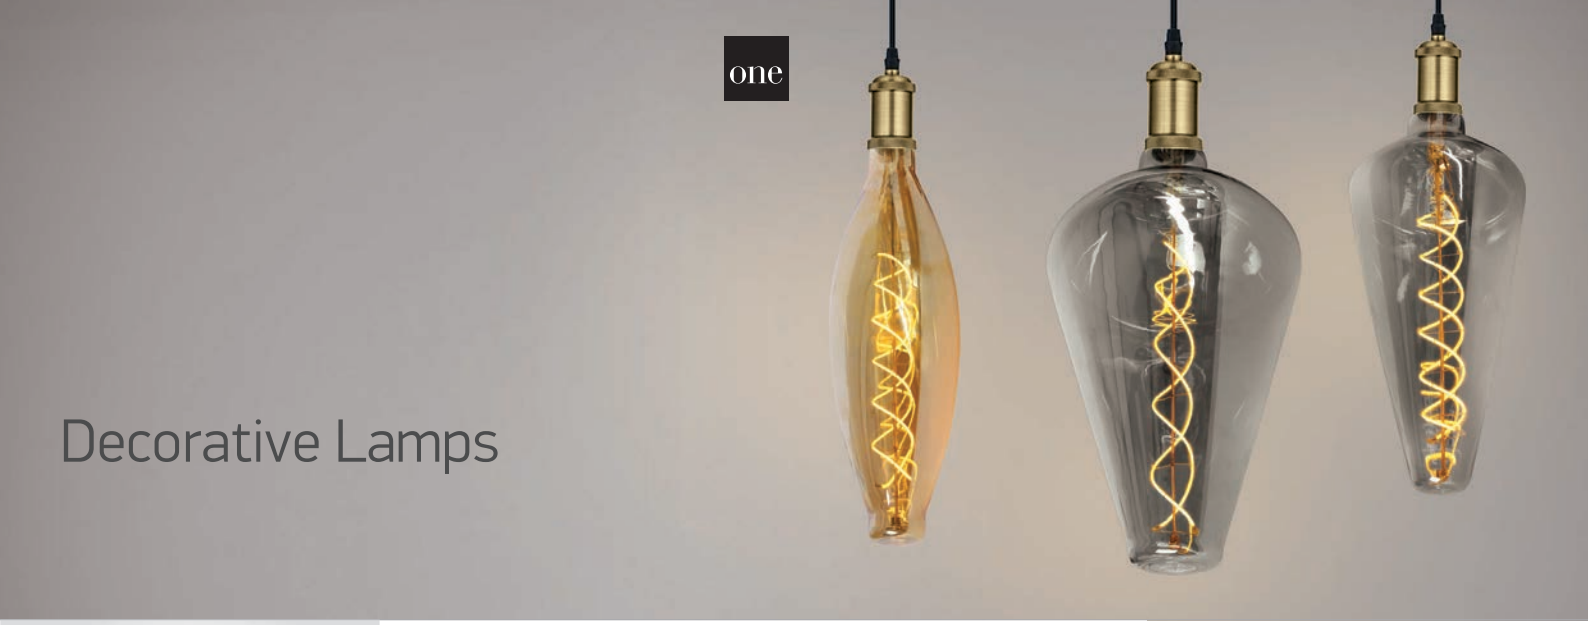

Decorative Lamps



9G04D/DC

9G04D | 4W | LED | E27

Decorative lamps.

LED

CE 2 YEAR





9G04E/DC

9G04E | 4W | LED | E27

Decorative lamps.

LED

CE 2 YEAR





9G08D/DC

9G08D | 8W | LED | E27

Decorative lamps.

LED

CE 2 YEAR





9G08E/DC

9G08E | 8W | LED | E27

Decorative lamps.

LED

CE 2 YEAR



Order Code	Lampholder	Glass Colour	Watts	Input	Dimmable	
9G04D/DC	E27	Dark chrome	4W	230V	NO	10
9G04E/DC	E27	Dark chrome	4W	230V	NO	8
9G08D/DC	E27	Dark chrome	8W	230V	NO	6
9G08E/DC	E27	Dark chrome	8W	230V	NO	8

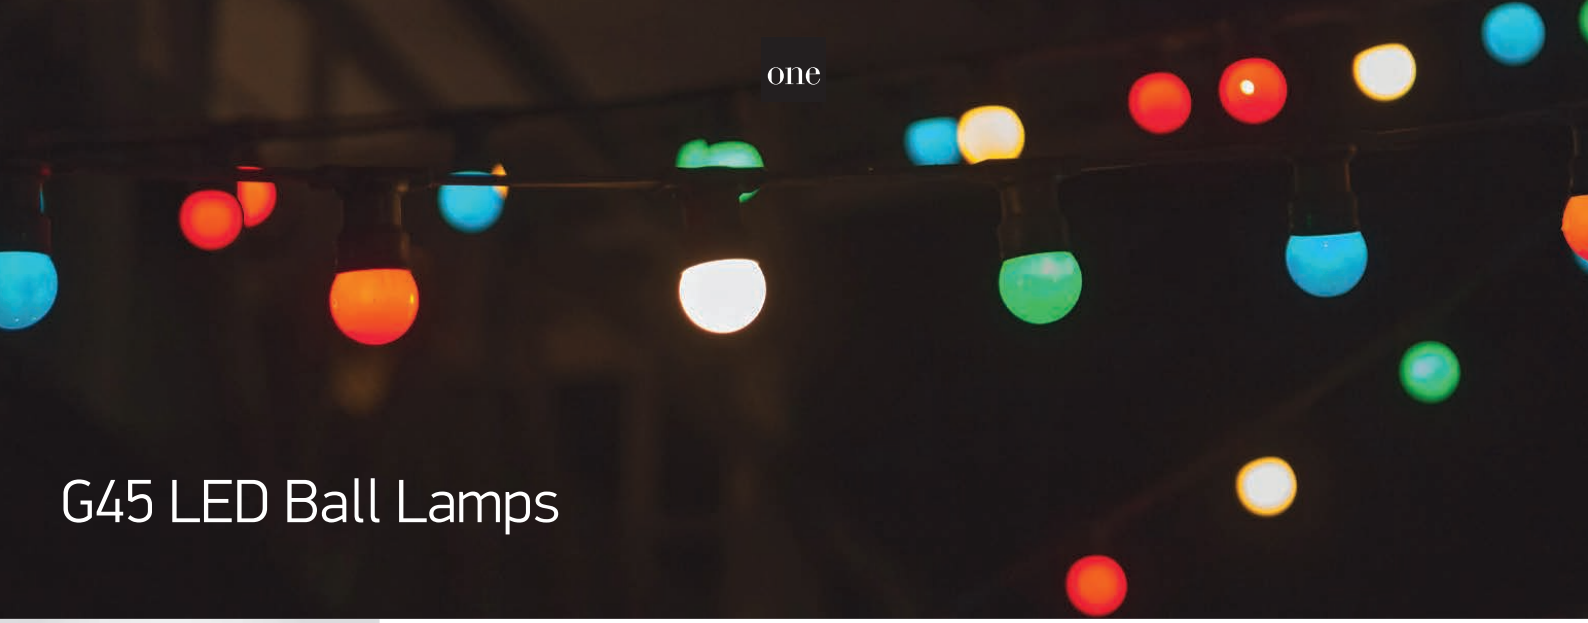

G45 LED Ball Lamps



9G01/GR/E | 0,5W | SMD LED | G45 | E27

LED

CE 2 YEAR

offer







9G01/BL/B | 0,5W | SMD LED | G45 | B22

LED

CE 2 YEAR

offer







9G01/GR/B | 0,5W | SMD LED | G45 | B22

LED

CE 2 YEAR

offer







9G01/R/B | 0,5W | SMD LED | G45 | B22

LED

CE 2 YEAR

offer





Order Code	Lampholder	Light Colour	Watts	Input	Dimmable	
9G01/GR/E	E27	Green	0,5W	230V	NO	200
9G01/BL/B	B22	Blue	0,5W	230V	NO	200
9G01/GR/B	B22	Green	0,5W	230V	NO	200
9G01/R/B	B22	Red	0,5W	230V	NO	200



Spiral Colour CFL E27

9S13/GR/E

9S23/Y/E



9S13/GR/E | 13W | E27

FLUO

CE 2 YEAR

offer



121mm

43mm



9S23/Y/E | 23W | E27

FLUO

CE 2 YEAR

offer



152mm

60mm

Order Code	Lampholder	Light Colour	Watts	Input	Dimmable	
9S13/GR/E	E27	Green	13W	230V	NO	100
9S23/Y/E	E27	Yellow	23W	230V	NO	100



9922L/D

9940L/W

T9C LED



9922L | 11W | LED | T9 | G10Q

LED 80 CRI

CE 2 YEAR

offer





205mm



9940L | 20W | LED | T9 | G10Q

LED 80 CRI

CE 2 YEAR

offer





375mm

Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Dimmable	
9922L/D	G10Q	Daylight	6000K	11W	1000lm	230V	NO	20
9922L/W	G10Q	Warm white	3000K	11W	1000lm	230V	NO	20
9940L/W	G10Q	Warm white	3000K	20W	1800lm	230V	NO	10

T8 LED Tubes

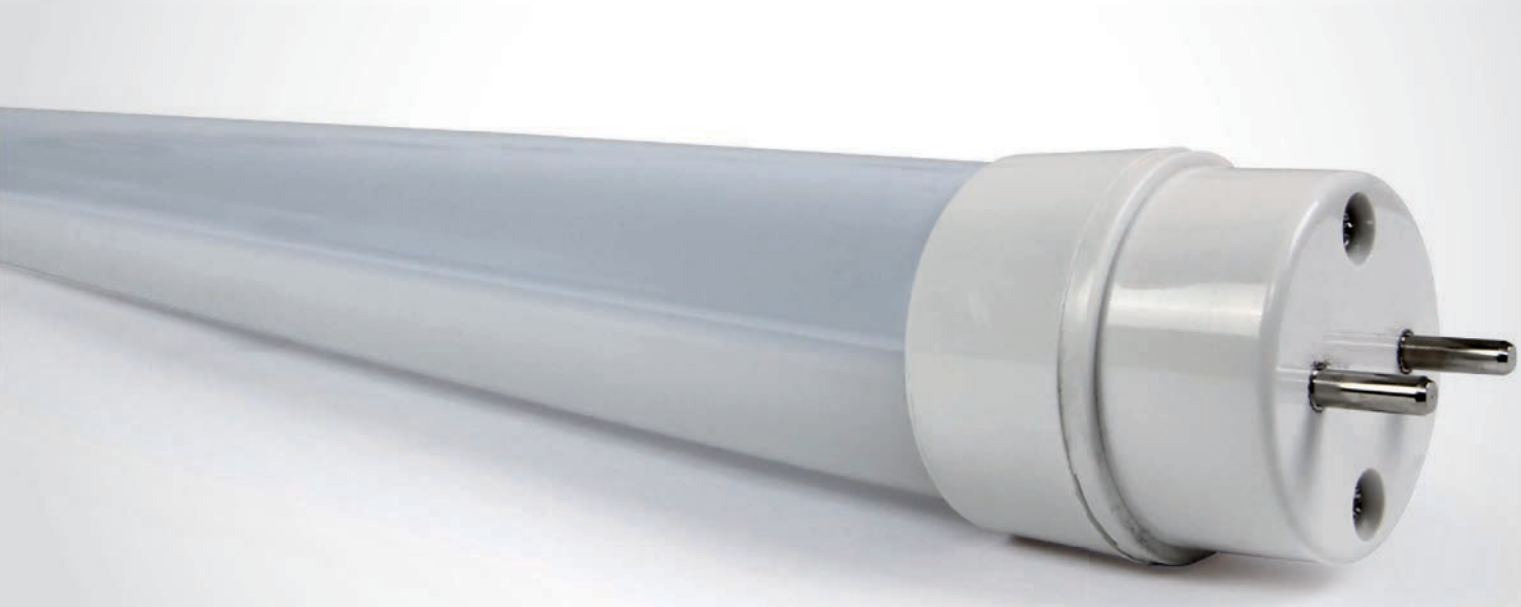

9021LB/W



9021LB | 21W | SMD LED | T8 | Nonrotating

LED 80 CRI

CE 2 YEAR

offer









9026L | 25W | SMD LED | T8 | Rotating

LED 80 CRI

CE 2 YEAR

offer







Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
9021LB/W	G13	Warm white	3000K	21W	1650lm	120°	230V	NO	20
9026L/W	G13	Warm white	3000K	25W	2200lm	180°	230V	NO	20

T8 LED Tubes Glass





9007L | 7W | SMD 2835 | T8 | Glass

LED 80 CRI

CE 2 YEAR









9009L | 9W | SMD 2835 | T8 | Glass

LED 80 CRI

CE 2 YEAR







Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
9007L/D	G13	Daylight	6500K	7W	700lm	320°	230V	NO	25
9009L/D	G13	Daylight	6500K	9W	1000lm	320°	230V	NO	25
9009L/C	G13	Cool white	4000K	9W	1000lm	320°	230V	NO	25
9009L/W	G13	Warm white	3000K	9W	1000lm	320°	230V	NO	25

T8 LED Tubes Glass

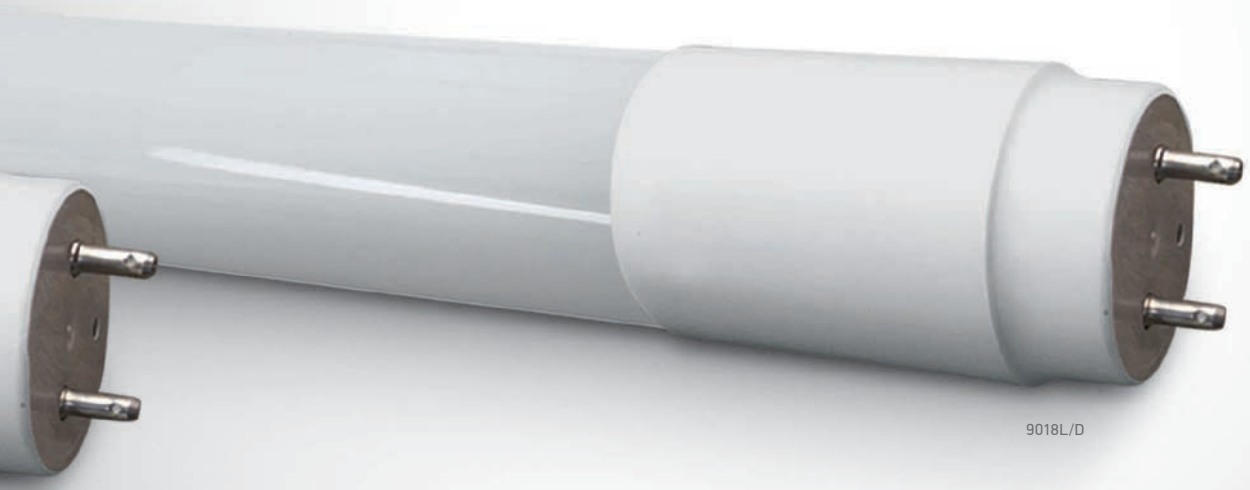



9018L | 18W | SMD 2835 | T8 | Glass

LED 80 CRI

CE 2 YEAR









9022L | 24W | SMD 2835 | T8 | Glass

LED 80 CRI

CE 2 YEAR







Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
9018L/D	G13	Daylight	6500K	18W	2000lm	320°	230V	NO	25
9018L/C	G13	Cool white	4000K	18W	2000lm	320°	230V	NO	25
9018L/W	G13	Warm white	3000K	18W	2000lm	320°	230V	NO	25
9022L/D	G13	Daylight	6500K	24W	2650lm	320°	230V	NO	25
9022L/C	G13	Cool white	4000K	24W	2650lm	320°	230V	NO	25
9022L/W	G13	Warm white	3000K	24W	2650lm	320°	230V	NO	25





26

Accessories & Gadgets

Pages 805-812

COB LED | Waterproof | Lampholders | Torch Lights | Handy Lights

IP20 IP67 IP68

CE 2 YEAR 5 YEAR





LED Accessories



89003/EXT | 3-way extension for 350mA / 500mA LED fittings

QUICK FIX

200cm

2 YEAR

Suitable for all 350mA LED fittings with fast connection system.

100



89006A/EXT | 6-way extension for 700mA LED fittings

QUICK FIX

200cm

2 YEAR

Suitable for all 700mA LED fittings with fast connection system.

100



0903F | 3-PIN Female connector

QUICK FIX

2 YEAR



200



0903M | 3-PIN Male connector

QUICK FIX

2 YEAR



200



0983M | 3-PIN Male connector + Cable

30cm

QUICK FIX

2 YEAR



500



0904F | 4-PIN Female connector

QUICK FIX

2 YEAR



500



0904M | 4-PIN Male connector

QUICK FIX

2 YEAR



200



0904MA | 4-PIN Male connector + Cable

30cm

QUICK FIX

2 YEAR



1



Waterproof Connection Boxes



0800BA | Waterproof connection box 1 IN / 1 OUT | 16A | 450V | Cable diameter 0,5-1,5mm

CE 2 YEAR

IP67

50





0800B | Waterproof connection box 1 IN / 1 OUT | Cable diameter 5-12mm

CE 2 YEAR

IP67

50





0800A | Waterproof connection box 1 IN / 2 OUT | Cable diameter 4-14mm

CE 2 YEAR

IP67

50





0800C | Waterproof connection box 2 IN / 2 OUT | 24A | 450V | Cable diameter 4-14mm

CE 2 YEAR

IP67

50





Lampholders & Connectors

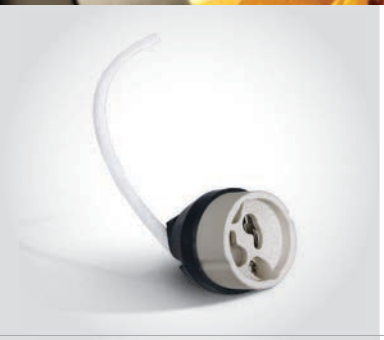

0950GA | 100-240V | GU10 Lampholder | Double insulated

18cm

5 YEAR

50





0950G | 100-240V | GU10 Lampholder with bracket | Double insulated

5 YEAR



100





0950GB | 100-240V | GU10 Lampholder with bracket | Double insulated

Loop connector IN/OUT.

5 YEAR



40





050180 | Fast cable connector | 32A | Max. 4mm wires

5 YEAR

100





0802 | Connection box 3-Way IN/OUT fast connector

Loop connector IN/OUT.

5 YEAR

10



IP20



70026

Rechargeable Torch Lights



70028



70028 | LED Rechargeable Torch | EU Socket | Plastic

LED BUILT IN

CE 2 YEAR

offer









70026 | LED Rechargeable Torch | BS Socket | Plastic

LED BUILT IN

CE 2 YEAR

offer







Order Code	Colour	Input	Class		Notes
70028	Grey	230V		48	-
70026	Grey	230V		48	-



70038

70036

LED Handy Lights



70038 | COB LED | Wardrobe / Magnet portable light

3xAAA Batteries included.

LED BUILT IN CE

2 YEAR

offer





12

95mm





70036 | COB LED | Wardrobe / Magnet portable light

3xAAA Batteries included.

LED BUILT IN CE

2 YEAR

offer





12

200mm





70034 | LED Portable light

3xAAA Batteries included.

LED BUILT IN CE

2 YEAR



100

165mm





Accessories



094004 | E27 / GU10 / E14 Testing panel

With power indicator.

2 YEAR

IP20

1





062002 | Display box for LED strips

7820/W, 7820W/W, 7829/C, 7835/W, 7835W/C, 7823/W, 7825/W, 7870/W, 7845/W

5 YEAR

IP20

1



Accessories





60000 | Square plate for BS box

2 YEAR

60000/W White
60000/AL Aluminium
60000/G Grey



10



7010P | Plastic spike for garden spots

2 YEAR



200


one
LIGHT
one light!
one light!
outdoo

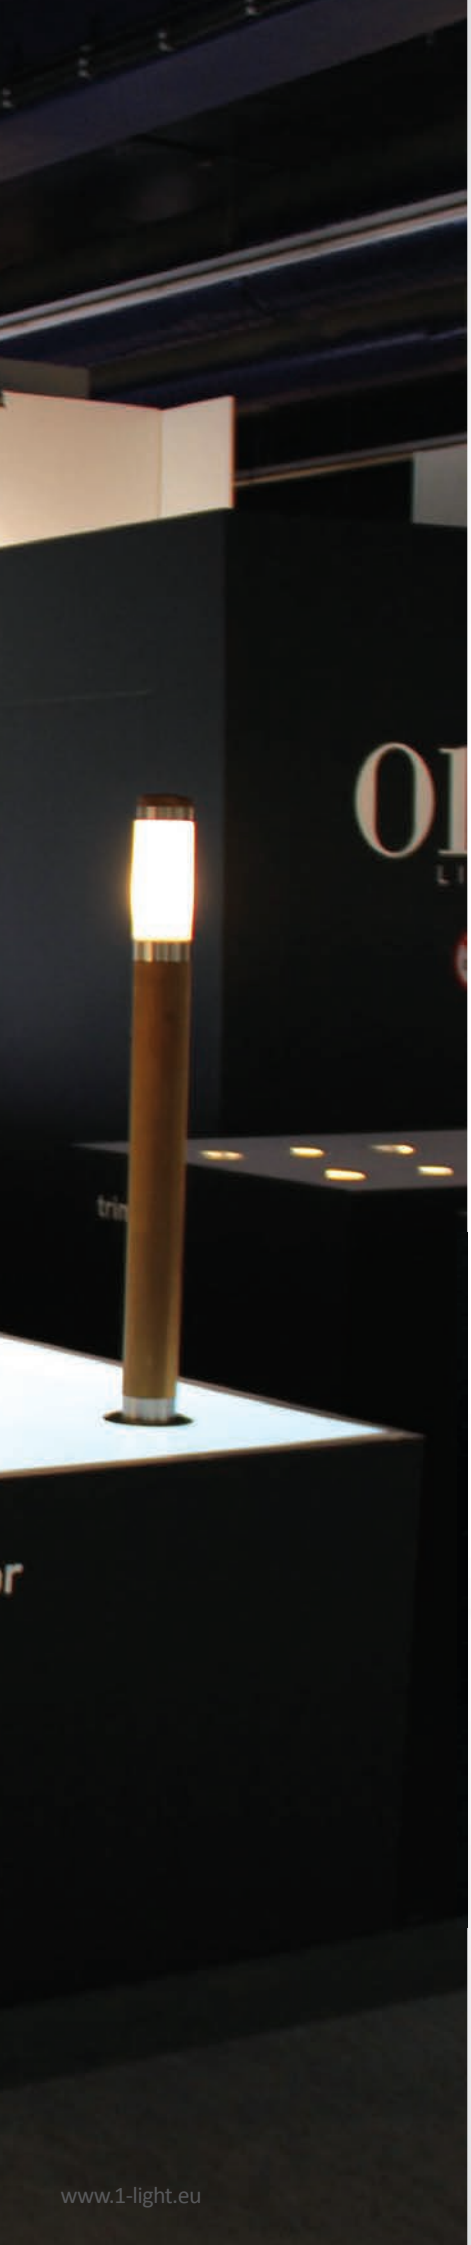

27

Marketing

Pages 815-816

Stickers | Packing Tape | Note Pads | Plastic Bags | T-Shirts





Stickers & Tape

060020 | one | Sticker

offer

120mm
140mm

060020A | one | Sticker

offer

290mm
340mm

060016 | switch to one light | Sticker

060018 | one light available here | Sticker

offer

300mm
90mm

060008 | Packing Tape

offer

4500mm
50mm



T-Shirts, Bags & Pads



060010 | A5 Note Pad

offer

148,5mm

210mm



060012 | Small Plastic Bag

offer

340mm

400mm



060014 | Large Plastic Bag

offer

445mm

590mm



060027 | T-Shirt | MEDIUM

060028 | T-Shirt | LARGE

060029 | T-Shirt | XLARGE

060030 | T-Shirt | XXLARGE

offer

Special Offers
Last Pieces
2022





10105AL
10105AL/B Black

Lamp type: 50W | MR16 | GU5,3
Description: Dark Light Range
5 YEAR



10113M
10113M/W/W White Warm white

Lamp type: 13W | COB LED | 350mA
Description: Asymmetric LED Spot
(Requires 350mA driver)
5 YEAR



51110C
51110C/W/W White Warm white

Lamp type: 10W | COB LED | 230V
Description: Recessed Spots Adjustable
(Complete with 500mA driver)
5 YEAR



11109LA
11109LA/W/W White Warm white

Lamp type: 9W | COB LED | 230V
Description: Recessed Spots Adjustable LED
(Complete with 250mA driver)
3 YEAR

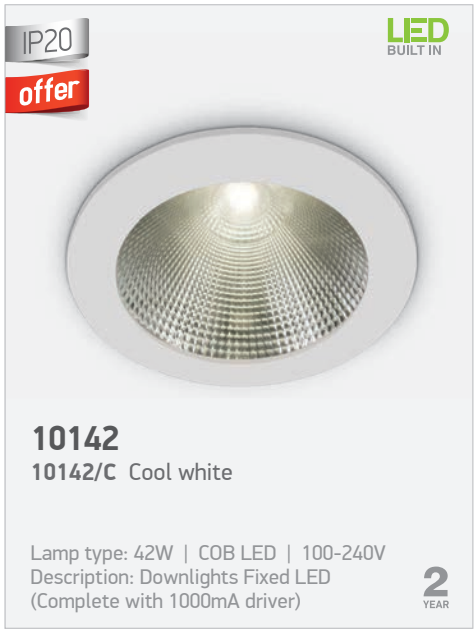

10142
10142/C Cool white

Lamp type: 42W | COB LED | 100-240V
Description: Downlights Fixed LED
(Complete with 1000mA driver)
2 YEAR



10130ED
10130ED/W/BS/W/SS White Warm white

Lamp type: 30W | LED | 230V
Description: Downlights Fixed LED
(Complete with 750mA driver)
2 YEAR



10150T
10150T/W/W White Warm white

Lamp type: 50W | COB LED | Trimless
Description: Downlights Fixed LED
(Requires 1050mA/1400mA driver)

3 YEAR



50148F
50148F/W/C White Cool white

Lamp type: 48W | SMD 2835 | 230V
Description: Downlights Fixed LED
(Complete with dimmable driver)

2 YEAR



11138
11138/G/C Grey Cool white

Lamp type: 38W | COB LED | 100-240V
Description: Downlights Adjustable LED
(Complete with 900mA driver)

2 YEAR



11130C
11130C/W/C White Cool white

Lamp type: 30W | COB LED | 230V
Description: Downlights Adjustable LED
(Complete with 700mA driver)

2 YEAR



11113V
11113V/AL/W Aluminium Warm white

Lamp type: 13W | LED | 230V
Description: Mini High Power
LED Downlights
(Complete with driver)

2 YEAR



11126V
11126V/AL/W Aluminium Warm white

Lamp type: 26W | LED | 230V
Description: Downlight Adjustable LED
(Complete with dimmable driver)

2 YEAR



51220B
51220B/W/C White Cool white

Lamp type: 2x20W | COB LED | 230V
Description: Downlights Adjustable LED
(Complete with 700mA driver)

2 YEAR



11135L
11135L/W/W White Warm white

Lamp type: 35W | COB LED | 230V
Description: Downlights Adjustable LED
(Complete with 900mA driver)

3 YEAR



11115RA
11115RA/W/C White Cool white

Lamp type: 15W | LED | 230V
Description: Downlight Adjustable LED
(Complete with 500mA driver)

2 YEAR

IP20 offer

LED BUILT IN



11130B

11130B/W/C White Cool white

Lamp type: 30W | COB LED | 230V
Description: Downlights Adjustable LED
(Complete with 700mA driver)

3 YEAR

IP68 offer

NO adhesive

LED BUILT IN



7835AW

7835AW/D Daylight

Lamp type: 14,4W/m | 24V DC | IP68
Description: LED Strips - NO adhesive
(Requires 24V DC driver)

3 YEAR

IP20 offer

LED BUILT IN



65632BT

65632BT/W/W White Warm white

Lamp type: 30W | COB LED | 230V
Description: Track Spots
(Complete with 700mA driver)

2 YEAR

IP20 offer



12205B

12205B/AL Aluminium

Lamp type: 2x35W | GU10 | 100-240V
Description: Wall & Ceiling

5 YEAR

IP20 offer



67134E

67134E/G Grey

Lamp type: 9W | GX53 | IP54 | 100-240V
Description: Wall & Ceiling

3 YEAR

IP54 offer

LED BUILT IN



67136A

67136A/G/D Grey Daylight

Lamp type: 2x3W | LED | 230V
Description: Wall Lights
(Complete with driver)

2 YEAR

IP40 offer

LED BUILT IN



12106L

12106L/W/W White Warm white

Lamp type: 7W | LED | 100-240V
Description: Ceiling Lights
(Complete with driver)

2 YEAR

IP40 offer

LED BUILT IN



63003

63003/AL/W Natural Alum. Warm white

Lamp type: 3W | LED | 100-240V
Description: Mini Pendants LED
(Complete with driver)

2 YEAR

IP20 offer



38140

38140/AL Aluminium

Lamp type: 40W | T5C | 2GX13 | 230V
Description: Retro Pendant
(Complete with electronic ballast)

2 YEAR

IP20 offer LED BUILT IN



60010
60010/AL/D Aluminium Daylight

Lamp type: 1W | LED | Natural aluminium | 230V
Description: Wall & Ceiling LED (Complete with driver)
2 YEAR

IP20 offer LED BUILT IN



51105G
51105G/MC/W Brushed chrome

Lamp type: 10W | MR16 | GU10
Sides: 16 LEDs x 0,06W Warm white | 230V
Description: Decorative Recessed LED (Complete with driver)
2 YEAR

IP44 offer LED BUILT IN



60012C
60012C/G/D Grey Daylight

Lamp type: 1W | LED | 12V AC
Description: Indoor/Outdoor Recessed LED (Use standard 12V AC transformer)
2 YEAR

IP44 offer



38124
38124/C Chrome

Lamp type: 24W | 2G11 | Die cast + acrylic | 230V
Description: Bathroom & Mirror (Complete with electronic ballast)
2 YEAR

IP20 offer



63070D
63070D/G Grey

Lamp type: 70W | HQI | G12 | Aluminium + PC | 230V
Description: Pendants (Complete with electronic ballast)
2 YEAR

IP54 offer LED BUILT IN



67128
67128/C/D Chrome Daylight

Lamp type: 3x1W | LED | 230V
Description: Garden Spots (Complete with driver)
2 YEAR

IP65 offer LED BUILT IN



70106A
70106A/C Cool white

Lamp type: 40W | LED | 100-240V
Description: Street Lights (Complete with driver)
3 YEAR

IP65 offer LED BUILT IN



70106D
70106D/C Cool white

Lamp type: 140W | LED | 100-240V
Description: Street Lights (Complete with driver)
3 YEAR

offer



89902
89902

Description: Daylight control 100-230V (Includes light sensor, LED panel + cover wall box, communication cable)
Compatible with 1-10V drivers/ballasts.
Save energy by dimming light when natural light is present
2 YEAR

030248	257, 258
040058	508
040060	174,176, 507, 508
050017	179, 180, 181, 182
050042	81
050042A	81
050044	155
050084	695, 696, 697
050086	137
050086A	137
050088	137
050088A	137
050090	343, 344
050097	206
050098	42
050099	40
050100	138
050102	138
050104	65
050106	414
050108	179, 180, 181, 182
050108A	183
050108B	184
050112	363, 364, 525, 526
050122	263, 264
050128	510
050136	779
050146	218
050148	218
050150	184
050162	56
050170	346, 348, 349
050170C	346, 348
050176	616
050178	82
050180	808
050182	16
050182R	16
050182RA	16
050182RB	16
050206	417
050208	418
050210	671
050250	678
050280	New 2022
050302	New 2022
060008	815
060010	816
060012	816
060014	816
060016	815
060018	815
060020	815
060020A	815
060027	816
060028	816
060029	816
060030	816
060048	New 2022
062002	811
0730	310
0740	293
0742	308
0800A	807
0800B	807
0800BA	807
0800C	807
0802	808
0903F	806
0903M	806
0904F	806
0904M	806
0904MA	806
094004	811
0950G	808
0950GA	808
0950GB	808
0983M	806
0990	534
0992	534
0994	683
10004	159
10007	159
10100	206
10101C	83
10101C4	582
10101D	45
10101G	84
10101L	45
10101LA	45
10101TR	89
10102	3
10102H	74
10103	5
10103A	86
10103B	48
10103BTR	87
10103DE	46
10103DL	46
10103E	50
10103FA	173
10103GL	86
10103L	51
10103M	73
10103N	52
10103NP	80
10103P	73
10103T	187
10104M	85
10105	5
10105A1	8
10105AC	28
10105AD	19
10105AL	817
10105ALG	10
10105C4	581
10105CJ	29
10105CM	7
10105D1	14
10105D2	14
10105D3	12
10105D4	12
10105D8	20
10105D9	17
10105DG	14
10105E	203
10105E1	18
10105F	27
10105FD	60
10105GL2	28
10105GT1	37
10105GT2	37
10105GU	6
10105H	15
10105K	207
10105L	27
10105M	21
10105MD	23
10105Q	29
10105R	30
10105R1	34
10105R1P	34
10105R2	31
10105R2P	32
10105RM	40
10105T	13
10105TG	13
10105TR	38
10105X	4
10105XS	4
10106CF	217
10106DC	64
10106DH	66
10106G	84
10106NA	783
10106P	80
10106PF	81
10106V	80
10107B	213
10107BT	89
10107CA	195
10107CD	193
10107DB	77
10107DC	57
10107DF	82
10107DFV	82
10107DL	74
10107H	74
10107HC	76
10107K	65
10107M	75
10107P	77
10107T	187
10107UV	190
10107WD	75
10107WP	77
10107Z	62
10108A	54
10108CF	217
10108D	53
10108D1	55
10108ED	200
10108FA	173
10108FD	202
10108H	76
10108R	53
10109D	211
10109F	35
10109FD	212
10110C	194
10110CA	195
10110CE	192
10110FD	60
10110G	215
10110K	207
10110P	79
10110T	12
10110TD	198
10110U	189
10112	205
10112BTR	88
10112C	79
10112DC	64
10112DH	66
10112ED	200
10112F	173
10112FA	173
10112H	55
10112HA	15, New 2022
10112K	New 2022
10112KD	204
10112L	65
10112LR	65
10112P	78
10112R	56
10112TD	58
10112TP	79
10112Z	62
10113A	204
10113B	213
10113M	817
10113P	75
10113UV	190
10114CE	192
10115	186
10115CA	195
10115CD	193
10115CF	218
10115E	203
10115FD	60
10115G	215
10115T	187
10116FD	201, 202
10118B	214
10118DC	64
10118DH	66
10118FA	174
10118TD	198
10120	206
10120C	194

10120CA 196
10120CE 192
10120F 174
10120FD 212
10120G 216
10120K 208
10120UV 190
10120Z 62
10122D 211
10122FD 202
10124 186
10124T 188
10124U 189
10125B 214
10125TD 198
10128 205
10130A 203
10130C 194
10130CA 196
10130CF 218
10130CR 194
10130ED 200, 817
10130FA 174
10130G 216
10130K 208
10130KA 208
10130T 188
10130U 189
10130UV 190
10140CD 193
10140F 177
10140P 206
10142 206, 817
10148P 177
10148PE 177
10150G 216
10150T 818
10160CA 196
11070R 168
11070RD 161
11070TR 170
11100R 167
11101B 125
11102 124
11102DB 133
11103A 93
11103B 123
11103C 93
11103D 139
11103E 139
11103K 124
11103L 129
11103LB 129
11103LC 127
11103LW 129
11103M 145
11103N 128
11104K 138
11105 93
11105A1 110
11105ABG 106
11105ABG New 2022
11105ABGL 105
11105AC 102
11105AL 102
11105B1 110
11105C 95
11105CDG 112
11105CF 97
11105CGU 96
11105D4 112
11105D7 110
11105D8 114
11105DT 112
11105DTR 117
11105E 115
11105F 120
11105GT4 119
11105GT5 119
11105GU 94
11105M 107
11105TA 116
11105TG 112
11105TR 117
11105U 104
11105UA 104
11105UB 104
11105UTR 117
11106A 135
11106DB 133
11106K 131
11106KD 132
11106LB 222
11106M 145
11106PF 155
11106R 168
11107B 134
11107BT 156
11107C 154
11107D 148
11107DA 140
11107DL 140
11107FD 140
11107K 138
11107P 148
11107RA 151
11107WD 147
11108LA 144
11109B 154
11109FA 120
11109KD 132
11109L 222
11109LA 817
11110AB 161
11110AD 163
11110ATR 164
11110E 225
11110F 233
11110GT1 165
11110H 166
11110N 160
11110R 168
11110TR 170
11110U 161
11111C 153
11112 136
11112D 139
11112E 142
11112H 137
11112L 222
11112P 149
11112RA 151
11112RB 152
11112T 156
11112TA 141
11113D 148
11113E 143
11113V 818
11114R 232
11115E 231
11115RA 818
11118H 232
11118L 222
11118TR 229
11120B 228
11120E 225
11120F 233
11125B 226
11125R 232
11125RA 234
11126F 231
11126V 818
11130B 819
11130BT 221
11130C 818
11130E 225
11135L 234, 818
11138 818
11140B 228
11140L 234
11150A 226
11150B 228
11207C 154
11207WD 147
11303L 129
12101 410
12104M 413
12105AB 372
12105AC 371
12105AL 370
12105B 371
12105E 370
12105E1 362
12105E2 362
12105E3 362
12105E4 377
12105E6 378
12105F 359
12105H 361
12105J 360
12105K 360
12105L 359
12105M 363
12105MA 364
12105N 365
12105NA 366
12105T 367
12105TA 368
12105Y 373
12105YA 374
12106B 423
12106C 413
12106CA 425
12106L 819
12107AL 425
12107B 421
12107K 414
12107KA 414
12107LD 428
12107V 416
12108C 416
12108D 417
12108DB 417
12108FD 429
12108LA 407
12108X 426
12108XA 426
12110D 413
12110HA 422
12112LA 408
12112Z 419
12112ZA 420
12115D 415
12115HA 422
12115L 427
12115LA 430
12115LD 428
12116FD 429
12120 369
12120Z 419
12120ZA 420
12122C 416
12122D 418
12124 369
12124D 415
12125L 427
12125LA 430
12125LD 428
12126 369
12130LA 430
12130Z 419
12132 369
12134 369
12135L 427
12138G 379
12140 379
12142 379
12144 380
12144A 380
12205B 819

12205NA 366
12205T 367
12205TA 368
12205Y 373
12205YA 374
12207B 421
12208LA 407
12208XA 426
12307B 421
12406B 423
12406C 424
12606C 424
12906B 423
12906C 424
20030 763
20032 252, 763
20034 764
20036 764
22000 762
22002 702
22004 758
22006 757
22008 758
22010 757
22012 758
22014 758
22020 762
22022 New 2022
24002 476
36002 355
36004 356
38001A 277
38002A 277
38005A 277
38006A 277
38006B 277
38006C 277
38007A 277
38007B 277
38007C 277
38016 542
38018 542
38101A 280
38101B 280
38101C 280
38101D 280
38102A 280
38102B 280
38102C 280
38103 279
38104B 278
38104L 275
38105 279
38108B 278
38110 279
38110BD 610
38114B 278
38114C 607
38114CE 608
38114DE 608
38114EE 608
38114EL 605
38114GE 608
38114M 604
38114MA 604
38115C 603
38115L 275
38116F 606
38116P 606
38118E 692
38118K 601
38118LA 697
38118LC 695
38118M 693
38118N 602
38120C 603
38120E 699
38120L 344
38121D 607
38121EL 605
38124 820
38135L 344
38136E 692
38136LA 697
38136LC 695
38136M 693
38136P 691
38136R 698
38140 819
38140AU 350
38145AR 352
38145BR 353
38145LA 697
38145LC 695
38148N 342
38150A 347
38150AR 352
38150B 345
38150BR 353
38150BU 345
38150C 345
38150E 346, 348
38151A 347
38152R 351
38152RC 351
38152RL 351
38154A 354
38154M 354
38158E 692
38158M 693
38160A 349
38207L 276
38215L 276
38218E 692
38218P 691
38220E 699
38225M 343
38230L 276
38236E 692
38236LC 696
38236M 694
38236R 698
38245LC 696
38248L 344
38248M 343
38258E 692
38258M 694
38280 New 2022
40002A 329
40002C 329
40003 333
40003A 329
40003R 335
40020 329
41002 336
41002A 336
41004 333
41004A 331
41004B 335
41008 333
41008A 331
41008B 335
41010 333
41010A 331
41012 334
41012A 332
41012B 335
41016 334
41016A 332
41016B 335
41018 334
41020 331, 333
41022 334
41022A 332
41024A 332
41026R 330
41030 336
41032 330
41034R 335
42001 New 2022
42002 New 2022
42004A New 2022
42004C New 2022
42012A New 2022
42012B New 2022
42012C New 2022
42022 New 2022
42026 New 2022
42032 New 2022
42100A New 2022
42100B New 2022
42100BL New 2022
42100E New 2022
42102A New 2022
42102B New 2022
42102BL New 2022
42104B New 2022
42106A New 2022
42106B New 2022
42106BL New 2022
42108 New 2022
42108A New 2022
42110 New 2022
42114A New 2022
42114B New 2022
42114BL New 2022
42114C New 2022
42114CL New 2022
42116C New 2022
42118 New 2022
42118L New 2022
42120B New 2022
42130A New 2022
42130B New 2022
42132 New 2022
42134 New 2022
42134A New 2022
42134B New 2022
50006B 68
50101 83
50102B 69
50103ATR 90
50103GT4 89
50103L 51
50104M 85
50105ALG 11
50105AR 28
50105D7 11
50105GL4 36
50105GT1 37
50105GT2 37
50105K 209
50105M 26
50105MA 25
50105R 30
50105RM 42
50105T 13
50105TG 13
50106B 67
50107B 71
50108A 54
50108F 175
50108FA 175
50116FA 175
50120B 210
50122D 211
50122FA 176
50130B 210
50130F 176
50130FA 176
50130K 209
50136P 183
50136RP 184
50140AE 181
50140AU 181
50140B 179

50140BU New 2022
50140BW New 2022
50143F 180
50148AU 181
50148E 180
50148F 818
50148PE 178
50148RE 182
50148U 180
50160E 182
50202B 69
50203ATR 90
50205D 27
50207B 71
50220B 210
50302B 70
50306B 67
50307B 71
50401L 51
50403ATR 90
50406B 67
50406C 72
50502B 70
50506B 68
50507B 71
50601L 51
50902B 70
50906B 67
50906C 72
51010TR 118
51020TR 118
51100TR 169
51101AL 125
51101B 125
51101W 125
51103 99
51103AB 101
51103L 130
51103LB 130
51103LW 130
51105 99
51105AB 101
51105ABG 106, New 2022
51105B 103
51105B1 109
51105CD 98
51105CGU 96
51105D 111
51105D5 114
51105D7 109
51105DG 111
51105G 820
51105GA 100
51105GT4 119
51105N 113
51105TA 116
51105TG 111
51105TR 118
51106A 135
51106M 146
51107 134
51109B 227
51110 162
51110A 135
51110AB 162
51110AD 163
51110ATR 164
51110C 817
51110N 160
51111C 153
51112 136
51112E 142
51112H 137
51113E 143
51120 224
51120B 227
51120TR 230
51125 223
51125A 226
51130 224
51138 223
51140 223
51140B 227
51140TR 230
51145 223
51200AR 167
51200R 167
51201AL 126
51205ABG 106, New 2022
51205B 103
51205N 113
51206M 146
51210N 160
51211C 153
51212E 142
51220B 818
51230 224
51240B 227
51301AL 126
51305B 103
51306M 146
51310AB 162
51310N 160
51401AL 126
51406B 150
51506B 150
60000 812
60001 410
60004 410
60008 404
60008A 404
60010 410, 820
60012C 820
60032 409
60034 409
60038 385
60040 385
60042 385
6005 384
60054 385
60056 383
60106 610
60106A 610
60107A 611
60107B 611
60107C 612
60107D 612
60116 567
60118 590
6012 384
60132 572
60158 577
60162 576
60168 580
6017 383
60176 575
6017A 383
6017G 384
60204 609
6022 384
6030 383
61038 589
61040 684
61042A 589
61044 586
61044A 589
61046 585
61048A 545
61048B 545
61050A 546
61050B 546
61066 341
61066T 341
61070 339
61072 339
61074 586
61076 585
61078 585
61080 587
61082A 550
61084 551
61086 553
61086A 554
61116 567
61116A 590
61118 552
61118A 552
61120 588
61122 588
61124 587
61126 609
61130 340
61132A 596
61132B 596
61134A New 2022
61134B New 2022
62010 481
62010A 481
62012 482
62014 482
62018 504
62018A 504
62018AF 506
62018F 506
62022A 485
62022AM 485
62022B 485
62022C 485
62024B 483
62024C 483
62025 503
62026A 484
62026B 484
62026C 484
62026D 484
62030F 506
62038F 506
62046F 506
62102 511
62104 511
62110 382
62110A 382
62112 501
62115F 507
62116 567
62116A 567
62116F 185, 505
62116FA 185, 505
62118D 489
62122F 508
62125D 489
62130AF 508
62130F 507
62130L 499, New 2022
62130N 495
62132N 495, New 2022
62132NA 496
62134N 497, New 2022
62135NA 501
62140AE 509
62140AF 510
62140F 510
62140FB 493
62140RE 509
62140RF 510
62142N 495
62142NA 496
62142NB 564
62144N 498, New 2022
62144NB 557, New 2022
62146 491
62146A 491
62148A 565
62148B 565
62148D 565
62148L 500, New 2022
62150D 489
62152 494
62152A 494
62154 488

62156C 558, New 2022
62156D 558
62158A 577
62158B 577
62160 492
62160A 492
62160FB 493
62162A 576
62162B 576
62164A 580
62164B 580
62166B 579
62168B 580
62170A 574
62170B 574
62172A 570
62172B 570
62172C 570
62174A 569
62174B 569
62176A 575
62176B 575
62180NB 564
62182 502
62182A 502
62210B 381
62310A 382
62401AL 404
63003 819
63016A 537, 538
63020 536
63022 537, 538
63022A 537, 538
63022B 537, 538
63028 681
63028A 681
63028B 681
63036 532
63038 532
63040 535
63042 535
63044 535
63046 555
63046A 555
63046B 555
63048 556
63050 557
63054A 561
63054B 561
63054C 561
63056 562
63058 563
63058A 563
63062 560
63064 559
63066 559
63066A 559
63068 560
63068A 560
63070D 820
63072 540
63072A 540
63074 539
63100E 701
63100N 702
63105M 525
63105MA 526
63105N 527
63108A 528
63110C 566
63110D 566
63112 566
63114 557
63116 568
63116A 568
63118 536
63122 530
63122B 530
63124 529
63124B 529
63124C 529
63126 533
63126A 533
63128 533
63130P 578
63132P 572
63134P 571
63136 573
63138 573
63140 531
63140B 531
63140C 531
63150N 702
63166P 579
63174C 569
63200N 702
64002 479
64004 479
64008 480
64010 480
65008T 311
65011T 312
65012T 312
65018T 316
65019T 312
65020T 313
65020T New 2022
65024T 315
65024TA 316
65025T 316
65026T 315
65040T 313
65042T 313
65102 404
65105BT 321
65105CT 322
65105GT 323
65105N 375, 376
65105NA 598
65105NAT 320
65105NT 319
65105WT 321
65107 408
65108T 306
65110B 405
65110E 406
65110F 406
65110P 541
65111AT 325
65118AT 326
65138 586
65142 592
65144 595
65146 595
65168T New 2022
65170AT 317
65170BT 318
65205N 375, 376
65226T 310
65305B 582
65305N 375, 376
65306BT 303
65405N 375, 376
65406BT 304
65505N 375, 376
65506BT 303
65514T 324
65518T 324
65519T 323
65520T 323
65522T 323
65524T 306
65608T 291
65610AT 292
65611NT 295, 296
65611T 294
65612NT 295, 296
65612T 294
65614NT 295, 296
65614T 294
65616T 294
65618T 308
65619T 308
65620AT 292
65620T 307
65620TA 307
65622T 310
65624T 308
65626T 310
65628T 307
65630T 310
65632BT 819
65632CT 309
65632T 309
65638T 308
65640BT 293
65642AT 299, 300
65642BT 299, 300
65642CT 299, 300
65644T 305
65646T 306
65648T 314
65650AT 314
65650T 314
65652T 305
65654AT 297, 298
65654BT 297, 298
65654CT 297, 298
65654CTT 297, 298
65656AT 301, 302
65656BT 301, 302
65656CT 301, 302
65656DT 301, 302
65738 593
65738A 594
65740 597
65740A 597
65742 591
65744 594
65746 591
65746A 591
65746B 592
65746R 591
65906BT 304
67002 673
67032 399
67034 664
67036 664
67050 673
67076 442
67076A 442
67090 662
67092 662
67094 661
67098 661
67100 662
67102 662
67116 470
67118 470
67124 455
67126 469
67128 469
67128/C/D 820
67130 391
67130A 392
67130C 391
67130D 392
67130DD 390
67130E 391
67130F 392
67132 393
67132A 394
67132C 393
67132D 394
67132F 394
67134A 386
67134E 819
67136A 819
67138 437
67138A 437

67138C 433, 434
67138D 433, 434
67138E 433, 435
67138EL 438
67138F 436
67138L 438
67160 400
67162 377
67164 377
67170 456
67174 467
67176 467
67196A 656
67196B 656
67196BG 655
67196C 656
67198AG 652
67198G 652
67204 395
67204B 395
67206 395
67208 396
67208B 396
67210 396
67216 395
67220A 472
67222A 472
67236 663
67236A 663
67242 470
67274A 449
67274B 450
67280AN 518
67280ANE 518
67280ANE 720
67280BN 518
67280E 520
67280EA 520
67280N 518
67282AN 517
67282ANE 517
67282ANE 720
67282BN 517
67282E 519
67282EA 519
67282N 517
67284LE 720
67286 673
67292 397
67302A 386
67304 455
67328 397
67328A 397
67334 473
67336 473
67340A 451
67342 443
67346 474
67354 451
67356 443
67358 667
67359 461
67359A 462
67359B 462
67360 461
67360A 462
67362 516
67362A 516
67362B 446
67362C 446
67363 516
67363A 516
67364 457
67366 513
67366E 513
67366E 719
67368 513
67368M 513
67370 514
67372 514
67374 443
67374A 443
67376 448
67376A 448
67378 447
67378A 447
67380 431
67380A 431
67384 515
67384A 515
67386A 459
67386C 459
67388A 460
67388B 460
67388C 460
67390 521, 522
67392 446
67394 458
67394A 458
67394B 458
67396 459
67396A 459
67398 452
67398A 452
67398C 452
67400A 387
67400B 387
67400D 388, New 2022
67400E 388
67402 503
67404A 486
67404M 486
67406 675
67406A 675
67406B 675
67406C 675
67406D 676
67406E 676
67408 674
67410 672
67410A 672
67412 448
67414 464
67416 464
67418 464
67420 398
67420A 398
67420AL 439
67420B 398
67420BL 440
67420L 439
67422 454
67422A 454
67424 457
67424A 457
67424B 457
67426 389
67426A 389
67426B New 2022
67426C New 2022
67426D New 2022
67428 678
67430A 463
67430B 463
67436 512
67438 490
67438A 490
67440 441
67440A 441
67442 471
67442B 471
67442C 471
67444C 471
67448 487
67448A 487
67450 475
67450A 475
67452 501
67454 403
67456 651
67458 651
67460A 666
67460B 666
67462 677
67464G 652
67466A 412
67466B 412
67466C 412
67468 455
67470 665
67470A 665
67472 465
67472A 465
67474 445
67474A 445
67474B 445
67478 472
67480A 453
67480B 453
67482 651
67484 472
67488A 657
67488B 657
67488C 657
67490 668
67490A 668
67492 444
67492P 444
67494 660
67494A 660
67496 679
67496A 679
67500 680
67500A 680
67502A 468
67502B 468
67502C 468
67504 670
67504A 670
67506 669
67506A 669
67508 667
67510 671
67510A 671
67510B 671
67512 454
67514 658
67516A 432
67516C 432
67518 386
67520 678
67520A 678
67522A 466
67522B 466
67524A New 2022
67524B New 2022
68001 631
68002 631
68004 620
68004A 620
68004B 619
68005 617
68006N 616
68007 615
68008 618
68012 632
68016 632
68030 623
68032 624
68046 622
68048 622
68050 622
68052 621
68054 617
68062 630
68064 630
68066 630
68068 628
68068A 628
68068C 628

68070 620
68070A 619
68072A 627
68072B 627
68072C 627
68074 625
68074A 625
68074B 625
68076 626
68076A 626
68078 619
69002A 648
69006 647
69006G 645
69008 647
69008G 645
69012 637
69016 636
69016A 636
69016AG 635
69016B 636
69016BG 635
69016G 635
69028 637
69040 640
69042 633
69042A 634
69042B 634
69042M 633
69044 634
69046G 646
69048G 646
69050 640
69050A 640
69052 638
69052A 638
69054 641
69054A 641
69056A 639
69056B 639
69056C 639
69058A 644
69058B 644
69058C 644
69060 642
69062 643
69064A 686
69064B 686, New 2022
69064C 686, New 2022
69066 687, New 2022
69066A 687
69066B 688, New 2022
69066D 688
69066M New 2022
70026 809
70028 809
70034 810
70036 810
70038 810
70080 714
7008A 659
7010 659
70104 715
70105 716
7010A 659
7010P 812
70106A 820
70106D 820
70110 716
70112 715
7020 703
7022 704
7028A 708
7028AG 711
7028AR 705
7028BG 711
7028CA 709
7028CB 709
7028CC 709
7028CD 710
7028CE 710
7028CF 710, New 2022
7028CG 711
7028E 708
7030 704
7032 706
7034B 707
7034C 707
7034D 707
7040 706
7046 653
7047 654
7052 658
7052B 658
7055A 712
7055B 712
7056 700
7056A 700
7058 713
7064 706
7068 651
7070 651
7072 682
7072A 682
7101AL 767
7102LG 768
7103ALG 769
7103ALG/DW 770
7103ALGD 770
7103ALGT 770
7103LG 768
7106ALG 769
7106ALGD 770
7106GPH 768
7107ALG New 2022
7109ALG 769
7201G 771
7301 773
7303G 772
7304AG 772
7304G 772
7305AG 772
7306CBG 775
7306CG 773, 775
7306CGD 776
7306CHG 776
7306GC 778
7306GCD 778
7306GDV 780
7306KGD 777
7307BG 774
7308G 772
7308GD 777
7310H 781
7312M 779
7315G 782
7315GB 782
7315GD 782
7512D 784
7513A 785
7524BD 784
7524D 784
7604 790
7610A 790
7810 283
7811 286
7811E 286
7811F 286
7812 283
7813L 247
7814 283
7815 283
7815B 283
7817 283
7820 239
7820/BL 253
7820A 254
7820L 247
7820V 248
7820W 240
7820WL 247
7822 248
7823 238
7824 248
7825 249
7826 247
7827 244, 256
7827A 246, 256, 284
7828 247
7829 241
7830 255
7830W 256
7830W/RGBW 256
7832 255
7833 238
7834 255
7835 243
7835/DEW 252
7835AW 819
7835C 242
7835P 242, 243
7835V 248
7835W 244
7836 261
7836A 261
7837 242, 243
7838M 263, 264, 259
7840 273
7840A 274
7840B 274
7840C 274
7840D 274
7841 286
7841F 286
7842 273
7843 New 2022
7845 250
7846 245
7846 New 2022
7846B New 2022
7846C New 2022
7846P New 2022
7846RB New 2022
7846RC New 2022
7846RP New 2022
7846W 246
7846WA 284
7846WB 284, New 2022
7846WC 284, New 2022
7846WP 284, New 2022
7848 237
7850 281
7850C 281
7850E 281
7850F 281
7850L 281
7850P 281
7860 281
7860C 281
7860E 281
7860F 281
7860L 281
7860P 281
7860R 281
7862 282
7862C 282
7862E 282
7862F 282
7862L 282
7862P 282
7862R 282
7864 285
7864C 285
7864E 285
7864F 285
7864P 285
7866 288
7866E 288
7866F 288
7868 287

7868C 287
7868E 287
7868F 287
7868P 287
7870 249
7875 249
7880 251
7882 251
7884 New 2022
7885 251
7887 250
7900 259
7900C 259, 263, 264
7900P 259, 263, 264, 266
7900R 259, 263, 264
7900TR 271
7901 261
7901A 286
7901AR 286
7901R 268
7901TR 260, 271
7902 259, 261
7902R 260, 268
7903 257
7903R 258
7903TR 258
7904 259, 262
7904ATR 271
7904R 268, New 2022
7904TR 260, 271
7905 262
7906 266
7906D 266
7906R 269
7906TR 271
7908 265
7908A 265
7910 264
7910A 264
7910AR 270
7910R 260, 270
7912 259, 263
7912A 263
7912R 260, 269
7914R 272
7915R 272
7916 267
7918 272
7920 267
7922 New 2022
7937T 265
89002 728
89002A 726
89003 805
89004 731
89004A 731
89004AT 731
89004T 731
89005 724
89005A 723
89006A 805
89006AT 738
89006P 732
89006PA 732
89006PC 732
89008 733
89008A 735
89008UT 737
89008W 740
89009 725
89010D 760
89015 733
89015A 735
89015AT 738
89015C 734
89015CT 738
89015T 738
89015V 741
89015W 740
89016UT 737
89020 733
89020C 734
89020L 753
89024D 759
89024E 759
89024UT 737
89025L 753
89027D 752
89028AM 739
89028M 739
89030A 735
89030C 734
89030UT 737
89030V 741
89030VD 751
89030VL 745
89030W 740
89040AT 738
89040VT 744
89042L 179 , 754, New 2022
89048 177, 178, 180, 181, 182
89048T 177, 178, 180, 181, 182, 736
89050TLD 177, 178, 180, 181 182, 183, 184, 754
89060 182
89060AR 749
89060VL 745
89060VLD 746
89060VN 747
89060VR 749
89060WD 743
89075L 751
89075V 741
89075VL 745
89075VT 744
89075W 740
89090VR 749
89100L 760
89100LP 255, 256, 712, 761
89100V 742
89100VL 745
89100VLD 746
89100VLL 746
89100VN 747
89100VND 748
89100VP 750
89100VT 744
89104LT 760
89143F 727
89150V 742
89150VL 745
89150VLD 746
89150VLL 746
89150VN 747
89150VP 750
89200V 742
89200VN 747
89200VND 748
89200VP 750
89200X New 2022
89200XN New 2022
89240XR New 2022
89302 761
89302A 761
89320V 742
89320X New 2022
89350VN 747
89350XN New 2022
89404 722
89406 721
89406R 721
89902 820
9007L 801
9009L 801
9018L 802
9021LB 800
9022L 802
9026L 800
9922L 799
9940L 799
9C004A 548
9C004B 548
9C006 547
9C008 547
9C02R 792
9F01 786
9F07L 786
9F07LD 786
9G01 797
9G02H 793
9G03R 792
9G03RAD 791
9G04A 793
9G04D 796
9G04E 795, 796
9G04F 794
9G04H 793
9G04RAD 791
9G06R 792
9G06RD 791, 792
9G07B 788
9G08B 794
9G08C 794
9G08D 795, 796
9G08E 795, 796
9G08K 794
9G09 787
9G10L 787
9G10M 787
9G10V 787
9G12B 788
9G12BD 788
9G12D 788
9G80N 789
9S13 798
9S23 798
9T05RD 791



Please note:

Prices are subject to change without notification. ONE Light may change product specifications without notifying customers. ONE Light does not accept any responsibility for mistakes in this catalogue, we strongly advise customers to contact us to confirm specifications. Fitting sizes in catalogue may vary from actual fitting dimensions. Always check the actual fitting before cutting holes. ONE Light may discontinue any item from this catalogue without prior notice. No images or information may be copied or reproduced without written permission from ONE Light.

5 291889 073390 >

one
LIGHT

www.1-light.eu