


Corbin  
Russwin

ASSA ABLOY

# Pyramid<sup>®</sup>

Owner's Manual

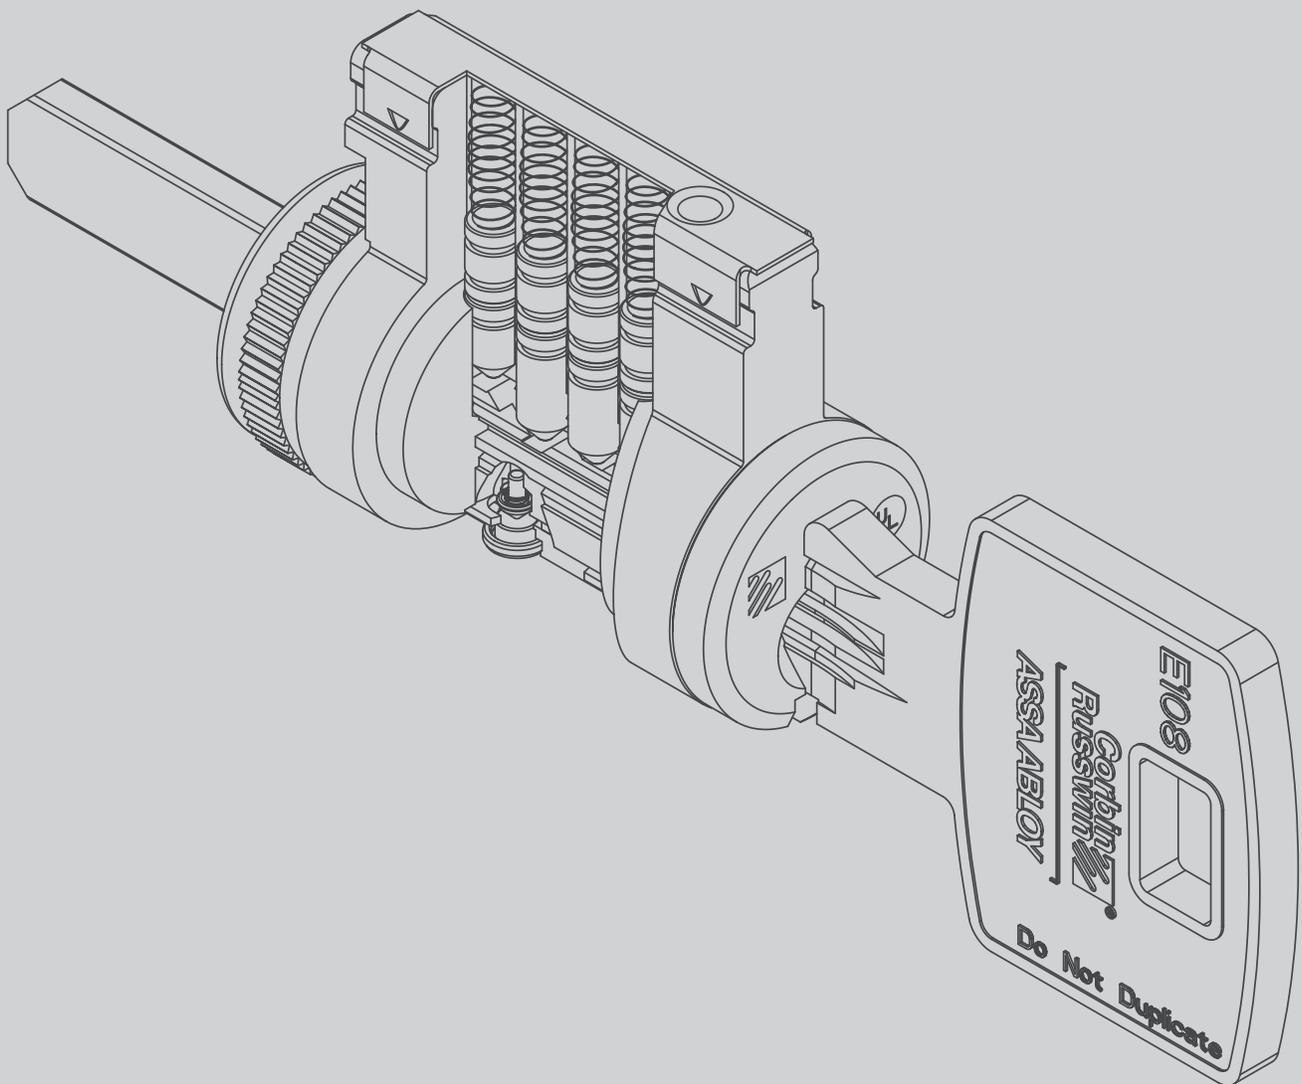

ASSA ABLOY, the global leader  
in door opening solutions

Keys.....2

Key Bitting Specs & Pin Lengths ..... 3-4

Combining Cylinders.....5

Combining Worksheet and Servicing Cylinders.....6

Mortise Cylinders - 1-1/4" .....7

Mortise Cylinders - 1-1/2" .....8

Rim Cylinders.....9

Key-in-Knob Cylinders.....10

Key-in-Lever Cylinders.....11

Competitor Key-in-Knob / Lever Cylinders .....12

IC Cylinders .....13

Pin Kit.....14

## Keys

- Nickel Silver

- Key Bow Type 28


- ◆ Ordering example: 7PIN-28-XXXX

└─ Keyway


- ◆ Ordering example P6 Keyway: 7PIN-28-XXXX-SPCXX

└─ Keyway      └─ Side Pin Code

**Front Side**



**Back Side**

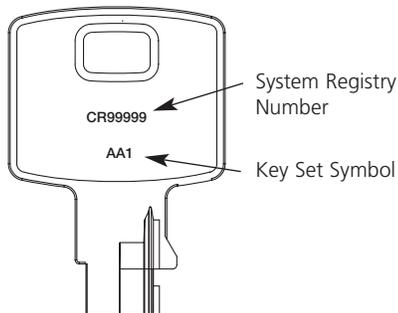

### Back Side Stamping & Options

- Key set (VKC 1), standard - unless otherwise indicated.
- System registry number (top master and control keys only).
- Concealed key control (CKC2 and CKC3) available on cylinders.

**Note:** Refer to Corbin Russwin’s general catalog and price book for complete detailed information.

The warranty on Corbin Russwin products becomes void if the product is modified in any way, regardless of whether the modifications causes or contributes to any alleged defect. If a Corbin Russwin product is modified it may no longer meet industry certification and quality control standards applicable to the original product and is no longer a genuine Corbin Russwin product.


Copyright © 2006-2018, Corbin Russwin, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of Corbin Russwin is prohibited. Patent pending and/or patent [www.assaabloydss.com/patents](http://www.assaabloydss.com/patents).

Applies to all Pyramid Keyways

## PRE-SYSTEM 70

MACS: 7

Increment: 0.016"  
 Progression: Two step  
 Blade width: 0.334"  
 Depth Tolerance: ± 0.0015"  
 Spacing Tolerance: ± 0.0015"  
 HPC Code Card CHSI  
 Cutter CW-90MC

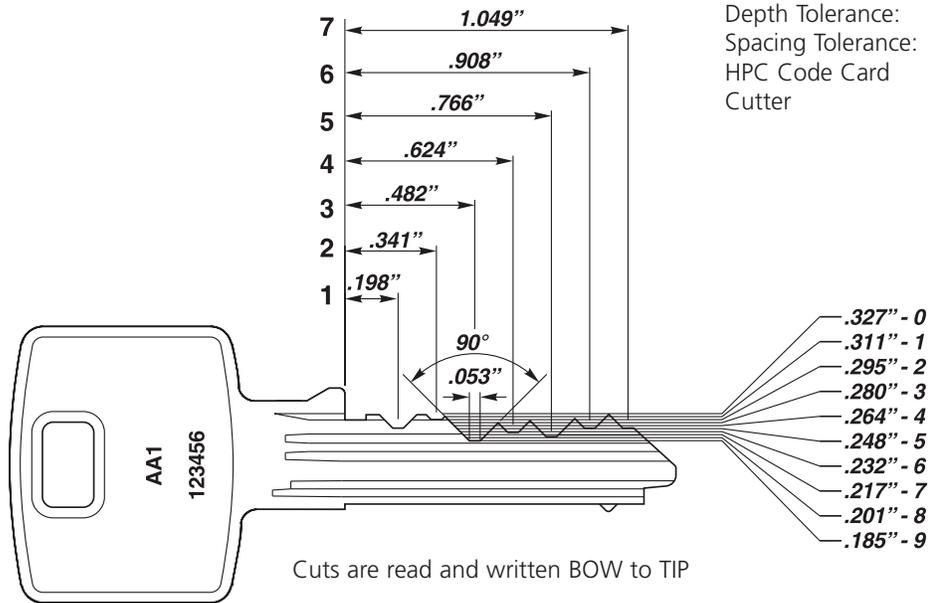

Plug Diameter: 0.496" Pin Diameter: 0.112"

## PIN LENGTHS

BOTTOM	BUILD-UP	IC TOP	MASTER
0 .139"	-9 NA	0 .189"	2 .031"
1 .155"	-8 .031"	1 .173"	3 .047"
2 .171"	-7 .047"	2 .157"	4 .063"
3 .187"	-6 .063"	3 .141"	5 .078"
4 .202"	-5 .078"	4 .126"	6 .094"
5 .218"	-4 .094"	5 .110"	7 .110"
6 .234"	-3 .110"	6 .094"	8 .126"
7 .250"	-2 .126"	7 .078"	9 .141"
8 .265"	-1 .141"	8 .063"	
9 .281"	0 .157"	9 .047"	
	+1 .173"		
	+2 .189"		
	+3 .204"		
	+4 .220"		
	+5 .236"		
	+6 .252"		
	+7 .267"		
	+8 .283"		
	+9 .299"		

## TOP PINS


CONVENTIONAL (FIXED CORE)	LENGTH	IC-NON CONTROL CHAMBERS
Use with Plug Totals		Use with Plug Totals
5-6-7-8-9	← A .141"	
	B .204" →	5-6-7-8-9
0-1-2-3-4	← C .236" →	0-1-2-3-4

The warranty on Corbin Russwin products becomes void if the product is modified in any way, regardless of whether the modifications causes or contributes to any alleged defect. If a Corbin Russwin product is modified it may no longer meet industry certification and quality control standards applicable to the original product and is no longer a genuine Corbin Russwin product.

Copyright © 2006-2018, Corbin Russwin, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of Corbin Russwin is prohibited. Patent pending and/or patent [www.assaabloydss.com/patents](http://www.assaabloydss.com/patents).

Applies to Pyramid P6 Keyway  
Only

## Side Pinning Example

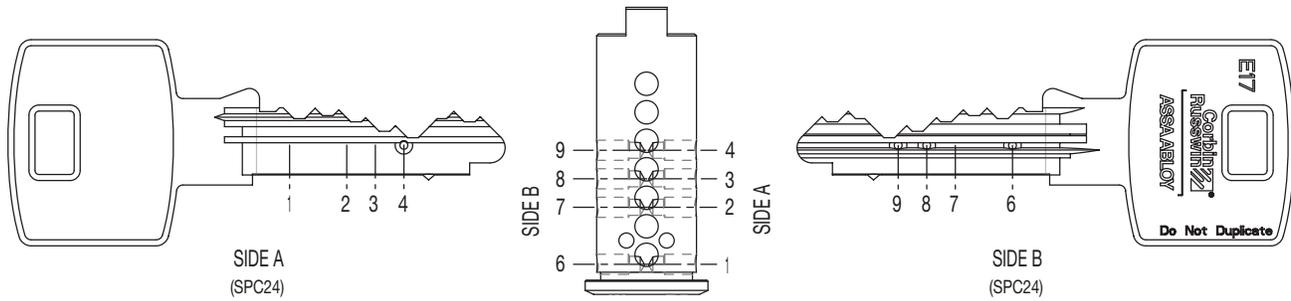

## PYRAMID CYLINDER - SIDE PIN COMBINATIONS

Side Pin Code Number	Pin Numbers
24	4 6 8 9

**Note:** Only side pin code 24 is listed to illustrate side pinning. Other side pin codes will be assigned for side pins placed in other locations.

The warranty on Corbin Russwin products becomes void if the product is modified in any way, regardless of whether the modifications causes or contributes to any alleged defect. If a Corbin Russwin product is modified it may no longer meet industry certification and quality control standards applicable to the original product and is no longer a genuine Corbin Russwin product.

Copyright © 2006-2018, Corbin Russwin, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of Corbin Russwin is prohibited. Patent pending and/or patent [www.assaabloydss.com/patents](http://www.assaabloydss.com/patents).


Refer to Corbin Russwin's Cylinder Manual (Cyl. Man 9506) for complete step-by-step instructions to service and combine Mortise, Rim, KIK/KIL and IC type cylinders.

Pyramid has seven pin chambers, each of which must be combined as per the cylinder type and biting specification.

### Rules for Combining:

#### Rules for Conventional (Fixed Core) Chambers

- ◆ The bottom pin always equals the shallowest operating cut.
- ◆ The master pin equals the difference between the deep and shallow operating cuts.
- ◆ The top pin is determined by the plug total.

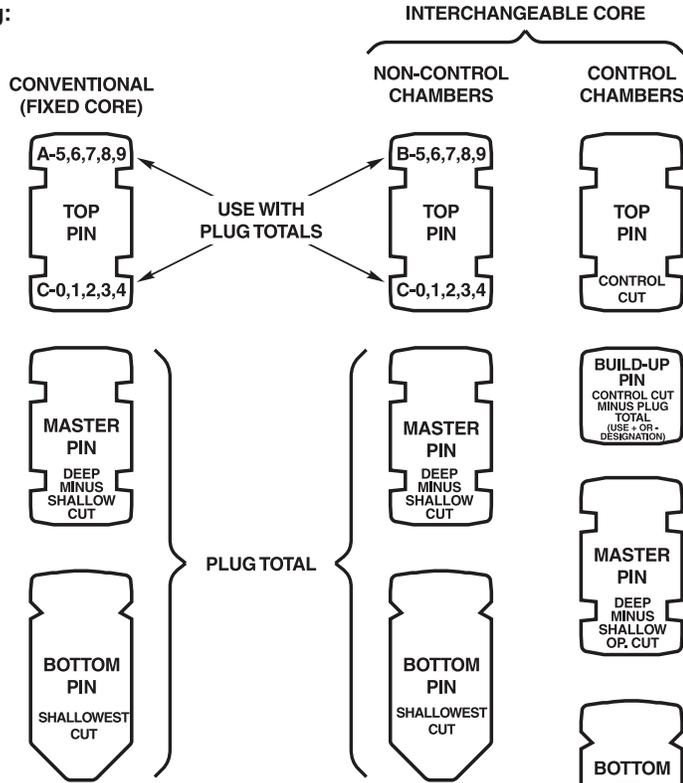

#### Rules for Control Chambers

- ◆ The bottom pin always equals the shallowest operating cut.
- ◆ The master pin equals the difference between the deep and shallow operating cuts.
- ◆ The build-up pin is determined by subtracting the plug total from the control cut.
- ◆ The top pin equals the control cut.

#### Rules for Non Control Chambers

- ◆ The bottom pin always equals the shallowest operating cut.
- ◆ The master pin equals the difference between the deep and shallow operating cuts.
- ◆ The top pin is determined by the plug total.

Example for a Conventional (Fixed Core) Cylinder

CHAMBER #	➡	1	2	3	4	5	6	7
CONTROL	N/A							
GGM	N/A							
GM	A	3	6	1	5	4	2	3
MK	AC	5	0	1	5	4	2	3
CK	AC1	5	0	1	3	0	0	3
TOP PIN		A	A	C	A	C	C	C
MASTER PIN		2	6	X	2	4	2	X
BOTTOM PIN		3	0	1	3	0	0	3

Example for an Interchangeable Core Cylinder

CHAMBER #	➡	1	2	3	4	5	6	7
CONTROL		3	1	6	5	4	2	3
GGM	N/A							
GM	A	3	6	1	5	4	2	3
MK	AA	5	2	1	5	4	2	3
CK	AA1	5	2	1	1	0	0	3
TOP PIN		B	1	6	5	C	C	C
BUILDUP PIN		X	-5	+5	0	X	X	X
MASTER PIN		2	4	X	4	4	2	X
BOTTOM PIN		3	2	1	1	0	0	3

The warranty on Corbin Russwin products becomes void if the product is modified in any way, regardless of whether the modifications causes or contributes to any alleged defect. If a Corbin Russwin product is modified it may no longer meet industry certification and quality control standards applicable to the original product and is no longer a genuine Corbin Russwin product.

Copyright © 2006-2018, Corbin Russwin, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of Corbin Russwin is prohibited. Patent pending and/or patent [www.assaabloydss.com/patents](http://www.assaabloydss.com/patents).

**CONVENTIONAL  
(FIXED CORE)  
CYLINDER**

CHAMBER # ➡	1	2	3	4	5	6	7
CONTROL							
GGM							
GM							
MK							
CK							
TOP PIN							
MASTER PIN							
BOTTOM PIN							

**INTERCHANGEABLE CORE CYLINDER**

CHAMBER # ➡	1	2	3	4	5	6	7
CONTROL							
GGM							
GM							
MK							
CK							
TOP PIN							
BUILDUP PIN							
MASTER PIN							
BOTTOM PIN							

**Servicing Cylinders**

No special key cutting equipment or service tools are required for cutting Pyramid keys or assembling Pyramid cylinders.

Note the following when servicing:


1. Before the plug is inserted into the shell, the blocking plate must be in position on the under side of the plug.
2. When reinserting the plug into the shell, care must be taken to depress the locking pin mechanism in the shell before the follower is used.
3. Side Pin Keyway Plug Only - If the side pins fall out, they must be inserted back into the side pin holes (in the plug) that correspond with the side pin dimples (on the key). Be sure to check both side of the key for dimple locations; most keys will have dimples on both sides of the key.

Pyramid cylinders are lubricated from the factory. Cylinders should be lubricated periodically depending upon environmental conditions. Petroleum based lubricant is recommended.


**Recommended Lubricants:**

- Medeco KeyLube
- Super Lube®


1. Non Side Pin Keyway Plug



3. Side Pin Keyway Plug




2.

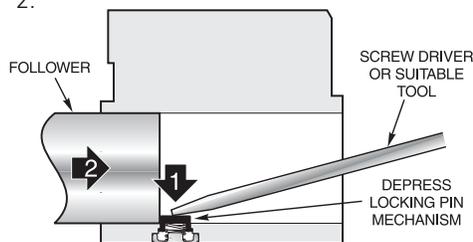

The warranty on Corbin Russwin products becomes void if the product is modified in any way, regardless of whether the modifications causes or contributes to any alleged defect. If a Corbin Russwin product is modified it may no longer meet industry certification and quality control standards applicable to the original product and is no longer a genuine Corbin Russwin product.

Copyright © 2006-2018, Corbin Russwin, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of Corbin Russwin is prohibited. Patent pending and/or patent www.assaabloydss.com/patents.

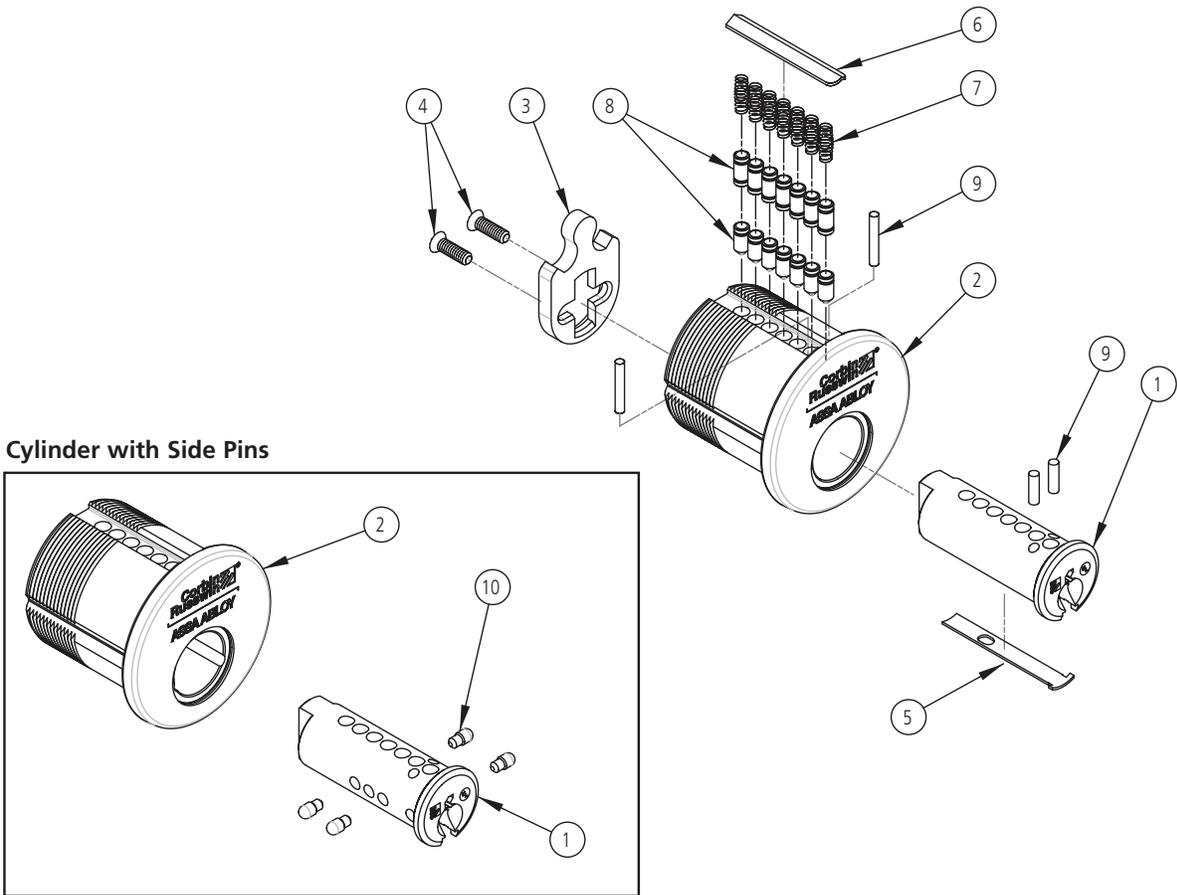

**STANDARD CYLINDER**


ITEM	DESCRIPTION	QTY.	PART NUMBER	REMARKS
1	Plug (1020-114)	1	696K432	Finish & Keyway Required
1	Plug (1027-114)	1	716K432	Finish & Keyway Required
2	Shell (1-1/4")	1	695F042	Finish required
3	Cam	1	480F058	A01 standard, refer to Key Systems Catalog (45078) for options.
4	Cam screws	2	438F418	
5	Blocking plate	1	696F427	
6	Spring cover	1	217F432	
7	Springs	7	697F507	
8	Top & bottom pins	*	*	Refer to page 14 for options
9	Hard metal inserts	4		Not sold separately

**CYLINDER WITH SIDE PINS**

ITEM	DESCRIPTION	QTY.	PART NUMBER	REMARKS
1	Plug (1020-114)	1	628K852	Finish & Keyway Required
1	Plug (1027-114)	1	628K992	Finish & Keyway Required
2	Shell (1-1/4")	1	629F062	Finish required
10	Side pins	4	630F494	The side pins are available in a vial that contains 20 side pins. Only 4 side pins are required for the cylinder.

The warranty on Corbin Russwin products becomes void if the product is modified in any way, regardless of whether the modifications causes or contributes to any alleged defect. If a Corbin Russwin product is modified it may no longer meet industry certification and quality control standards applicable to the original product and is no longer a genuine Corbin Russwin product.

Copyright © 2006-2018, Corbin Russwin, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of Corbin Russwin is prohibited. Patent pending and/or patent [www.assaabloydss.com/patents](http://www.assaabloydss.com/patents).

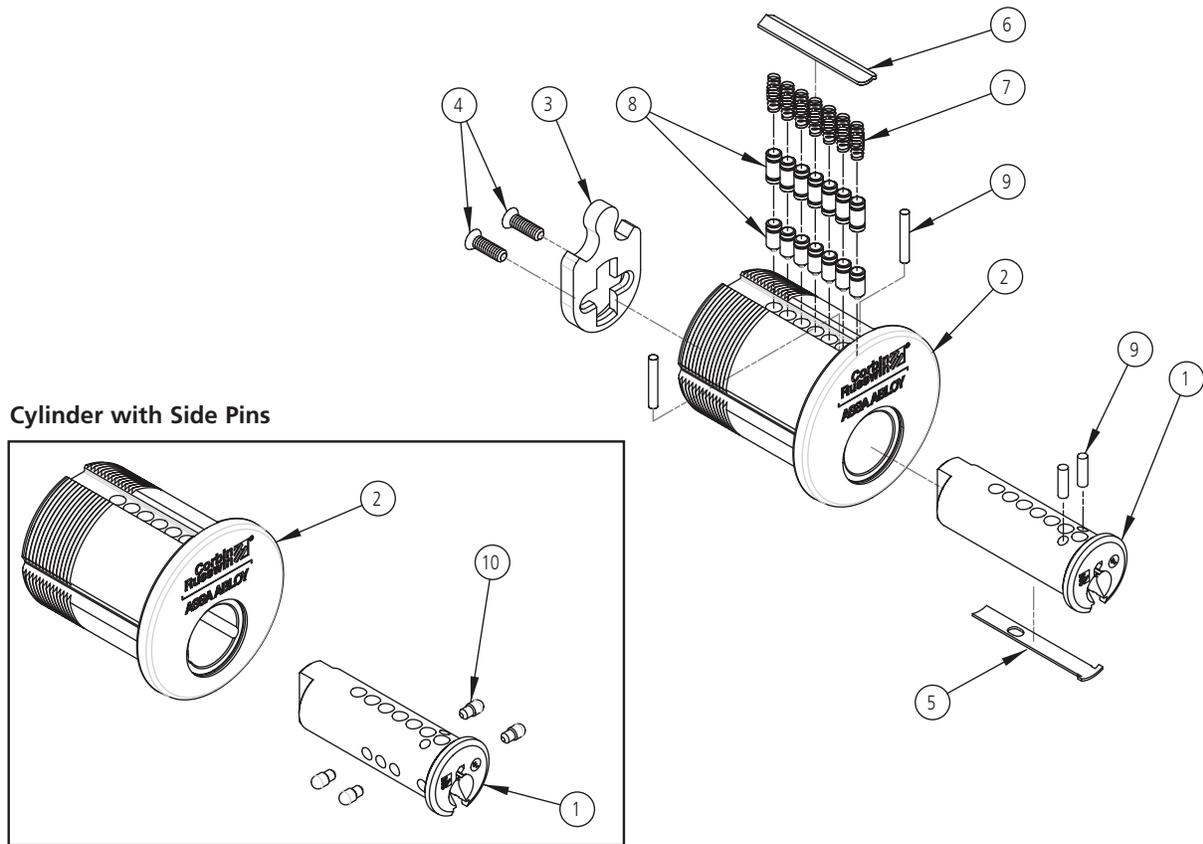

**STANDARD CYLINDER**


ITEM	DESCRIPTION	QTY.	PART NUMBER	REMARKS
1	Plug (1020-112)	1	798K912	Finish & Keyway Required
1	Plug (1027-112)	1	798K922	Finish & Keyway Required
2	Shell (1-1/2")	1	798F982	Finish required
3	Cam	1	480F058	A01 standard, refer to Key Systems Catalog (45078) for options.
4	Cam screws	2	438F418	
5	Blocking plate	1	696F427	
6	Spring cover	1	217F432	
7	Springs	7	697F507	
8	Top & bottom pins	*	*	Refer to page 14 for options
9	Hard metal inserts	4		Not sold separately

**CYLINDER WITH SIDE PINS**


ITEM	DESCRIPTION	QTY.	PART NUMBER	REMARKS
1	Plug (1020-112)	1	628K972	Finish & Keyway Required
1	Plug (1027-112)	1	630K472	Finish & Keyway Required
2	Shell (1-1/2")	1	630F482	Finish required
10	Side pins	4	630F494	The side pins are available in a vial that contains 20 side pins. Only 4 side pins are required for the cylinder.

The warranty on Corbin Russwin products becomes void if the product is modified in any way, regardless of whether the modifications causes or contributes to any alleged defect. If a Corbin Russwin product is modified it may no longer meet industry certification and quality control standards applicable to the original product and is no longer a genuine Corbin Russwin product.

Copyright © 2006-2018, Corbin Russwin, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of Corbin Russwin is prohibited. Patent pending and/or patent www.assaabloydss.com/patents.

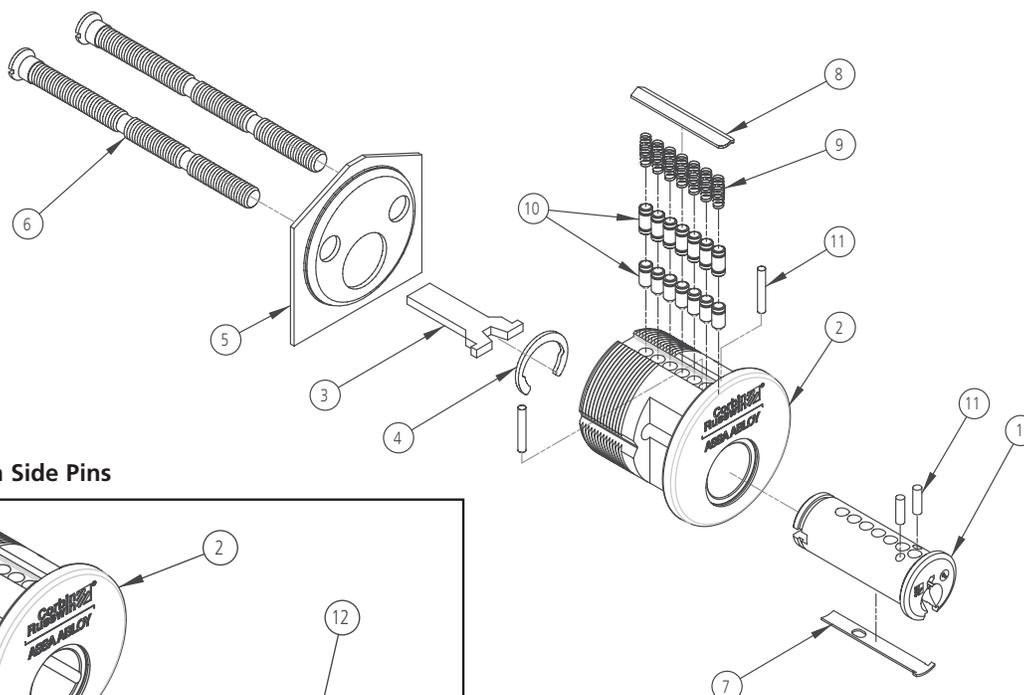

**Cylinder with Side Pins**

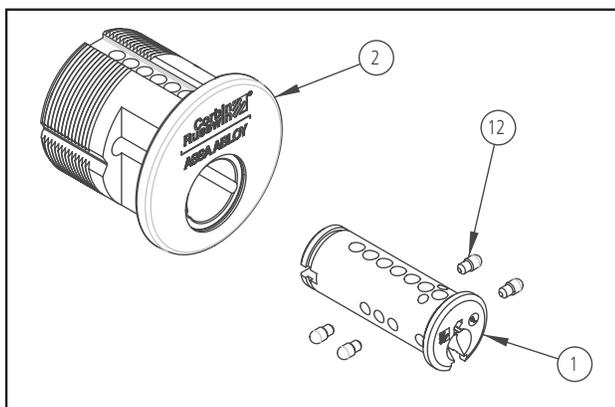

**STANDARD CYLINDER**


ITEM	DESCRIPTION	QTY.	PART NUMBER	REMARKS
1	Plug (3020)	1	696K452	Finish & Keyway Required
1	Plug (3027)	1	716K452	Finish & Keyway Required
2	Shell - standard	1	695F042	Finish Required
2	Shell - slotted	1	695F052	Finish Required
3	Tailpiece	1	253F768	1-7/8 standard, refer to Key Systems Catalog (45078) for options.
4	Plug retainer	1	333F997	
5	Back plate	1	253F758	
6	Mounting screws	2	021F688	1-7/8 standard, refer to Key Systems Catalog (45078) for options.
7	Blocking plate	1	696F427	
8	Slide	1	217F432	
9	Springs	7	697F507	
10	Top & bottom pins	*	*	Refer to page 14 for options
11	Hard metal inserts	4		Not sold separately

**CYLINDER WITH SIDE PINS**

ITEM	DESCRIPTION	QTY.	PART NUMBER	REMARKS
1	Plug (3020)	1	628K872	Finish & Keyway Required
1	Plug (3027)	1	629K002	Finish & Keyway Required
2	Shell - standard	1	629F062	Finish Required
2	Shell - slotted	1	629F072	Finish Required
12	Side pins	4	628F844	The side pins are available in a vial that contains 20 side pins. Only 4 side pins a required for the cylinder.

The warranty on Corbin Russwin products becomes void if the product is modified in any way, regardless of whether the modifications causes or contributes to any alleged defect. If a Corbin Russwin product is modified it may no longer meet industry certification and quality control standards applicable to the original product and is no longer a genuine Corbin Russwin product.

Copyright © 2006-2018, Corbin Russwin, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of Corbin Russwin is prohibited. Patent pending and/or patent [www.assaabloydss.com/patents](http://www.assaabloydss.com/patents).

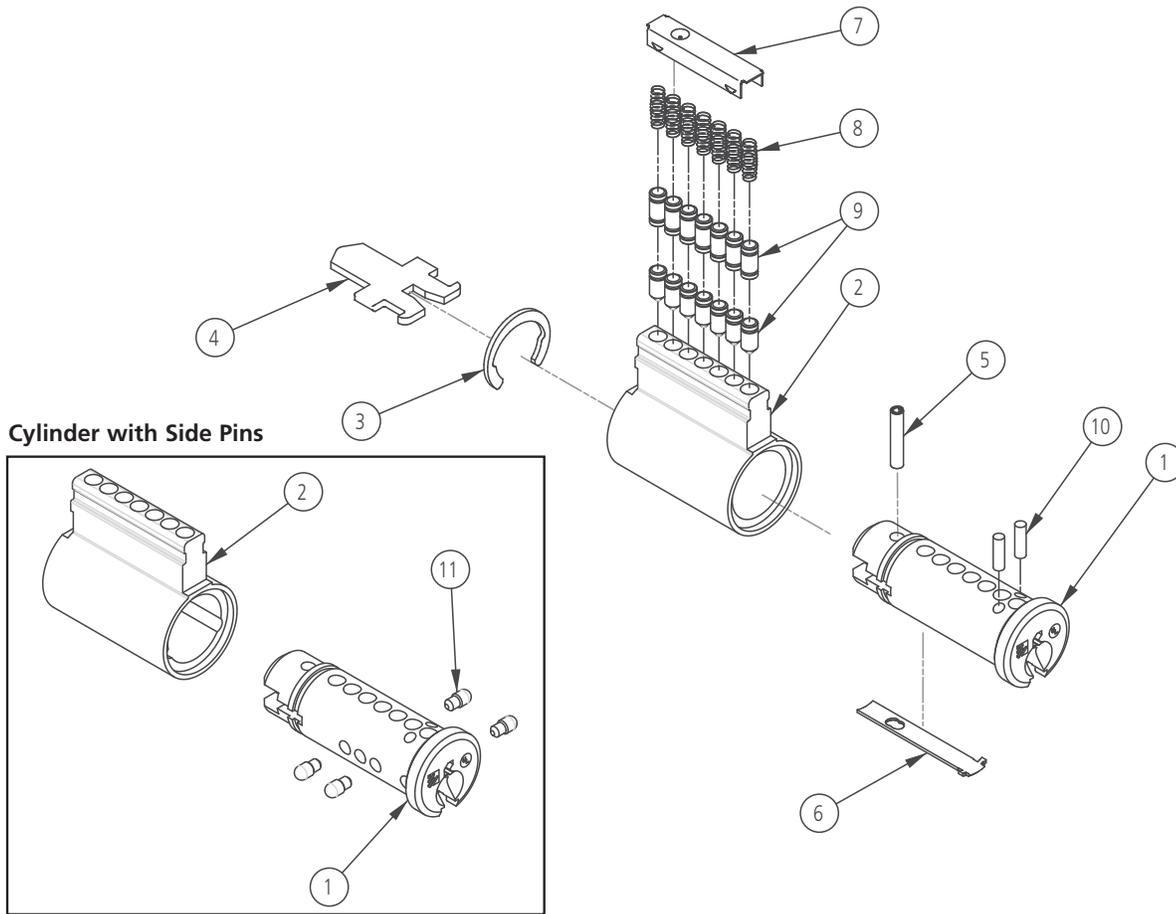

### STANDARD CYLINDER


ITEM	DESCRIPTION	QTY.	PART NUMBER	REMARKS
1	Plug (2020)	1	696K482	Finish & Keyway Required
1	Plug (2027)	1	716K482	Finish & Keyway Required
2	Shell	1	696F492	
3	Plug retainer	1	333F997	
4	Tailpiece	1	489F028	-051 cylinder only
5	Roll pin	1	232F037	
6	Blocking plate	1	696F427	
7	Spring cover	1	585F397	
8	Spring	7	697F507	
9	Top & bottom pins	*	*	Refer to page 14 for options
10	Hard metal inserts	2		Not sold separately

### CYLINDER WITH SIDE PINS

ITEM	DESCRIPTION	QTY.	PART NUMBER	REMARKS
1	Plug (2020)	1	628K902	Finish & Keyway Required
1	Plug (2027)	1	629K022	Finish & Keyway Required
2	Shell	1	628F912	
11	Side pins	4	630F494	The side pins are available in a vial that contains 20 side pins. Only 4 side pins are required for the cylinder.

The warranty on Corbin Russwin products becomes void if the product is modified in any way, regardless of whether the modifications causes or contributes to any alleged defect. If a Corbin Russwin product is modified it may no longer meet industry certification and quality control standards applicable to the original product and is no longer a genuine Corbin Russwin product.

Copyright © 2006-2018, Corbin Russwin, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of Corbin Russwin is prohibited. Patent pending and/or patent [www.assaabloydss.com/patents](http://www.assaabloydss.com/patents).

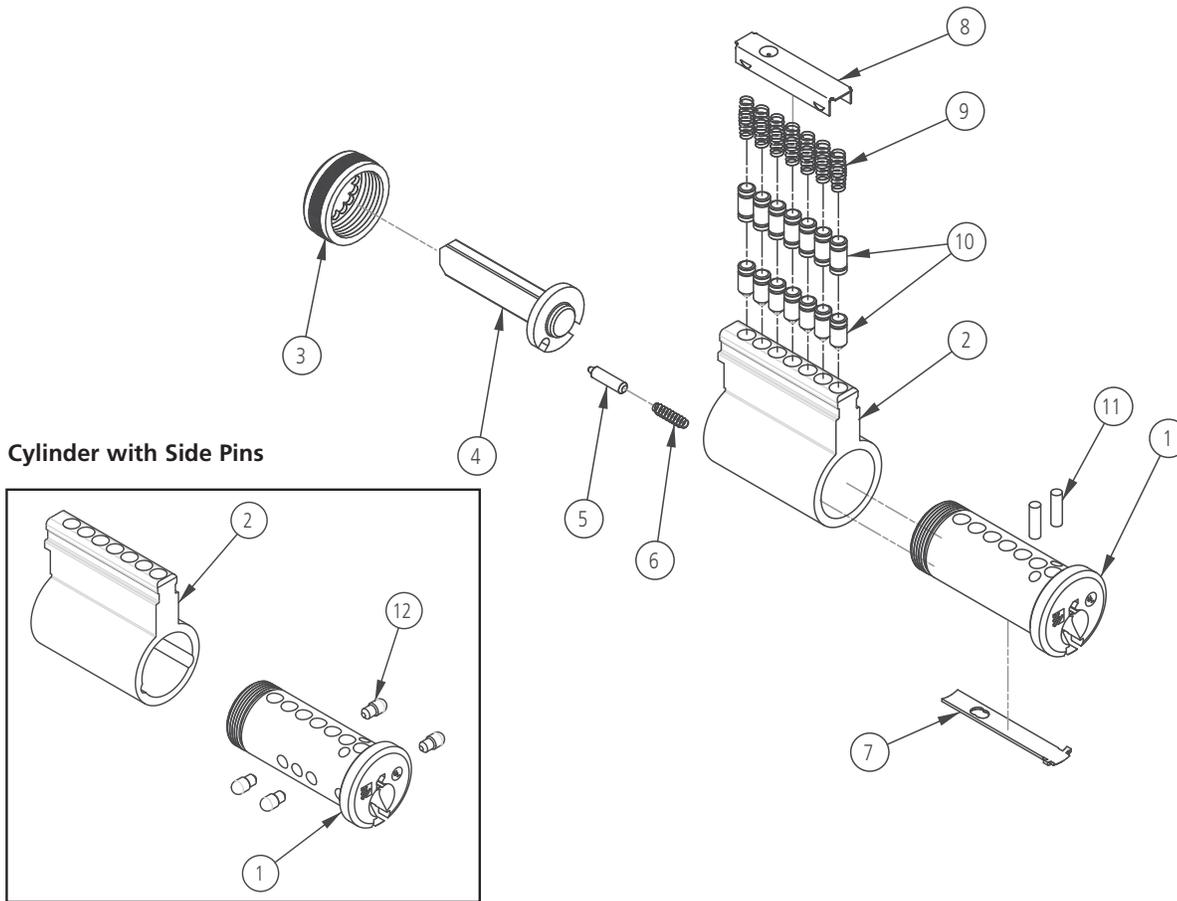

### STANDARD CYLINDER


ITEM	DESCRIPTION	QTY.	PART NUMBER	REMARKS
1	Plug (2020)	1	696K462	Finish & Keyway Required
1	Plug (2027)	1	716K462	Finish & Keyway Required
2	Shell	1	696F472	
3	Cap, cylinder	1	680F645	
4	Tailpiece	1	622F308	-033 Cylinder, refer to Key Systems Catalog (45078) for options.
5	Pin, cap	1	585F312	
6	Spring, cap pin	1	585F327	
7	Blocking plate	1	696F427	
8	Spring cover	1	585F397	
9	Spring	7	697F507	
10	Top & bottom pins	*	*	Refer to page 14 for options
11	Hard metal inserts	2		Not sold separately

### CYLINDER WITH SIDE PINS

ITEM	DESCRIPTION	QTY.	PART NUMBER	REMARKS
1	Plug (2020)	1	628K882	Finish & Keyway Required
1	Plug (2027)	1	629K012	Finish & Keyway Required
2	Shell	1	628F892	
12	Side pins	4	630F494	The side pins are available in a vial that contains 20 side pins. Only 4 side pins are required for the cylinder.

The warranty on Corbin Russwin products becomes void if the product is modified in any way, regardless of whether the modifications causes or contributes to any alleged defect. If a Corbin Russwin product is modified it may no longer meet industry certification and quality control standards applicable to the original product and is no longer a genuine Corbin Russwin product.

Copyright © 2006-2018, Corbin Russwin, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of Corbin Russwin is prohibited. Patent pending and/or patent [www.assaabloydss.com/patents](http://www.assaabloydss.com/patents).

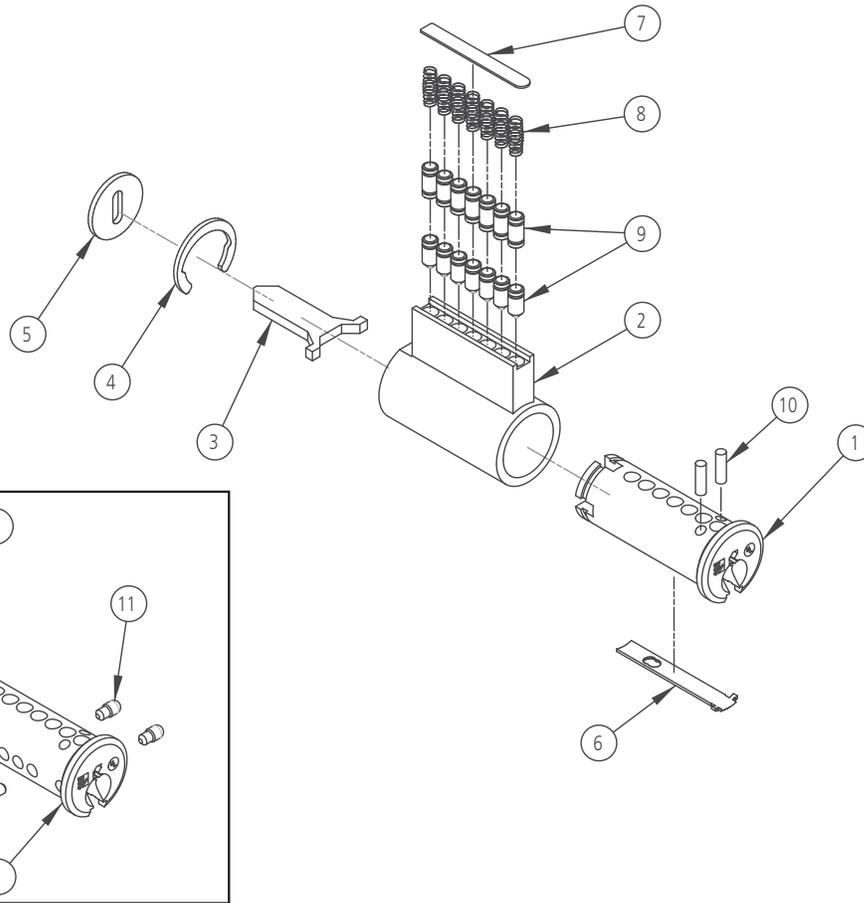

Cylinder with Side Pins

**STANDARD CYLINDER**


ITEM	DESCRIPTION	QTY.	PART NUMBER	REMARKS
1	Plug (2220)	1	715K142	Finish & Keyway Required
1	Plug (2227)	1	715K162	Finish & Keyway Required
2	Shell	1	715F152	
3	Tailpiece	1	715F108	-P21 Cylinder, refer to Key Systems Catalog (45078) for options.
4	Plug retainer	1	333F997	
5	Spacer	1	715F139	KIK cylinder only
6	Blocking plate	1	696F427	
7	Slide	1	411F092	
8	Springs	7	697F507	
9	Top & bottom pins	*	*	Refer to page 14 for options
10	Hard metal inserts	2		Not sold separately

**CYLINDER WITH SIDE PINS**

ITEM	DESCRIPTION	QTY.	PART NUMBER	REMARKS
1	Plug (2220)	1	628K952	Finish & Keyway Required
1	Plug (2227)	1	629K042	Finish & Keyway Required
2	Shell	1	628F962	
11	Side pins	4	630F494	The side pins are available in a vial that contains 20 side pins. Only 4 side pins are required for the cylinder.

The warranty on Corbin Russwin products becomes void if the product is modified in any way, regardless of whether the modifications causes or contributes to any alleged defect. If a Corbin Russwin product is modified it may no longer meet industry certification and quality control standards applicable to the original product and is no longer a genuine Corbin Russwin product.

Copyright © 2006-2018, Corbin Russwin, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of Corbin Russwin is prohibited. Patent pending and/or patent [www.assaabloydss.com/patents](http://www.assaabloydss.com/patents).

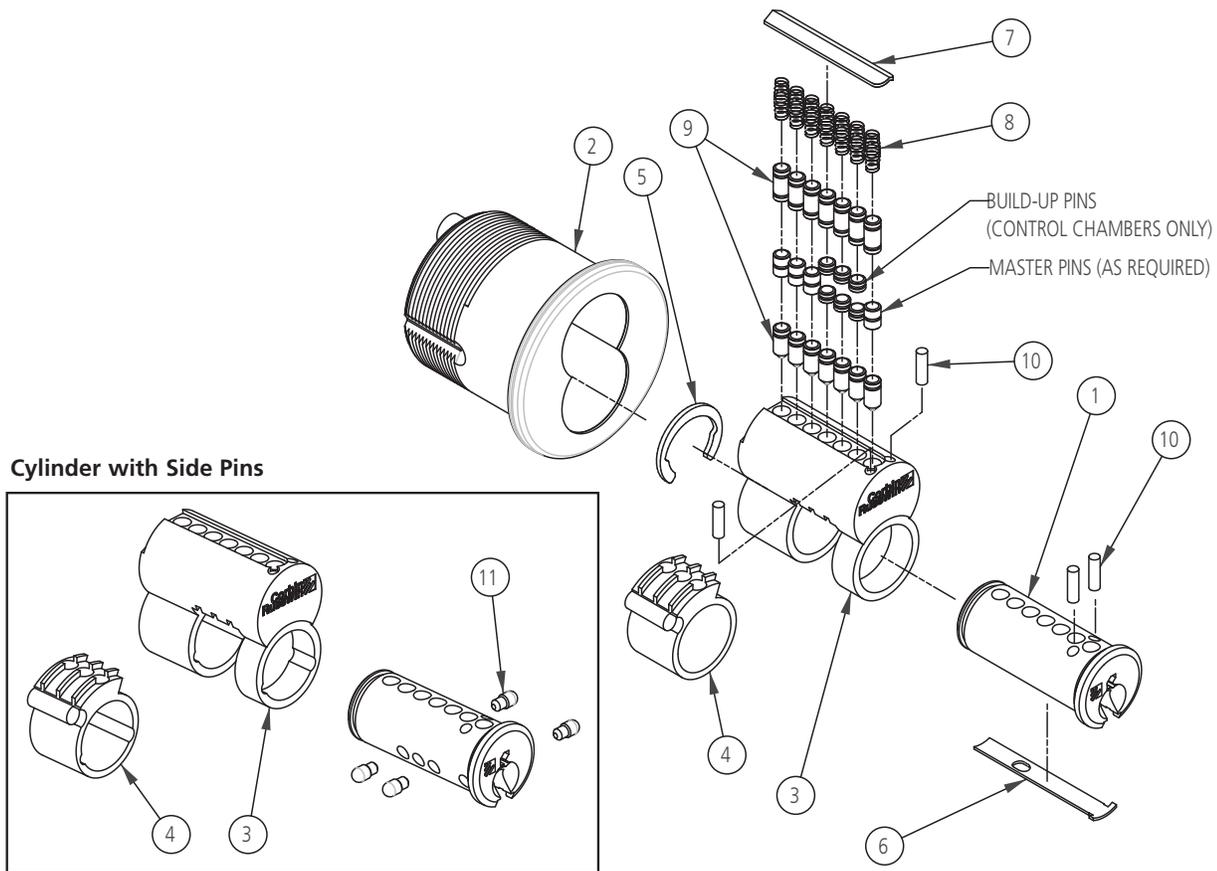

**STANDARD CYLINDER**

ITEM	DESCRIPTION	QTY.	PART NO.	REMARKS
1	Plug (8020 & 8027)	1	696K522	Finish & Keyway Required
2	Housing	1	*	Mortise housing 1070 shown
3	IC Core	1	695F502	Finish Required
4	Control sleeve	1	696F51	
5	Plug retainer	1	333F997	
6	Blocking plate	1	696F427	
7	Slide	1	217F442	
8	Springs	7	697F507	
9	Top & bottom pins	*	*	Refer to page 14 for options
10	Hard metal inserts	4		Not sold separately

**CYLINDER WITH SIDE PINS**

ITEM	DESCRIPTION	QTY.	PART NO.	REMARKS
1	Plug (8020 & 8027)	1	629K032	Finish & Keyway Required
3	IC Core	1	628F922	Finish Required
4	Control sleeve	1	628F932	Finish Required
11	Side pins	4	630F494	The side pins are available in a vial that contains 20 side pins. Only 4 side pins a required for the cylinder.

The warranty on Corbin Russwin products becomes void if the product is modified in any way, regardless of whether the modifications causes or contributes to any alleged defect. If a Corbin Russwin product is modified it may no longer meet industry certification and quality control standards applicable to the original product and is no longer a genuine Corbin Russwin product.




Copyright © 2006-2018, Corbin Russwin, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of Corbin Russwin is prohibited. Patent pending and/or patent www.assaabloydss.com/patents.

**Pin Kit** - Includes Follower and Tweezers


**How to Order:**

Pyramid High Security: PK-20-HS

Pyramid Security: PK-20-PS

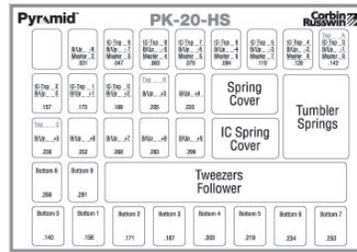

**Follower**  
How to Order Separately: CT20



**Tweezers**  
How to Order Separately: CT19

**Pin Kit Contents**



LENGTH	BOTTOM	MASTER	BUILD-UP	TOP	IC - TOP	PK-20-HS and PK-20-PS QTY	PK-20-HS PART NO.	PK-20-PS PART NO.
.031"		2	-8			100	695F257031	695F252031
.047"		3	-7		9	100	695F257047	695F252047
.063"		4	-6		8	100	695F257063	695F252063
.078"		5	-5		7	100	695F257078	695F252078
.094"		6	-4		6	100	695F257094	695F252094
.110"		7	-3		5	100	695F257110	695F252110
.126"		8	-2		4	100	695F257126	695F252126
.139"	0					100	695F247139	695F244139
.141"		9	-1	A	3	100	695F257141	695F252141
.155"	1					100	695F247155	695F244155
.157"			0		2	100	695F257157	695F252157
.171"	2					100	695F247171	695F244171
.173"			+1		1	100	695F257173	695F252173
.187"	3					100	695F247187	695F244187
.189"			+2		0	100	695F257189	695F252189
.202"	4					100	695F247202	695F244202
.204"			+3	B		100	695F257204	695F252204
.218"	5					100	695F247218	695F244218
.220"			+4			100	695F257220	695F252220
.234"	6					100	695F247234	695F244234
.236"			+5	C		100	695F257236	695F252236
.250"	7					100	695F247250	695F244250
.252"			+6			100	695F257252	695F252252
.265"	8					100	695F247265	695F244265
.267"			+7			100	695F257267	695F252267
.281"	9					100	695F247281	695F244281
.283"			+8			100	695F257283	695F252283
.299"			+9			100	695F257299	695F252299

PINS (SPECIFY SIZE)		
QTY.	PART NO.	DESCRIPTION
Vial of 100	695F25(Length)	Top Pins
Vial of 100	695F24(Length)	Bottom Pins
Vial of 100	628F107-142	Top Pins A - BRP
Vial of 100	628F107-236	Top Pins C - BRP
Vial of 20	630F494	Side-Pin

CYLINDER PARTS		
DESCRIPTION	PART NO.	PK-20HS Qty.
Tumbler Springs	697F50	100
Spring Cover	217F43	100
IC Spring Cover	217F44	20
Follower .496	CT20	1
Tweezers	CT19	1
Blocking Plate	696F42	20

The warranty on Corbin Russwin products becomes void if the product is modified in any way, regardless of whether the modifications causes or contributes to any alleged defect. If a Corbin Russwin product is modified it may no longer meet industry certification and quality control standards applicable to the original product and is no longer a genuine Corbin Russwin product.

Copyright © 2006-2018, Corbin Russwin, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of Corbin Russwin is prohibited. Patent pending and/or patent www.assaabloydss.com/patents.



ASSA ABLOY, the global leader in door opening solutions

The warranty on Corbin Russwin products becomes void if the product is modified in any way, regardless of whether the modifications causes or contributes to any alleged defect. If a Corbin Russwin product is modified it may no longer meet industry certification and quality control standards applicable to the original product and is no longer a genuine Corbin Russwin product.

Copyright © 2006-2018, Corbin Russwin, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of Corbin Russwin is prohibited. Patent pending and/or patent [www.assaabloydss.com/patents](http://www.assaabloydss.com/patents).

ASSA ABLOY is the global leader in door opening solutions, dedicated to satisfying end-user needs for security, safety and convenience



**ASSA ABLOY**

**In U.S.**

Corbin Russwin  
Architectural Hardware  
225 Episcopal Road  
Berlin, CT 06037  
Phone: 800-543-3658  
Fax: 800-447-6714  
[corbinrusswin.com](http://corbinrusswin.com)

**In Canada**

ASSA ABLOY Door  
Security Solutions Canada  
160 Four Valley Drive  
Vaughan, Ontario  
Canada L4K 4T9  
Phone: 800-461-3007  
Fax: 905-738-2478  
[www.assaabloy.ca](http://www.assaabloy.ca)

For more information regarding Corbin Russwin Locksets, Exit Devices, Door Controls and Key Systems, contact your authorized Corbin Russwin Distributor or Sales Representative.