


# Architectural Door Accessories

**ASSA ABLOY**  
Opening Solutions


## Pemko LP200 Sliding Door Hardware

**Door Leaf Capacity - Up to 200 lbs.**


Manufactured by  
**HENDERSON**

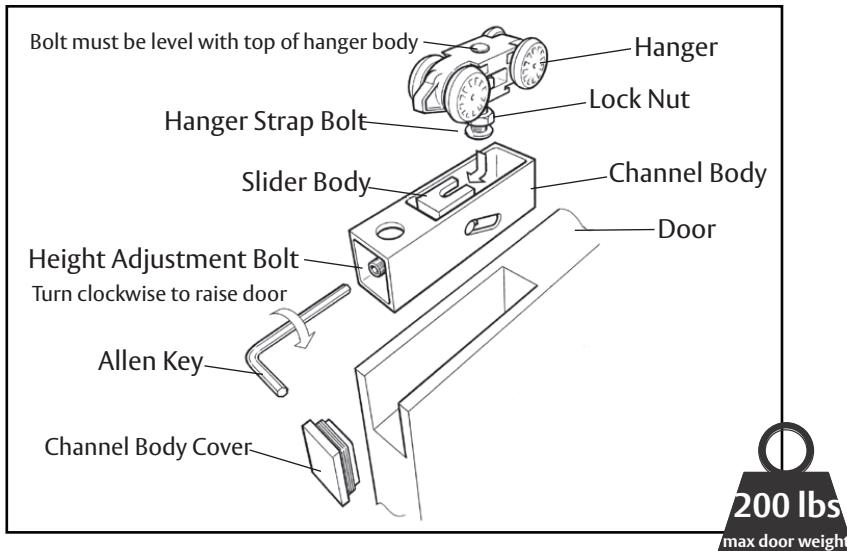

### Overhead Mount

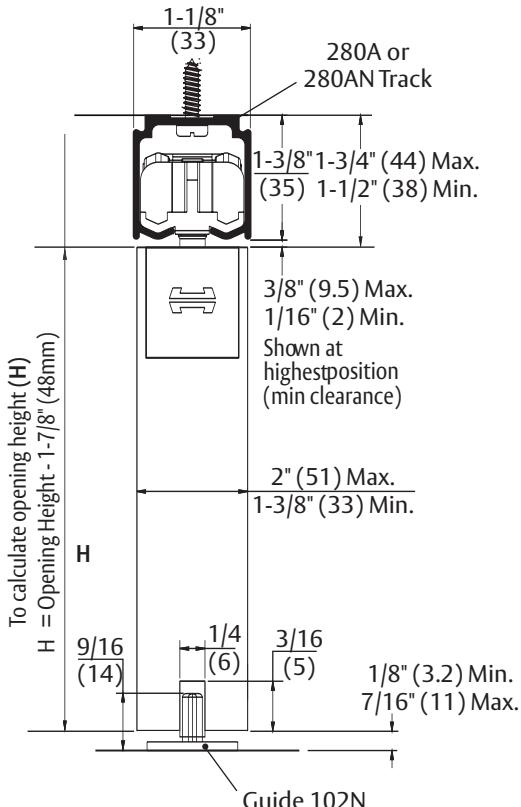

### Side Wall Mount

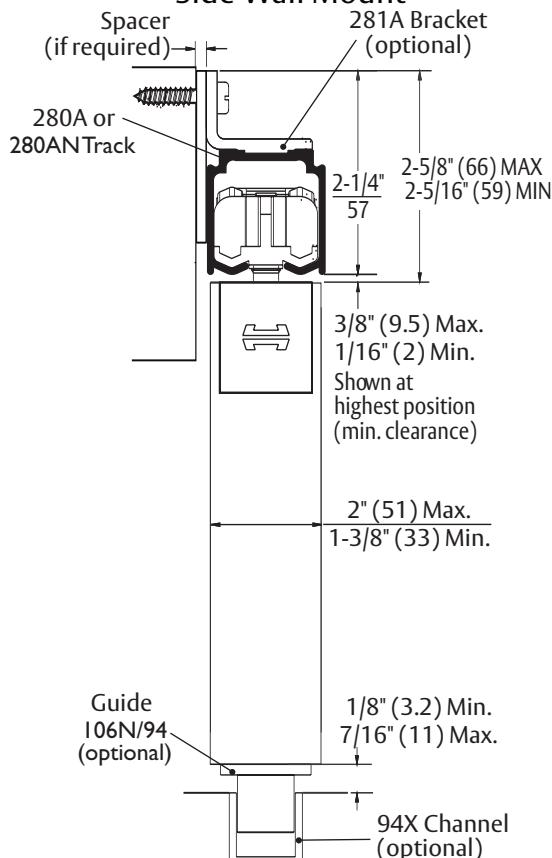

Experience a safer  
and more open world

### LP200A Kits Include:


- 1 ea 280AN Aluminum Track
- 1 ea LH100 Hardware Kit

### LH100 Hardware Kits Include:

- 2 ea Low Head Room Units
- 2 ea End Caps
- 2 ea In-Track Clip Stops
- 1 ea Screw Pack
- 2 ea Low Head Room Hangers
- 1 ea 102N White Nylon Mortise Guide
- 1 ea Small Spanner
- 1 ea 4mm Allen Key


Kit No.	Material	Max Leaf Width
LP200A/6	aluminum track / 6'	36"
LP200A/8	aluminum track / 8'	48"
LP200A/10	aluminum track / 10'	60"

**Alternative Guide Arrangement**  
Requires an additional 102N guide.  
Not supplied in kit.

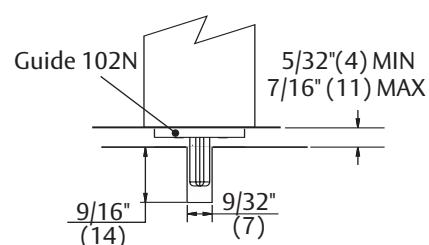


## 1. Assemble hanger.

Place nut inside hanger body. Thread locking nut onto bolt and then screw bolt into the nut within hanger. Leave a  $1\frac{1}{2}$ " clearance between the base of the hanger and bolt head as shown.




## 2. Secure track.

Use one bracket or fastener at each end of track and no more than 3' in between.

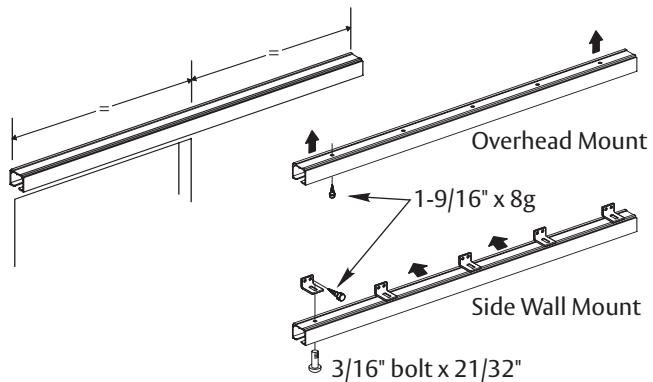


## 3. Mortise door for door guide.

Attach a plumb line to hanger. Remove one end bracket. Place hanger inside track. Using plumb line, mark the centerline of door guide.

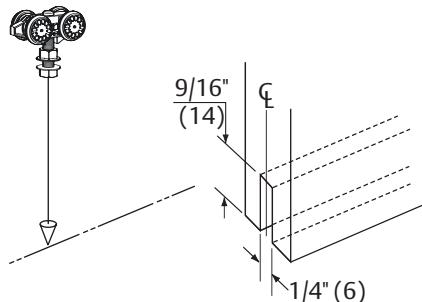

## 4. Fit door guide to floor.




**ASSA ABLOY**  
Opening Solutions

Experience a safer  
and more open world


Copyright © 2017, 2019, ASSA ABLOY Accessories and Door Controls Group, Inc. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.

81015 08/19

5. Route top of door at both ends for channel bodies.




6. Insert hangers and retaining stop.

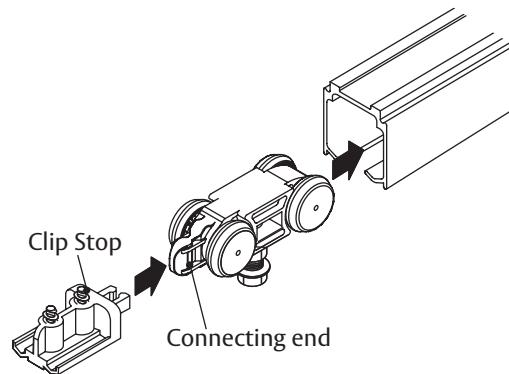

7. Fit both channel bodies into door.

Slowly guide complete door unit into track using installed floor guide. Install track stops.

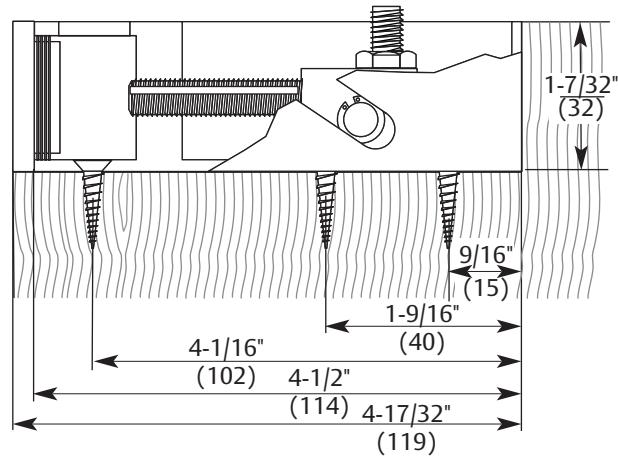

**ASSA ABLOY**  
Opening Solutions

Experience a safer  
and more open world

Copyright © 2017, 2019, ASSA ABLOY Accessories and Door Controls Group, Inc. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.


81015 08/19

The ASSA ABLOY Group is the global leader in access solutions. Every day we help people feel safe, secure and experience a more open world.

**ASSA ABLOY**  
Opening Solutions

## 8. Position and adjust door height.

Ensure 102N guide is running in routed guide slot in base of door.

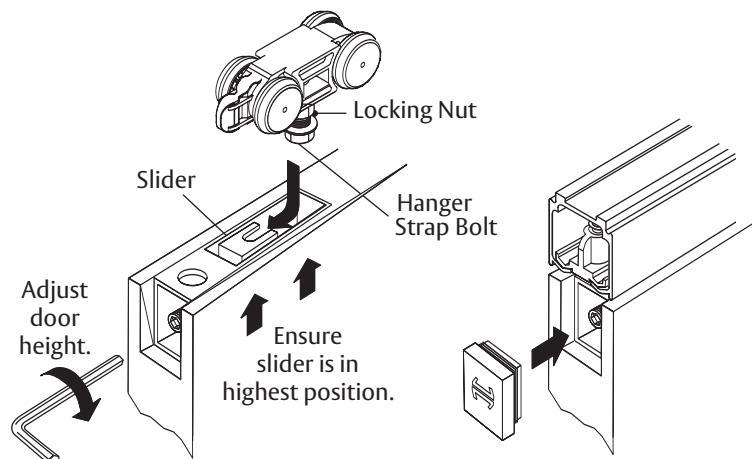

[www.assaabloydooraccessories.us](http://www.assaabloydooraccessories.us)

USA:

Ventura, CA 93003  
Phone: 800.283.9988

Memphis, TN 38141  
Phone: 800.824.3018

Canada:

Vaughan, ON  
Phone: 800.461.3007