


# Architectural Door Accessories

## Rockwood ESK-MS-DBL Double Electric Strike for Medium Stile (Page 1)

Experience a safer  
and more open world

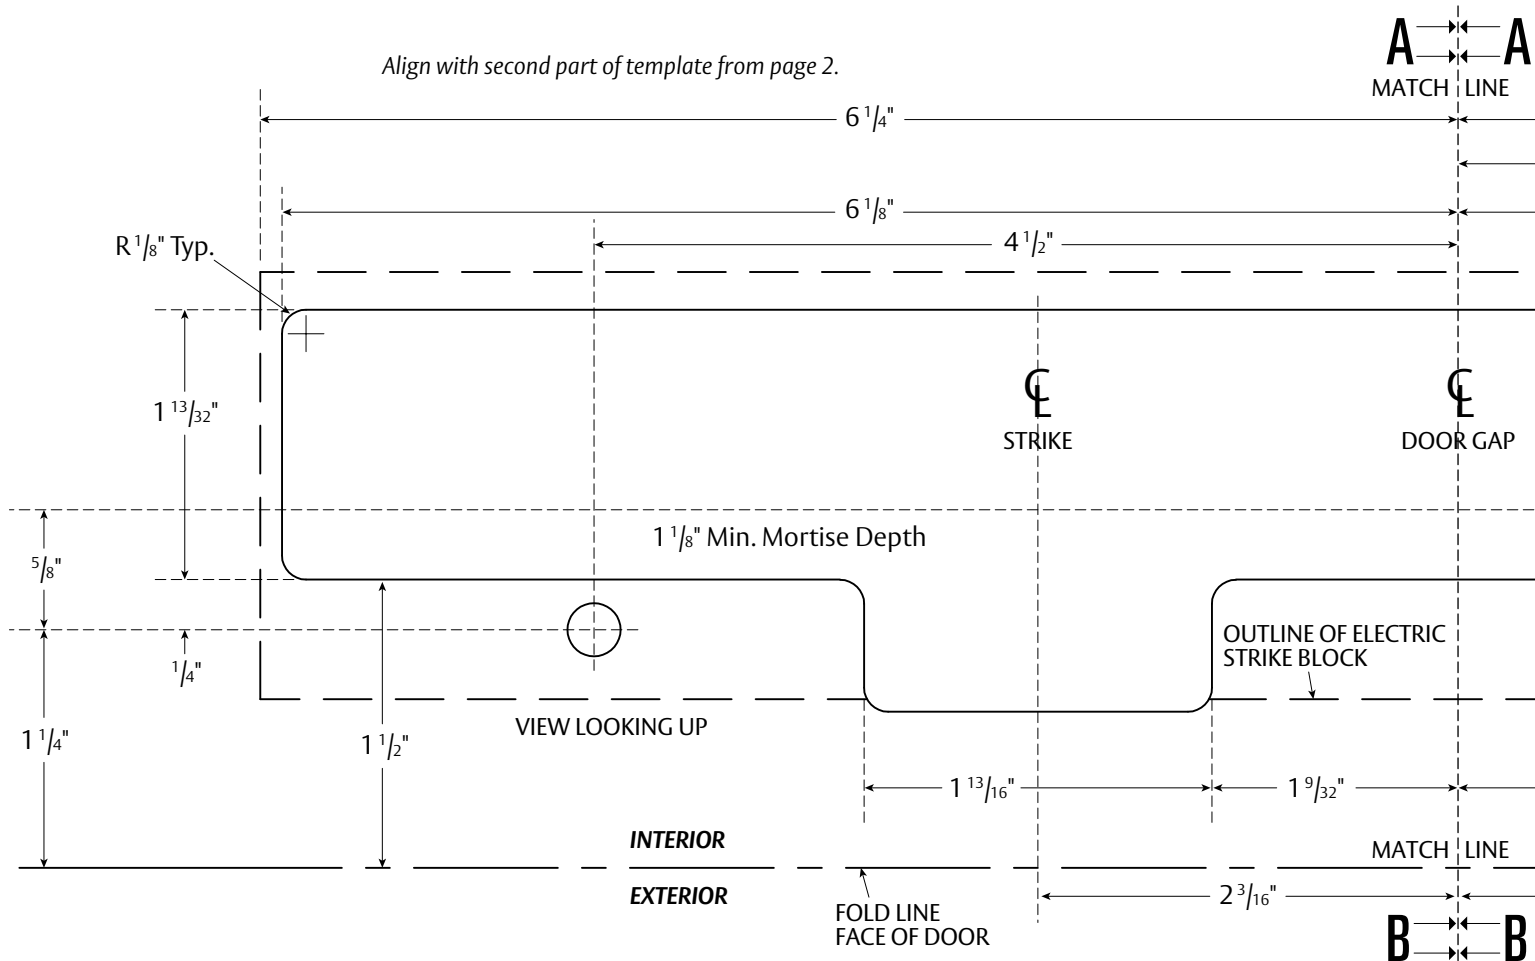

### Template ESK-MS-DBL

Effective date: June 1, 2020  
**Supersedes:** All Previous

NOTE: ASSA ABLOY reserves the right to make product changes and is not responsible for obsolete template errors. To ensure your template is current, please visit our website at [www.assaabloydooraccessories.us](http://www.assaabloydooraccessories.us) or call us at 800-458-2424.

#### Notes:

1. Allowable distance from edge of door to centerline of strike is  $2 \frac{1}{4}''$ , consult factory if distance to centerline is different.
2. View is from bottom of header.
3. Prep shown is for medium stile storefront doors only, minimum stile width is  $3 \frac{1}{2}''$ .
4. Backing plate of 12 ga. min. required in header for strike installation.
5.  $\frac{1}{4}''$ -20 fasteners provided.
6. For headers less than or equal to  $5 \frac{1}{4}''$  wide, cover is required by others to conceal a portion of electric strike.

**PRINT ON 11" X 8.5" PAPER OR LARGER AT 1:1 SCALE. VERIFY MEASUREMENTS AFTER PRINTING BEFORE USING THIS AS A TEMPLATE.**

## Rockwood ESK-MS-DBL Double Electric Strike for Medium Stile (Page 2)

