APW wyott

Food Well SERIES

APW Top-Mount, Rectangular Drop-In Food Warmers


HFW-1S

APW heavy-duty, top-mount, drop-in, modular food warmers are designed to hold heated foods at safe serving temperatures. One-piece stainless steel top flange and heavy-gauge, deep-drawn stainless steel warming pans are standard features on all models. E-Z Locks are standard for quick and easy installation. Sides, front, back, and bottom are fully insulated for energy savings, efficiency, quicker pre-heat and faster recovery. Individual controls for each well provide maximum versatility. Thermostatic or infinite controls available, varies per model. High-limits prevent overheating. Temperature-ready indicator lights are standard on all control types. Powerful tubular heating elements located under the warming pans for quick and efficient heating and for even heat distribution.

HFW Single-Well & Two-Well with Thermostat Control (Single), Infinite Control (2-Pan)

APW HFW-1S models accommodate (one) 12"x20" standard food pan or equivalent fractional inset pans & are designed for wet or dry operation. HFW-1DS models include a drain. HFW-43DS model accommodates (one) 12 x 27" food pan or equivalent fractional inset pans.

HFW SERIES Single-Pan Top-Mount Modular Warmers

APW Model #	Part #	Description	Size W x D [in]	Ship Wt. [lb]	Cubic Feet	
SINGLE PAN 12" x 20", TOP MOUNT						
HFW-1S	3P-HFW1TS-120	Thermostat control 120V, 1Ø, 1650W	13-3/4 x 21-3/4	24	4.15	
HFW-1S	39P-HFW1TS	Thermostat control 208/240V, 1Ø, 1240/1650W	13-3/4 x 21-3/4	24	4.15	
HFW-1DS	3P-HFW1DTS-120	Thermostat control, with Drain 120V, 1Ø, 1650W	13-3/4 x 21-3/4	24	4.15	
HFW-1DS	3P-HFW1DTS	Thermostat control, with Drain 208/240V, 1Ø, 1240/1650W	13-3/4 x 21-3/4	24	4.15	
SINGLE PAN 12" x 27", TOP MOUNT						
HFW-43DS	3P-HFW43DTS	Thermostat control, with Drain 208/240V, 1Ø, 1240/1650W	14-3/4 x 30-1/2	25	5.2	


APW HFW-2S models accommodate (two) 12"x20" standard food pans or equivalent fractional inset pans & are designed for wet or dry operation.

HFW-2DS model includes a drain in each well.


HFW-2S, HFW-2DS Two-Pan Top-Mount Modular Warmers

APW Model #	Part #	Description	Size W x D [in]	Ship Wt. [lb]	Cubic Feet	
TWO PAN 12" x 20", TOP MOUNT						
HFW-2S	3P-HFW2S	Infinite control 208/240V, 1Ø, 900/1200W each	29-1/2 x 23-5/8	51	7.89	
HFW-2DS	3P-HFW2DS	Infinite control, with Drain 208/240V, 1Ø, 900/1200W each	29-1/2 x 23-5/8	51	7.89	
HFW-2DTS	3P-HFW2DTS	Thermostat control, with Drain 208/240V, 1Ø, 900/1200W each	29-1/2 x 23-5/8	51	7.89	

HFW-1DS



HFW-2DS

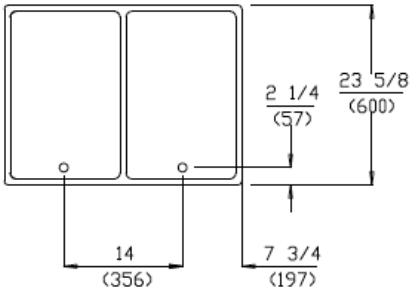

APW wyott

Food Well SERIES

APW Top-Mount, Rectangular Drop-In Food Warmers
HFW Three-Well, Four-Well, & Five-Well with Infinite Control



APW HFW-3S model accommodates (three) 12"x20" standard food pans or equivalent fractional inset pans and are designed for wet or dry operation. HFW-3DS model includes a drain in each well.

HFW-3S, HFW-3DS Three-Pan Top-Mount Modular Warmers

APW Model #	Part #	Description	Size W x D [in]	Ship Wt. [lb]	Cubic Feet	
THREE PAN 12" x 20", TOP MOUNT						
HFW-3S	3P-HFW3S	Infinite control 208/240V, 3Ø (1Ø), 900/1200W each	43-1/2 x 23-5/8	73	10.54	
HFW-3DS	3P-HFW3DS	Infinite control, with Drain 208/240V, 3Ø (1Ø), 900/1200W each	43-1/2 x 23-5/8	74	10.54	
HFW-3DTS	3P-HFW3DTS	Thermostat control, with Drain 208/240V, 3Ø (1Ø), 900/1200W each	43-1/2 x 23-5/8	74	10.54	

APW HFW-4S model accommodates (four) 12"x20" standard food pans or equivalent fractional inset pans and are designed for wet or dry operation. HFW-4DS model includes a drain in each well.

HFW-4S, HFW-4DS Four-Pan Top-Mount Modular Warmers


APW Model #	Part #	Description	Size W x D [in]	Ship Wt. [lb]	Cubic Feet	
FOUR PAN 12" x 20", TOP MOUNT						
HFW-4S	3P-HFW4S	Infinite control 208/240V, 3Ø (1Ø), 900/1200W each	57-1/2 x 23-5/8	95	13.56	
HFW-4DS	3P-HFW4DS	Infinite control, with Drain 208/240V, 3Ø (1Ø), 900/1200W each	57-1/2 x 23-5/8	95	13.56	
HFW-4DTS	3P-HFW4DTS	Thermostat control, with Drain 208/240V, 3Ø (1Ø), 900/1200W each	57-1/2 x 23-5/8	95	13.56	

APW HFW-5S model accommodates (five) 12"x20" standard food pans or equivalent fractional inset pans and are designed for wet or dry operation. HFW-5DS model includes a drain in each well.


HFW-5S, HFW-5DS Five-Pan Top-Mount Modular Warmers

APW Model #	Part #	Description	Size W x D [in]	Ship Wt. [lb]	Cubic Feet	
FIVE PAN 12" x 20", TOP MOUNT						
HFW-5S	3P-HFW5S	Infinite control 208/240V, 3Ø (1Ø), 900/1200W each	71-1/2 x 23-5/8	105	16.57	
HFW-5DS	3P-HFW5DS	Infinite control, with Drain 208/240V, 3Ø (1Ø), 900/1200W each	71-1/2 x 23-5/8	116	16.57	
HFW-5DTS	3P-HFW5DTS	Thermostat control, with Drain 208/240V, 3Ø (1Ø), 900/1200W each	71-1/2 x 23-5/8	116	16.57	


HFW-3DS

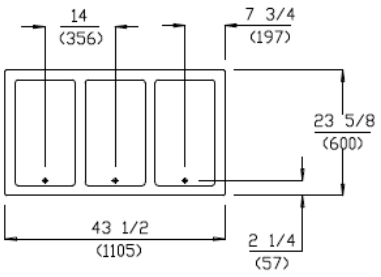

HFW-4DS

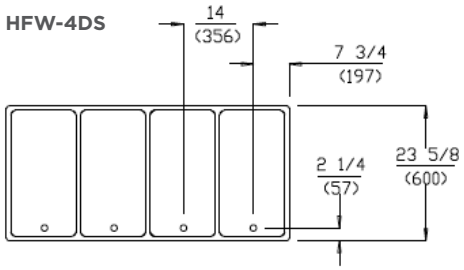

HFW-5DS

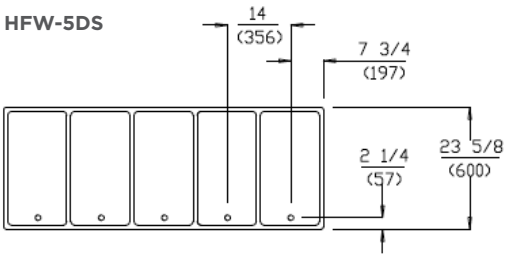

APW wyott

Food Well SERIES

APW Top-Mount, Round Drop-In Food Warmers
4 Quart, 7 Quart & 11 Quart with Thermostat Control


SM-50-4

APW heavy-duty, top-mount, drop-in, round food warmers are designed to hold heated foods at safe and fresh serving temperatures. APW Wyott SM-50-4s Series accommodates standard 4-quart round inset pans, and are designed for wet or dry operation. One-piece stainless steel top flange and heavygauge, deep-drawn stainless steel warming pans are standard features on all models. E-Z Locks are standard for quick and easy installation. Models with thermostatic controlls are available. High-limits prevent overheating. Temperature-ready indicator lights are standard on all control types. Powerful tubular heating elements are located under the warming pans for quick and efficient heating and for even heat distribution.

Round Warmers, Top-Mount, 4-Quart

APW Model #	Part #	Description	Dimensions [in]	Ship Wt. [lb]	Cubic Feet	
NON-INSULATED, 4-QUART ROUND WARMERS, TOP MOUNT						
SM-50-4 ULS	3P-SM504ULS-120	4 Quart, Thermostat control 120V, 1Ø, 620/825W, UL APPROVED	8-1/4" O.D.	6 lb. 2.8 kg	0.82	
SM-50-4DS	3P-SM504DULS120	4 Quart, Thermostat control with DRAIN 120V, 1Ø, 825W, UL APPROVED	8-1/4" O.D.	6 lb. 2.8 kg	0.82	


Round Warmers, Top-Mount, 7-Quart

APW Model #	Part #	Description	Dimensions [in]	Ship Wt. [lb]	Cubic Feet	
NON-INSULATED, 7-QUART ROUND WARMERS, TOP MOUNT						
SM-50-7DS	3P-SM507DS	7 Quart, Thermostat control with DRAIN 120V, 1Ø, 825W	10-1/16" O.D.	6 lb. 2.8 kg	1.62	
SM-50-7 ULS	3P-SM507ULS-120	7 Quart, Thermostat control 120V, 1Ø, 825W, UL APPROVED	10-1/16" O.D.	6 lb. 2.8 kg	1.62	
SM-50-7DS ULS	3P-SM507DULS120	7 Quart, Thermostat control with DRAIN 120V, 1Ø, 825W, UL APPROVED	10-1/16" O.D.	6 lb. 2.8 kg	1.62	

Round Warmers, Top-Mount, 11-Quart

APW Model #	Part #	Description	Dimensions [in]	Ship Wt. [lb]	Cubic Feet	
NON-INSULATED, 11-QUART ROUND WARMERS, TOP MOUNT						
SM-50-11S	3P-SM5011S	11 Quart, Thermostat control 120V, 1Ø, 825W	12" O.D.	7 lb. 3.2 kg	1.62	
SM-50-11DS	3P-SM5011DS-120	11 Quart, Thermostat control with DRAIN 120V, 1Ø, 825W	12" O.D.	7 lb. 3.2 kg	1.62	

Top View

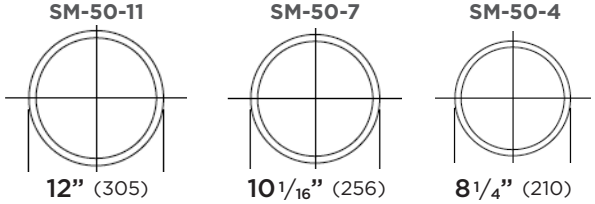

APW wyott

Food Well SERIES

APW Top-Mount, Rectangular Food Warmers with Thermostat Control



TM-90 ULS

TM-90, TM-43 MODELS Single-Pan Top-Mount Rectangular Warmers

APW Model #	Part #	Description	Dimensions [in]	Ship Wt. [lb]	Cubic Feet	
SINGLE PAN, FRACTIONAL SIZE, HALF-SIZE LONG, TOP MOUNT						
TM-12LS	TM-12LS-120	Half-size LONG, holds 6" x 20" pan Thermostat Control 120V, 1Ø, 750W	6 3/8 x 20-3/4	11	2.54	
SINGLE PAN, 12" x 20" TOP MOUNT						
TM-90S	3P-TM90S-120	Thermostat Control 120V, 1Ø, 1200W	13-11/16 x 21-3/4	16	2.97	
TM-90S	3P-TM90S	Thermostat Control 208/240V, 1Ø, 900/1200W	13-11/16 x 21-3/4	16	2.97	
TM-90 ULS	3P-TM90ULS-120	Thermostat Control 120V, 1Ø, 1650W, UL APPROVED	13-11/16 x 21-3/4	20	4.15	
TM-90 ULS	3P-TM90ULS	Thermostat Control 208/240V, 1Ø, 1240/1650W, UL APPROVED	13-11/16 x 21-3/4	20	4.15	
TM-90DS	3P-TM90DS-120	Thermostat Control, with DRAIN 120V, 1Ø, 1200W	13-11/16 x 21-3/4	15	2.97	
TM-90DS	3P-TM90DS	Thermostat Control, with DRAIN 208/240V, 1Ø, 900/1200W	13-11/16 x 21-3/4	15	2.97	
TM-90D ULS	3P-TM90DULS-120	Thermostat Control, with DRAIN 120V, 1Ø, 1650W, UL APPROVED	13-11/16 x 21-3/4	21	4.15	
TM-90D ULS	3P-TM90DULS	Thermostat Control, with DRAIN 08/240V, 1Ø, 1240/1650W, UL APPROVED	13-11/16 x 21-3/4	21	4.15	
SINGLE PAN, 12" x 27" TOP MOUNT						
TM-43 ULS	3P-TM43ULS-120	Thermostat Control 120V, 1Ø, 1650W, UL APPROVED	13-1/2 x 28-1/2	22	3.85	
TM-43 ULS	3P-TM43ULS	Thermostat Control 208/240V, 1Ø, 1240/1650W, UL APPROVED	13-1/2 x 28-1/2	22	3.85	
TM-43D ULS	3P-TM43DULS-120	Thermostat Control, with DRAIN 120V, 1Ø, 1650W, UL APPROVED	13 -1/2 x 28-1/2	22	3.85	
TM-43D ULS	3P-TM43DULS	Thermostat Control, with DRAIN 208/240V, 1Ø, 1240/1650W, UL APPROVED	13 -1/2 x 28-1/2	22	3.85	



APW wyott

Food Well SERIES

APW Bottom-Mount, Rectangular Food Warmers with Thermostat Control, Square and Round Corner Options



BM-30DS

BM-80CS, BM-80C, BM-80CDS
Single-Pan Bottom-Mount Rectangular Warmers with Square Corners

APW Model #	Part #	Description	Dimensions [in]	Ship Wt. [lb]	Cubic Feet	
FULLY-INSULATED, SINGLE PAN, 12" x 20" BOTTOM MOUNT with SQUARE CORNERS						
BM-80CS	3P-BM80CS	Thermostat Control, FULLY INSULATED 208/240V, 1Ø, 1240/1650W	13-11/16 x 21-13/16	22	2.97	
BM-80C ULS	3P-BM80CULS	Thermostat Control, FULLY INSULATED 208/240V, 1Ø, 1240/1650W, UL APPROVED	13-11/16 x 21-13/16	24	2.97	
BM-80CDS	3P-BM80CDS	Thermostat Control, FULLY INSULATED with DRAIN 208/240V, 1Ø, 1240/1650W	13-11/16 x 21-13/16	22	2.97	
BM-80CD ULS	3P-BM80CDULS	Thermostat Control, FULLY INSULATED with DRAIN, UL Approved 208/240V, 1Ø, 1240/1650W	13-11/16 x 21-13/16	22	2.97	

BM-30S, BM-30DS, BM-80S, BM-80DS
Single-Pan Bottom-Mount Rectangular Warmers with Round Corners

APW Model #	Part #	Description	Dimensions [in]	Ship Wt. [lb]	Cubic Feet	
SINGLE PAN, 12" x 20" BOTTOM MOUNT with ROUND CORNERS, Uninsulated						
BM-30S-120	3P-BM30S-120	Infinite Control 120V, 1Ø, 1200W	13-7/8 x 21-15/16	14	2.97	
BM-30S	3P-BM30S	Infinite Control 208/240V, 1Ø, 900/1200W	13-7/8 x 21-15/16	14	2.97	
BM-30DS	3P-BM30DS-120	Infinite Control, with DRAIN 120V, 1Ø, 1200W	13-7/8 x 21-15/16	14	2.97	
BM-30DS	3P-BM30DS	Infinite Control, with DRAIN 208/240V, 1Ø, 900/1200W	13-7/8 x 21-15/16	14	2.97	
FULLY-INSULATED, SINGLE PAN, 12" x 20" BOTTOM MOUNT with ROUND CORNERS, Uninsulated						
BM-80S	3P-BM80S-120	Thermostat Control, FULLY INSULATED 120V, 1Ø, 1200W	13-11/16 x 21-13/16	22	2.97	
BM-80S	3P-BM80S	Thermostat Control, FULLY INSULATED 208/240V, 1Ø, 1240/1650W	13-11/16 x 21-13/16	22	2.97	
BM-80DS	3P-BM80DS-120	Thermostat Control, FULLY INSULATED with DRAIN 120V, 1Ø, 1200W	13-11/16 x 21-13/16	22	2.97	
BM-80DS	3P-BM80DS	Thermostat Control, FULLY INSULATED with DRAIN 208/240V, 1Ø, 1240/1650W	13-11/16 x 21-13/16	22	2.97	
BM-80D ULS	3P-BM80DULS	Thermostat Control, FULLY INSULATED with DRAIN 208/240V, 1Ø, 1240/1650W, UL APPROVED	13-7/8 x 21-15/16	22	2.97	

APW wyott

Food Well SERIES

APW Top-Mount, Rectangular Half-Size Food Warmers with EZ-Lock



HFW-12DS

HFW-12DS
Half-Size, Single-Pan Top-Mount Rectangular Warmers

APW Model #	Part #	Description	Dimensions [in]	Ship Wt. [lb]	Cubic Feet	
SINGLE PAN, HALF-SIZE 12" x 10" TOP MOUNT with EZ-Lock						
HFW-12S	3P-HFW12S-120	Half Size, Holds 12" x 10" pan UL LISTED 120V, 1Ø, 450W, with EZ-Lock	11-5/8 x 13-7/8	18	2.16	
HFW-12DS	3P-HFW12DS-120	Half Size, Holds 12" x 10" pan with DRAIN, UL LISTED 120V, 1Ø, 450W, with EZ-Lock	11-5/8 x 13-7/8	18	2.16	

Food Well Accessories

Food Well Accessories

APW Part #	Description	Ship Wt. [lb]	
ADAPTER TOPS FOR 12" x 20" SQUARE CORNER WARMERS			
3P-20176	Adapter Top, Converts warmer to hold two 7 quart insets	2	$203
3P-20434	Adapter Top, Converts warmer to hold two 4 quart and two 2 1/2 quart insets	2	$208
3P-21615	Adapter Top, Converts warmer to hold three 4 quart insets	2	$207
3P-21621	Adapter Top, Converts warmer to hold one 7 quart and one 11 quart inset	2	
3P-21624	Adapter Top, Converts warmer to hold four 2 1/2 quart insets	2	
ADAPTER TOPS FOR 12" x 27" SQUARE CORNER WARMERS			
3P-22589	Adapter Top, Converts warmer to hold three 7 quart insets	1	
3P-23115	Adapter Top, Converts warmer to hold two 11 quart insets	1	$348
BUILT-IN WARMER MISCELLANEOUS			
3P-21709	Drain Screen, Fits all models with drains, one per well required	1	
3P-20385	Drain Valve Extension Kit, Extension from drain to counter front with remote handle, for use with "D" models only, excluding "DM" models. Includes 1/2" brass drain valve	1	
3P-22592	EZ-Lock Extension Kit*, For UL listed Non-Insulated Round Warmers only to adapt to wood countertops up to 1 1/2" thick	1	
3P-22593	EZ-Lock Extension Kit*, For UL listed 12" x 20" Warmers only to adapt to wood countertops up to 1 1/2" thick	1	
3P-EZ0330	EZ-Lock Extension Kit*, For Fully Insulated Round Warmers only to adapt to wood countertops up to 1 ½" thick	1	
	• Optional 72" Wiring for APW food wells • Thermostatically controlled warmers - one required per well • Infinite Switch controlled models - one required per well • Please contact factory for availability of optional wiring		
*EZ-Lock Extension Kits for UL listed units approved for installation in wood countertops. One well unit requires one kit. Two to three well units require two kits. Four to five well units require three kits.			
ADAPTER PLATE for HFW-3, HFW-4, HFW-5 models			
3P-ADPTINFCTRL	Adapter Plate for models: HFW-3DS, HFW-3S, HFW-4DS, HFW-4S, HFW-5DS, HFW-5S		

3P-EZ0330

