

WSM SHEET STEEL ENCLOSURES WITH MOUNTING PLATE FOR WALL MOUNTING



WSM

SCHRACK-INFO

- Delivery contents:
Complete enclosure with mounting plate and fixing material, Blank flange with gasket and screws. Nylon washers for sealing the wall-fastening holes 2 door-mounting profiles (from size WSM6040210, plastic key DIN 5mm.
Wall-fastening flaps WSMWB004 – are not included – please order separately.
- Degree of protection: single door IP 66 NEMA 4, 12 and 13, double door IP 55
- Shock resistance: IK10 according to IEC 60529
Surface: Powder-structure coating, grey RAL 7035

TECHNICAL DATA

Body: single door: 1.2mm / 1.4mm WSM6060210 and above / 1.5mm WSM108260 and above, and 400mm depth.
Double door: 1.4mm WSM6080302 / 1.5mm WSM1010302 and above mild steel enclosures folded and seam welded.
Cable entry is reached by a maximum gland opening, which is placed in the most far back position of the enclosure frame.
To allow for air circulation around the rear and for wall fixing, four 20.4mm diameter x 2mm deep depressions are pressed out with an 8.5mm diameter hole.. All parts are pre-treated with iron phosphate, demineralised and protected with a epoxy polyester powder paint RAL 7035 with structured finish.

Door: single door 1.2mm mild steel / 1.4mm WSM6060210 and above / 1.8mm WSM1060260 and above.
Double door: 1.4mm mild steel / 1.8mm WSM8012302 and above.
Surface mounted with 130° opening. Concealed removable hinges with captive pin. Hinges can be mounted to allow left or right hand opening. From height 300mm and above there are studs to mount door profiles WSMTP..., and from height 600 and above the profiles are included as standard. Sealing is ensured by an injected one piece polyurethane gasket.

Lock: Customized lock with double grip for easy opening of the door. Double-bit 5mm insert and 90° movement. 1000mm high enclosures and above have espagnolette three point locking. Other inserts are available as an accessory. Double door have espagnolette three point locking..

Mounting plate: The mounting plate is marked vertically at 10mm intervals for easy horizontal positioning of equipment. On the top and bottom there are holes to facilitate cable fixing. Fixed onto M8 press welded studs to the rear of the enclosure. All sides from 800mm and above are strengthened by folded edges. By using the WSMAMG accessory the mounting plate position can be adjusted to any depth.

Gland Plate 1.4mm mild steel.

-Opening: Situated at the far rear of the enclosure to make cabling onto the mounting plate easier.

Protection: The enclosure offers maximum protection to the user and equipment by a protection degree IP66 according to IEC 60529 and IEC_50102 (IP 55 - IK 10 for enclosures with double door and enclosures with glazed door). When using an inner door, modular framework or 19" swing frame, protection degree IP20 is guaranteed within the enclosure. Omplying with NEMA 4, 12 and 13.



Finish: RAL 7035 structure powder coating.

Mounting: The enclosure is secured to the wall using: bolts, directly through the rear wall and protected inside with plastic washers, or wall mounting brackets WSMWB004 at the rear screwed from the enclosure. In both cases the IP / NEMA degrees are guaranteed.


WSM SHEET STEEL ENCLOSURES WITH MOUNTING PLATE FOR WALL MOUNTING – continued

DIMENSIONS

SINGLE DOOR:

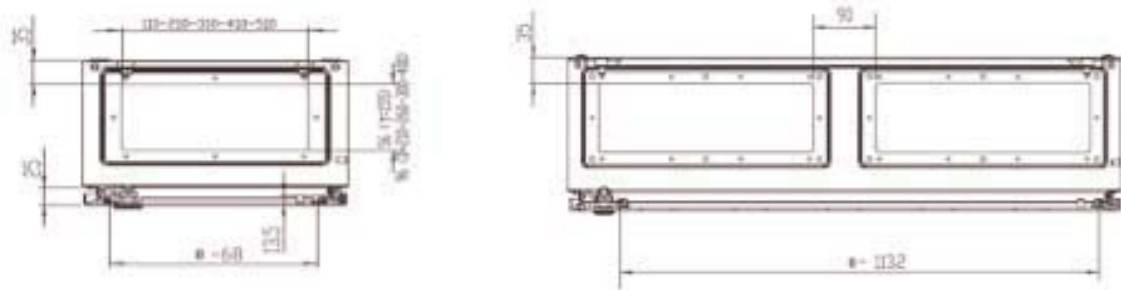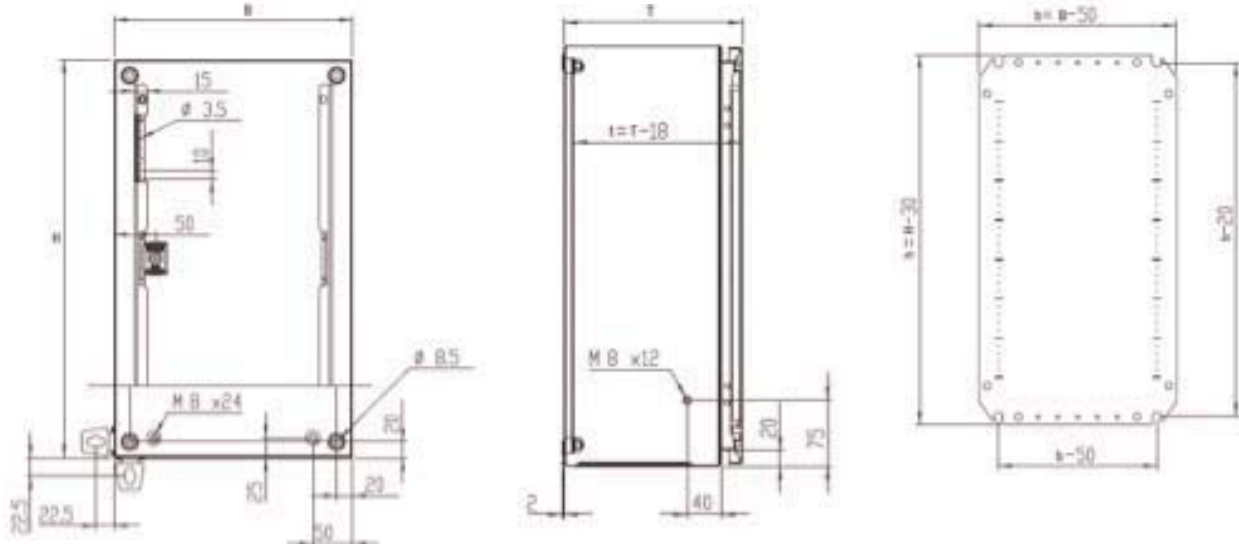


SINGLE DOOR:

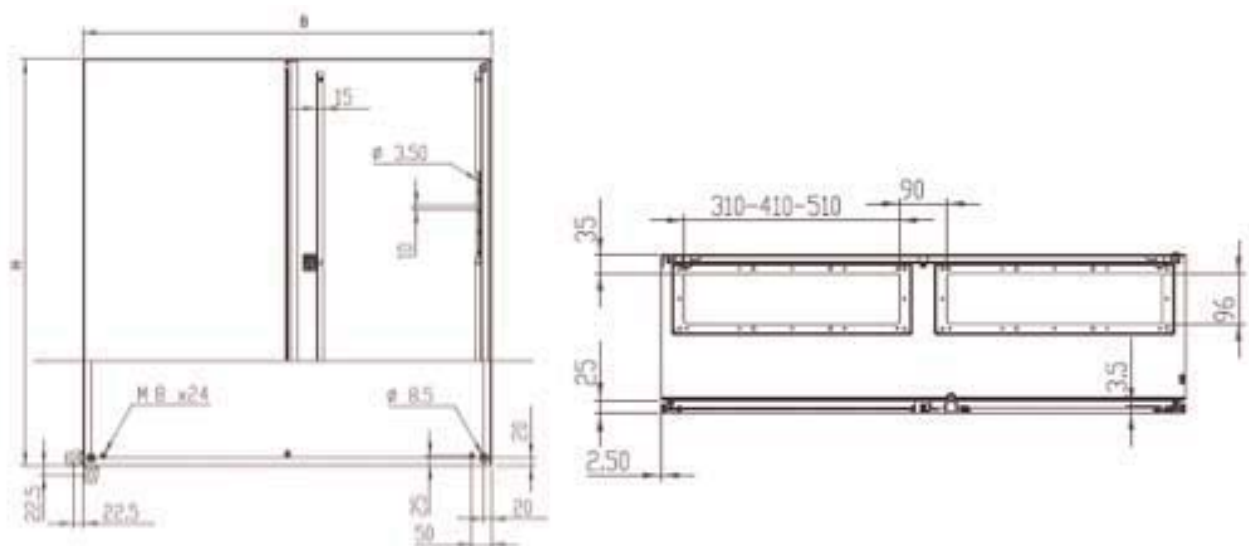



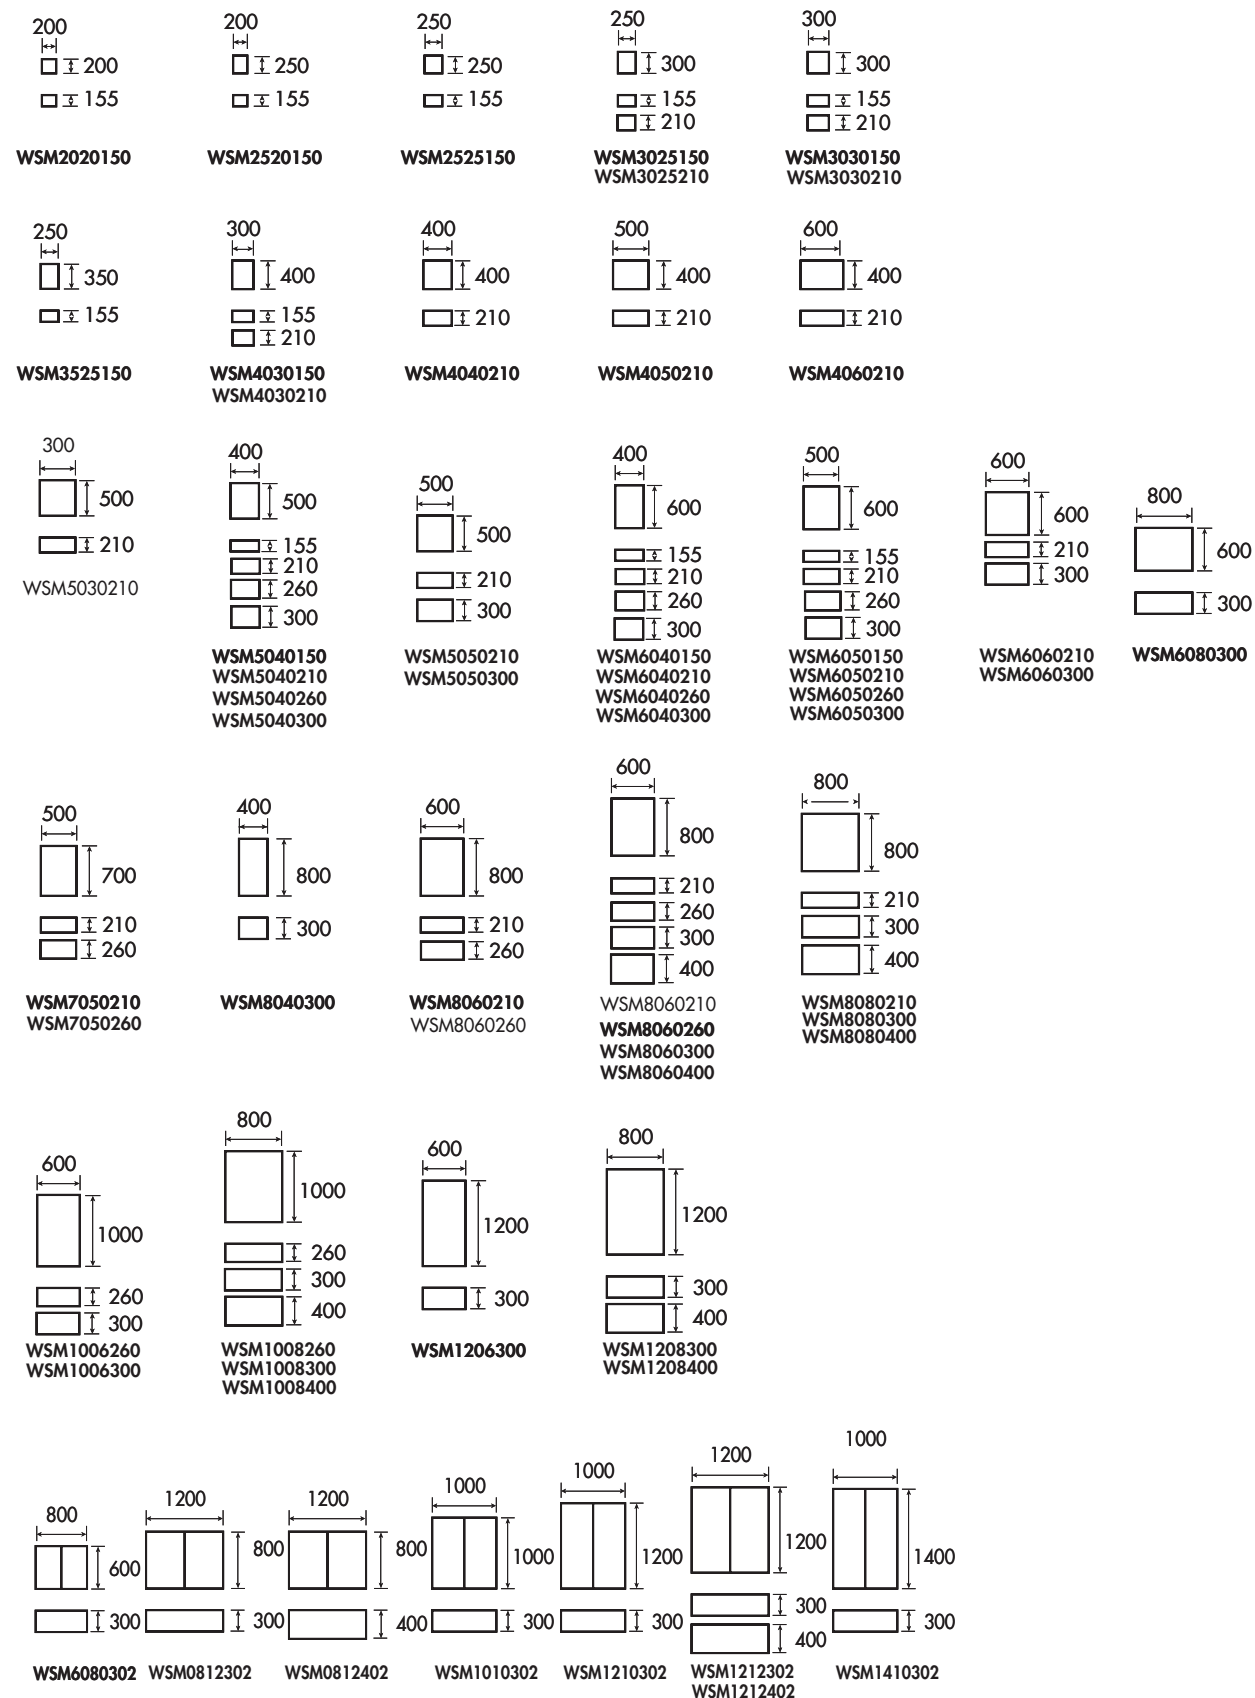







































WSM SHEET STEEL ENCLOSURES WITH MOUNTING PLATE FOR WALL MOUNTING – continued

TYPES



















WSM SHEET STEEL ENCLOSURES WITH MOUNTING PLATE FOR WALL MOUNTING – continued

DIM. (HxWxD) mm	MOUNTING PLATE (HxW) mm	INSTALLATION DEPTH (D) mm	FLANGE OPENING (WxD) mm / SIZE	LOCK	EAN CODE	AVAILABLE	ORDER NO.
MILD STEEL SINGLE DOOR ENCLOSURES							
200x200x155	170x150	137	110x56 / 00	1	9004840374278		WSM2020150
250x200x155	220x150	137	110x56 / 00	1	9004840374285		WSM2520150
250x250x155	220x200	137	110x56 / 00	1	9004840374292		WSM2525150
300x250x155	270x200	137	110x56 / 00	1	9004840374308		WSM3025150
300x250x210	270x200	192	110x56 / 00	1	9004840374315		WSM3025210
300x300x155	270x250	137	210x56 / A0	1	9004840374322		WSM3030150
300x300x210	270x250	192	210x96 / A	1	9004840374339		WSM3030210
350x250x155	320x200	137	110x56 / 00	1	9004840374346		WSM3525150
400x300x155	370x250	137	210x56 / A0	1	9004840374353		WSM4030150
400x300x210	370x250	192	210x96 / A	1	9004840374360		WSM4030210
400x400x210	370x350	192	310x96 / B	1	9004840374377		WSM4040210
400x500x210	370x450	192	410x96 / C	1	9004840374384		WSM4050210
400x600x210	370x550	192	510x96 / D	1	9004840374391		WSM4060210
500x300x210	470x250	192	210x96 / A	1	9004840422603		WSM5030210
500x400x155	470x350	137	310x56 / B0	1	9004840374407		WSM5040150
500x400x210	470x350	192	310x96 / B	1	9004840374414		WSM5040210
500x400x260	470x350	224	310x96 / B	1	9004840374421		WSM5040260
500x400x300	470x350	282	310x96 / B	1	9004840374438		WSM5040300
500x500x210	470x450	192	410x96 / C	1	9004840374445		WSM5050210
500x500x300	470x450	282	410x96 / C	1	9004840374452		WSM5050300
600x400x155	570x350	137	310x56 / B0	2	9004840374469		WSM6040150
600x400x210	570x350	192	310x96 / B	2	9004840374476		WSM6040210
600x400x260	570x350	224	310x96 / B	2	9004840374483		WSM6040260
600x400x300	570x350	282	310x96 / B	2	9004840374490		WSM6040300
600x500x155	570x450	137	410x56 / C0	2	9004840374506		WSM6050150
600x500x210	570x450	192	410x96 / C	2	9004840374513		WSM6050210
600x500x260	570x450	224	410x96 / C	2	9004840374520		WSM6050260
600x500x300	570x450	282	410x96 / C	2	9004840374537		WSM6050300
600x600x210	570x550	192	510x96 / D	2	9004840374544		WSM6060210
600x600x300	570x550	282	510x96 / D	2	9004840374551		WSM6060300
600x600x400	570x550	382	510x96 / D	2	9004840374568		WSM6060400
600x800x300	570x750	282	2x310x96 / B	2	9004840374575		WSM6080300
700x500x210	670x450	192	410x96 / C	2	9004840374582		WSM7050210
700x500x260	670x450	224	410x96 / C	2	9004840374589		WSM7050260
800x400x300	770x350	282	310x96 / B	2	9004840374605		WSM8040300
800x600x210	770x550	192	510x96 / D	2	9004840374612		WSM8060210
800x600x260	770x550	224	510x96 / D	2	9004840374629		WSM8060260
800x600x300	770x550	282	510x96 / D	2	9004840374636		WSM8060300
800x600x400	770x550	382	510x96 / D	2	9004840374643		WSM8060400
800x800x210	770x750	192	2x310x96 / B	2	9004840374650		WSM8080210
800x800x300	770x750	282	2x310x96 / B	2	9004840374667		WSM8080300
800x800x400	770x750	382	2x310x96 / B	2	9004840374674		WSM8080400



WSM SHEET STEEL ENCLOSURES WITH MOUNTING PLATE FOR WALL MOUNTING – continued

DIM. (HxWxD) mm	MOUNTING PLATE (HxW) mm	INSTALLATION DEPTH (D) mm	FLANGE OPENING (WxD) mm / SIZE	LOCK	EAN CODE	AVAILABLE	ORDER NO.
MILD STEEL SINGLE DOOR ENCLOSURES							
1000x600x260	970x550	224	510x96 / D	3 pt.	9004840374681		WSM1006260
1000x600x300	970x550	282	510x96 / D	3 pt.	9004840374698		WSM1006300
1000x800x260	970x750	224	2x310x96 / B	3 pt.	9004840374704		WSM1008260
1000x800x300	970x750	282	2x310x96 / B	3 pt.	9004840374711		WSM1008300
1000x800x400	970x750	382	2x310x96 / B	3 pt.	9004840374728		WSM1008400
1200x600x300	1170x550	282	510x96 / D	3 pt.	9004840374735		WSM1206300
1200x800x300	1170x750	282	2x310x96 / B	3 pt.	9004840374742		WSM1208300
1200x800x400	1170x750	382	2x310x96 / B	3 pt.	9004840374759		WSM1208400
MILD STEEL DOUBLE DOOR ENCLOSURES							
600x800x300	570x750	282	2x310x96 / B	3 pt.	9004840374766		WSM6080302
800x1200x300	770x1150	282	2x510x96 / D	3 pt.	9004840374773		WSM8012302
800x1200x400	770x1150	382	2x510x96 / D	3 pt.	9004840374780		WSM8012402
1000x1000x300	970x950	282	2x410x96 / C	3 pt.	9004840374797		WSM1010302
1200x1000x300	1170x950	282	2x410x96 / C	3 pt.	9004840374803		WSM1210302
1200x1200x300	1170x1150	282	2x510x96 / D	3 pt.	9004840374810		WSM1212302
1200x1200x400	1170x1150	382	2x510x96 / D	3 pt.	9004840374827		WSM1212402
1400x1000x300	1370x950	282	2x410x96 / C	3 pt.	9004840374834		WSM1410302
Wall-fastening flaps, glavanized					9004840379150		WSMWB004

MODULAR CHASSIS WSMIE



WSMIE03025








SCHRACK-INFO

- Used for easy mounting of DIN-rail components with a maximum height of 68mm. Distance between rows 125mm. If required, the standard enclosure door can be replaced with a glazed door. Usable depth between front cover and external door: 35mm. Adjustable depth position with AMG accessory. In stainless steel enclosure machining is required.

Material: DIN-rails PP0735 made of 1.20mm galvanized steel, vertical profiles 1.5mm mild steel, and front cover 1.5mm mild steel.

Finish: RAL 7035 structure powder coating.

Pack quantity: Slotted front panel, two vertical profiles, top and bottom blank panels, one DIN-rail per row, and mounting accessories.

FOR EQUIPMENT CABINETS (HxW) mm	ROWS	MODULES	EAN CODE	AVAILABLE	ORDER NO.
300x250	2	16	9004840381443		WSMIE03025
400x300	3	33	9004840381450		WSMIE04030
500x400	3	48	9004840381467		WSMIE05040
600x400	4	64	9004840381474		WSMIE06040
600x600	4	108	9004840381481		WSMIE06060
700x500	5	110	9004840381498		WSMIE07050
800x600	6	162	9004840381504		WSMIE08060



VENTILATED GLAND PLATE



SCHRACK-INFO


Material: 1.4mm mild steel

Finish: RAL 7035 structure powder coating

Protection: Complies with IP 23, in bottom or vertical position

DESCRIPTION/DIM. (WxD) mm	TYPE	EAN CODE	AVAILABLE	ORDER NO.
210x96	A	9004840235852		WSVF0001
310x96	B	9004840235869		WSVF0002
410x96	C	9004840235876		WSVF0003
510x96	D	9004840381955		WSVF0004

CONNECTION GLAND PLATE




SCHRACK-INFO

Material: 1.4mm mild steel

Finish: RAL 7035 structure powder coating

DESCRIPTION/DIM. (WxD) mm	TYPE	EAN CODE	AVAILABLE	ORDER NO.
210x96	A	9004840235913		WSVBF001
310x96	B	9004840235920		WSVBF002
410x96	C	9004840235937		WSVBF003
510x96	D	9004840381887		WSVBF004

GLAND PLATE WITH KNOCK OUTS




SCHRACK-INFO

Material: 1.4mm mild steel

Finish: RAL 7035 structure powder coating

DESCRIPTION/DIM. (WxD) mm	TYPE	EAN CODE	AVAILABLE	ORDER NO.
210x56 – 4xM16, 3xM20A0		9004840235883		WSFA0001
210x96 – 4xM16, 5xM20, 2xM25, 2xM32	A	9004840381917		WSFA0011
210x96 – 12xM16, 1xM25, 1xM32	A	9004840381900		WSFA0012
310x56 – 6xM16, 3xM20, 1xM25	B0	9004840381931		WSFA0021
310x96 – 9xM16, 4xM20, 2xM25, 2xM32	B	9004840235890		WSFA0002
310x96 – 21xM16, 1xM32, 1xM25	B	9004840264098		WSFA0022
410x56 – 9xM16, 4xM20, 1xM25	C	9004840381924		WSFA0031
410x96 – 18xM16, 5xM20, 4xM25, 2xM32	C	9004840235906		WSFA0003
410x96 – 21xM16, 10xM20	C	9004840264104		WSFA0032
510x96 – 27xM16, 5xM20, 4xM25, 2xM32	D	9004840381894		WSFA0004
510x96 – 18xM16, 14xM20, 3xM25, 1xM32	D	9004840381948		WSFA0042

RAIN HOOD FOR WSM ENCLOSURES



SCHRACK-INFO

Material: 1.5mm mild steel

Finish: RAL 7035 structure powder coating

DESCRIPTION/DIM. (WxD) mm	EAN CODE	AVAILABLE	ORDER NO.
250x155	9004840381528		WSMD2515
250x210	9004840381535		WSMD2521
300x155	9004840381511		WSMD3015
300x210	9004840381542		WSMD3021
400x155	9004840381559		WSMD4015
400x210	9004840381566		WSMD4021
400x260	9004840381573		WSMD4026
400x300	9004840381580		WSMD4030
500x155	9004840381597		WSMD5015
500x210	9004840381603		WSMD5021
500x260	9004840381610		WSMD5026
500x300	9004840381627		WSMD5030
600x210	9004840381634		WSMD6021
600x260	9004840381641		WSMD6026
600x300	9004840381658		WSMD6030
600x400	9004840381665		WSMD6040
800x210	9004840381672		WSMD8021
800x260	9004840381689		WSMD8026
800x300	9004840381696		WSMD8030
800x400	9004840381702		WSMD8040
1000x300	9004840381719		WSMD1030
1200x300	9004840381726		WSMD1230
1200x400	9004840381733		WSMD1240



I KNOW WHERE TO FIND IT!

THE SCHRACK TECHNIK WEB SHOP WITH NAVIGATOR

WWW.SCHRACK.COM

- Finding product information made easy
- Buying products around the clock
- Quick access customer service



TRANSPARENT DOORS



WSMF3025AC

SCHRACK-INFO

Description: To replace the standard door, it provides a clear view of the components installed inside the enclosure. Allows all the options of the locking program.

Material: 1.2mm mild steel / 1.4mm WSMF6060AC and above / 1.8mm WSMF1060AC and above, and 3mm transparent acrylic glass.


Finish: RAL 7035 structure powder coating

Protection: Complies with IP 55

Pack quantity: 1 door

VIEWING AREA	DIM. (HxW) mm	EAN CODE	AVAILABLE	ORDER NO.
159x93	300x250	9004840381740		WSMF3025AC
159x143	300x300	9004840381757		WSMF3030AC
259x143	400x300	9004840381764		WSMF4030AC
259x243	400x400	9004840381771		WSMF4040AC
359x243	500x400	9004840381788		WSMF5040AC
459x243	600x400	9004840381795		WSMF6040AC
459x343	600x500	9004840381801		WSMF6050AC
459x443	600x600	9004840381818		WSMF6060AC
559x343	700x500	9004840381825		WSMF7050AC
659x443	800x600	9004840381832		WSMF8060AC
859x427	1000x600	9004840381849		WSMF1060AC
859x627	1000x800	9004840381856		WSMF1080AC
1059x427	1200x600	9004840381863		WSMF1260AC
1059x627	1200x800	9004840381870		WSMF1280AC

DOOR MOUNTING PROFILES





SCHRACK-INFO

Description: To strengthen the door, mounted on the inside of the door on the M6 welded studs. equipped with 10mm hole pattern.

Material: 1.4mm galvanized steel

Dimension: 15x14 mm

HEIGHT mm	EAN CODE	AVAILABLE	ORDER NO.
500	9004840382051		WSMTP050
600	9004840382068		WSMTP060
700	9004840382075		WSMTP070
800	9004840382082		WSMTP080
1000	9004840382099		WSMTP100
1200	9004840382105		WSMTP120
1400	9004840382112		WSMTP140



Order no. blue: on stock, usually ready for delivery on the day of order!

LOCKS AND INSERTS



SCHRACK-INFO

Description: Inserts to replace the standard double-bit 3mm insert in the standard polyamide lock.

Material: Polyamide

DESCRIPTION	EAN CODE	AVAILABLE	ORDER NO.
Standard DIN 5mm insert	9004840236149		WSSL3532
Alternative handles to replace the standard lock	9004840459135		WSMLT561
Swing Handle for WSM	9004840423006		WSSL1107
Cylinder Sash Lock	9004840236156		WSSL3844
DIN 3mm insert	9004840236217		WSSL3530
DIN 5mm insert	9004840236224		WSSL3535
Tri 8mm insert	9004840236170		WSSL3515
Sqr 7mm insert	9004840236194		WSSL3520
Sqr 8mm insert	9004840236200		WSSL3525
Key 333 for Halfcylinderlock DV900333	9004840409222		DV900334
Door Stop for WSM Enclosures	9004840459128		WSMDSTP2
Turnbuckle for halfcyl. lock - WSM w/o punching	9004840654974		IU001925



I KNOW WHERE TO FIND IT!

WITH THE SCHRACK TECHNIK LIVE-PHONE APP

- Access technical product information at any time and from everywhere
- See availability and price immediately
- Order desired products easily

MINIPOL POLYESTER ENCLOSURES




MINIPOL

SCHRACK-INFO

- Hot pressed, fibreglass-reinforced polyester, colour grey RAL 7035
- Free of halogens
- Degree of protection IP 66 according to EN 60529
- Double insulated according to EN 60439-1
- Self-extinguishing
- Weather-resistant
- High shock resistance
- Water-resistant
- Temperature range: -50° C to 150° C
- With flaps for fastening to wall
- With swing handle w/o cylinder insert
- UV-resistant
- UL, CSA, NEMKO, LGAI and KEMA certified
- Many areas of use and combinations

VW = viewing window

3P = 3-point rod lock with swing handle w/o semicylinder insert (otherwise 2x double tongue fastener)

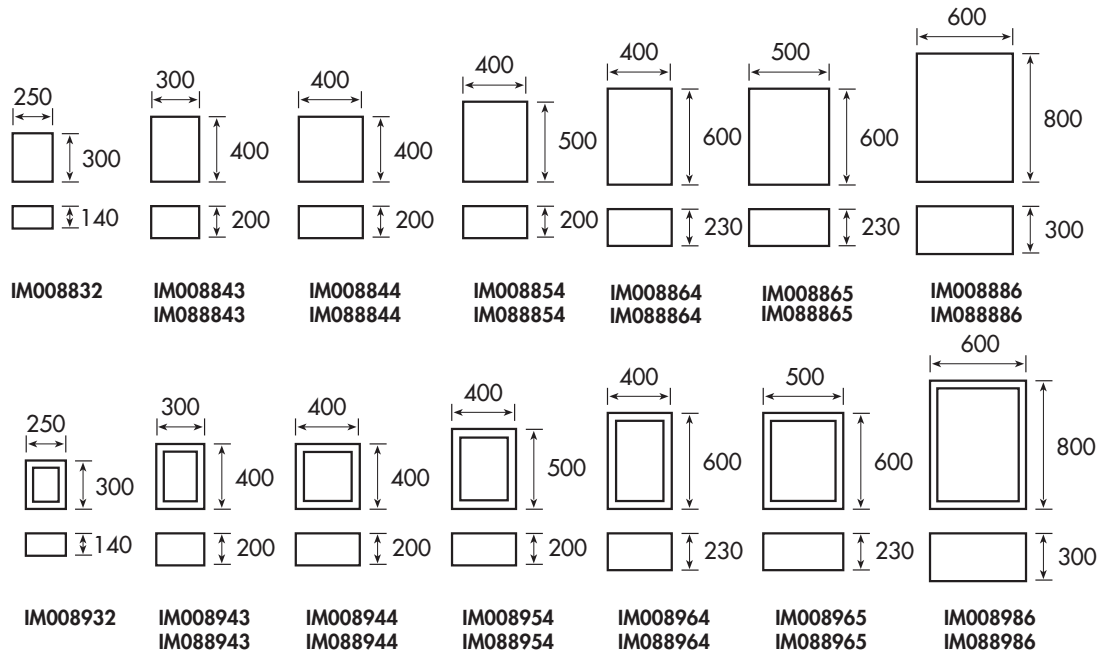







DESCRIPTION	DIM. (WxHxD) mm	EAN CODE	AVAILABLE	ORDER NO.
POLYESTER MINIPOL WALL ENCLOSURE				
Pol. wall enclosure	300x250x140	9004840234664		IM008832
Pol. wall enclosure	400x300x200	9004840234671		IM008843
Pol. wall enclosure	400x400x200	9004840234688		IM008844
Pol. wall enclosure	500x400x200	9004840234695		IM008854
Pol. wall enclosure	600x400x230	9004840234701		IM008864
Pol. wall enclosure	600x500x230	9004840234718		IM008865
Pol. wall enclosure	800x600x300	9004840234725		IM008886
Pol. wall enclosure VW	300x250x140	9004840234732		IM008932
Pol. wall enclosure VW	400x300x200	9004840234749		IM008943
Pol. wall enclosure VW	400x400x200	9004840234756		IM008944
Pol. wall enclosure VW	500x400x200	9004840234763		IM008954
Pol. wall enclosure VW	600x400x230	9004840234770		IM008964
Pol. wall enclosure VW	600x500x230	9004840234787		IM008965
Pol. wall enclosure VW	800x600x300	9004840234794		IM008986










Order no. blue: on stock, usually ready for delivery on the day of order!

MINIPOL POLYESTER ENCLOSURES – continued

DESCRIPTION	DIM. (WxHxD) mm	EAN CODE	AVAILABLE	ORDER NO.
POLYESTER MINIPOL WALL ENCLOSURE				
Pol. wall enclosure 3P	400x300x200	9004840234800		IM088843
Pol. wall enclosure 3P	400x400x200	9004840234817		IM088844
Pol. wall enclosure 3P	500x400x200	9004840234824		IM088854
Pol. wall enclosure 3P	600x400x230	9004840234831		IM088864
Pol. wall enclosure 3P	600x500x230	9004840234848		IM088865
Pol. wall enclosure 3P	800x600x300	9004840234855		IM088886
Pol. wall enclosure 3P/VW	400x300x200	9004840234862		IM088943
Pol. wall enclosure 3P/VW	400x400x200	9004840234879		IM088944
Pol. wall enclosure 3P/VW	500x400x200	9004840234886		IM088954
Pol. wall enclosure 3P/VW	600x400x230	9004840234893		IM088964
Pol. wall enclosure 3P/VW	600x500x230	9004840234909		IM088965
Pol. wall enclosure 3P/VW	800x600x300	9004840234916		IM088986








POLYESTER MOUNTING PLATE



DESCRIPTION	DIM. (WxHxD) mm	EAN CODE	AVAILABLE	ORDER NO.
Polyester mounting plate, Minipol	268x216x4	9004840234923		IMMP0032
Polyester mounting plate, Minipol	358x260x4	9004840234930		IMMP0043
Polyester mounting plate, Minipol	358x360x4	9004840234947		IMMP0044
Polyester mounting plate, Minipol	458x360x4	9004840234954		IMMP0054
Polyester mounting plate, Minipol	558x360x4	9004840234961		IMMP0064
Polyester mounting plate, Minipol	558x460x4	9004840234978		IMMP0065
Polyester mounting plate, Minipol	754x556x4	9004840234985		IMMP0086







METALL MOUNTING PLATE



DESCRIPTION	DIM. (WxHxD) mm	EAN CODE	AVAILABLE	ORDER NO.
Metal mounting plate, Minipol	268x216x2	9004840234992		IMMM0032
Metal mounting plate, Minipol	358x260x2	9004840235005		IMMM0043
Metal mounting plate, Minipol	358x360x2	9004840235012		IMMM0044
Metal mounting plate, Minipol	458x360x2	9004840235029		IMMM0054
Metal mounting plate, Minipol	558x360x2	9004840235036		IMMM0064
Metal mounting plate, Minipol	558x460x2	9004840235043		IMMM0065
Metal mounting plate, Minipol	754x556x2	9004840235050		IMMM0086

INSTALLATION INSERT FOR MINIPOL



DESCRIPTION	EAN CODE	AVAILABLE	ORDER NO.
Installation insert for 400x300 2x12 MW	9004840235159		IMCH0043
Installation insert for 400x400 2x18 MW	9004840235166		IMCH0044
Installation insert for 500x400 3x18 MW	9004840235173		IMCH0054
Installation insert for 600x400 3x18 MW	9004840235180		IMCH0064
Installation insert for 600x500 3x23 MW	9004840235197		IMCH0065
Installation insert for 800x600 4x29 MW	9004840235203		IMCH0086
Installation insert for 800x600 5x29 MW	9004840235326		IMCH0586

MINIPOL INTERIOR DOORS



DESCRIPTION	EAN CODE	AVAILABLE	ORDER NO.
Interior doors 400 x 400	9004840376890		IMPI0044
Interior doors 500 x 400	9004840376906		IMPI0054
Interior doors 600 x 400	9004840376913		IMPI0064
Interior doors 600 x 500	9004840376920		IMPI0065
Interior doors 800 x 600	9004840376937		IMPI0086



I KNOW WHERE TO FIND IT!

THE SCHRACK TECHNIK WEB SHOP WITH NAVIGATOR
WWW.SCHRACK.COM

- Finding product information made easy
- Buying products around the clock
- Quick access customer service





KS FLOOR-MOUNTED ENCLOSURES



KS



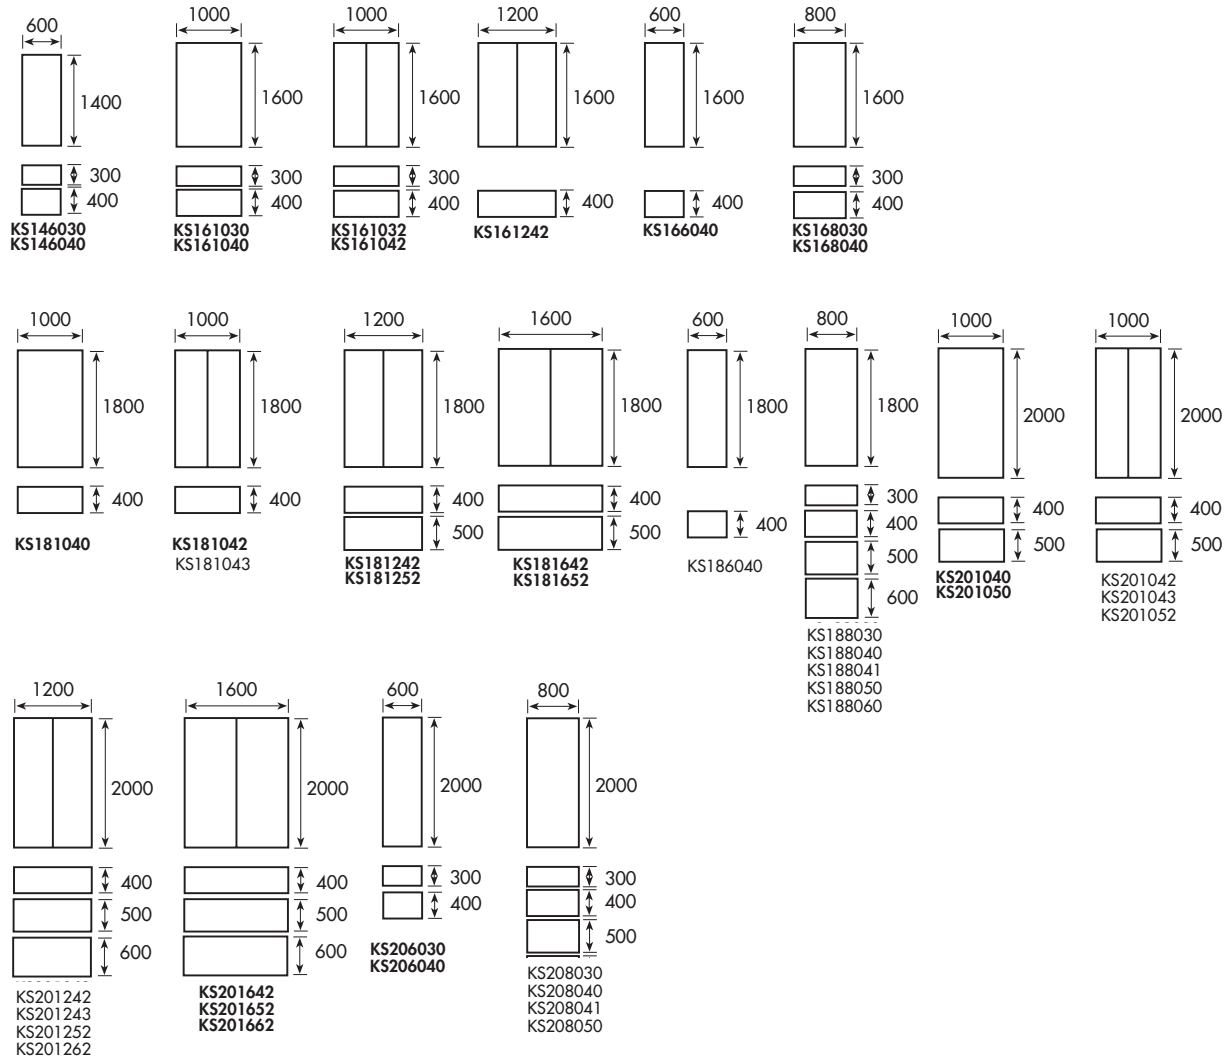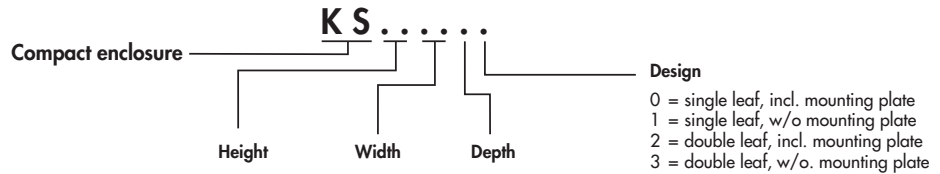
























Type key



SCHRACK-INFO

- Material:
 - Frame: Sheet steel 1.5 mm
 - Doors: Sheet steel 2 mm
 - Rear panel: Sheet steel 1.5 mm
 - Roof: Sheet steel 1.5 mm
 - Mounting plate: Sheet steel, galvanised 3 mm
 - Frame: Rounded profile, seam-welded
 - Doors: Hinges can be attached on left or right, reinforced frame
 - Rear panel: Removable
 - Lock: Self-positioning 4 point rod lock for single doors and 3 point rod lock for double doors
- 5 mm double-bit insert comes as standard
- Mounting plate: Double-folded profile. Depth can be adjusted in 25 mm steps. Enclosures 1600 mm in width are supplied with two mounting plates.
- Surface: powder-coated RAL 7035
- Degree of protection: single door: IP 66 / NEMA 4
double door: IP 55 / NEMA 12
- Included in delivery: Enclosure with pre-fitted doors with 5 mm semicylinder two-way lock and reinforced profiles, roof, cable entry plates, rear panel and mounting plate, earthing bolts, keys and assembly instructions

KS FLOOR-MOUNTED ENCLOSURES – continued

DESCRIPTION	DIM. (WxHxD) mm	EAN CODE	AVAILABLE	ORDER NO.
SINGLE DOOR WITH MOUNTING PLATE				
single door	1400x600x300	9004840535839		KS146030-5
single door	1400x600x400	9004840535822		KS146040-5
single door	1600x600x400	9004840535884		KS166040-5
single door	1600x800x300	9004840535877		KS168030-5
single door	1600x800x400	9004840535860		KS168040-5
single door	1600x1000x300	9004840535815		KS161030-5
single door	1600x1000x400	9004840535853		KS161040-5
single door	1800x600x400	9004840535983		KS186040-5
single door	1800x800x300	9004840536010		KS188030-5
single door	1800x800x400	9004840536003		KS188040-5
single door	1800x800x500	9004840536027		KS188050-5
single door	1800x1000x400	9004840535907		KS181040-5
single door	2000x600x300	9004840586022		KS206030-5
single door	2000x600x400	9004840536287		KS206040-5
single door	2000x800x300	9004840536270		KS208030-5
single door	2000x800x400	9004840536263		KS208040-5
single door	2000x800x500	9004840536249		KS208050-5
single door	2000x1000x400	9004840536072		KS201040-5
single door	2000x1000x500	9004840536041		KS201050-5
SINGLE DOOR WITHOUT MOUNTING PLATE				
single door without MPL	1600x800x400	9004840535914		KS168041-5
single door without MPL	1800x800x400	9004840535990		KS188041-5
single door without MPL	1800x800x600	9004840536034		KS188060-5
single door without MPL	2000x800x400	9004840536256		KS208041-5
DOUBLE DOOR WITH MOUNTING PLATE				
double door	1600x1000x300	9004840535808		KS161032-5
double door	1600x1000x400	9004840535846		KS161042-5
double door	1600x1200x400	9004840535891		KS161242-5
double door	1800x1000x400	9004840535938		KS181042-5
double door	1800x1200x400	9004840535945		KS181242-5
double door	1800x1200x500	9004840535952		KS181252-5
double door	1800x1600x400	9004840535969		KS181642-5
double door	1800x1600x500	9004840535976		KS181652-5
double door	2000x1000x400	9004840536065		KS201042-5
double door	2000x1000x500	9004840536089		KS201052-5
double door	2000x1200x400	9004840536096		KS201242-5
double door	2000x1600x400	9004840536126		KS201642-5
double door	2000x1200x500	9004840536119		KS201252-5
double door	2000x1600x500	9004840536133		KS201652-5
double door	2000x1600x600	9004840536140		KS201662-5
DOUBLE DOOR WITHOUT MOUNTING PLATE				
double door without MPL	1800x1000x400	9004840535921		KS181043-5
double door without MPL	2000x1000x400	9004840536058		KS201043-5
double door without MPL	2000x1200x400	9004840536102		KS201243-5

