

Vertical Cable Ladder Cover


Complete set, unassembled

STVFA 600 S

EAN Code: 4013339055289
 Smallest packaging unit:3 m
 quantity unit:m M



the photorealistic images are to be considered as reference images

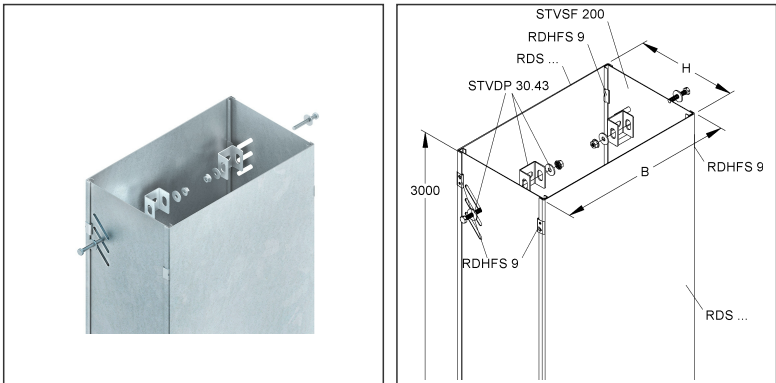

Article Description

Vertical cable ladder cover, 236x709x3000 mm, free installation, steel, pre-galvanised according to DIN EN 10346, incl. accessories

Incl. accessories

3 meter = 1 piece		<input checked="" type="checkbox"/> lowest delivery unit	<input checked="" type="checkbox"/> preferred delivery unit
Model No.	Description	quantity	
STVDP 30.43 S	Fastening set, steel, pre-galvanised according to DIN EN 10346	6 pcs.	

Additional Price Information

Article group	N13
quantity unit	m

Technical Datasheet

Vertical Cable Ladder System

STVFA 600 S

the photorealistic images are to be considered as reference images

Weight

Weight per quantity unit	27 kg/ m
Weight in kg per 100	2724 kg/ 100m

Physical Article Dimensions

Height	235.60 mm
Width	718 mm
Depth/length	3000 mm

Packing Dimension

3 meters = 1 piece		✓ VP1-smallest packaging unit (PU)	✓ VP1-preferred PU
Lenght	3000 mm	Width	718 mm
Gross weight	82 kg	Volume	0,507 m³
Min. quantity	3.00 m	Max. Quantity	3.00 m

Tender Text

Vertical cable ladder cover, complete set, unassembled, for free-standing Vertical cable ladders, including hot-dip galvanised fixing accessories. There is sufficient space under the cladding so that U-clamps for up to 3 cables can be easily mounted on the Vertical cable ladder. For transport reasons, the delivery is made as a kit! The side parts are mounted to the Vertical cable ladder on site with the accessories. After completion of the installation, the cover is snapped on with the cover retaining springs. Due to external influences, e.g. wind loads, outdoor use is only possible with additional securing (self-tapping screws, steel strap, etc.).

Set consists of:

2 side panels STVSF 200,
12 lid retaining springs RDHFS 9,
2 cover RDS ...
6 accessory sets STVDP 30.43 S

Used for :

Vertical cable ladders : STUC .../... with U-clamp BU .../3
STIC 86/... with U-clamp BU .../3
Dimensions (approx. dimensions)

Height H outside : 236 mm

Width W outside : 709 mm

Delivery length L : 3000 mm

Material : steel, pre-galvanised acc. to DIN EN 10346

NIEDAX Model no. : STVFA 600 S

EP Material_____ EP Wage_____

Unit price/meter

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Technical Datasheet

Vertical Cable Ladder System

STVFA 600 S

the photorealistic images are to be considered as reference images

Origin & International Trade	
Country of origin	DE
Customs tarif number	73089059