



Device Built-In Box, triple

made of flame-retardant, self-extinguishing plastic, front-locking, pre-assembled, consisting of left (1) right (2) and extension module (3)

★ GDM 50-3 VW

EAN Code: 4013339227419
Smallest packaging unit: 2 x 5 pcs.

the photorealistic images are to be considered as reference images

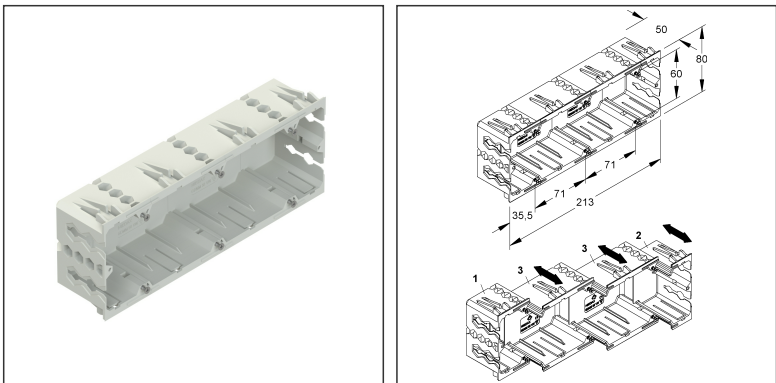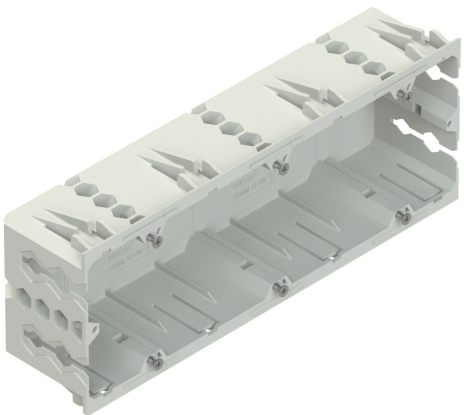

Article Description

Device built-in box, triple, height 50 mm, plastics, polyamide, RAL 9016, traffic white

Additional Price Information

Article group	N17
quantity unit	pcs.

Weight

Weight per quantity unit	123 g / pcs.
Weight in kg per 100	12 kg / 100pcs.

Technical Datasheet

Device trunking system



the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	80.20 mm
Width	71.00 mm
Depth/length	55.00 mm

Packing Dimension

10 pieces = 1 carton		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	350 mm	Width	250 mm	Height	145.00 mm
Gross weight	1,78 kg	Volume	0,013 m³		
Min. quantity	10.00 pcs.	Max. Quantity	10.00 pcs.		

450 pieces = 1					
Lenght	1230 mm	Width	840 mm	Height	970 mm
Gross weight	150 kg	Volume	1,002 m ³		
Min. Quantity	450.00 pcs.	Max. Quantity	450.00 pcs.		

Tender Text

Device installation box, triple, front-locking, pre-assembled, consisting of left and right module, for fastening in the cover mounting contour of device trunking, lateral hexagonal cable entry openings enable effective cable retention for common cables such as NYM 3x1.5 mm² and NYM 3x2.5 mm², with 60 mm fastening track, for accommodating built-in devices with 80 mm cover frame, can be extended as required to 4-, 5-fold etc. using the extension module GDMM 50 VW, halogen-free.

The cross-section of approx. 2702 mm² is to be deducted from the usable cross-section of the device trunking.

Used for : Device trunking bases GKU ..., DKU ...

Desk trunking bases PGU ..., PLU ...

Aluminium trunking bases GAU ..., DAU ...

Energy columns ESDB 133/..., ESED 133/..., ESDD 133/...

Dimensions (approx. dimensions)

Height H : 80 mm

Width W : 213 mm

Depth D : 50 mm

for cover opening : 78 mm

Protection class : IP20

Glow wire test according to VDE 0471/DIN IEC 695 : 650°C

Colour : traffic white

RAL : 9016 (similar)

Material box body : PA (polyamide), flame retardant, self-extinguishing

Material countersunk screws : steel, zinc plated

NIEDAX Model No. : GDM 50-3 VW

EP material_____ EP wage_____

Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Technical Datasheet
Device trunking system



the photorealistic images are to be considered as reference images

Origin & International Trade

Country of origin	DE
Customs tarif number	39259020