

Hexagon Screw acc. to DIN EN ISO 4017


incl. toothed flange nut acc. to DIN EN 1661

SKM 10X30 E4

EAN Code: 4013339962730

Smallest packaging unit: 50 pcs.

the photorealistic images are to be considered as reference images

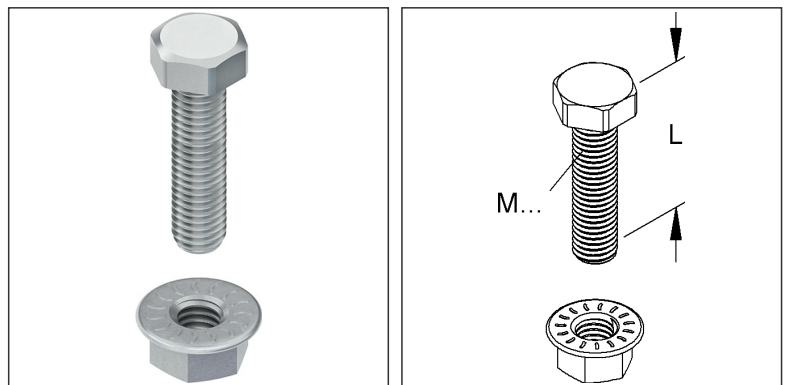

Article Description

Hexagonal head screw, M10x30 mm, acc. DIN EN ISO 4017, Edelstahl, Werkstoff-Nr.: 1.4401, 1.4404

Additional Price Information

Article group	N15
quantity unit	pcs.

Weight

Weight per quantity unit	39 g / pcs.
Weight in kg per 100	3,81 kg / 100pcs.

Physical Article Dimensions

Height	18.90 mm
Width	18.90 mm
Depth/length	36.40 mm

Technical Datasheet

Fastenings accessories

SKM 10X30 E4

the photorealistic images are to be considered as reference images

Packing Dimension

50 pieces = 1		✓ VP1-smallest packaging unit (PU) ✓ VP1-preferred PU			
Lenght	138.00 mm	Width	96.00 mm	Height	71.00 mm
Gross weight	1,97 kg	Volume	0,001 m³		
Min. quantity	50.00 pcs.	Max. Quantity	50.00 pcs.		

5400 pieces = 1					
Lenght	750 mm	Width	750 mm	Height	730 mm
Gross weight	252 kg	Volume	0,411 m³		
Min. Quantity	5.400.00 pcs.	Max. Quantity	5.400.00 pcs.		

Tender Text

Hexagon screw acc. to DIN EN ISO 4017, including toothed flange nut acc. to DIN EN 1661.

The strength class of the bolt is stamped on the bolt head. Especially for connections that have to transmit vertical loads via friction, it is essential to pay attention to the screw tightening torque and to check it with the torque spanner! In product combinations (hexagon screw with nut), the lower strength class must be used to determine the torque.

Dimensions (approx. dimensions)

Thread : M 10

Screw length : 30 mm

Strength class screw : 70

Strength class nut : 80

Screw tightening torque : 30 Nm

Material : stainless steel, material no. 1.4404, AISI 316L

NIEDAX Model no. : SKM 10X30 E4

EP Material_____ EP Wage_____

Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	
Customs tariff number	73181575