


Cable Tray, heavy

unperforated, without connector

RSUS 60.400 OV

EAN Code: 4013339898299
Smallest packaging unit: 2 x 3 m
quantity unit: m M

the photorealistic images are to be considered as reference images

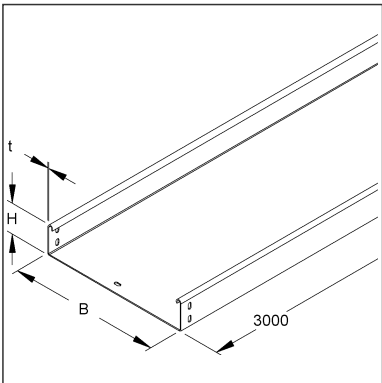

Article Description

Cable tray, heavy, 60x400x3000 mm, unperforated, steel, pre-galvanised according to DIN EN 10346, without connector

Additional Price Information

Article group	N13
quantity unit	m

Weight

Weight per quantity unit	8,445 kg / m
Weight in kg per 100	844 kg / 100m

Technical Datasheet

Cable Tray System

RSUS 60.400 OV

the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	60.00 mm
Width	400 mm
Depth/length	3000 mm

Packing Dimension

6 meters = 1 bundle		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	3000 mm	Width	405 mm	Height	65.00 mm
Gross weight	51 kg	Volume	0,079 m³		
Min. quantity	6.00 m	Max. Quantity	6.00 m		

180 meters = 1 rack					
Lenght	3000 mm	Width	1162 mm	Height	1120 mm
Gross weight	1618 kg	Volume	3,904 m³		
Min. Quantity	180.00 m	Max. Quantity	180.00 m		

Tender Text

Cable tray, heavy, according to DIN EN 61537, unperforated, without splice plate but with connector perforations at both ends for connection, for the walkable cable tray system. Standard fittings can be used in conjunction with the cover of the walkable system.

Please order two universal splice plates RSUV 60-1.5 per joint separately.

Dimensions (approx. dimensions)

H x W : 60 x 400 mm

Material thickness t : 2 mm

Delivery length L : 3000 mm

Usable cross-section : 23800 mm²

Material : Steel, pre-galvanised acc. to DIN EN 10346

NIEDAX Model No. : RSUS 60.400 OV

EP Material _____ EP Wage _____

Unit price/meter

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73089059

Technical Datasheet

Cable Tray System

RSUS 60.400 OV

the photorealistic images are to be considered as reference images

Related items

Cover

Model No.	Description
RDHFS 9 VZL	Cover clamp, steel, electro galvanised according to DIN EN ISO 2081, blue passivate
RDRS 400-2.0 S	Cover for cable tray, antislip, 405x3000 mm, steel, pre-galvanised according to DIN EN 10346
RDRS 9X2	Turning bolt, reinforced design, steel, pre-galvanised according to DIN EN 10346
RDS 400	Cover for cable tray, 405x3000 mm, steel, pre-galvanised according to DIN EN 10346
RDSRS 400	Cover for cable tray, antislip, 405x3000 mm, t=6,0 mm, steel, pre-galvanised according to DIN EN 10346
RDSRSL 400	Cover for cable tray, antislip, 405x3000 mm, t=4,0 mm, steel, pre-galvanised according to DIN EN 10346
RDVS 400	Cover for cable tray, 405x3000 mm, with turning bolt, steel, pre-galvanised according to DIN EN 10346
RDVSRs 400	Cover for cable tray, antislip, 405x3000 mm, t=6,0 mm, steel, pre-galvanised according to DIN EN 10346
RDVSRSL 400	Cover for cable tray, antislip, 405x3000 mm, t=4,0 mm, steel, pre-galvanised according to DIN EN 10346

Barrier strip

Model No.	Description
RW 60-2.0 S	Barrier strip, 58x2998 mm, t=2,0 mm, steel, pre-galvanised according to DIN EN 10346, incl. accessories
RWTS 60-1.5	Barrier strip, L-profile, 58x2998 mm, with system perforation, steel, pre-galvanised according to DIN EN 10346, incl. accessories