

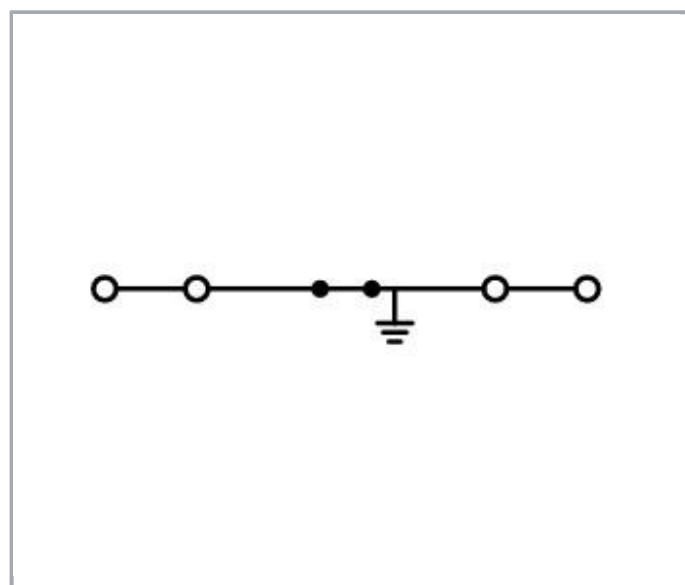


## Fișă tehnică | Număr articol: 2202-1407

4-conductor ground terminal block; 2.5 mm<sup>2</sup>; with test port; side and center marking; for DIN-rail 35 x 15 and 35 x 7.5; Push-in CAGE CLAMP®; 2,50 mm<sup>2</sup>; green-yellow

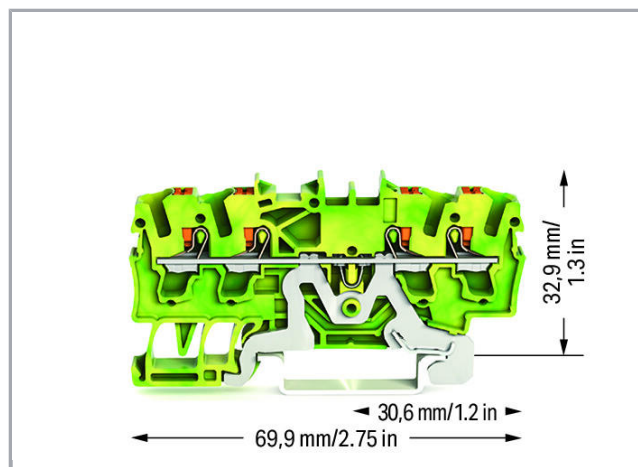

[www.wago.com/2202-1407](http://www.wago.com/2202-1407)

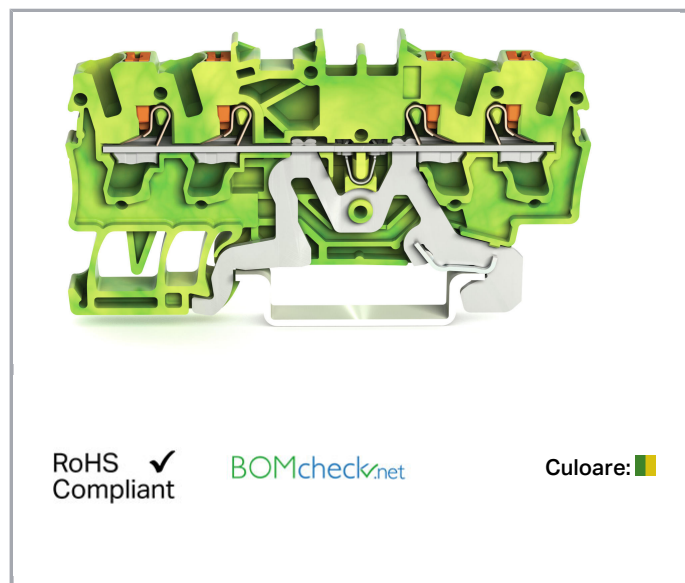

### Date

#### Electrical data

Supus modificărilor.

WAGO Kontakttechnik GmbH & Co. KG  
/Representative Office Romania  
Sos. Pipera-Tunari nr. 1/1  
building 1, 2nd floor | 077190 Voluntari, Ilfov  
Tel.: +40-(0)31 421 85 68 | Email: info-RO@wago.com

Aveți întrebări despre produsele noastre?  
Vă stăm la dispoziție pentru preluarea apelului la +40 (0) 31 421 85 68.

## Ratings per IEC/EN 60664-1

|             |                  |
|-------------|------------------|
| Ratings per | IEC/EN 60947-7-2 |
|-------------|------------------|

## Connection data

|  |   |
|--|---|
| Connection technology                                      | Push-in CAGE CLAMP®   |
| Actuation type   | Push-in<br>Push-button  |
| Connectable conductor materials                            | Copper  |
| Nominal cross-section                                      | 2,5 mm <sup>2</sup>   |
| Solid conductor  | 0,25 ... 4 mm <sup>2</sup> / 22 ... 12 AWG  |
| Solid conductor; push-in termination                       | 0,75 ... 4 mm <sup>2</sup> / 18 ... 12 AWG  |
| Fine-stranded conductor                                    | 0,25 ... 4 mm <sup>2</sup> / 22 ... 12 AWG  |
| Fine-stranded conductor; with insulated ferrule            | 1 ... 2,5 mm <sup>2</sup> / 18 ... 12 AWG   |
| Fine-stranded conductor; with ferrule; push-in termination | 1 ... 2,5 mm <sup>2</sup> / 18 ... 12 AWG   |
| Strip length   | 10 ... 12 mm / 0.39 ... 0.47 inch   |
| Total number of connection points                          | 4   |
| Total number of potentials                                 | 1   |
| Number of levels   | 1   |
| Wiring type  | Front-entry wiring  |
| Note (conductor cross-section)                             | Depending on the conductor characteristic, a conductor with a smaller cross-section can also be inserted via push-in termination. |
| Number of jumper slots                                     | 2   |

## Geometrical Data

|                                    |                      |
|------------------------------------|----------------------|
| Width                              | 5,2 mm / 0.205 inch  |
| Height from upper-edge of DIN-rail | 32,9 mm / 1.295 inch |
| Depth                              | 69,9 mm / 2.752 inch |

## Mechanical data

|               |                     |
|---------------|---------------------|
| Design        | horizontal type     |
| Mounting type | DIN-35 rail         |
| Marking level | Center/side marking |

## Material Data

|       |              |
|-------|--------------|
| Color | green-yellow |
|-------|--------------|

Supus modificărilor.

WAGO Kontakttechnik GmbH & Co. KG  
/Representative Office Romania  
Sos. Pipera-Tunari nr. 1/1  
building 1, 2nd floor | 077190 Voluntari, Ilfov  
Tel.: +40-(0)31 421 85 68 | Email: info-RO@wago.com

Aveți întrebări despre produsele noastre?  
Vă stăm la dispoziție pentru preluarea apelului la +40 (0) 31 421 85 68.

|                     |                      |
|---------------------|----------------------|
| Insulation material | Polyamide 66 (PA 66) |
| Weight              | 10,8g                |

### Commercial data



|                       |               |
|-----------------------|---------------|
| Packaging type        | BOX           |
| Country of origin     | DE            |
| GTIN                  | 4055143713917 |
| Customs tariff number | 85369010000   |

### Aprobări / certificate

#### Ex-Approvals

| Emblemă  | Aprobare  | Text de aprobare suplimentar | Nume certificat  |
|--|---|------------------------------|--|
|    | <b>AEx</b><br>Underwriters Laboratories Inc.          | UL 60079                     | 20190704-<br>E185892   |
|   | <b>ATEX</b><br>Physikalisch Technische Bundesanstalt  | IEC 60079-0                  | PTB 18<br>ATEX<br>1005 U (II<br>2 G Ex eb<br>IIC Gb<br>bzw. I M 2<br>Ex eb I Mb) |
|  | <b>IECEX</b><br>Physikalisch Technische Bundesanstalt | IEC 60079                    | IECEX PTB<br>18.0012U<br>(Ex eb IIC<br>Gb and EX<br>eb I Mb)                     |

#### Country specific Approvals

| Emblemă  | Aprobare                               | Text de aprobare suplimentar | Nume certificat |
|--|--|------------------------------|-----------------|
|  | <b>CCA</b><br>DEKRA Certification B.V. | EN 60947                     | NTR NL<br>7665  |
|  | <b>CSA</b><br>DEKRA Certification B.V. | C22.2                        | 70173745        |
|  | <b>KEMA/KEUR</b>                       | EN 60947                     | 71-             |

Supus modificărilor.

WAGO Kontakttechnik GmbH & Co. KG  
/Representative Office Romania  
Sos. Pipera-Tunari nr. 1/1  
building 1, 2nd floor | 077190 Voluntari, Ilfov  
Tel.: +40-(0)31 421 85 68 | Email: info-RO@wago.com




Aveți întrebări despre produsele noastre?  
Vă stăm la dispoziție pentru preluarea apelului la +40 (0) 31 421 85 68.

DEKRA Certification B.V.


102876



## Ship Approvals

| Emblemă  | Aprobare  | Text de aprobare suplimentar | Nume certificat          |
|--|---|------------------------------|--------------------------|
|  | <b>ABS</b><br>American Bureau of Shipping               | -                            | 19-<br>HG1866350-<br>PDA |
|  | <b>DNV GL</b><br>Det Norske Veritas, Germanischer Lloyd | -                            | TAE00003JT               |
|  | <b>LR</b><br>Lloyds Register                            | -                            | 19/20050                 |

## UL-Approvals

| Emblemă  | Aprobare                                       | Text de aprobare suplimentar | Nume certificat |
|--|--|------------------------------|-----------------|
|  | <b>cURus</b><br>Underwriters Laboratories Inc. | UL 1059                      | 4788227146      |

## Counterpart



















## Produse compatibile

check

Supus modificărilor.

WAGO Kontakttechnik GmbH & Co. KG  
 /Representative Office Romania  
 Sos. Pipera-Tunari nr. 1/1  
 building 1, 2nd floor | 077190 Voluntari, Ilfov  
 Tel.: +40-(0)31 421 85 68 | Email: info-RO@wago.com

Aveți întrebări despre produsele noastre?  
 Vă stăm la dispoziție pentru preluarea apelului la +40 (0) 31 421 85 68.

|  |  |  |
|--|--|--|
|    | <b>Nr. articol: 2002-511</b><br>Modular TOPJOB®S connector; modular; for jumper contact slot; 1-pole; 2,50 mm <sup>2</sup> ; gray              | <a href="http://www.wago.com/2002-511">www.wago.com/2002-511</a>   |
|    | <b>Nr. articol: 2002-549</b><br>Spacer module; modular; e.g., for bridging commoned terminal blocks; gray                                      | <a href="http://www.wago.com/2002-549">www.wago.com/2002-549</a>   |
|    | <b>Nr. articol: 2002-552</b><br>Modular TOPJOB®S connector; modular; for jumper contact slot; 2-pole; 2,50 mm <sup>2</sup> ; gray              | <a href="http://www.wago.com/2002-552">www.wago.com/2002-552</a>   |
|    | <b>Nr. articol: 2002-553</b><br>Modular TOPJOB®S connector; modular; for jumper contact slot; 3-pole; 2,50 mm <sup>2</sup> ; gray              | <a href="http://www.wago.com/2002-553">www.wago.com/2002-553</a>   |
|    | <b>Nr. articol: 2002-554</b><br>Modular TOPJOB®S connector; modular; for jumper contact slot; 4-pole; 2,50 mm <sup>2</sup> ; gray              | <a href="http://www.wago.com/2002-554">www.wago.com/2002-554</a>   |
|    | <b>Nr. articol: 2002-555</b><br>Modular TOPJOB®S connector; modular; for jumper contact slot; 5-pole; 2,50 mm <sup>2</sup> ; gray              | <a href="http://www.wago.com/2002-555">www.wago.com/2002-555</a>   |
|    | <b>Nr. articol: 2002-556</b><br>Modular TOPJOB®S connector; modular; for jumper contact slot; 6-pole; 2,50 mm <sup>2</sup> ; gray              | <a href="http://www.wago.com/2002-556">www.wago.com/2002-556</a>   |
|    | <b>Nr. articol: 2002-557</b><br>Modular TOPJOB®S connector; modular; for jumper contact slot; 7-pole; 2,50 mm <sup>2</sup> ; gray              | <a href="http://www.wago.com/2002-557">www.wago.com/2002-557</a>   |
|    | <b>Nr. articol: 2002-558</b><br>Modular TOPJOB®S connector; modular; for jumper contact slot; 8-pole; 2,50 mm <sup>2</sup> ; gray              | <a href="http://www.wago.com/2002-558">www.wago.com/2002-558</a>   |
|   | <b>Nr. articol: 2002-559</b><br>Modular TOPJOB®S connector; modular; for jumper contact slot; 9-pole; 2,50 mm <sup>2</sup> ; gray              | <a href="http://www.wago.com/2002-559">www.wago.com/2002-559</a>   |
|  | <b>Nr. articol: 2002-560</b><br>Modular TOPJOB®S connector; modular; for jumper contact slot; 10-pole; 2,50 mm <sup>2</sup> ; gray             | <a href="http://www.wago.com/2002-560">www.wago.com/2002-560</a>   |
|  | <b>Nr. articol: 2002-611</b><br>TOPJOB®S L-type test plug module; modular; 1-pole; 2,50 mm <sup>2</sup> ; gray                                 | <a href="http://www.wago.com/2002-611">www.wago.com/2002-611</a>   |
|  | <b>Nr. articol: 2002-649</b><br>TOPJOB®S L-type spacer module; modular; e.g., for bridging commoned terminal blocks; gray                      | <a href="http://www.wago.com/2002-649">www.wago.com/2002-649</a>   |
|  | <b>Nr. articol: 2009-174</b><br>Test plug adapter; for 4 mm Ø test plugs; for testing TOPJOB®S rail-mounted terminal blocks; gray              | <a href="http://www.wago.com/2009-174">www.wago.com/2009-174</a>   |
|  | <b>Nr. articol: 2009-182</b><br>Testing tap; for max. 2.5 mm <sup>2</sup> ; tool-free connection for individual test wires 0.08 - 2.5 mm; gray | <a href="http://www.wago.com/2009-182">www.wago.com/2009-182</a>   |
| <b>End plate</b>   |  |  |
|  | <b>Nr. articol: 2002-1491</b><br>End and intermediate plate; 0.8 mm thick; gray  | <a href="http://www.wago.com/2002-1491">www.wago.com/2002-1491</a> |
|  | <b>Nr. articol: 2002-1492</b><br>End and intermediate plate; 0.8 mm thick; orange  | <a href="http://www.wago.com/2002-1492">www.wago.com/2002-1492</a> |
|  | <b>Nr. articol: 2002-1493</b><br>Separator plate; 2 mm thick; oversized; gray  | <a href="http://www.wago.com/2002-1493">www.wago.com/2002-1493</a> |

Supus modificărilor.



**Nr. articol: 2002-1494**  
Separator plate; 2 mm thick; oversized; orange

[www.wago.com/2002-1494](http://www.wago.com/2002-1494)

#### Push-In type wire jumper



**Nr. articol: 2009-412**  
Push-in type wire jumper; insulated; wire length 60 mm; Conductor cross section 1.5 mm<sup>2</sup>; suitable for 2001, 2002, 2003 and 2022 Series rail-mounted terminal blocks; black

[www.wago.com/2009-412](http://www.wago.com/2009-412)



**Nr. articol: 2009-414**  
Push-in type wire jumper; insulated; wire length 110 mm; Conductor cross section 1.5 mm<sup>2</sup>; suitable for 2001, 2002, 2003 and 2022 Series rail-mounted terminal blocks; black

[www.wago.com/2009-414](http://www.wago.com/2009-414)



**Nr. articol: 2009-414/000-005**  
Push-in type wire jumper; insulated; wire length 110 mm; Conductor cross section 1.5 mm<sup>2</sup>; suitable for 2001, 2002, 2003 and 2022 Series rail-mounted terminal blocks; red

[www.wago.com/2009-414/000-005](http://www.wago.com/2009-414/000-005)



**Nr. articol: 2009-414/000-006**  
Push-in type wire jumper; insulated; wire length 110 mm; Conductor cross section 1.5 mm<sup>2</sup>; suitable for 2001, 2002, 2003 and 2022 Series rail-mounted terminal blocks; blue

[www.wago.com/2009-414/000-006](http://www.wago.com/2009-414/000-006)



**Nr. articol: 2009-416**  
Push-in type wire jumper; insulated; wire length 250 mm; Conductor cross section 1.5 mm<sup>2</sup>; suitable for 2001, 2002, 2003 and 2022 Series rail-mounted terminal blocks; black

[www.wago.com/2009-416](http://www.wago.com/2009-416)

#### tools



**Nr. articol: 210-658**  
Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; angled; short

[www.wago.com/210-658](http://www.wago.com/210-658)



**Nr. articol: 210-720**  
Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft


[www.wago.com/210-720](http://www.wago.com/210-720)

#### Carrier rail



**Nr. articol: 210-112**  
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 25 mm

[www.wago.com/210-112](http://www.wago.com/210-112)



**Nr. articol: 210-113**  
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; according to EN 60715

[www.wago.com/210-113](http://www.wago.com/210-113)



**Nr. articol: 210-114**  
Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; similar to EN 60715

[www.wago.com/210-114](http://www.wago.com/210-114)



**Nr. articol: 210-115**  
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 18 mm

[www.wago.com/210-115](http://www.wago.com/210-115)



**Nr. articol: 210-118**  
Steel carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715

[www.wago.com/210-118](http://www.wago.com/210-118)



**Nr. articol: 210-196**  
Aluminum carrier rail; 35 x 8.2 mm; 1.6 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored

[www.wago.com/210-196](http://www.wago.com/210-196)


















**Nr. articol: 210-197**  
Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; similar to EN 60715

[www.wago.com/210-197](http://www.wago.com/210-197)

**Nr. articol: 210-198**
















Supus modificărilor.

|  |  |  |
|--|--|--|
|    | Copper carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; copper-colored  | <a href="http://www.wago.com/210-198">www.wago.com/210-198</a>                   |
|    | <b>Nr. articol: 210-504</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; galvanized; according to EN 60715                     | <a href="http://www.wago.com/210-504">www.wago.com/210-504</a>                   |
|    | <b>Nr. articol: 210-505</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; galvanized; according to EN 60715                   | <a href="http://www.wago.com/210-505">www.wago.com/210-505</a>                   |
|    | <b>Nr. articol: 210-506</b><br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; galvanized; similar to EN 60715                    | <a href="http://www.wago.com/210-506">www.wago.com/210-506</a>                   |
|    | <b>Nr. articol: 210-508</b><br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; galvanized; similar to EN 60715                      | <a href="http://www.wago.com/210-508">www.wago.com/210-508</a>                   |
| <b>Marking accessories</b>   |  |  |
|    | <b>Nr. articol: 2002-161</b><br>Adaptor  | <a href="http://www.wago.com/2002-161">www.wago.com/2002-161</a>                 |
|    | <b>Nr. articol: 2009-110</b><br>Marking strips; on reel; not stretchable; plain; snap-on type; white   | <a href="http://www.wago.com/2009-110">www.wago.com/2009-110</a>                 |
|    | <b>Nr. articol: 2009-115</b><br>WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white               | <a href="http://www.wago.com/2009-115">www.wago.com/2009-115</a>                 |
|    | <b>Nr. articol: 2009-115/000-002</b><br>WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; yellow      | <a href="http://www.wago.com/2009-115/000-002">www.wago.com/2009-115/000-002</a> |
|  | <b>Nr. articol: 2009-115/000-005</b><br>WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; red         | <a href="http://www.wago.com/2009-115/000-005">www.wago.com/2009-115/000-005</a> |
|  | <b>Nr. articol: 2009-115/000-006</b><br>WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; blue        | <a href="http://www.wago.com/2009-115/000-006">www.wago.com/2009-115/000-006</a> |
|  | <b>Nr. articol: 2009-115/000-007</b><br>WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; gray        | <a href="http://www.wago.com/2009-115/000-007">www.wago.com/2009-115/000-007</a> |
|  | <b>Nr. articol: 2009-115/000-012</b><br>WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; orange      | <a href="http://www.wago.com/2009-115/000-012">www.wago.com/2009-115/000-012</a> |
|  | <b>Nr. articol: 2009-115/000-017</b><br>WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; light green | <a href="http://www.wago.com/2009-115/000-017">www.wago.com/2009-115/000-017</a> |
|  | <b>Nr. articol: 2009-115/000-023</b><br>WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; green       | <a href="http://www.wago.com/2009-115/000-023">www.wago.com/2009-115/000-023</a> |

Supus modificărilor.

WAGO Kontakttechnik GmbH & Co. KG  
/Representative Office Romania  
Sos. Pipera-Tunari nr. 1/1  
building 1, 2nd floor | 077190 Voluntari, Ilfov  
Tel.: +40-(0)31 421 85 68 | Email: info-RO@wago.com

Aveți întrebări despre produsele noastre?  
Vă stăm la dispoziție pentru preluarea apelului la +40 (0) 31 421 85 68.

|  |  |  |
|--|--|--|
|   | <b>Nr. articol: 2009-115/000-024</b><br>WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; violet      | <a href="http://www.wago.com/2009-115/000-024">www.wago.com/2009-115/000-024</a> |
|    | <b>Nr. articol: 2009-145</b><br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white          | <a href="http://www.wago.com/2009-145">www.wago.com/2009-145</a>                 |
|    | <b>Nr. articol: 2009-145/000-002</b><br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; yellow | <a href="http://www.wago.com/2009-145/000-002">www.wago.com/2009-145/000-002</a> |
|    | <b>Nr. articol: 2009-145/000-005</b><br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; red    | <a href="http://www.wago.com/2009-145/000-005">www.wago.com/2009-145/000-005</a> |
|    | <b>Nr. articol: 2009-145/000-006</b><br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; blue   | <a href="http://www.wago.com/2009-145/000-006">www.wago.com/2009-145/000-006</a> |
|    | <b>Nr. articol: 2009-145/000-007</b><br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; gray   | <a href="http://www.wago.com/2009-145/000-007">www.wago.com/2009-145/000-007</a> |
|    | <b>Nr. articol: 2009-145/000-012</b><br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; orange | <a href="http://www.wago.com/2009-145/000-012">www.wago.com/2009-145/000-012</a> |
|  | <b>Nr. articol: 2009-145/000-023</b><br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; green  | <a href="http://www.wago.com/2009-145/000-023">www.wago.com/2009-145/000-023</a> |
|  | <b>Nr. articol: 2009-145/000-024</b><br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; violet | <a href="http://www.wago.com/2009-145/000-024">www.wago.com/2009-145/000-024</a> |
|  | <b>Nr. articol: 2009-191</b><br>Group marker carrier   | <a href="http://www.wago.com/2009-191">www.wago.com/2009-191</a>                 |
|  | <b>Nr. articol: 2009-192</b><br>Group marker carrier   | <a href="http://www.wago.com/2009-192">www.wago.com/2009-192</a>                 |
|  | <b>Nr. articol: 2009-193</b><br>Group marker carrier   | <a href="http://www.wago.com/2009-193">www.wago.com/2009-193</a>                 |
|  | <b>Nr. articol: 2009-198</b><br>Adaptor  | <a href="http://www.wago.com/2009-198">www.wago.com/2009-198</a>                 |
|  | <b>Nr. articol: 248-501</b><br>Miniature WSB Quick marking system; plain; Marker width 5 mm; 10 strips with 10 markers per card                      | <a href="http://www.wago.com/248-501">www.wago.com/248-501</a>                   |
|  | <b>Nr. articol: 248-501/000-002</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; yellow                                  | <a href="http://www.wago.com/248-501/000-002">www.wago.com/248-501/000-002</a>   |

Supus modificărilor.





**Nr. articol:** 248-501/000-005

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; red

[www.wago.com/248-501/000-005](http://www.wago.com/248-501/000-005)



**Nr. articol:** 248-501/000-006

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; blue

[www.wago.com/248-501/000-006](http://www.wago.com/248-501/000-006)



**Nr. articol:** 248-501/000-007

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; gray

[www.wago.com/248-501/000-007](http://www.wago.com/248-501/000-007)



**Nr. articol:** 248-501/000-012

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; orange

[www.wago.com/248-501/000-012](http://www.wago.com/248-501/000-012)



**Nr. articol:** 248-501/000-017

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; light green

[www.wago.com/248-501/000-017](http://www.wago.com/248-501/000-017)



**Nr. articol:** 248-501/000-023

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; green

[www.wago.com/248-501/000-023](http://www.wago.com/248-501/000-023)



**Nr. articol:** 248-501/000-024

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; violet

[www.wago.com/248-501/000-024](http://www.wago.com/248-501/000-024)



**Nr. articol:** 793-501

WMB marking card; as card; not stretchable; plain; snap-on type; white

[www.wago.com/793-501](http://www.wago.com/793-501)



**Nr. articol:** 793-501/000-002

WMB marking card; as card; not stretchable; plain; snap-on type; yellow

[www.wago.com/793-501/000-002](http://www.wago.com/793-501/000-002)



**Nr. articol:** 793-501/000-005

WMB marking card; as card; not stretchable; plain; snap-on type; red

[www.wago.com/793-501/000-005](http://www.wago.com/793-501/000-005)



**Nr. articol:** 793-501/000-006

WMB marking card; as card; not stretchable; plain; snap-on type; blue

[www.wago.com/793-501/000-006](http://www.wago.com/793-501/000-006)



**Nr. articol:** 793-501/000-007

WMB marking card; as card; not stretchable; plain; snap-on type; gray

[www.wago.com/793-501/000-007](http://www.wago.com/793-501/000-007)



**Nr. articol:** 793-501/000-012

WMB marking card; as card; not stretchable; plain; snap-on type; orange

[www.wago.com/793-501/000-012](http://www.wago.com/793-501/000-012)



**Nr. articol:** 793-501/000-017

WMB marking card; as card; not stretchable; plain; snap-on type; light green

[www.wago.com/793-501/000-017](http://www.wago.com/793-501/000-017)

Supus modificărilor.



**Nr. articol: 793-501/000-023**  
WMB marking card; as card; not stretchable; plain; snap-on type; green

[www.wago.com/793-501/000-023](http://www.wago.com/793-501/000-023)



**Nr. articol: 793-501/000-024**  
WMB marking card; as card; not stretchable; plain; snap-on type; violet

[www.wago.com/793-501/000-024](http://www.wago.com/793-501/000-024)



**Nr. articol: 793-5501**  
WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; white

[www.wago.com/793-5501](http://www.wago.com/793-5501)



**Nr. articol: 793-5501/000-002**  
WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; yellow

[www.wago.com/793-5501/000-002](http://www.wago.com/793-5501/000-002)



**Nr. articol: 793-5501/000-005**  
WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; red

[www.wago.com/793-5501/000-005](http://www.wago.com/793-5501/000-005)



**Nr. articol: 793-5501/000-006**  
WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; blue

[www.wago.com/793-5501/000-006](http://www.wago.com/793-5501/000-006)



**Nr. articol: 793-5501/000-007**  
WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; gray

[www.wago.com/793-5501/000-007](http://www.wago.com/793-5501/000-007)



**Nr. articol: 793-5501/000-012**  
WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; orange

[www.wago.com/793-5501/000-012](http://www.wago.com/793-5501/000-012)



**Nr. articol: 793-5501/000-014**  
WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; brown

[www.wago.com/793-5501/000-014](http://www.wago.com/793-5501/000-014)



**Nr. articol: 793-5501/000-017**  
WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; green

[www.wago.com/793-5501/000-017](http://www.wago.com/793-5501/000-017)



**Nr. articol: 793-5501/000-023**  
WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; light green

[www.wago.com/793-5501/000-023](http://www.wago.com/793-5501/000-023)



**Nr. articol: 793-5501/000-024**  
WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; violet

[www.wago.com/793-5501/000-024](http://www.wago.com/793-5501/000-024)

#### Insulation stop



**Nr. articol: 2002-171**  
Insulation stop; 0.25 - 0.5 mm<sup>2</sup>; 5 pieces/strip; light gray

[www.wago.com/2002-171](http://www.wago.com/2002-171)

**Nr. articol: 2002-172**

Supus modificărilor.



Insulation stop; 0.75 - 1 mm<sup>2</sup>; 5 pieces/strip; dark gray

[www.wago.com/2002-172](http://www.wago.com/2002-172)

## Jumper



**Nr. articol:** 2002-400

Adjacent jumper for continuous commoning; insulated; 2-way; Nominal current 25 A; light gray

[www.wago.com/2002-400](http://www.wago.com/2002-400)



**Nr. articol:** 2002-402

Push-in type jumper bar; insulated; 2-way; Nominal current 25 A; light gray

[www.wago.com/2002-402](http://www.wago.com/2002-402)



**Nr. articol:** 2002-402/000-005

Push-in type jumper bar; insulated; 2-way; Nominal current 25 A; red

[www.wago.com/2002-402/000-005](http://www.wago.com/2002-402/000-005)



**Nr. articol:** 2002-402/000-006

Push-in type jumper bar; insulated; 2-way; Nominal current 25 A; blue

[www.wago.com/2002-402/000-006](http://www.wago.com/2002-402/000-006)



**Nr. articol:** 2002-403

Push-in type jumper bar; insulated; 3-way; Nominal current 25 A; light gray

[www.wago.com/2002-403](http://www.wago.com/2002-403)



**Nr. articol:** 2002-403/000-005

Push-in type jumper bar; insulated; 3-way; Nominal current 25 A; red

[www.wago.com/2002-403/000-005](http://www.wago.com/2002-403/000-005)



**Nr. articol:** 2002-403/000-006

Push-in type jumper bar; insulated; 3-way; Nominal current 25 A; blue

[www.wago.com/2002-403/000-006](http://www.wago.com/2002-403/000-006)



**Nr. articol:** 2002-404

Push-in type jumper bar; insulated; 4-way; Nominal current 25 A; light gray

[www.wago.com/2002-404](http://www.wago.com/2002-404)



**Nr. articol:** 2002-404/000-005

Push-in type jumper bar; insulated; 4-way; Nominal current 25 A; red

[www.wago.com/2002-404/000-005](http://www.wago.com/2002-404/000-005)



**Nr. articol:** 2002-404/000-006

Push-in type jumper bar; insulated; 4-way; Nominal current 25 A; blue

[www.wago.com/2002-404/000-006](http://www.wago.com/2002-404/000-006)



**Nr. articol:** 2002-405

Push-in type jumper bar; insulated; 5-way; Nominal current 25 A; light gray

[www.wago.com/2002-405](http://www.wago.com/2002-405)



**Nr. articol:** 2002-405/000-005

Push-in type jumper bar; insulated; 5-way; Nominal current 25 A; red

[www.wago.com/2002-405/000-005](http://www.wago.com/2002-405/000-005)



**Nr. articol:** 2002-405/000-006

Push-in type jumper bar; insulated; 5-way; Nominal current 25 A; blue

[www.wago.com/2002-405/000-006](http://www.wago.com/2002-405/000-006)



**Nr. articol:** 2002-405/011-000















Star point jumper; insulated; 3-way (1-3-5); IN = IN terminal block; light gray

[www.wago.com/2002-405/011-000](http://www.wago.com/2002-405/011-000)

Supus modificărilor.

WAGO Kontakttechnik GmbH & Co. KG  
/Representative Office Romania  
Sos. Pipera-Tunari nr. 1/1  
building 1, 2nd floor | 077190 Voluntari, Ilfov  
Tel.: +40-(0)31 421 85 68 | Email: [info-RO@wago.com](mailto:info-RO@wago.com)
















Aveți întrebări despre produsele noastre?  
Vă stăm la dispoziție pentru preluarea apelului la +40 (0) 31 421 85 68.

|  |  |  |
|--|--|--|
|    | <b>Nr. articol: 2002-406</b><br>Push-in type jumper bar; insulated; 6-way; Nominal current 25 A; light gray      | <a href="http://www.wago.com/2002-406">www.wago.com/2002-406</a>                 |
|    | <b>Nr. articol: 2002-406/000-005</b><br>Push-in type jumper bar; insulated; 6-way; Nominal current 25 A; red     | <a href="http://www.wago.com/2002-406/000-005">www.wago.com/2002-406/000-005</a> |
|    | <b>Nr. articol: 2002-406/000-006</b><br>Push-in type jumper bar; insulated; 6-way; Nominal current 25 A; blue    | <a href="http://www.wago.com/2002-406/000-006">www.wago.com/2002-406/000-006</a> |
|    | <b>Nr. articol: 2002-406/020-000</b><br>Delta jumper; insulated; 1-2 3-4 5-6; IN = IN terminal block; light gray | <a href="http://www.wago.com/2002-406/020-000">www.wago.com/2002-406/020-000</a> |
|    | <b>Nr. articol: 2002-407</b><br>Push-in type jumper bar; insulated; 7-way; Nominal current 25 A; light gray      | <a href="http://www.wago.com/2002-407">www.wago.com/2002-407</a>                 |
|    | <b>Nr. articol: 2002-407/000-005</b><br>Push-in type jumper bar; insulated; 7-way; Nominal current 25 A; red     | <a href="http://www.wago.com/2002-407/000-005">www.wago.com/2002-407/000-005</a> |
|    | <b>Nr. articol: 2002-407/000-006</b><br>Push-in type jumper bar; insulated; 7-way; Nominal current 25 A; blue    | <a href="http://www.wago.com/2002-407/000-006">www.wago.com/2002-407/000-006</a> |
|   | <b>Nr. articol: 2002-408</b><br>Push-in type jumper bar; insulated; 8-way; Nominal current 25 A; light gray      | <a href="http://www.wago.com/2002-408">www.wago.com/2002-408</a>                 |
|  | <b>Nr. articol: 2002-408/000-005</b><br>Push-in type jumper bar; insulated; 8-way; Nominal current 25 A; red     | <a href="http://www.wago.com/2002-408/000-005">www.wago.com/2002-408/000-005</a> |
|  | <b>Nr. articol: 2002-408/000-006</b><br>Push-in type jumper bar; insulated; 8-way; Nominal current 25 A; blue    | <a href="http://www.wago.com/2002-408/000-006">www.wago.com/2002-408/000-006</a> |
|  | <b>Nr. articol: 2002-409</b><br>Push-in type jumper bar; insulated; 9-way; Nominal current 25 A; light gray      | <a href="http://www.wago.com/2002-409">www.wago.com/2002-409</a>                 |
|  | <b>Nr. articol: 2002-409/000-005</b><br>Push-in type jumper bar; insulated; 9-way; Nominal current 25 A; red     | <a href="http://www.wago.com/2002-409/000-005">www.wago.com/2002-409/000-005</a> |
|  | <b>Nr. articol: 2002-409/000-006</b><br>Push-in type jumper bar; insulated; 9-way; Nominal current 25 A; blue    | <a href="http://www.wago.com/2002-409/000-006">www.wago.com/2002-409/000-006</a> |
|  | <b>Nr. articol: 2002-410</b><br>Push-in type jumper bar; insulated; 10-way; Nominal current 25 A; light gray     | <a href="http://www.wago.com/2002-410">www.wago.com/2002-410</a>                 |

Supus modificărilor.

WAGO Kontakttechnik GmbH & Co. KG  
/Representative Office Romania  
Sos. Pipera-Tunari nr. 1/1  
building 1, 2nd floor | 077190 Voluntari, Ilfov  
Tel.: +40-(0)31 421 85 68 | Email: info-RO@wago.com













Aveți întrebări despre produsele noastre?  
Vă stăm la dispoziție pentru preluarea apelului la +40 (0) 31 421 85 68.

|  |  |  |
|--|--|--|
|    | <b>Nr. articol: 2002-410/000-005</b><br>Push-in type jumper bar; insulated; 10-way; Nominal current 25 A; red  | <a href="http://www.wago.com/2002-410/000-005">www.wago.com/2002-410/000-005</a> |
|    | <b>Nr. articol: 2002-410/000-006</b><br>Push-in type jumper bar; insulated; 10-way; Nominal current 25 A; blue   | <a href="http://www.wago.com/2002-410/000-006">www.wago.com/2002-410/000-006</a> |
|    | <b>Nr. articol: 2002-423</b><br>Adjacent jumper for continuous commoning; insulated; from 1 to 3; Nominal current 25 A; light gray   | <a href="http://www.wago.com/2002-423">www.wago.com/2002-423</a>                 |
|    | <b>Nr. articol: 2002-423/000-005</b><br>Adjacent jumper for continuous commoning; insulated; from 1 to 3; Nominal current 25 A; red  | <a href="http://www.wago.com/2002-423/000-005">www.wago.com/2002-423/000-005</a> |
|    | <b>Nr. articol: 2002-423/000-006</b><br>Adjacent jumper for continuous commoning; insulated; from 1 to 3; Nominal current 25 A; blue   | <a href="http://www.wago.com/2002-423/000-006">www.wago.com/2002-423/000-006</a> |
|    | <b>Nr. articol: 2002-433</b><br>Push-in type jumper bar; insulated; from 1 to 3; Nominal current 25 A; light gray  | <a href="http://www.wago.com/2002-433">www.wago.com/2002-433</a>                 |
|    | <b>Nr. articol: 2002-434</b><br>Push-in type jumper bar; insulated; from 1 to 4; Nominal current 25 A; light gray  | <a href="http://www.wago.com/2002-434">www.wago.com/2002-434</a>                 |
|   | <b>Nr. articol: 2002-435</b><br>Push-in type jumper bar; insulated; from 1 to 5; Nominal current 25 A; light gray  | <a href="http://www.wago.com/2002-435">www.wago.com/2002-435</a>                 |
|  | <b>Nr. articol: 2002-436</b><br>Push-in type jumper bar; insulated; from 1 to 6; Nominal current 25 A; light gray  | <a href="http://www.wago.com/2002-436">www.wago.com/2002-436</a>                 |
|  | <b>Nr. articol: 2002-437</b><br>Push-in type jumper bar; insulated; from 1 to 7; Nominal current 25 A; light gray  | <a href="http://www.wago.com/2002-437">www.wago.com/2002-437</a>                 |
|  | <b>Nr. articol: 2002-438</b><br>Push-in type jumper bar; insulated; from 1 to 8; Nominal current 25 A; light gray  | <a href="http://www.wago.com/2002-438">www.wago.com/2002-438</a>                 |
|  | <b>Nr. articol: 2002-439</b><br>Push-in type jumper bar; insulated; from 1 to 9; Nominal current 25 A; light gray  | <a href="http://www.wago.com/2002-439">www.wago.com/2002-439</a>                 |
|  | <b>Nr. articol: 2002-440</b><br>Push-in type jumper bar; insulated; from 1 to 10; Nominal current 25 A; light gray   | <a href="http://www.wago.com/2002-440">www.wago.com/2002-440</a>                 |
|  | <b>Nr. articol: 2002-472</b><br>Staggered jumper; insulated; 2-way; Nominal current 25 A; suitable for 2002 and 2003 Series rail-mounted terminal blocks; light gray                           | <a href="http://www.wago.com/2002-472">www.wago.com/2002-472</a>                 |
|  | <b>Nr. articol: 2002-473</b><br>Staggered jumper; insulated; 3-way; Nominal current 25 A; suitable for 2002 and 2003 Series rail-mounted terminal blocks; light gray                           | <a href="http://www.wago.com/2002-473">www.wago.com/2002-473</a>                 |
|  | <b>Nr. articol: 2002-473/011-000</b><br>Ready-made staggered jumper; insulated; 2-way (1-3); Nominal current 25 A; with contact lugs broken off at the factory and circuit marking; light gray | <a href="http://www.wago.com/2002-473/011-000">www.wago.com/2002-473/011-000</a> |

Supus modificărilor.










WAGO Kontakttechnik GmbH & Co. KG  
/Representative Office Romania  
Sos. Pipera-Tunari nr. 1/1  
building 1, 2nd floor | 077190 Voluntari, Ilfov  
Tel.: +40-(0)31 421 85 68 | Email: info-RO@wago.com

Aveți întrebări despre produsele noastre?  
Vă stăm la dispoziție pentru preluarea apelului la +40 (0) 31 421 85 68.

|  |  |  |
|--|--|--|
|    | <b>Nr. articol: 2002-474</b><br>Staggered jumper; insulated; 4-way; Nominal current 25 A; suitable for 2002 and 2003 Series rail-mounted terminal blocks; light gray                             | <a href="http://www.wago.com/2002-474">www.wago.com/2002-474</a>                 |
|    | <b>Nr. articol: 2002-475</b><br>Staggered jumper; insulated; 5-way; Nominal current 25 A; suitable for 2002 and 2003 Series rail-mounted terminal blocks; light gray                             | <a href="http://www.wago.com/2002-475">www.wago.com/2002-475</a>                 |
|  | <b>Nr. articol: 2002-475/011-000</b><br>Ready-made staggered jumper; insulated; 3-way (1-3-5); Nominal current 25 A; with contact lugs broken off at the factory and circuit marking; light gray | <a href="http://www.wago.com/2002-475/011-000">www.wago.com/2002-475/011-000</a> |
|    | <b>Nr. articol: 2002-476</b><br>Staggered jumper; insulated; 6-way; Nominal current 25 A; suitable for 2002 and 2003 Series rail-mounted terminal blocks; light gray                             | <a href="http://www.wago.com/2002-476">www.wago.com/2002-476</a>                 |
|    | <b>Nr. articol: 2002-477</b><br>Staggered jumper; insulated; 7-way; Nominal current 25 A; suitable for 2002 and 2003 Series rail-mounted terminal blocks; light gray                             | <a href="http://www.wago.com/2002-477">www.wago.com/2002-477</a>                 |
|    | <b>Nr. articol: 2002-477/011-000</b><br>Ready-made staggered jumper; insulated; 1-3-5-7; Nominal current 25 A; with contact lugs broken off at the factory and circuit marking; light gray       | <a href="http://www.wago.com/2002-477/011-000">www.wago.com/2002-477/011-000</a> |
|    | <b>Nr. articol: 2002-478</b><br>Staggered jumper; insulated; 8-way; Nominal current 25 A; suitable for 2002 and 2003 Series rail-mounted terminal blocks; light gray                             | <a href="http://www.wago.com/2002-478">www.wago.com/2002-478</a>                 |
|   | <b>Nr. articol: 2002-479</b><br>Staggered jumper; insulated; 9-way; Nominal current 25 A; suitable for 2002 and 2003 Series rail-mounted terminal blocks; light gray                             | <a href="http://www.wago.com/2002-479">www.wago.com/2002-479</a>                 |
|  | <b>Nr. articol: 2002-479/011-000</b><br>Ready-made staggered jumper; insulated; 1-3-5-7-9; Nominal current 25 A; with contact lugs broken off at the factory and circuit marking; light gray     | <a href="http://www.wago.com/2002-479/011-000">www.wago.com/2002-479/011-000</a> |
|  | <b>Nr. articol: 2002-480</b><br>Staggered jumper; insulated; 10-way; Nominal current 25 A; suitable for 2002 and 2003 Series rail-mounted terminal blocks; light gray                            | <a href="http://www.wago.com/2002-480">www.wago.com/2002-480</a>                 |
|  | <b>Nr. articol: 2002-481</b><br>Staggered jumper; insulated; 11-way; Nominal current 25 A; suitable for 2002 and 2003 Series rail-mounted terminal blocks; light gray                            | <a href="http://www.wago.com/2002-481">www.wago.com/2002-481</a>                 |
|  | <b>Nr. articol: 2002-481/011-000</b><br>Ready-made staggered jumper; insulated; 1-3-5-7-9-11; Nominal current 25 A; with contact lugs broken off at the factory and circuit marking; light gray  | <a href="http://www.wago.com/2002-481/011-000">www.wago.com/2002-481/011-000</a> |
|  | <b>Nr. articol: 2002-482</b><br>Staggered jumper; insulated; 12-way; Nominal current 25 A; suitable for 2002 and 2003 Series rail-mounted terminal blocks; light gray                            | <a href="http://www.wago.com/2002-482">www.wago.com/2002-482</a>                 |
|  | <b>Nr. articol: 210-103</b><br>Wire commoning chain; insulated; 50 connections; black  | <a href="http://www.wago.com/210-103">www.wago.com/210-103</a>                   |
|  | <b>Nr. articol: 210-123</b><br>Wire commoning chain; insulated; 50 connections   | <a href="http://www.wago.com/210-123">www.wago.com/210-123</a>                   |

## ferrule

Supus modificărilor.

|   |   |  |
|---|---|--|
|    | <b>Nr. articol: 216-241</b><br>Ferrule; Sleeve for 0.5 mm <sup>2</sup> / 20 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; white | <a href="http://www.wago.com/216-241">www.wago.com/216-241</a> |
|    | <b>Nr. articol: 216-242</b><br>Ferrule; Sleeve for 0.75 mm <sup>2</sup> / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray | <a href="http://www.wago.com/216-242">www.wago.com/216-242</a> |
|    | <b>Nr. articol: 216-243</b><br>Ferrule; Sleeve for 1 mm <sup>2</sup> / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red     | <a href="http://www.wago.com/216-243">www.wago.com/216-243</a> |
|    | <b>Nr. articol: 216-244</b><br>Ferrule; Sleeve for 1.5 mm <sup>2</sup> / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black | <a href="http://www.wago.com/216-244">www.wago.com/216-244</a> |
|    | <b>Nr. articol: 216-246</b><br>Ferrule; Sleeve for 2.5 mm <sup>2</sup> / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; blue  | <a href="http://www.wago.com/216-246">www.wago.com/216-246</a> |
|    | <b>Nr. articol: 216-262</b><br>Ferrule; Sleeve for 0.75 mm <sup>2</sup> / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray | <a href="http://www.wago.com/216-262">www.wago.com/216-262</a> |
|    | <b>Nr. articol: 216-263</b><br>Ferrule; Sleeve for 1 mm <sup>2</sup> / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red     | <a href="http://www.wago.com/216-263">www.wago.com/216-263</a> |
|   | <b>Nr. articol: 216-264</b><br>Ferrule; Sleeve for 1.5 mm <sup>2</sup> / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black | <a href="http://www.wago.com/216-264">www.wago.com/216-264</a> |
|  | <b>Nr. articol: 216-266</b><br>Ferrule; Sleeve for 2.5 mm <sup>2</sup> / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; blue  | <a href="http://www.wago.com/216-266">www.wago.com/216-266</a> |

## Descărcări

### Documentation

#### Additional Information

|                        |             |               |            |
|------------------------|-------------|---------------|------------|
| Technical explanations | Apr 3, 2019 | pdf<br>2,1 MB | Descărcare |
|------------------------|-------------|---------------|------------|

### CAD/CAE-Data

#### CAD data

|                        |     |            |
|------------------------|-----|------------|
| 2D/3D Models 2202-1407 | URL | Descărcare |
|------------------------|-----|------------|

#### CAE data

|                             |     |            |
|-----------------------------|-----|------------|
| EPLAN Data Portal 2202-1407 | URL | Descărcare |
|-----------------------------|-----|------------|


Supus modificărilor.

WAGO Kontakttechnik GmbH & Co. KG  
/Representative Office Romania  
Sos. Pipera-Tunari nr. 1/1  
building 1, 2nd floor | 077190 Voluntari, Ilfov  
Tel.: +40-(0)31 421 85 68 | Email: info-RO@wago.com

Aveți întrebări despre produsele noastre?  
Vă stăm la dispoziție pentru preluarea apelului la +40 (0) 31 421 85 68.

## Installation Notes

### Conductor termination

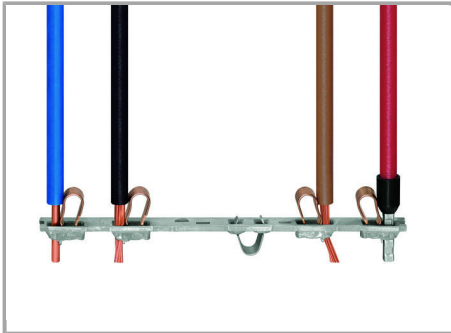

All conductor types at a glance

## Familie de produse

### TOPJOB® S

TOPJOB® S: In various industrial applications and modern building installations, WAGO's wide and versatile range of rail-mount terminal blocks provides more than just reliable electrical connections.

[Afișare globală produse din familie.](#)

Supus modificărilor.