




REV.	REVISED DESCRIPTION	DATE	CHECKED
A1	FIRST RELEASE	2010.05.17	

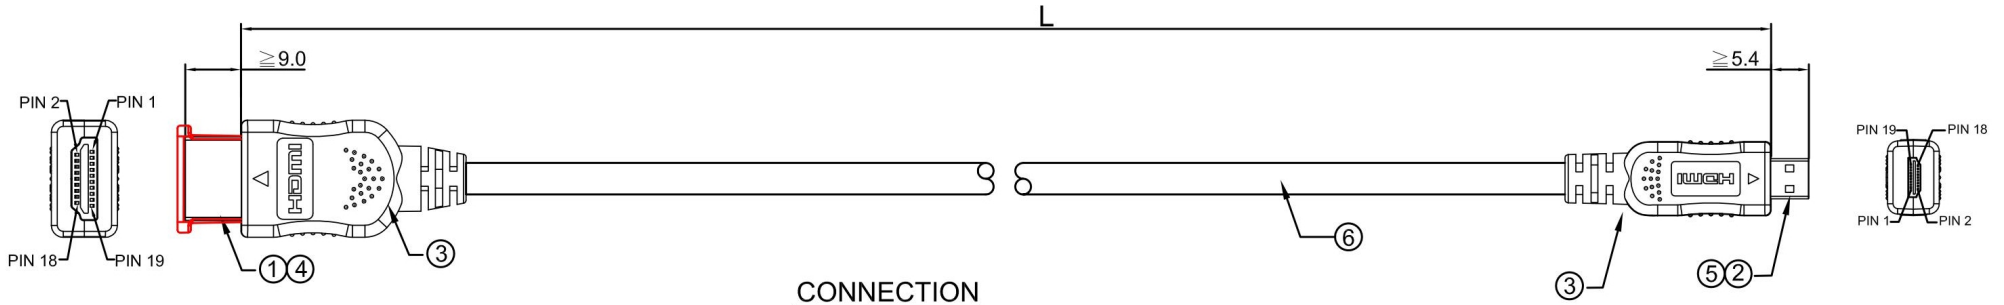

CONNECTION

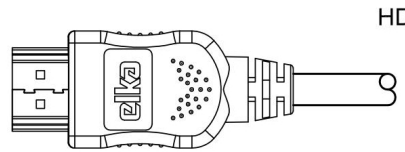


HDMI Type A



HDMI Typ D

HANK SIZE



1PC/ 1PE Bag

Pin No.	Color	Signal	Pin No.	Color	Signal
1	Blue	T.M.D.S Data 2 +	3	Blue	T.M.D.S Data 2 -
2	D.W		4	D.W	
3	White	T.M.D.S Data 2 -	5	White	T.M.D.S Data 1 +
4	Red	T.M.D.S Data 1 +	6	Red	T.M.D.S Data 1 -
5	D.W		7	D.W	
6	White	T.M.D.S Data 1 -	8	White	T.M.D.S Data 0 +
7	Brown	T.M.D.S Data 0 +	9	Brown	T.M.D.S Data 0 -
8	D.W		10	D.W	
9	White	T.M.D.S Data 0 -	11	White	T.M.D.S Clock +
10	Green	T.M.D.S Clock +	12	Green	T.M.D.S Clock -
11	D.W		13	D.W	
12	White	T.M.D.S Clock -	14	White	CEC
13	Gray	CEC	15	Gray	Utility
14	Red	Utility	2	Red	SCL
15	Yellow	SCL	17	Yellow	SDA
16	Orange	SDA	18	Orange	DDC/CEC Ground
17	Pink	DDC/CEC Ground	16	Pink	+5 V Power
18	White	+5 V Power	19	White	Hot Plug Detect
19	Purple	Hot Plug Detect	1	Purple	Braid Shield
			1		Braid Shield

ERP NO.	Part No.:	Length (L)	Length (H)
A00-00823-0001	HG61	1000±30	120±10
A00-00823-0002	HG62	2000±50	130±10

ELECTRIC TESTING:

- 100% OPEN & SHORT TESTING
- INSULATION RESISTANCE: $\geq 20 M\Omega$
- CONDUCTOR RESISTANCE: $\leq 3 \Omega$
- VOLTAGE: 300V DC/0.1S

ITEM	SPECIFICATION
6	CABLE SPEC:{{{(7/0.06Sc+FEP)*1P+7/0.08Tc+AL.F)*4P+(7/0.08Tc+PP)*7C+AL+16/9/0.06Tc}*1C OD:4.0±0.15mm Matte Black PVC Jacket marking:High Speed HDMI R(logo) Cable E119932 UL(Logo) AWM 20276 80 30V VW-1 COPARTNER(C18-2G012-*)
5	Plastic Cap-Transparent(OPT-110-0**)
4	Plastic Cap-Transparent(OPT-110-024)
3	PVC - Black 50P(M01-011-050)
2	HDMI Plug - Gold Plated Type D(P37-D001G-00/YT-1973)
1	HDMI Plug - Gold Plated(P37-0034G-00/YT-1879)

TOLERANCES UNLESS OTHERWISE STATED

X.	= ± 1
.X	= ± 0.2
.XX	= ± 0.1

ERP NO.:	PART NO
DOC No.:	REVISION A1
CUSTOMER:	FAST
CUSTOMER P/N:	UNIT mm
DESCRIPTION	SCALE NO
	PAGE NO 1/1
	DATE 2010.05.17
APPROVAL	CHECKED
	DRAWN YJ