



AIRSTAR

SIROCCO 2-S
24 x 10 W LED 48 V

#professional lighting

NEW



MAIN FEATURES

- Battery powered
- Self-inflating lighting balloon
- Small size
- Pro-pack option

STRENGTHS

- Led lamps
- Instant restrike
- Excellent size-to-performance ratio
- Flexible and multipurpose

APPLICATIONS

- Industrial maintenance
- Emergency lighting
- Logistical lighting
- Security lighting


SIROCCO 2-S

24 x 10 W LED 48 V



LIGHTING DATA

Open core area lighting requirement (EN1838 norm)	1050 m ²
Very low risk area lighting requirement for safety and security (EN12464-2 norm)	230 m ²
Light under the balloon (2 m high)	403 lux
Maximum lumen	24 000 lm
Colour temperature: DAYLIGHT	6000°K

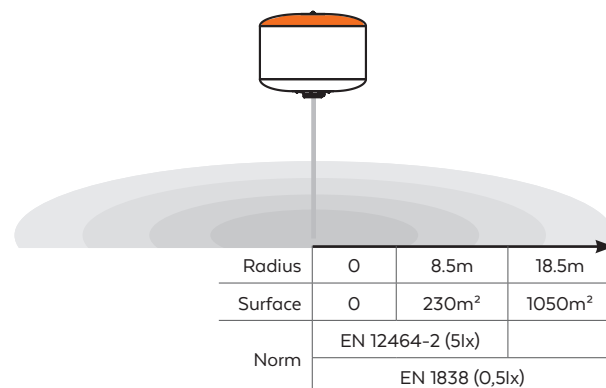

How to read the drawing : In a range of 18.5 meters, being a surface of 1050m², we guarantee a lighting in accordance with the standard EN1838

TECHNICAL DATA

Lamps	6 x 4 x 10 W LED			
Average lamps life*	30 000 h			
Efficiency	103 lm/W			
Bulb / COB type	10W LED COB			
Maximum power	240 W			
Power supply	48 v lithium battery			
Dimmable	100%	66%	33%	flash mode
Lifetime on battery	4h	6h	12h	8h
Restrike time	instant			
Envelope options	multiple envelope colours, without reflector or with reverse reflector			

*Under normal conditions of use



SAFETY

Flame-retardant fabric	
Silver reflector to improve highlight luminance below the balloon and avoid light pollution	
Rain and dust proof material	IP54
Wind resistance	80 km/h

DIMENSIONS & PACKAGING

Metal storage box (integrated handle)


Total weight without stand	22 kg
Net weight balloon only	3.7 kg

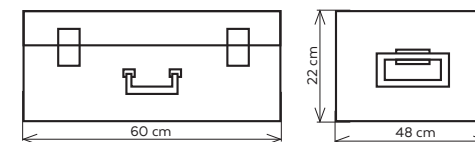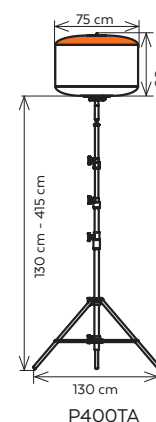

Full set lighting balloon with 2 batteries, 2 chargers, one repair patch kit, one user manual and one glove, all in a metal box, stand separately

Pro-Pack (integrated handle and wheels)

Total weight with stand	38 kg
Net weight balloon only	3.7 kg

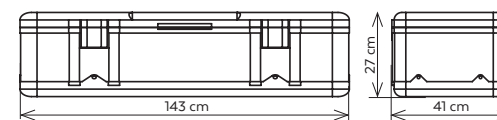

Full set lighting balloon with 2 batteries, 2 chargers, one repair patch kit, one user manual and one glove, P400TA stand, all in a black hard case

