



Datasheet

RS PRO NYLON CABLE GLAND (PG Thread) (With Strain Relief)


Stock No. 2101365, 2101368, 2101370, 2101374, 2101376, 2101377

EN



SPECIFICATION

- Material: UL approved Nylon 66, 94V-2
- Color: **Grey (RAL7001)**
- Suit a variety of applications, and diverse industries.
- Function : Mount gland to pre-drilled panel hole, use locknut to fix gland on board, insert the cables in the seal, and then tighten up the nut to hold cables in position.
- Feature : Simply and quickly fixed, high degree of the protection IP68 preventing dust and water.
- Strain relief design protect cable from breakage/right angle bending.

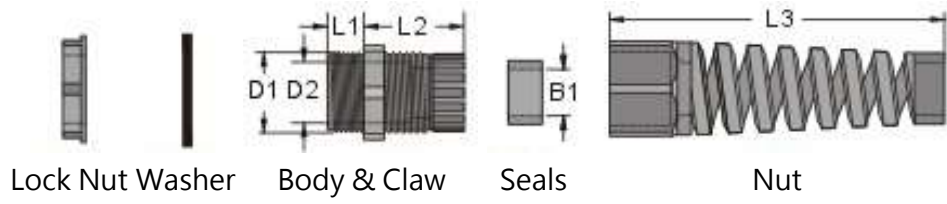

RS Article (will be replayed RS new article no.)	KSS Aricle NO	Thread Size	Mounting Hole	D1	D2	B1	L1	L2	L3	Cable Range	Packing
389549	EGRWW7SRGY3	PG7	12.5~12.8	12.5	8.3	6.9	7.9	20	53.3	3 ~ 6.5	10PCS/BG
389555	EGRWW9SRGY3	PG9	15.2~15.5	15.2	10.5	8	7.9	22	62.5	4 ~ 8	
392078	EGRWW11SRGY3	PG11	18.3~18.9	18.3	13.2	10.5	7.9	23.7	74.9	5 ~ 10	
389561	EGWW135SRGY3	PG13.5	20.4~20.7	20.4	15.5	12	8.9	24.6	85.5	6 ~ 12	
392084	EGRWW16SRGY3	PG16	22.5~22.8	22.5	17.2	14	9.8	26.2	96.2	10 ~ 14	
392090	EGRWW21SRGY3	PG21	28.3~28.7	28.3	22.4	18.4	10.8	30	111.2	13 ~ 18	

** PG THREAD (DIN STANDARD)

