


Datasheet

ANSI PVC Insulated & Screened Thermocouple Extension & Compensating Cable

PVC Insulated & Screened (ANSI MC96.1)

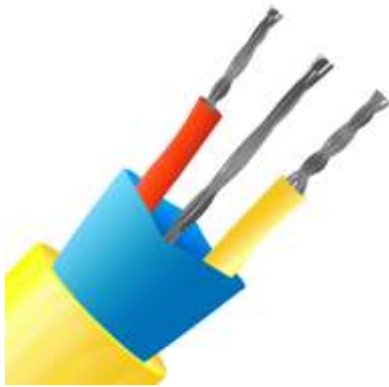

- PVC insulated & screened
- Twisted cores & screened construction for reduced electrical noise
- Conductors PVC insulated and twisted together, aluminium Mylar® tape screen & drain wire, overall PVC sheath
- General purpose cable both waterproof and flexible
- Thermocouple extension types for K & J
- Stranded 7/0.2mm conductors
- Available in multiple reel lengths
- Tolerance Class 2
- Insulation rating -10°C to 105°C
- Colour code (cores & jacket) to ANSI MC96.1

T/C Type	Conductors	Cores	Jacket	Reel Length	Allied Code	RS order code
Extension:						
KX	7/0.2mm	+Yellow/-Red	Yellow	10 m		2154924
KX	7/0.2mm	+Yellow/-Red	Yellow	25 m	70656117	814-0068
KX	7/0.2mm	+Yellow/-Red	Yellow	50 m		2154925
KX	7/0.2mm	+Yellow/-Red	Yellow	100 m	70656120	814-0077
KX	7/0.2mm	+Yellow/-Red	Yellow	200 m	70656118	814-0070
JX	7/0.2mm	+White/-Red	Black	10 m		2154871
JX	7/0.2mm	+White/-Red	Black	25 m	70656097	814-0002
JX	7/0.2mm	+White/-Red	Black	50 m		2154872
JX	7/0.2mm	+ White/-Red	Black	100 m	70656100	814-0011
JX	7/0.2mm	+ White/-Red	Black	200 m	70656101	814-0014