


SAFETY FIRST



- Australia's leading manufacturer
- Production for over 20 years
- 2 1/2 acre works & HQ
- **Proudly Australian**
- ISO 9001 quality accredited
- Exporting worldwide









Members of Ausiet association



AUSSIE PRO-OPERATOR ... PUTTING YOU FIRST!

- FREE education program about the implications for operators under the new AU/NZS 4233.01 Safety Standards
- NEW advanced design blasters to 5,000 psi that are Class A compliant to give maximum operator efficiency while maintaining the highest safety standards
- Machines clearly identify by their safety classification so operators make an informed choice
- Safety training programs for distributors, owners & operators on the machine selection, their safe use & maintenance
- **WORK SAFE** operator manuals that lead the industry

- Comprehensive safety decals on all machines to protect operators
- **Aussie Safety Protection kits** fitted to all Aussie blasters to protect against pressure spikes
- A range of PPE to protect operators of Class B machines to 500 bar (page 80-83)

AUSTRALIAN MANDATORY SAFETY CLASSIFICATIONS

AS/NZS 4233.1:2013 ... recommended reading for all professional operators

Summarised below

CLASS A ... under 5,600 bar lpm

(multiply pressure in bar by flow) Operators must be trained and assessed as competent in the following

- Danger awareness
- Site safety
- Machinery stop controls
- Hose & equipment inspection
- Personal protection equipment



CLASS B ... over 5,600 bar lpm

(multiply pressure in bar by flow) Operators must be RTO trained and certified as competent in the following

- System operation and safety procedures.
- Pressurised water jets and hazards
- Controls and safe operation
- Component compatibility
- Hose inspection, application and fittings
- Nozzle selection and operation
- Personal protection equipment
- Equipment maintenance
- Body positioning during cleaning processes.



AUSSIE PUMPS PUTS SAFETY FIRST TO ELIMINATE INJURIES & SAVE LIVES





CONTENTS

COLD WATER BLASTERS



Commercial ...

3,000 psi 4,000 psi

P6-7



Industrial Petrol...



P8-11



Industrial/Mine Diesel



7,300 psi

P12-15

Selection guide ... page 5





Hire Spec







Hydraulic drive...



P23 Jetters...





P24-31 Electric ...

Mine Spec ...

P32-36

P49-50

HOT WATER & STEAM CLEANERS



Electric... P38-39



Engine drive... P41-46



Skid & trailer...



Mine Spec...



Clean' n Capture P51-54

HIGH PRESSURE ACCESSORIES



Guns, lances & turbos ...

P56-59



Nozzles ... r60-61



Engines & motors ... P62-63





P69

P77





Hose ... P70-71



Reels ... P72-73





P68

P76

P98

Telewands & grit blast Kits ...

Injectors, Gauges &

filters ...



coils, solenoids, fuel

pumps ...

Foamers, wheels, carts, tanks ...



500 bar ...



P78-79



BERTOLINI & UDOR HIGH PRESSURE PUMPS

P74-75

P84-85



Direct drive ...



Heavy duty ...



350-500 bar ...



P88

from page 83



Pressure ...



Pressure ...



P94



HYDROSTATIC TESTERS





System Requirements ..



WET/DRY VACS



High flow ...







Pressure Cleaner Trouble Shooting Guide ... P105

P102





A 25 YEAR JOURNEY DRIVEN BY OUR PASSION TO GIVE CUSTOMERS THE BEST SOLUTIONS



Our mission is to produce products for the cleaning industry that excel in terms of performance and efficiency.

The result is the world's best machines, proudly built in Australia, for the toughest applications on construction sites, shipyards and mines.

Our range extends from compact, portable machines for **'Executive**

Tradies' through to the **Aussie Mine Boss** extreme series.

We understand that professionals want reliability, quality without compromise, at a price that is real value.

Time is your most valuable commodity. Selecting the right size machine for the job will increase cleaning efficiency, saving time, water & labour.

Choose an Aussie ... it's an machine **you'll love** to use!



NOBODY

hours ...

the job!

wants to take

5 hours when the job can

be done in 11/2

Buy the right machine for



COMMERCIAL PETROL DRIVE

P6-7

3,000 psi - 4,000 psi Honda direct drive

Tradies, cleaning contractors, schools, farm use, property maintenance, landscapers

INDUSTRIAL PETROL DRIVE

3,000 psi - 5,000 psi Class A ... NO CERT REQUIRED Scud & Ultra, gearbox drive

Cleaning contractors, construction, concrete & paint prep machinery wash-down, graffiti removal, councils

HYDRO-BLASTERS PETROL DRIVE

P10-11

5,000 psi-7,200 psi Class B

Contract cleaning, shipyards, large machinery wash-down, rust removal, surface prep, concrete scoring & hydro-demolition

INDUSTRIAL/MINE DIESEL DRIVE

P12-14

3,000 psi - 7,300 psi trolley Class A & B

Cleaning contractors, construction, large machinery wash-down, mine sites, council workshops

MINE BOSS EXTREME SERIES

P15-18

4,300 psi-7,300 psi, flows to 31 lpm, Skids & trailer mounts Class B

Contract cleaning, shipyards, large machinery wash-down, mine sites

HIRE SPEC BLASTERS (HOT & COLD)

1,400 psi-5,000 psi Class A ... NO CERT REQUIRED

Hire ready machines

PUMP MOTOR GROUPS

P22

'Big Berty' pumps with top quality engines & motors

HYDRAULIC DRIVE BLASTERS

P23

2,175 psi - 5,000 psi Class A ... NO CERT REQUIRED

Mobile, flexible installations, machinery wash-down, vac trucks, drill rigs, concrete pumps

DRAIN JETTERS & ACCESSORIES

P24-31

4,000 psi - 5,000 psi Class A & B

Aussie Cobra series ... world's best drain cleaners Trolley, cube & trailer mounted

ELECTRIC DRIVE

P32-36

2,000 psi - 5,000 psi Class A 7,300 psi Class B

Cleaning contractors, construction, shipyards, large machinery wash-down, mine sites, council workshops

























Honda GX engine warranty

- "Big Berty" Bertolini triplex pump with 4 year warranty
- **NEW Compact**, robust stainless steel frame with steel wheels & FLAT FREE tyres (10")
- Pro accessories, gun, Vario lance & double wire braid high pressure hose
- Detergent injection ... faster cleaning (not for use with 15m hose)
- FREE ASP (Aussie Safety Protection) kit ... protects against pressure spikes & extended by-pass running

AB30 CONTRACTOR VERSION

- Includes lifting bar for easy loading (ASS30LIFTBAR)
- Heavy duty pro gun with 700mm single lance (more suited to heavier work loads)

AB30 15M HOSE REEL VERSION

- Fitted steel hose reel with 15m double wire braid high pressure hose
- FREE PRO-FOAMER kit valued at \$148













	Pressure	EWP with turbo	Flow	Honda Engine	НР	Version	Stock code	List price
Scud AB30	3,000 psi (210 bar)	4,785 psi	10 lpm	GX200	6.5	Standard	ABSS30/GX200	\$2,078
						Contractor	ABSS30H/GX200	\$2,250
						Hose Reel	ABSS30/GX200HR	\$2,584

Pump details, weights & dimensions

	Bertolini Pump	Nozzle size	Version	Weight	Boxed dims mm
			Standard	45 kg	620 x 540 x 580
AB30	WBXG3025	030	Contractor	50 kg	620 x 540 x 580
			Hose Reel	55 kg	630 x 560 x 825



Scan to see

Accessories supplied with machine

AB30 Standard & AB30 Hose reel version

7.555 514.144.14 6.7.555 1.655 1.65.1					
Hose	AHW06M22X2X8	8m R2 3/8" with M22 couplings (NB not supplied with hose reel version)			
Gun	M4021108007	AL13 gun			
Lance	C4723.45.115	Vario Lance			
Turbo	M4042100004	Turbo lance			
Pump service kits p84-85					

AB30 Contractor version

Hose	AHW06M22X2X8	8m R2 3/8" with M22 couplings
Gun	M4022209003	AL55 pro gun
Lance	C3905.14	700mm lance
Turbo	M4042100004	Turbo lance

Optional accessories FASTER, SMARTER, SAFER

Tele-wand ... REACH FURTHER

Ideal for reaching eaves & washing windows, extends to 5.5m, includes FREE harness. Quik Tip nozzle sold separately.



AGPDLTG18	\$431
AGPDCLTG18A Heavy duty	\$502
QT nozzle C915035Q	\$20

15" FLAT SURFACE CLEANER

Clean flat surfaces three times faster, leaving a streak free finish. Steel

FNA80166 (15") **\$225** 700mm lance to suit FNA7103261



GUTTER CLEANER

DITCH THE LADDER Unique design attaches

To a lance & enables gutter cleaning. Can also be used with a turbo head. Inlet: 1/4 QC plug Outlet: 1/4" QC

AGPD20011

\$40 Quick Tip nozzle C915035Q \$20 70mm lance with OC FNA7103261 \$74

NEW Foamer ... SPRAY FOAM FAST

LS3 foamer ...

Spray detergents, degreasers. disinfectants without chemicals going through the pump. Recommended for hoses in excess of 10m.

FREE with ABSC30/GX200HR

Hose reel version of AB30 MPA25152612 Requires coupling to fit to gun C1500.06 \$10

4,000 psi Hose Reel Kit .. EASY FIT

Safer & smarter working, includes reel, 15m double wire braid hose, whip hose & mounting plate

(not to be used in conjunction with lifting bar)



AD30001 (hose reel kit)

Lifting bar .. EASY LOADING

Optional lift bar

ASS30LIFTBAR



ABSS30/GX200

ABSS30H/GX200 Contractor version ABSS30/GX200HR











- Genuine Honda 13HP with
 3 year Honda GX engine warranty
- "Big Berty" Bertolini TMG triplex pump with 4 year warranty
- NEW Compact, robust stainless steel frame with integrated hose reel mounting bar
- Steel wheels & NEW FLAT FREE tyres (13")
- Pro accessories, gun, dual lance & double wire braid high pressure hose
- Detergent injection ... faster cleaning (not for use with 30m hose)

- FREE ASP (Aussie Safety Protection) kit
 ... protects against pressure spikes & extended by-pass running
- ◆ Optional lift bar ASS40LIFTBAR \$230



AB40-GT 30M HOSE REEL VERSION

 Fitted steel hose reel with 30m double wire braid high pressure hose











	Pressure	EWP with turbo	Flow	Honda Engine	НР	Stock code	List price
Scud AB40 GT	4,000 psi (275 bar)	0 psi bar) 6,485 psi	13 lpm	GX390	13	Standard version ABSS40-GT/GX390	\$3,542
	(275 bar)					Hose reel version ABSS40-GTGX390HR	\$3,988

Pump details, weights & dimensions

	Bertolini Pump	Nozzle size	Weight	Dimensions with skid (Lxwxh) mm (standard version)
Scud AB40 GT	TMG4035	030	75 kg	1100 x 800 x 950

Accessories supplied with machine

Hose	AHW06M22X2X10	10m R2 3/8" Aussie Blue-Pro non marking hose with M22 couplings (30m double wire braid hose supplied with hose reel version)
Gun	M4022209003	AL55 4,500 psi Pro Gun
Lance	C3924.01	700mm Dual Lance
Nozzle	C915030M C915500MSS	2 x Laser Cut (15° & detergent)
Turbo	CTN310-030	Turbo lance
Pump service kits	n8/1-85	

Optional accessories FASTER, SMARTER, SAFER

Tele-wand ... REACH FURTHER

Ideal for reaching eaves & washing windows, extends to 5.5m, includes FREE harness. Quik Tip nozzle sold separately.



AGPDLTG18 \$431
AGPDCLTG18A Heavy duty \$502
QT nozzle C915030 \$20

CLEAN FLAT SURFACES FAST

SLASH CLEANING TIMES BY 75%

Clean flat surfaces four times faster, leaving a streak free finish. Standard nozzles included.

AGPDFSC20 20" Spinner **\$1,247**AGPDFSCS22Z 22" Cyclone **\$1,565**



Extra length hose ... CONVENIENT

Cleaning large plant?...
reach further with these extra length
Aussie Blue-Pro hoses, 5,800 psi rated,
R2 wire braid hose, 3/8 female ends
(M22 couplings sold separately)

Note detergent injection will not work with longer hose, foamer required.



AHW06FB6FB6X20 (20m) \$330 AHW06FB6FB6X30 (30m) \$499 AHW06FB6FB6X50 (50m) \$772 M212003540 (M22 QC) \$21 (2 required)

Foam Jet ... SPRAY UP TO 3 STORIES

Use with extra long hose to apply detergents, degreasers, disinfectants without chemicals going through the pump.

MTM140289 **\$233**Requires coupling to fit to gun
C1500.06 **\$10**



4,000 psi Hose Reel Kit .. EASY FIT

Safer & smarter working, includes reel, 30m double wire braid hose, whip hose & mounting plate.



ADHR40100D (hose reel kit) \$845

Free Safety glasses with all Aussie blasters & jetters





2,000 - 4,000 PSI **HONDA SCUD**

SLOW SPEED ... LONG LIFE





Scud 400 with 30m hose & reel fitted (ABBSS400HR/GX390)



- 'Big Berty' Bertolini slow speed triplex pump with 4 year warranty
- **NEW Scud stainless steel frame &** anti vib mounts, steel wheels with flat free tyres (13")
- Detergent injection ... faster cleaning
- Gearbox drive ... longer life, OH&S, dust free drive, 2:1 reduction
- FREE ASP (Aussie Safety Protection) kit ... protects operator & machine from pressure spikes & extended by-pass running

Aussic Pumps

- Pro accessories including 10m hose, 4,500 psi pro gun & dual lance
- Scud 400 option with hose reel fitted
- Optional lift bar (ASS400LIFTBAR \$170)



Optional Cobra Loc for permanent ute mounting (ACRADLECOBRA \$497)



YANMAR Diesel drive ... p12

Stock codes & prices

BLASTER

AS/NZS 4233.1

	, , , ,					Electric start	ABBSS400/GX390E	\$4,688
400	4,000 psi (275 bar)	6,485 psi	15 lpm	GX390	13	Recoil + reel	ABBSS400HR/GX390	\$5,390
						Recoil	ABBSS400/GX390	\$4,186
351	(180 bar)	4,000 psi	21 lpm GX390 13		13	Electric start	ABBSS351/GX390E	\$4,720
254	2,600 psi	4 000:	21	CV200	12	Recoil	ABBSS351/GX390	\$4,360
350	(210 bar)	4,785 psi	19 ibili	GX390	13	Electric start	ABBSS350/GX390E	\$4,430
350	3,000 psi	4,785 psi	1 F Inna	CV200	12	Recoil	ABBSS350/GX390	\$3,980
SCUD	Pressure	EWP with turbo	Flow	Honda Engine	НР	Version	Stock code	List price

Pump details, weights & dimensions

SCUD	Bertolini Pump	Nozzle size	Weight	Dimensions with skid (Lxwxh)
350	TTL1520	045	110kg	1100 x 800 x 950 mm
351	TTL2120	060	110kg	1100 x 800 x 950 mm
400	TTL1330	035	110kg	1100 x 800 x 950 mm

Accessories supplied with machine

Hose	AHW06M22X2X10 (AHW06M22X2X30)	10m R2 3/8" hose, M22 couplers (30m hose with hose reel version)					
Gun	M4022209003	AL55 4,500 psi gun					
Lance	C3924.01	700mm Dual Lance					
Nozzle	C915 M	2 x Laser Cut (15° & detergent)					

Pump service kits ... p86-87

Optional accessories FASTER, SMARTER, SAFER

Turbo Lance 60% MORE BITE

Increase the effective working pressure (EWP) of your blaster without loading the pump!




IDUSTRIAL PETROL

CTN255-045	(Scud 350)	\$214
CTN255-060	(Scud 351)	\$214
CTN400-035	(Scud 400)	\$394

Tele-wand ... REACH further

Ideal for reaching eaves & washing windows, extends to 5.5m, includes FREE harness. Quik Tip nozzle sold separately.



CLEAN FLAT SURFACES FAST

SLASH CLEANING TIMES BY 75%

Clean flat surfaces four times faster. leaving a streak free finish. Standard nozzles included.

AGPDFSC20 20" Spinner \$1.247 AGPDFSCS227 22" Cyclone \$1.565



Foam Jet ... SPRAY UP TO 3 STORIES

Use with extra long hose to apply detergents, degreasers,

disinfectants with chemicals going

through the pump. MTM140289 Requires coupling to fit to gun C1500.06 \$10



Extra length hose ... CONVENIENT

Cleaning large plant?... reach further with these extra length Aussie Blue-Pro hoses, 5,800 psi rated,

R2 wire braid hose, 3/8 female ends AHW06FB6FB6X20 (20m) \$330

AHW06FB6FB6X30 (30m) \$499 AHW06FB6FB6X50 (50m) \$772 M212003540 (M22 QC) \$21 (2 required)

4,000 psi Hose Reel Kit .. EASY FIT

Safer & smarter working, includes reel, 30m double wire braid hose. whip hose & mounting plate

For Scud 100 ... call Aussie

(hose reel kit) ADHR40100D \$845 AHRBARSSUNI (SS mounting bar) \$170



Includes Aussie Viper Mini Reel with 60 metres of 3/16" sewer hose. Full Aussie Jetters Tool Box including quick coupler to fit to end of blaster high pressure hos Includes Safety Plate.

ADRAINKIT





4,000 PSI HONDA ... CLASS A

SLOW SPEED | HUGE FLOW | REAL WHACK

NO OPERATOR CERTIFICATION REQUIRED



- NEW Premium 'Big Berty' heavy duty, slow speed triplex pump with 4 year warranty
- Stainless steel frame & anti vib mounts, steel wheels with flat free tyres (13")
- FREE ASP (Aussie Safety Protection) kit
- 18 litre fuel tank
- Heavy duty gearbox drive provides OH&S safety benefits, minimal maintenance
- FREE ASP (Aussie Safety Protection) kit ... protects operator & machine from pressure spikes & extended by-pass running
- Pro accessories including 10m R2 wire braid hose, pro gun & dual stainless steel lance
- Hose reel version includes 30m high pressure hose on a fitted stainless steel reel
- Detergent injection ... faster cleaning











	Pressure	EWP with turbo	Flow	Honda Engine	НР	Version	Stock code	List price
Ultra A	4,000 psi (275 bar)	6,485	20 lpm) lpm GX630	22	Standard	ABBSSULTRA/GX630	\$7,768
Ultra A	(275 bar)	psi	20 ipini		23	Hose Reel	ABBSSULTA/GX630HR	\$8,960

Pump details, weight & dimensions

	Bertolini Pump	Nozzle size	Weight	Dimensions with skid (Lxwxh) mm
Ultra A	TTL 2028	050	135 kg	1100 x 800 x 1100

Accessories supplied with machine

Hose	AHW06M22X2X10	10m R2 3/8" Aussie Blue-Pro non marking hose with M22 couplings (30m on hose reel version)
Gun	M4022209003	AL55 4,500 psi Pro Gun with melted handle
Lance	C3924.01	700mm Stainless Steel Dual Lance
Nozzle	C915050M C915500MSS	2 x Laser Cut (15° & detergent)

Pump service kits ... p86-87

Aussie Hot Link converts this machine into a hot water blaster ... p42



Optional accessories FASTER, SMARTER, SAFER

TURBO LANCE 60% MORE BITE

p 59

Increase the effective working pressure (EWP) of your blaster without loading the pump!



\$394

CTN400-050

Tele-wand ... REACH FURTHER


Ideal for reaching eaves & washing windows, extends to 5.5m, includes FREE harness. Quik Tip nozzle sold separately.



CLEAN FLAT SURFACES FAST

SLASH CLEANING TIMES BY 75% Clean flat surfaces four times faster, leaving a streak free finish. Standard nozzles included.

AGPDFSC20 20" Spinner **\$1,247**AGPDFSCS22Z 22" Cyclone **\$1,565**



Remove paint & rust fast

MTM160172 \$359 (head, probe & hose, NB nozzle & lance required)



Extra length hose ... CONVENIENT

Cleaning large plant?...

reach further with these extra length **Aussie Blue-Pro** hoses, 5,800 psi rated R2 wire braid hose, 3/8 female ends (M22 couplings sold separately)

HW06FB6FB6X20	(20m)	\$330
HW06FB6FB6X30	(30m)	\$499
HW06FB6FB6X50	(50m)	\$772
Л212003540	(M22 QC)	\$21 (2 required)

5,000 psi Stainless Steel Hose Reel

5,000 psi rated, takes up to 80m of 3/8" hose, universal foot mount. Fits to frame on petrol versions (older models may need holes redrilled).

ω,.	The state of
(ss reel only)	\$890
(1m whip hose)	\$31
(3/8" M22 QC)	\$21 (3 required)
(3/8"elbow)	\$ 22
(1/2" F M22)	\$ 17
	(ss reel only) (1m whip hose) (3/8" M22 QC) (3/8"elbow)

Drain Clearing Kit, SAFE & SIMPLE

Includes Aussie Viper Mini Reel with 60 metres of 3/16" sewer hose. Full Aussie Jetters Tool Box, including quick coupler to fit to end of blaster high pressure hose. Includes Safety Plate.

ADRAINKIT







\$3,285

5,000 PSI HONDA CLASS A

PETROL | SLOW SPEED | NO OPERATOR CERT REQUIRED



- 'Big Berty' slow speed triplex pump designed for continuous operation
- Heavy duty stainless steel frame, antivibration mounts, 13" steel wheels with flat free tyres.
- Reliable, powerful Honda engine (Vanguard option) with electric start
- Gearbox drive provides OH&S safety benefits, minimal maintenance.
- FREE ASP (Aussie Safety Protection) kit ... protects operator & machine from pressure spikes & extended bypass running
- Heavy duty pro accessories including gun, single lance & 10m hp hose
- Diesel drive option p14

Scan & see Aussie Predator A demo









	Pressure	EWP with turbo	Flow	Honda Engine	НР	Stock code	List price
PREDATOR A	5,000 psi (350 bar)	8,500 psi	16 lpm	GX630	23	ABBSSPRED-A/GX630	\$8,698

Pump details, unit weight & dimensions

	Bertolini Pump	Nozzle size	Weight	Dimensions with skid (Lxwxh) mm
PREDATOR A	KTL1635	035	130kg	1100 x 800 x 1130

Accessories supplied with machine

Hose	AHW06FB6FB6X10	10m R2 3/8" Aussie Blue-Pro non marking hose with M22 couplings		
Gun	MPA30450010	RL56 5,100 psi PA compensated spray gun		
Lance	MPA40025800	800mm PA single lance		
Nozzle	C915035M	Laser Cut (15°)		
Pump service kits p86-87				



SAFE OPERATOR PPE to 500 bar ... p 80

Optional accessories FASTER, SMARTER, SAFER

Turbo Gun Kit 60% MORE BITE

Turbo lance/gun kit.... Increase the effective working pressure of your blaster!



Grit Blast Kit ... SURFACE PREP

Remove paint & rust fast (head, probe & hose, NB nozzle & lance required

CTN400-035GLKM24



\$462

MTM160172

Extra length hose ... CONVENIENT

Cleaning large plant?...

reach further with these extra length Aussie Blue-Pro hoses, 5,800 psi rated R2 wire braid hose, 3/8 female ends (M24 couplings sold separately)



AHW06FB6FB6X20 (20m) AHW06FB6FB6X30 (30m) AHW06FB6FB6X50 \$772 (50m) MPA26095050 (M24 OC) \$137 (2 required)

5,000 psi Stainless Steel Hose Reel p 73

5,000 psi rated, takes up to 80m of 3/8" hose, universal foot mount. Fits to frame on petrol versions only, otherwise wall

A4418SS-REEL	(ss reel only)	\$890
AHW06FB6FB6X1	(1m whip hose)	\$31
AE-E-90-0808	(Elbow ½"FF)	\$30
AA-A-0608	(½"to 3/8"nipple)	\$8
AA-A-90-0606	(3/8"elbow)	\$22
MPA26065050	(M24 QC)	\$40 (2 required)

Drain Clearing Kit, SAFE & SIMPLE p 73

Includes Aussie Viper Mini Reel with 60 metres of 3/16" sewer hose. Full Aussie Jetters Tool Box, including quick coupler to fit to end of blaster high pressure hose. Includes Safety Plate.



ADRAINKIT \$3,285





aussiepumps.com.au

p 73

7,300 PSI (500 BAR) PETROL VANGUARD | GEARBOX DRIVE | CLASS B



- 'Big Berty' heavy duty slow speed pumps designed for continuous operation ... Class B, operator RTO certification required
- Reliable, powerful engines (Vanguard petrol engines) with emergency stop
- Heavy duty stainless steel frame, anti-vib mounts
- 13" steel wheels with flat free tyres
- FREE ASP (Aussie Safety Protection) kit

- Double bearing gearbox drive ... OH&S safety benefits, minimal maintenance.
- 10 metres of 500 bar hose
- 500 bar accessories ... PA gun, 1050mm lance & ceramic nozzle
- 500 bar certified hose
- **FREE** hose restraint valued at \$130







Diesel drive option p15

	Pressure	EWP with turbo	Flow	Vanguard Engine	s/code	List price
RAPTOR 18	7,300 psi (500 bar)	12,000 psi	18 lpm	35HP	ABSSRAP/VAN18L	\$12,868

Pump details, weight & dimensions

	Bertolini Pump	Nozzle size	Weight	Dims with skid (Lxwxh)
RAPTOR 18	RA1850	030	135kg	1100 x 800 x 1000 mm

Accessories supplied with machine

Hose	A3641443109	10M 3/8" 500 bar
Gun/lance	MPA30540000	RL57 500 bar pro gun & 1050mm lance
Nozzle	M0124006210	Ceramic tip 500 bar nozzle 15°

Pump service kits ... p87-88



Optional accessories FASTER, SMARTER, SAFER

Turbo Master 500 MORE BITE

Increase the effective working pressure (EWP) of your blaster without loading the pump!

500 bar (7,300 psi) includes turbo head, gun, 800mm lance, nozzle & quick coupling nipple



Foot Valve ... MORE CONTROL


Stainless steel foot valve adds a second level of operator control, in addition to gun trigger, includes 3m whip hose AST500-M24



Grit Blast Kit ... SURFACE PREP

TPS 450, 500 bar (7,300 psi) c/w probe, plastic hose, lance, gun, nozzle & quick coupling nipple

TPS450/030GLK (insert nozzle size) \$1,559



500 bar reel.(7.300 psi) rated, takes up to 30m hose, universal foot mount.

A3641443039 (2m whip hose, M24) \$440

3/8" R2 HP hose, 3/8M BSP ends, 150°C rated, for quick couplings refer p 67 A3641443209 \$976 (20m)

(30m) Ceramic Nozzles ... LAST LONGER

\$1,246

Aussie White Tip 500 bar 0° & 15°, nozzle material ceramic, inlet 1/4" NPT

A3641443309

O° (pencil jet) 15° (fan) M0124006200





aussiepumps.com.au

2,000 - 4,000 PSI YANMAR

DIESEL | SLOW SPEED | LONG LIFE





SCUD YANMAR

- 'Big Berty' slow speed pumps designed for continuous operation
- **Industrial Yanmar LN** series diesel engines
- **NEW Scud stainless steel** frame & anti vib mounts, steel wheels with flat free tyres (13")
- Gearbox drive

- FREE ASP (Aussie Safety Protection) kit including unloader, safety valve & thermal dump
- Detergent injection ... faster cleaning (not on Mine Spec version)
- Yanmar engine care kit ... see p 62

Aussie Mine Spec Features:

- **Emergency stop**
- Fire extinguisher
- Dry cell battery with lockable battery isolation
- Double insulated wire
- Incorporated lifting bar/ hose mounting bar
- Single lance
- Detergent injection







YANMAR

SCUD	Pressure	EWP with turbo	Flow	Yanmar Engine	НР	Version	Stock code	List price
100 YDE	2,000 psi (140 bar)	2,600 psi	11 lpm	L48 recoil	4.8	Standard	ABSS100/L48	\$4,920
350 YDE	3,000 psi (210 bar)	4,785 psi	15 lpm	L100 e/start	10	Standard	ABBSS350/L100E	\$7,980
330 TDE						Mine Spec	ABBSS350/L100EM	\$9,180
400 YDE	4,000 psi	6,485 psi	13 lpm	L100	10	Standard	ABBSS400/L100E	\$8,480
400 TDE	(275 bar)	0,465 psi	13 ihiii	e/start	10	Mine Spec	ABBSS400/L100EM	\$9,688

Pump details, weights & dimensions

SCUD	Bertolini Pump	Nozzle size	Weight	Dimensions with skid (Lxwxh)
100 YDE	WBL1114	-	50kg	620x540x580 mm
350 YDE	TTL1520	045	160kg	1100x800x950 mm
400 YDE	TTL1330	030	160kg	1100x800x950 mm

Accessories supplied with machine

	Scud 100	1			
Hose	AHW06M22X2X8	8m R2			
Gun	M4021108007	AL13			
Lance	C4723.45.115	Vario			
Nozzle					
Pump service kits p85					

Scud 350, 400 YDE Standard

AHW06M22X2X10	10m R2
M4022209003	AL55
C3924.01	700mm Dual
C915M	15° &
C915500MSS	detergent
Pump service kits .	p86-87

Standard

Scud 350, 400 YDE Mine Spec

	AHW06M22X2X10	10m R2
	CGPDG5010	Aussie Spray Gun
al	C3905.15	900mm Single
	C915M	15°

Optional accessories FASTER, SMARTER, SAFER

Turbo Lance 60% MORE BITE

Increase the effective working pressure (EWP) of your blaster without loading the pump!



Tele-wand ... REACH FURTHER

Ideal for reaching eaves & washing windows, extends to 5.5m, includes FREE harness. Quik Tip nozzle sold separately



CLEAN FLAT SURFACES FAST

SLASH CLEANING TIMES BY 75%

Clean flat surfaces four times faster. leaving a streak free finish. Standard nozzles included

AGPDFSC20 20" Spinner \$1,247 AGPDFSCS22Z 22" Cyclone \$1,565



Grit Blast Kit ... SURFACE PREP

Remove paint & rust fast

M202903460 (to 3,000 psi) \$233 (head, lance, nozzle, probe & hose) MTM160172 (4,000 psi) \$359 (head, probe & hose, NB nozzle & lance required)

Extra length hose ... CONVENIENT

Cleaning large plant?... reach further with these extra length Aussie Blue-Pro hoses, 5,800 psi rated, R2 wire braid hose, 3/8 female ends (M22 & M24 couplings sold separately)



4,000 psi Hose Reel Kit .. EASY FIT

Safer & smarter working, includes reel, 30m double wire braid hose, whip hose & mounting plate

For Scud 100 ... call Aussie ADHR40100D (hose reel kit)



AHRPLATEL100SS (mounting bar for standard frame) \$211

Drain Clearing Kit, SAFE & SIMPLE

Includes Aussie Viper Mini Reel with 60 metres of 3/16" sewer hose. Full Aussie Jetters Tool Box. including quick coupler to fit to end of blaster high pressure hose Includes Safety Plate. ADRAINKIT







- 'Big Berty' slow speed pumps designed for continuous operation
- **Industrial Hatz B series** diesel with DSE engine control panel & 21 litre fuel tank
- **NEW Scud stainless steel** frame & anti vib mounts, steel wheels with pneumatic tyres
- Gearbox drive provides OH&S safety benefits, minimal maintenance

BLASTER

Atlas 400

- 30 litre stainless steel break tank
- Stainless steel reel with 30m Aussie Blue-Pro
- FREE ASP (Aussie Safety Protection) kit including unloader, safety valve & thermal dump
- Detergent injection ... faster cleaning
- Hatz engine care kit ... see p 62

year warranty

FASTER, SMARTER, SAFER

Optional accessories

Turbo Kit 60% MORE BITE

Turbo lance/gun kit.... Increase the effective working pressure of your blaster!



Tele-wand ... REACH FURTHER

Ideal for reaching eaves & washing windows, extends to 5.5m, includes FREE harness. Quik Tip nozzle sold separately.



CLEAN FLAT SURFACES FAST

SLASH CLEANING TIMES BY 75% Clean flat surfaces four times faster. leaving a streak free finish. Standard nozzles included.

AGPDFSC20 20" Spinner \$1,247 AGPDFSCS22Z 22" Cyclone \$1.565



Grit Blast Kit ... SURFACE PREP

Remove paint & rust fast

M202903460 (to 3.000 psi) (head, lance, nozzle, probe & hose) MTM160172 (4,000 psi)

(head, probe & hose,



NB nozzle & lance required)

Extra length hose ... CONVENIENT

Cleaning large plant?... reach further with these extra length Aussie Blue-Pro hoses, 5,800 psi rated. R2 wire braid hose, 3/8 female ends (M22 & M24 couplings sold separately)

AHW06FB6FB6X20 \$330 (20m)AHW06FB6FB6X30 (30m)\$499 (50m) \$772

AHW06FB6FB6X50 M212003540 (M22 QC) **\$21** (2 required)

Drain Clearing Kit, SAFE & SIMPLE

Includes Aussie Viper Mini Reel with 60 metres of 3/16" sewer hose. Full

Aussie Jetters Tool Box,

ADRAINKIT

including quick coupler to fit to end of blaster high pressure hose. Includes Safety Plate.





Honda petrol drive ... p9

Emergency stop

Fire extinguisher

Lifting bar/hose

mounting bar

Dry cell battery with

Double insulated wire

lockable battery isolation



	Pressure	EWP with turbo	Flow	Hatz Engine	НР	Stock code	List price
)	4,000 psi (275 bar)	6,485 psi	15 lpm	1B50E e/start	11	ABBSS400/1B50EMS	\$16,420

Pump details, weight & dimensions

	Bertolini Pump	Nozzle size	Weight	Dimensions with skid (Lxwxh) mm
Atlas 400	TTL1530	035	220 kg	1150 x 800 x 1650

Accessories supplied with machine

Hose	AHW06M22X2X30	30m R2 3/8" Aussie Blue-Pro non marking hose with M22 couplings
Gun	CGPDG5010	Aussie Blue-Pro Gun
Lance	C3905.15	900mm Stainless Steel Dual Lance
Nozzle	C915040M	Laser Cut (15°)

Pump service kits ... p86-87

\$3,285



continuous operation

- **Heavy duty stainless** steel frame, antivibration mounts
- 16" steel wheels with pneumatic tyres
- Reliable, powerful Kohler air cooled diesel engine

BLASTER

AS/NZS 4233.1

protects operator &

machine from pressure spikes & extended bypass running

- Gearbox drive provides OH&S safety benefits, minimal maintenance
- Heavy duty pro accessories ... gun, single lance & 10m hp hose

Aussie Mine Spec Features:

- **Emergency stop**
- Fire extinguisher
- Dry cell battery with lockable battery isolation
- Double insulated wire
- Lifting bar (ASSPREDLIFTBAR \$252)

Honda petrol drive ... p10



KOHLER.

	Pressure	EWP with turbo	Flow	Kohler Engine	НР	Version	Stock code	List price
PREDATOR	5,000 psi (350 bar)	000 psi 8,500 1 50 bar) psi Ip	16 lpm K	KD477	23	Standard	ABSSPRED-A/KDE	\$15,260
A KDE				ND4//		Mine Boss	ABBSSPRED-A/KDMS	\$19,426

Pump details, weight & dimensions

	Bertolini Pump	Nozzle size	Weight	Dimensions with skid (Lxwxh)
PREDATOR A KDE	KTL1635	035	250kg	1250 x 800 x 1130 mm

Accessories supplied with machine

Hose	AHW06FB6FB6X10	10m R2 3/8" Aussie Blue-Pro non marking hose with M22 couplings					
Gun	MPA30450010	RL56 5,100 psi PA compensated spray gun					
Lance	MPA40025800	800mm PA single lance					
Nozzle	C915035M	Laser Cut (15°)					

Pump service kits ... p86-87

Aussie Pump AFE OPERATOR PPE to 500 bar ... p 80

Optional accessories FASTER, SMARTER, SAFER

Turbo Lance Kit 60% MORE BITE

Turbo lance/gun kit.... Increase the effective working



CTN400-035GLKM24

\$441

Grit Blast Kit ... SURFACE PREP

Remove paint & rust fast (head, probe & hose, NB nozzle & lance required)



MTM160172

Extra length hose ... CONVENIENT

Cleaning large plant?...

reach further with these extra length Aussie Blue-Pro hoses, 5,800 psi rated, R2 wire braid hose, 3/8 female ends (M24 couplings sold separately)



AHW06FB6FB6X20 (20m)\$330 AHW06FB6FB6X30 (30m) \$499 AHW06FB6FB6X50 (50m) \$772 MPA26065050 (M24 QC) **\$40** (2 required)

5,000 psi Stainless Steel Hose Reel

5,000 psi rated, takes up to 80m of 3/8" hose, universal foot mount. Fits to frame on petrol versions only, otherwise wall mount.

Α44

A4418SS-REEL	(ss reel only)	\$890
AHW06FB6FB6X1	(1m whip hose)	\$31
AE-E-90-0808	(Elbow ½"FF)	\$30
AA-A-0608	(½"to 3/8"nipple)	\$8
AA-A-90-0606	(3/8"elbow)	\$22
MPA26065050	(M24 QC)	\$40 (2 required)
AHRSCPRED/KOH	mounting bar	\$180

Drain Clearing Kit ... SAFE & SIMPLE

Includes Aussie Viper Mini Reel with 60 metres of 3/16" sewer hose. Full Aussie Jetters Tool Box, including quick coupler to fit to end of blaster high pressure hose. Includes Safety



ADRAINKIT \$3,285





7,300 PSI (500 BAR) DIESEL

GEARBOX DRIVE | CLASS B (OPERATOR RTO CERT REQUIRED)



RAPTOR DIESEL

- 'Big Berty' slow speed pumps designed for continuous operation
- Kohler industrial diesel engines with emergency
- Heavy duty stainless steel frame, anti-vib mounts
- 16" steel wheels with pneumatic tyres
- FREE ASP (Aussie Safety

Protection) kit ...

4 year warranty

protects operator & machine from pressure spikes & extended by-pass running

- 10 metres of 500 bar hose
- 500 bar accessories ... PA gun, 1050mm lance & ceramic nozzle
- 500 bar certified hose
- FREE hose restraint valued at \$130

Aussie Mine spec includes

drive ... p11

- **Emergency stop**
- Fire extinguisher (2 Kg)
- Dual pole battery isolator
- High-viz class A reflective frame markings
- Double insulated wiring
- Lifting bar (ASSPREDLIFTBAR \$252)

	Pressure	EWP with turbo	Flow	Kohler Engine	НР	Version	Stock code	List price
RAPTOR	7,300 psi	300 psi 12,000 16 00 bar) psi lpm	16	WD 477	23	Standard	ABRAPK23H16/500	\$21,920
16 KOH	(500 bar)		KIM 77	25	Mine Spec	ABRAPK23H16/500MS	\$24,846	

Pump details, weight & dimensions

	Bertolini Pump	Nozzle size	Weight	Dimensions with skid (Lxwxh) mm
RAPTOR 16 KOH	RA1650	030	250kg	1250 x 1200 x 1500

Accessories supplied with machine

Hose	A3641443109	10M 3/8" 500 bar
Gun/lance	MPA30540000	RL57 500 bar pro gun & 1050mm lance
Nozzle	M0124006210	Ceramic tip 500 bar nozzle 15°

Pump service kits ... p87-88



Optional accessories **FASTER, SMARTER, SAFER**

lance, nozzle & quick coupling nipple

Turbo Master 500 MORE BITE

Increase the effective working pressure (EWP) of your blaster without loading the pump! 500 bar (7,300 psi) includes turbo head, gun, 800mm

CTN500-030 GLK (insert nozzle size)

Foot Valve ... MORE CONTROL

Stainless steel foot valve adds a second level of operator control, in addition to gun trigger includes 3m whip hose AST500-M24



Grit Blast Kit ... SURFACE PREP

TPS 450, 500 bar (7,300 psi) c/w probe, plastic hose, lance, gun, nozzle & quick coupling nipple

TPS450/030 GLK (insert nozzle size) \$1,559

500 Bar Hose Reels & Hose

p 73

500 bar reel,(7,300 psi) rated, takes up to 30m hose, universal foot mount. Does not fit onto frame, wall mount only.

\$1,452


A3641443039 (2m whip hose, M24) \$440

3/8" R2 HP hose, 3/8M BSP ends, 150°C rated, for quick couplings refer p 67 A3641443209 (20m) \$976

A3641443309 (30m) \$1,246 AHRSCPRED/KOH mounting bar \$180

Ceramic Nozzles ... LAST LONGER

Aussie White Tip 500 bar 0° & 15°, nozzle, ceramic insert , inlet 1/4" NPT M ... \$142







4,300 - 5,000 PSI MINE SPEC EXTREME

CLASS B ... OPERATOR CERTIFICATION REQUIRED



PYTHON & PREDATOR

- **'Big Berty'** slow speed pumps designed for continuous operation
- Heavy duty gal frame skid base with multiple fork lifting points & integrated bunding
- Reliable, water cooled, multi cylinder, Yanmar engine producing 24kW at 2300 rpm
- Integrated control panel including full engine protection& hour meter.
- 50 litre fuel tank ... runs for approx. 8 hrs.
- Engine governed to 2,400 rpm max
- 60 litre stainless steel break tank with low water shutdown

- FREE ASP (Aussie Safety Protection) kit
- Stainless steel hose reel with 30 metres of R2 double wire braid 400 bar rated hose. (Manual Recoila reel option, \$2,850 extra)
- FREE hose restraint worth

Aussie Mine spec includes

- **Emergency stop**
- Bunded frame
- Fire extinguisher (2 Kg)
- Dual pole battery isolator
- High-viz class A reflective frame markings
- Flashing safety beacon
- Double insulated wiring



FRFF ASP (Aussie Safety Protection) kit







	Pressure	EWP with turbo	Flow	Yanmar Engine	Stock code	List price
Python MS	4,300 psi (300 bar)	6,485 psi	31 lpm	3 TNV88	ABPYTHON18-3TNV	\$29,403
Predator + MS	5,000 psi (350 bar)	8,500 psi	25 lpm	3 TNV88	ABPRED+3TNV	\$29,866

Pump details, weight & dimensions

	Bertolini Pump	Nozzle size	Weight	Dims with skid (Lxwxh) mm					
Python MS	Premium RAS4482	070	565kg	1400x1400x1250					
Predator + MS	Premium RAL2535	045	560kg	1400x1400x1250					
Accessories supplied with machine									
Hose	AHW06FB6FB6X30	30m R2 3/8	" Aussie Blu	e-Pro hose with M22 couplings					

AGPDG5010 5,000 psi pro gun Lance C3905.15 900mm single lance Nozzle C915 M Laser Cut (15°)

Pump service kits ... p87-88

Optional accessories FASTER, SMARTER, SAFER

Turbo Lance Kit 60% MORE BITE

Turbo lance/gun kit.... Increase the effective working pressure of your blaster!



CTN400-045GLKM24 \$441 CTN400-075GLK \$430

Grit Blast Kit ... SURFACE PREP


Remove paint & rust fast (head, probe & hose, NB nozzle & lance required)



MTM160172 \$359

Foot Valve ... MORE CONTROL

350 BAR foot valve adds a second level of operator control, in addition to gun trigger,



500 Bar Personal Protective Gear

Overalls

Aprons Gloves

р 80



- Jackets
 - **Boots** Trousers



Drain Clearing Kit, SAFE & SIMPLE

Includes Aussie Viper Mini Reel with 60 metres of 3/16" sewer hose. Full Aussie Jetters Tool Box, including quick coupler to fit to end of blaster high pressure hose. Includes Safety Plate.

ADRAINKIT



Gun





7,300 PSI MINE SPEC EXTREME

RAPTOR MAXI'S CONTINUOUS DUTY CLASS B ... OPERATOR CERTIFICATION REQUIRED



- 'Big Berty' slow speed pumps designed for continuous operation ... 4 year warranty
- Heavy duty gal frame skid base with multiple fork lifting points & integrated bunding
- Reliable, water cooled, multi cylinder Yanmar engine
- Integrated control panel including full engine protection & hour meter.
- 50 litre fuel tank ... runs for approx. 8 hrs.
- Engine governed to 2,400 rpm
- 60 litre stainless steel break tank with low water shutdown
- FREE ASP (Aussie Safety Protection) kit

- 30 metres of R2 double wire braid 500 bar rated, certified hose on stainless steel hose reel (Manual Recoila 10,000 psi rated reel option, \$3,450 extra)
- FREE hose restraint valued at
- **Aussie Mine spec includes**
 - **Emergency stop**
 - Bunded frame
 - Fire extinguisher (2 Kg)
 - Dual pole battery isolator
 - High-viz class A reflective frame markings
 - Flashing safety beacon
 - Double insulated wiring

YANMAR





RAPTOR	Pressure	EWP with turbo	Flow	Yanmar Engine	Stock code	List price
MAXI 18	7,300 psi (500 bar) 12,000 psi		18 lpm	3 TNV88 24kW @ 2300rpm	ABRAPTOR18-3TNV	\$31,370
MAXI 21	7,300 psi (500 bar)	12,000 psi	21 lpm	3 TNV84T 26kW @ 2300rpm	ABRAPTOR21-ETNV	\$34,228
MAXI 24	7,300 psi (500 bar)	12,000 psi	24 lpm	4 TNV88 30kW @ 2300rpm	ABRAPT24-4TNV88	\$38,618
·	- Bertolini Pum	р	Nozzle size	Weight	Dims with skid (Lxwxh)	
MAXI 18	RA1850		030	565kg	1400x1400x1250mm	
MAXI 21	RA2150		035	590kg	1400x1400x1250mm	
MAXI 24	RA2150		040	590kg	1400x1400x1250mm	

Accessories supplied with machine

Hose	A3641443109	10M 3/8" 500 bar
Gun/lance	MPA30540000	RL57 500 bar pro gun & 1050mm lance
Nozzle	See nozzle chart	Ceramic tip 500 bar nozzle 15°

Pump service kits ... p87-88

500 BAR accessories for **FASTER, SMARTER, SAFER cleaning**

Turbo Master 500 MORE BITE

Increase the effective working pressure (EWP) of your blaster without loading the pump!

500 bar (7,300 psi) includes turbo head, gun, 800mm lance, nozzle & quick coupling nipple



Foot Valve ... MORE CONTROL

Stainless steel foot valve adds a second level of operator control, in addition to gun trigger, includes 3m whip hose AST500-M24



Grit Blast Kit ... SURFACE PREP

TPS 450, 500 bar (7,300 psi) c/w probe, plastic hose, lance, gun, nozzle & quick coupling nipple



GLK TPS450/ (insert nozzle size) \$1,559

Personal Protective Gear 500 bar



- Overalls
- Aprons
- Jackets Gloves
- Boots Trousers

tussie Pumps

Ceramic Nozzles ... LAST LONGER

Aussie White Tip 500 bar 0° & 15°, nozzle material ceramic, inlet 1/4" NPT M ... \$142

Size	O° (pencil jet)	15° (fan)	4
030	M0124006200	M0124006210	
035	M0124006300	M0124006310	
040	M0124006400	M0124006410	





BUILT TO A HIRE SPEC

Heavy duty machines specifically designed for the hire industry. Robust fittings & low maintenance components make them reliable & simple to use.

ELECTRIC DRIVE



- 'Big Berty' triplex brass
- IP 56 4 pole electric motor (1450 rpm)
- Compact "car boot" style gal frame, solid rubber wheels
- Heavy duty on/off switch with motor protection,
- Heavy duty unloader valve
- Stainless steel 900 mm single lance
- 4,000 psi rated hand gun.
- 10 metres of HP hose with pigtail wrap
- Hydrotester option

AKENNHOSEKIT1

\$382

Specifications

	Pressure	EWP with turbo	Flow	Motor	r	Pump	Nozzle size	Weight	Boxed di (Lxwxh) r	mensions mm
BB100 Electric	1,400 psi (100 bar)	1,820 psi	11 lpm	240V 2 4 pole		WBL1114	035	55kg	680 x 400	0 x 340
Stock codes & prices Accessories supplied with machine (with replacement price)										
BB100 Electric ABB100EH/2.2KW		\$2.439 Gun		Gun/lanc	Gun/lance/nozzle kit		PROGUN-90	0-035	\$175	

ENGINE DRIVE

- 'Big Berty' triplex brass pump
- Industrial Honda petrol or Yanmar diesel
- BERTOLINI 4 year warranty
- Gearbox drive for extra long life
- **NEW** stainless steel frame with lifting bar
- ASP Safety Pack including safety valve, thermal dump valve & heavy duty unloader valve
- Stainless steel 900 mm single lance
- 4,000 psi rated hand gun
- Combine with an optional Aussie drain cleaning kit to enable this blaster to be used as a jetter ... p73





	Specifications								
V		Pressure	EWP with turbo	Flow	Engine	Pump	Nozzle size	Weight	Boxed dim (Lxwxh) mm
	BB100 Honda	2,000 psi (140 bar)	2,600 psi	11 lpm	Honda GX200 recoil start	WBL1114	035	45 kg	580 x 430 x 550
	Scud AB30 Honda Hire Spec	3,000 psi (210 bar)	4,785 psi	10 lpm	Honda GX200 recoil start	WBXG3025	030	45 kg	620 x 540 x 580
)	Scud 400 Honda Hire spec	4,000 psi (275 bar)	6,485 psi	15 lpm	Honda GX390 electric start	TTL1330	035	115 kg	1100 x 800 x 950
	Scud 400 Yanmar Hire spec	4,000 psi (275 bar)	6,485 psi	13 lpm	Yanmar L100 electric start	TTL1330	035	160 kg	1100 x 800 x 950

Stock codes & prices

Stock codes & prices		
BB100 Honda (gal frame)	ABB100K/GX200	\$2,659
Scud AB30 Honda Hire Spec (ss frame)	ABSS30H/GX200	\$2,250
Scud 400 Honda Hire spec (ss frame)	ABBSS400KGX390E	\$4,786
Scud 400 Yanmar Hire spec (ss frame)	ABBSS400H/L100E	\$8,642

SCUD 400 Hire Special with Lifting bar

Accessories supplied with machine (with replacement price)


Gun/lance/nozzle kit (BB100/AB30/Scud 400)	APROGUN-900-035	\$175
Aussie BluePro 10m hose with pigtail wrap (BB100/Scud 400)	AKENNHOSEKIT1	\$382
Aussie BluePro 8m hose (AB30)	AHW06M22X2X8	\$142



INDUSTRIAL COLD WATER HIRE UNITS

Aussie Ultra & Predator A Class A blasters **NO OPERATOR CERTIFICATION REQUIRED**

- 'Big Berty' triplex, heavy duty, slow speed, brass pump
- Industrial Honda petrol or Kohler diesel
- Gearbox drive for extra long life
- **NEW** stainless steel frame with lifting bar/hose reel bar
- ASP Safety Pack including safety valve, thermal dump valve & heavy duty unloader valve
- Stainless steel 900 mm single lance
- 4,000 psi rated hand gun
- Mine Boss options





Honda Petrol

Aussie Ultra A ... 4,000 psi | 20 lpm | GX630 Page 9 Aussie Predator A ... 5,000 psi | 16 lpm | GX630 Page 10

Diesel

Aussie Predator A ... 5,000 psi | 16 lpm | KD477 Page 14



DOCKYARD SPECIALIST AUSSIE ATLAS

HARD WORKING AUSSIES FOR MINE SITES & SHIPYARDS

- 'Big Berty' slow speed pumps designed for continuous operation
- Industrial Hatz B series diesel with DSE engine control panel
- **NEW Scud stainless steel** frame & anti vib mounts, steel wheels with pneumatic tyres
- Gearbox drive
- Stainless steel break tank
- Stainless steel reel with 30m Aussie Blue-Pro hose

FREE ASP (Aussie Safety Protection) kit including unloader, safety valve & thermal dump

Aussie Mine Spec Features:

- **Emergency stop**
- Fire extinguisher
- Dry cell battery with lockable battery isolation
- Double insulated wire
- Lifting bar/hose mounting bar



	Pressure	EWP with turbo	Flow	Engine	Pump	Nozzle size	Weight	Dimensions with skid (Lxwxh) mm
Atlas 400	4,000 psi (275 bar)	6,485 psi	15 lpm	Hatz 1B50E	TTL1530	035	220 kg	1150 x 800 x 1650

Stock code & pricing

Atlas 400 Electric start ABBSS400/1B50EMS

Accessories	supplied	with	machine

Hose	AHW06M22X2X30	30m R2 3/8" Aussie Blue-Pro hose
Gun	CGPDG5010	Aussie Blue-Pro Gun
Lance	C3905.15	900mm Stainless Steel Dual Lance
Nozzle	C915040M	Laser Cut (15°)





HIRE A JETTER ... IT'S EASY

OPERATOR CERTIFICATION NOT REQUIRED



- "Big Berty" Bertolini heavy duty pump designed for continuous service
- Genuine Honda electric start industrial twin cylinder engine
- 30 litre stainless steel break tank with cut off float and low water cut out pump protection
- NEW stainless steel frame designed to fit through doorways
- 12 litre fuel tank
- FREE ASP (Aussie safety protection) kit
- NEW 5,000 psi rated steel hose reel
- 60 m 1/4" R8 high quality sewer hose
- FREE 7 piece Aussie Jetters Nozzle box

Specifications

		Pressure	EWP with turbo	Flow	Engine	Clears drains to	Pump	Nozzle size	Weight	Unit Dim (Lxwxh) mm
C	obra A	4,000 psi (275 bar)	6,485 psi	20 lpm	Honda E/S GX630	6" (150mm)	TTL2028	050	130 kg	900x600x1330

Stock codes & prices

Cobra A	ABSSCOBRA-A	\$9,482
		¥5, .5=

Replacement accessories

Hose	AHOSE RF8-60M	60M R8 ¼" sewer hose
Gun	CGPDG5010	5,000 psi pro gun
Lance	C3905.15	900mm single lance
Nozzle	AD NOZZLE BOX	Full 7 piece nozzle box





Optional accessories

Viper Mini Reel ... REMOTE CONTROL

Leave your jetter in the ute & extend your reach to 120m (60m on jetter & 60m on mini reel)

- Stainless steel stand/handle
- Integrated on/off valve that allows remote control of ietter
- 60m of Redflex 3/16" sewer
- Three nozzle holders
- Pressure gauge




AMINIREEL/WHOSE \$2,040

CLEANING ACCESSORIES FOR FASTER, BETTER RESULTS

VALUE ADD EVERY HIRE

AUSSIE 5,000 PSI PRO-GUN KIT—SINGLE



Laser cut nozzle (030, 035, 045) Packed weight 2kg, Boxed dimensions 1180mm x 210mm x 45mm (900mm kit)

	lance	nozzle	single buy	10 pack buy
				(each)
APROGUN-900-030	900mm	030	\$175	\$131
APROGUN-900-035	900mm	035	\$175	\$131
APGUN-900-035M24	900mm	035	\$186	\$140
APROGUN-900-045	900mm	045	\$175	\$131
APGUN-900-045M24	900mm	045	\$186	\$140
APROGUN-1200-035	1200mr	n 035	\$188	\$141
APROGUN-1200-045	1200mr	n 045	\$188	\$141


Aussie Drain Cleaning Kit


Convert your pressure washer to a drain cleaning

Includes Aussie Viper Mini Reel with 60 metres of 3/16" sewer hose. Full Aussie Jetters Tool Box, including quick coupler to fit to end of blaster high pressure hose and safety plate.

ADRAINKIT \$3,338





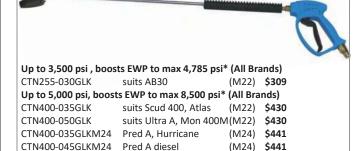

(*dependant on pump capability)

VALUE ADD EVERY HIRE

Call for bulk pricing

Aussie HP accessories save water, save time & save labour.





HOT WATER ELECTRIC ... NEW AUSSIE SIZZLER HOT WASH



- Heavy duty triplex brass pump
- Slow speed 4 pole motor with thermal cut out
- Double loop mild steel coil
- Max temp set to 80°C
- Four wheels for mobility
- 18 litre diesel fuel tank
- Delayed Total Stop for auto shut down of machine when gun not in use.
- 10 metres of HP hose
- Pro gun with stainless steel lance & laser cut nozzle
- Optional protective stainless steel cage with lifting bar ... AFRAMES/SIZZLER ... \$743

Specifications

	Pressure	EWP with turbo	Flow	Motor	Pump	Nozzle size	Weight	Unit dimensions (Lxwxh) mm
Aussie Sizzler	1,800 psi (130 bar)	3,100 psi	10 lpm	240v, 2.7kW, 4 pole	Interpump	035	100 kg	820 x 630 x 870

Stock codes & prices

FS-D1310P4M \$4,773 Aussie Sizzler

Industrial steam cleaners also available ... pages 39-40

Accessories supplied with machine (with replacement price)

Gun/lance/nozzle kit	APROGUN-1200-045	\$188
Hose kit (10m hot water rated)	AKENNHOSEKIT2	\$236

HOT WATER HONDA ... AUSSIE HEATWAVE ... MOBILE STEAM CLEANER



Compact, portable hot water pressure washer, just connect to the tap.

- 12 volt, diesel fired burner
- Honda GX390 petrol engine
- Spiralast coil with lifetime warranty
- Flat free tyres on steel wheels
- Stainless steel frame with integrated

- Direct drive industrial triplex pump
- Integrated burst disc and safety relief
- Hose & pro accessories
- Battery ordered separately

Specifications

	Safety Class	Pressure	Flow	Max Temp	Honda Engine	Pump	Weight	Dimensions (LxWxH) m
Aussie Heatwave	Α	4,000 psi (275 bar)	13 lpm	130°C	GX390 e/start	AR triplex (3200 rpm)	165 kg	1.2x0.7x0.9



Aussie Heatwave	Α	4,000 psi (275 bar)	13 lpm	130°C	GX390 e/start	AR triplex (3200 rpm)	165 kg	1.2
Ctack and as 9	· nrisina							



Accessories supplied with machine

Hose	AHW06M22X2X15	15m R2 3/8"
Gun	CGPDG5010	5,000 psi pro gun
Lance	C3924.01	700mm dual lance
Nozzle	C915 Q	Quick tip nozzle

AUSSIE INDUSTRIAL WET/DRY VACS ... HIRE HEROS

- Impact resist polypropylene barrel
- Heavy duty wheel kit
- Professional 40mm accessory kit
- Unique Aussie Microweb ... 99.9% filtration, reusable filter
- 7 metre durable power cable

Model	S/code	Capacity	Motor		Water lift	Air Flow	
VC61	VC61	50 litres	1 x 1200 watt,	10 amp plug	2200 mm	70 l/s	\$754
VC72	VC72	75 litres	2 x 1200 watt,	10 amp plug	2400 mm	119 l/s	\$933
VC73	VC73	75 litres	3 x 1200 watt,	15 amp plug	2600 mm	181 l/s	\$1,078

Check out the full range including Jumbos & pump out vacs Page 99 onwards







PUMP MOTOR GROUPS

Build your own truck, ute or trailer mounted high pressure water blaster or drain cleaning jetter.

- 'Big Berty' Bertolini triplex pump
- Unloader
- Safety valve
- Pressure gauge
- Heavy duty inlet filter
- High pressure gun & lance





Supplied on gal base

Dimensions of gal base 540mm (W) x 550mm (L)

P	E	T	R	O	L

Model	Stock code	Safety Class	Pump model	Engine	Pump Pressure (psi)	Flow (lpm)	Weight (kg)	List Price
BB100 PM	ABB100GX200NF	А	WBL1114	Honda GX200	2,000 (140 bar)	11	45	\$1,840
BB350 PM	ABB350/GX390NF	A	TTL1520	Honda GX390	3,000 (210 bar)	15	90	\$3,128
BB400 PM	ABB400/GX390PN	А	TTL1330	Honda GX390	4,000 (275 bar)	15	90	\$3,692
ULTRA PM*	ABBULTRA(PM)	А	TTK2130	Honda GX630	4,300 (300 bar)	20	110	\$6,180
PYTHON PM*	ABBPYTHON(PM)	В	Premium RAS4482	Vanguard 31HP	4,300 (300 bar)	31	90	\$8,172
PREDATOR A PM	ABPREDATOR+N/I	F A	KTL1635	Honda GX630	5,000 (350 bar)	20	120	\$6,972
PREDATOR + PM*	ABPRED+VANPMO	G B	Premium RAL2535	Vanguard 27HP	5,000 (350 bar)	25	120	\$7,693
RAPTOR 18 PM*	ABRAPTORSC18PI	M B	RA1850	Vanguard 35HP	7,300 (500 bar)	18	128	\$10,664



DIESEL

		Safety			Pump	Flow	Weight	
Model	Stock code	Class	Pump model	Engine	Pressure (psi)	(lpm)	(kg)	List Price
BB100 DPM	ABB100/L48ENF	Α	WBL1114	Yanmar L48E	2,000 (140 bar)	11	65	\$4,205
BB350 DPM	ABB350/L100ENF	Α	TTL1520	Yanmar L100E	3,000 (210 bar)	15	115	\$6,935
BB400 DPM	ABB400/L100ENF	Α	TTL1330	Yanmar L100E	4,000 (275 bar)	15	115	\$7,280
PREDATOR A DPM	ABPREDKDEPMG	Α	KTL1635	Kohler KD477 23HP	5,000 (350 bar)	20	250	\$11,693
RAPTOR 16 DPM*	ABRAPTORSC16DPM	В	RA1650	Kohler KD477 23HP	7,300 (500 bar)	16	250	\$13,937





3,000 - 5,000 PSI

mobile, flexible installations, trenchless excavation



HYDRAULIC DRIVE ... CLASS A

Hydraulic drive high pressure blasters for mobile applications, i.e. truck mounting for on-site cleaning, hydraulic concrete pumps, garbage trucks, drillers, marine applications, non destructive digging.

Non fumes, no sparks, unlimited power!

- "Big Berty" Bertolini pump ... **4 YEAR WARRANTY**
- Top quality hydraulic motor

FREE ASP (Aussie Safety Protection) kit, includes unloader & safety valve. Protects operator & machine against pressure spikes

required for operators

- FREE heavy duty, brass inlet strainer
- FREE wash down kit including gun, lance & 10m hose
- Optional 30 metre hose reel kit (see below)

Hydraulic drive range to 7,300 psi available ... call for more options.

Specifications

	Pump Pressure	Turbo EWP	Flow	Motor	Rqd Hyd Pressure	Rqd Hyd Flow	Pump	Nozzle size	Weight
THY2715/HYD	2,175 psi (150 bar)	3,500 psi	27 lpm	Salami	1450 psi	38 lpm	THY2715	035	15 kg
WHY1520/HYD	3,000 psi (200 bar)	4,785 psi	15 lpm	Salami	1160 psi	38 lpm	WHY1520	035	12 kg
TTL1330/HYD	4,300 psi (300 bar)	7,000 psi	13 lpm	Casappa PLM 30 22	2900 psi	38 lpm	TTL1330	035	35 kg
TTL2028/HYD	4,000 psi (275 bar)	6,485 psi	20 lpm	Casappa PLM 30 34	2900 psi	60 lpm	TTL2028	050	40 kg
KTL1635/HYD	5,000 psi (350 bar)	8,500 psi	16 lpm	Casappa PLM 30 34	2900 psi	60 lpm	KTL1635	035	40 kg

Stock codes & pricing

THY2715/HYD	BTHY2715/HYDKIT	\$2,475
WHY1520/HYD	BWHY1520HYD-KIT	\$2,580
TTL1330/HYD	BTTL1330/HYDKIT	\$3,940
TTL2028/HYD	BTTL2028/HYDKIT	\$4,635
KTL1635/HYD	BKTL1635/HYDKIT	\$5,240



Note: requires installation by a qualified hydraulics engineer over speeding will cause pump damage

Accessories supplied with machine

	Up to 4,000 psi		Over 4,000 psi	
Hose	AHW06M22X2X10	10m R2 3/8"	AHW06M22X2X10	10m R2 3/8"
Gun	M4022209003	AL55 4,500 psi Pro Gun	MPA30450010	RL56 5,100 psi PA gun
Lance	C3924.01	700mm Dual Lance	MPA40025800	800mm PA single lance
Nozzle	C915035M C915500MSS	2 x Laser Cut (15° & detergent)	C915045M	Laser cut nozzle

Optional accessories FASTER, SMARTER, SAFER

Turbo Lance 60% MORE BITE

Increase the effective working pressure (EWP) of your blaster without loading the pump!



(up to 5,000 psi)

\$394

Tele-wand ... REACH further

CTN400-___

Ideal for reaching eaves & washing windows, extends to 5.5m, includes FREE harness. Quik Tip nozzle sold



AGPDCLTG18A Heavy duty \$502 QT nozzle C915___Q \$20 (insert nozzle size)

CLEAN FLAT SURFACES FAST

SLASH CLEANING TIMES BY 75% Clean flat surfaces four times faster, leaving a streak free finish. Standard

nozzles included

AGPDFSC20 20" Spinner \$1,247 AGPDFSCS22Z 22" Cyclone \$1,565



Trenchless Excavation ... **TURBO HEADS TO 500 BAR**

Guns/lances & couplings for No dig excavations ... p56 onwards

Extra length hose ... CONVENIENT

Cleaning large plant?... reach further with these extra length Aussie Blue-Pro hoses, 5,800 psi rated, R2 wire braid hose, 3/8 female ends (M22 & M24 couplings sold separately)

AHW06FB6FB6X20	(20m)	\$330
AHW06FB6FB6X30	(30m)	\$499
AHW06FB6FB6X50	(50m)	\$772
M212003540	(M22 QC)	\$21 (2 required)
MPA26065050	(M24 QC)	\$40 (2 required)

4,000 psi Hose Reel Kit .. EASY FIT

Safer & smarter working, includes reel, 30m double wire braid hose, whip hose & mounting plate

ADHR40100D

(hose reel kit)

Drain Clearing Kit, SAFE & SIMPLE

Includes Aussie Viper Mini Ree with 60 metres of 3/16" sewer hose. Full Aussie Jetters Tool Box, including quick coupler to fit to end of blaster high pressure hose. Includes Safety Plate.





ADRAINKIT \$3,285

aussiepumps.com.au All prices AU\$, exclude GST, ex Sydney warehouse, July 2021

02 8865 3500







HONDA JETTERS

King Cobra A cube frame

OPERATOR CERTIFICATION NOT REQUIRED

COBRA A SERIES

CLASS A






FREE SAFETY PLATE (valued at \$225)







STAINLESS STEEL FRAME

- 12 litre fuel tank **Genuine Honda** electric start industrial
 - FREE ASP (Aussie safety protection) kit
 - NEW 5,000 psi rated steel hose reel
 - 60 m 1/4" R8 high quality sewer hose
 - FREE 7 piece Aussie Jetters Nozzle box
 - FREE Safety eyewear

"Big Berty" Bertolini heavy duty pump designed for continuous service

- twin cylinder engine
- 30 litre stainless steel break tank with cut off float and low water cut out pump protection
- NEW stainless steel trolley frame designed to fit through doorways
- NEW stainless steel Cube version, smaller footprint, for permanent

Specifications

	Pressure	EWP with turbo	Flow lpm	Engine	Clears drains to	Pump	Nozzle size	Weight
Cobra A	4,000 psi (275 bar)	6,485 psi	20	Honda E/S GX630	6" (150mm)	TTL2028	050	130 kg
King Cobra A	5,000 psi (350 bar)	8,500 psi	16	Honda E/S GX630	7" (180mm)	KTL1635	035	130 kg

Frame options		Trolley			Cube	
	Unit Dim (Lxwxh) mm			Unit Dim (Lxwxh) mm		
Cobra A	ABSSCOBRA-A	900x600x1330	\$9,482	ABSSCOBRA-A-CUBE	850x563x1230	\$9,482
King Cobra A	ABSSCOBRAK-A	900x600x1330	\$10,460	ABSSCOBRAK-A-CUBE	850x563x1230	\$10,460

Accessories supplied with machine

Hose	AHOSE RF8-60M	60M R8 ¼" sewer hose
Gun	CGPDG5010	5,000 psi pro gun
Lance	C3905.15	900mm single lance
Nozzle	AD NOZZLE BOX	Full 7 piece nozzle box
Safety plate	AD MSP	Covers drain entrance

Click or scan QR code for Aussie Jetter handover video









Optional accessories **FASTER, SMARTER, SAFER**

Viper Mini Reel ... REMOTE CONTROL

Leave your jetter in the ute & extend your reach to 120m (60m on jetter & 60m on mini reel)

- Stainless steel stand/
- Integrated on/off valve that allows remote control of jetter
- 60m of Redflex 3/16"
- Three nozzle holders
- Pressure gauge



AMINIREEL/WHOSE

\$2,040

Aussie Super Worm Hose (15 metres)

1/8", 5,000 psi rated, super flexible sewer hose, ideal for small drains and tight Complete with compressor

nozzle & quick fit tail. (1/8 BSP M ends)

AHOSER8 1/8 15M



SECURE YOUR JETTER ... COBRA LOC

Heavy duty galvanised steel Easy bolt down to vehicle Secures Cobra jetter in transit Eliminates frame stress Facilitates quick release for

jetter maintenance Pad lockable

ACRADLECOBRA \$497





HONDA JETTERS ... CLASS B

RTO CERTIFICATION REQUIRED

COBRA B SERIES

- Genuine Honda electric start industrial twin cylinder engine with emergency stop fitted
- "Big Berty" Bertolini heavy duty pump designed for continuous service
- **NEW stainless steel** frame designed to fit through doorways
- Cube version, smaller footprint, for permanent mounting on a ute ... comes complete with Cobra Loc. (no 🛮 🖔 wheels)
- 30 litre stainless steel break tank with cut off float and low water cut out pump protection
- 12 litre fuel tank
- FREE ASP (Aussie safety protection) kit
- **FREE** hose restraint & safety plate
- 5,000 psi rated steel hose reel
- 60 m 1/4" R8 high quality sewer
- FREE 7 piece Jetters Nozzle box
- **FREE** Safety eyewear









20% more space efficient

Specifications

•							1	
	Pressure	EWP with turbo	Flow lpm	Engine	Clears drains to	Pump	Nozzle size	Weight
King Cobra	5,000 psi (350 bar)	8,500 psi	20	Honda E/S GX690	7" (180mm)	Premium RAL2035	045	135 kg
NEW King Cobra I	5,000 psi (350 bar)	8,500 psi	25	Honda E/S EIGX800	8" (200mm)	Premium RAL2535	055	150 kg

Frame options

			Unit Dim (Lxwxh) n	nm
King Cobra	ABSSCOBRAKINGMK2	Trolley frame	900x600x1330	\$11,395
Killig Cobi a	ABSSCOBRAKINGCUBE	Cube Frame	850x563x1230	\$11,395
King Cobra I	ABSSCOBRA-K-I-CUBE	Cube Frame	tba	\$12.895

Accessories supplied with machine

Accessories supplied with indefinite				
Hose	AHOSE RF8-60M	60M R8 1/4" sewer hose		
Gun	CGPDG5010	5,000 psi pro gun		
Lance	C3905.15	900mm single lance		
Nozzle	AD NOZZLE BOX	Full 7 piece jetters nozzle box		
Safety plate	AD MSP	Covers drain entrance		
Hose restraint	AD HRSS8	Suits 1/4" hose		

Click or scan QR code for Aussie Jetter handover video



Pump service kits ... p87 - 88

Optional accessories FASTER, SMARTER, SAFER

Viper Mini Reel ... REMOTE CONTROL

Leave your jetter in the ute & extend your reach to 120m (60m on jetter & 60m on mini reel)

- Stainless steel stand/ handle
- Integrated on/off valve that allows remote control of jetter
- 60m of Redflex 3/16" sewer hose
- Three nozzle holders
- Pressure gauge



AMINIREEL/WHOSE

\$2,040

Aussie Super Worm Hose (15 metres)

1/8", 5,000 psi rated, super flexible sewer hose, ideal for small drains and tight bends. Complete with compressor nozzle & quick fit tail. (1/8 BSP M ends)



AHOSER8 1/8 15M

\$436

SECURE YOUR JETTER ... COBRA LOC

Heavy duty galvanised steel Easy bolt down to vehicle Secures Cobra jetter in transit Eliminates frame stress Facilitates quick release for ietter maintenance Pad lockable



ACRADLECOBRA \$497



FOOT VALVE ... MORE CONTROL

350 bar foot valve adds a second level of operator control, in addition to gun trigger (complies with new safety standards for Class B machines)



AST350-2605	(foot valve)	\$625
AD MFVPH	(whip hose kit)	\$188
AD HT12-M	(QC plug)	\$34
C20024550	(SS QC)	\$67

LOW PRESSURE REEL WITH SUPPLY HOSE

Top quality low pressure steel reel with 30m of 3/4" supply hose



A4418-LP ASSY

CLASS B.... RTO CERTIFICATION REQUIRED



AS/NZS4233.1

CLASS B

Refer standard

VANGUARD JETTERS







COBRA VANGUARD SERIES

Vanguard petrol engine with

30 litre stainless steel break

tank with cut off float and low

water cut out pump protection

Stainless steel frame with anti-


pneumatic wheels with sealed


vibration mounts with 10"

Genuine industrial twin

emergency stop fitted

triplex pump





- FREE 7 piece Jetters Nozzle box
- FREE hose restraint & safety plate
- **FREE** Safety eyewear
- Cube options available ... call for details



	Pressure	EWP with turbo	Flow lpm	Engine	Clears drains to	Pump	Nozzle size	Weight
King Cobra Vanguard	5,000 psi (350 bar)	8,500 psi	25	Vanguard 27 HP electric start	8" (200mm)	Premium RAL2535	055	140 kg
Python Vanguard	4,300 psi (300 bar)	6,785 psi	31	Vanguard 31 HP electric start	9" (230mm)	Premium RAS4482	070	150 kg

Stock codes & pricing

bearings

Specifications

		U	nit Dimensions (Lxwxh) m	nm
King Cobra Vanguard	ABSSCOBRAKVAN	Stainless Steel Frame	1020 x 600 x 1330	\$11,584
Python Vanguard	ABSSPYTHON	Stainless Steel Frame	1020 x 600 x 1330	\$12,919

Accessories supplied with machine

	King Cobra			
Hose (60M)	AHOSE RF8-60M	1/4" sewer hose		
Gun	CGPDG5010	5,000 psi pro gun		
Lance	C3905.15	900mm single lance		
Nozzle	AD NOZZLE BOX	Full 7 piece jetters nozzle box		
Safety plate	AD MSP	Covers drain entrance		
Hose restraint	AD HRSS8	Suits 1/4" hose		
Pump service kits p87 - 88				

Python ... BIG FLOW, BIG HOSE

•	
AHOSER8 3/8 60M	3/8" sewer hose
CGPDG5010	5,000 psi pro gun
C3905.15	900mm single lance
AD NOZZLE BOX AD BT6R1F10 AD SD6R1F10	Full 7 piece nozzle box Bandit 3/8"Nozzle Screwdriver 3/8"nozzle
AD MSP	Covers drain entrance
AD HRSS10	Suits 3/8" hose

Optional accessories FASTER, SMARTER, SAFER

Viper Mini Reel ... REMOTE CONTROL

Leave your jetter in the ute & extend your reach to 120m (60m on jetter & 60m on mini reel)

- Stainless steel stand/ handle
- Integrated on/off valve that allows remote control of jetter
- 60m of Redflex 3/16" sewer hose
- Three nozzle holders
- Pressure gauge



AMINIREEL/WHOSE (suits King Cobra) \$2,040 AMINIREELWH1/4" (suits Python)

Aussie Super Worm Hose (15 metres)

1/4", 5,000 psi rated, super flexible sewer hose, ideal for small drains and tight Complete with compressor

nozzle & guick fit tail. (1/8 BSP M ends)

AHOSER8 1/8 15M



SECURE YOUR JETTER ... COBRA LOC

Heavy duty galvanised steel Easy bolt down to vehicle Secures Cobra letter in transit Eliminates frame stress Facilitates quick release for jetter maintenance Pad lockable

ACRADLECOBRA

\$497





FOOT VALVE ... MORE CONTROL

350 bar foot valve adds a second level of operator control, in addition to gun trigger (complies with new safety standards for Class B machines)

AST350-2605	(foot valve)
AD MFVPH	(whip hose kit)
AD HT12-M	(QC plug)
C20024550	(SS QC)



\$188 \$34 (SS QC) \$67

LOW PRESSURE REEL WITH SUPPLY HOSE

Top quality low pressure steel reel with 30m of 3/4" supply hose

A4418-I P ASSY





Click or scan OR code for Aussie Jetter handover video

\$906



COBRA TRAILER JETTS ... READY, SET, JET (CLASS A & B OPTIONS)



Specifications

	Safety Class	Pressure	EWP with turbo	Flow	Engine	Clears drains to	Pump	Nozzle size
King Cobra A	Α	5,000 psi (350 bar)	8,500 psi	16 lpm	Honda GX630 electric start	6" (150mm)	KTL1635	035
King Cobra	В	5,000 psi (350 bar)	8,500 psi	20 lpm	Honda GX690 electric start	7" (180mm)	KTL2035	045
NEW King Cobra I	В	5,000 psi (350 bar)	8,500 psi	25 lpm	Honda IGX800 electric start	8" (00mm)	Premium RAL2535	055
King Cobra Vanguard	В	5,000 psi (350 bar)	8,500 psi	25 lpm	Vanguard 27 HP electric start	8" (200mm)	Premium RAL2535	055
Python Vanguard	В	4,300 psi (300 bar)	6,785 psi	31 lpm	Vanguard 31 HP electric start	9" (230mm)	Premium RAS4482	070

4 year warranty

Pricing

	Trailer moun	t (approx. weight 550kg	Skid Mount			
		Dimensions			Dimensions	
King Cobra A	ABBCOBRAKING-A-T	3.8m x 1.7m x 1.5m	\$19,215	ABBCOBRAKING-A-S	3m x 1.25m	\$17,035
King Cobra	ABBCOBRAKINGTR	3.8m x 1.7m x 1.5m	\$20,560	ABBCOBRAKINGSM	3m x 1.25m	\$18,227
King Cobra I	ABBCOBRA-K-I-TR	3.8m x 1.7m x 1.5m	\$21,473	ABBCOBRA-K-I-SM	3m x 1.25m	\$18,988
King Cobra Vanguard	ABBCOBRAKINGVTR	3.8m x 1.7m x 1.5m	\$21,473	ABBCOBRAKINGVSM	3m x 1.25m	\$18,988
Python Vanguard	ABBPYTHONTR	3.8m x 1.7m x 1.5m	\$27,758	ABBPYTHONSM	3m x 1.25m	\$25,239

Accessories supplied with machine

	King Cobra	
Hose (60M)	AHOSE RF8-60M	1/4" sewer hose
Gun	CGPDG5010	5,000 psi pro gun
Lance	C3905.15	900mm single lance
Mini Reel	AMINIREEL/WHOSE	60M 3/16" sewer hose on a Remote Mini Reel
Nozzle	AD NOZZLE BOX	Full 7 piece jetters nozzle box
Safety plate	AD MSP	Covers drain entrance
Hose restraint (Class B only)	AD HRSS8	Suits 1/4" hose

Python BIG FLOW, BIG HOSE						
AHOSER8 3/8 60M	3/8" sewer hose					
CGPDG5010	5,000 psi pro gun					
C3905.15	900mm single lance					
AMINIREEL/WHOSE	60M 1/4" sewer hose on a Remote Mini Reel					
AD NOZZLE BOX AD BT6R1F10 AD SD6R1F10	Full 7 piece nozzle box Bandit 3/8"Nozzle Screwdriver 3/8"nozzle					
AD MSP	Covers drain entrance					
AD HRSS10	Suits 3/8" hose					

Professional, self contained, trailer or skid mounted high pressure water jetting systems, ideal for cleaning drains up to 9 inches. Can also double as a high pressure, high flow water blaster.

- 'Big Berty' heavy duty triplex pump
- Industrial Honda or Vanguard twin cylinder engine with Emergency stop
- 200 litre Rapid Spray poly tank, UV resistant
- Low pressure supply hose reel with 30m of 3/4" low pressure hose
- 60m of high quality 5,000psi rated jetting hose, fitted to steel hose reel for jetting straight off trailer
- Full 7 piece nozzle kit including Aussie Turbo Root Mulcher nozzle
- Aussie Viper Mini Reel with 60m of 3/16" Redflex sewer hose
- FREE hose restraint & safety plate
- FREE Safety eyewear

Call for details of diesel powered options.

Trailer specs ...

Heavy duty Australian made hot dipped galvanised single axle trailer ...

- New tyres & wheels (spare included)
- · Heavy duty jockey wheel,
- VIN number & blue slip ready for registration
- Heavy duty lockable toolbox
- Optional gal roof for weather protection (+\$1,362^{+GST})



Click or scan QR code for Aussie Jetter handover video





- Heavy duty triplex pump (1 year warranty)
- Adjustable temperature up to 130° C, steam melts grease without using chemicals.

- Spiralast coil with lifetime warranty
- Water tight electrical box with battery. (Battery not included)
- ◆ COMPACT, robust "Pro-tect" steel frame with built-in lifting eyes for transportation

- · Stainless steel panels and boiler cover.
- Full 7 piece nozzle kit (Mustang) including Aussie Turbo Root Mulcher nozzle
- ◆ Aussie Viper Mini Reel with 60m of 3/16" Redflex sewer hose
- Skid mount option with 700 litre water tank & hose reels
- Safety Plate & safety eye wear included





Specifications

	Safety Class	Pressure	EWP with turbo	Flow	Max Temp	Engine	Clears drains to	Pump	Weight
NEW HSS40005HH	Α	4,000 psi (275 bar)	6,485 psi	18 lpm	130°C	Honda GX630	6" (150mm)	General Pump EZ4040G	204 kg

Stock codes & prices

		Unit Dimensions (Lxwxh) m	
HSS40005HH	HSS40005HHJ	1.2x0.66x1.02	\$20,492

Accessories supplied with machine

Hose	AHW06M22X2X10	10m R2 3/8"
Gun	CGPDG5010	5,000 psi pro gun
Lance	C3905.15	900mm single lance
Mini Reel	AMINIREEL/ WHOSE	60M 3/16" sewer hose on a Remote Mini Reel
Nozzle	AD NOZZLE BOX	Full 7 piece jetters nozzle box



Includes Viper Mini Reel

BUDGET MINI JETTERS ... SUPER CONVENIENT

- 2,175 psi max pump pressure
- 3,400 psi effective working pressure with Aussie Turbo Master turbo lance
- Compact design
- Heavy duty 4 pole, slow speed motor
- Brass head triplex pump
- Pro gun & Vario lance
- Normal 10 amp plug, 240 volt

- FREE turbo lance ... maximise your effective working pressure for fast results
- Includes 15m Aussie Super Worm flexible sewer hose & drain cleaning
- Optional heavy duty trolley kit ... AGP2100436 trolley \$218 F43146 mounting kit \$17



Specifications

	Safety Class	Pump Pressure	EWP with turbo	Flow	Motor	Clears drains to	Pump	Weight
Black Box with Drain Cleaning kit	Α	1,800 psi (124 bar)	3,400 psi	8 lpm	240v 2.6kW 4 pole	Small drains	Triplex	30 kg

Stock codes & pr	ricing		
	Stock codes to use	Unit Dimensions (Lxwxh) mm	
Black Box with 15m Super Worm jetting hose (&	FKB8.15 AHOSE R8 1/8_15M C1500.06 AD QR8BR2	390 x 240 x 230	\$1,588

Accessories supplied with machine

Accessories supplied with machine						
Hose	AHW06M22X2X8	8M R2 hose				
Sewer hose	AHOSER8 1/8 15M	15M R8 sewer hose with nozzle				
Gun	M4021108007	AL13 pro gun				
Lance	C4723.45.115	Vario lance				
Turbo	M4042100004	Turbo lance				
Pump service kits n34						

aussiepumps.com.au All prices AU\$, exclude GST, ex Sydney warehouse, July 2021





JETTING ESSENTIALS ... ADD THEM TO YOUR LIST!

SECURE YOUR JETTER ... Aussie Cobra Loc

Heavy duty galvanised steel

- Easy bolt down to vehicle
- Secures Cobra jetter in transit
- · Eliminates frame stress
- Facilitates quick release for jetter maintenance
- Pad lockable

ACRADLECOBRA \$497





DOUBLE STACKER HOSE REEL KITS Simply to ute mount



Heavy duty powder coasted steel double stacker hose reel

- Low pressure steel reel with 30m of 3/4" supply hose
- 5.000 psi rated reel with 60m of sewer hose.

(requires joining hoses & couplings)

AD ARS-DSC \$2,690

Dual Stacker without hose AD ARS-DCNH \$1,539

Low pressure steel reel with 30m of 3/4" supply hose A4418-LP ASSY \$906

Bare hose reel with 5,000 psi swivel (no hose) A4418-REEL \$680

Essential for Class B safety

350 BAR foot valve adds a second level of operator control, in addition to gun trigger

FOOT VALVE



AUSSIE SAFETY EYEWEAR

Aussie tinted safety glasses (ANSI Z87.1) equivalent to AS/NZS 1337



AP-SAFETYGLASSES \$10

SAFETY PLATE

Designed to make jetting safer & easier.

Prevents operator injuries caused by jetting nozzle accidentally returning out of the drain.



AD MSP \$225

AUSSIE COBRA CLASS B SAFETY PACK

- · Safety plate
- 500 bar safety gloves
- Foot valve with whip hose
- 500 bar hose shroud
- Hose restraint



ACOBRASAFEKIT2

\$1.385

500 BAR SAFETY GEAR (more p80)

Aussie Jet Stop boots ATST5652025xx \$524 (xx = size 42-48)

Safety gloves ATSTP5600025xxS \$215

\$252

(xx = size 8 or 11) **Hose Shroud** ATST56600455920

AUSSIE VIPER MINI REEL ... Remote control of jetter



to 120m (60m on jetter & 60m on mini reel) Stainless steel

- stand/handle
- Integrated on/off valve that allows remote control of ietter
- 60m of Redflex 3/16" sewer hose or 1/4" sewer hose
- 3 nozzle holders
- Pressure gauge

AMINIREEL/WHOSE (Cobra & King Cobra) \$2,040 AMINIREELWH1/4" (Python) \$2,153

Replacement parts

Swivel	AD MRSB	\$169
Repair kit (circlip & o-rings)	AD MNRRK	\$40
3/8" Ball valve (with handle)	MTM00089502	\$71
Ball valve extended handle only	AD BVH	\$48
Locking pin & spring	AD MNR PL	\$31

AUSSIE HOT LINK Converts a jetter into a hot jetter



- Suits any cold water pressure cleaner to 4,000 psi with flows to 20 lpm
- 12 volt diesel fired burner
- Built-in diesel fuel tank (11 litres).
- Flow switch control
- Requires 14 amp charge circuit
- Integrated burst disc and safety relief valve
- 2.7 metres of 5,000 psi hose
- Stainless steel frame with stainless steel boiler housing and powder coated steel
- Requires a 12 volt power source

\$4,690 HCPHL5DC

DRAIN CLEANING JETTER NOZZLE BOX Clear a full range of chokes

- Predator Penetrator Nozzle Complete
- Negotiator Invader Nozzle Complete
- Compressor Invader Nozzle with Adapter,
- Turbo Root Mulching Nozzle reverse spinning nozzle
- Nozzle Tip Cleaner
- Spare ¼" coupler
- 3/16" allen key

Australian Made



AD NOZZLE BOX \$976

Want to convert a high pressure cleaner into a jetter? See our Drain Cleaning Kit p73





CLEAR IT FASTER ... REPLACE WORN NOZZLES

PREDATOR PENETRATOR

3 rear jets & 1 forward jet

It's used for general drain cleaning. The long pointed nose penetrates deep into a choke, blasting out the debris. (5,000 psi rated) Includes cowl & tail, use with 1/4" coupler AD P3R1FC \$187



NEGOTIATOR INVADER

6 rear jets & 1 forward jet It's used for tight bends and traps. It is a good multi-purpose nozzle. (5,000 psi rated) Includes cowl & tail, use with 1/4" coupler

\$181



COMPRESSOR INVADER

6 rear jets & 1 forward jet Small nozzle that assists with blockages in smaller pipes. (5,000 psi rated) Includes cowl & tail, use with 1/4" coupler



AD C6R1FC \$159

BEAVER COMPLETE

2 forward jets & 6 rear jets The 2 forward jets bore deep into the choke. Ideal for dry paper chokes. (5,000 psi rated) Includes cowl & tail, use with 1/4" coupler



AD BV6R2FC \$202

ROOT RAT

AD N6R1FC

1 front jet & 6 rear jets

(3 behind the tip of the nozzle at 45° and 3 at the rear of the nozzle at 30°) Quickly penetrates chokes. (5,000 psi rated) Includes cowl & tail, use with 1/4" coupler

AD RR6R1FC



1 front jet & 6 rear jets

It's used for tight root blockages. Although it is very effective, only use on difficult chokes as it has a habit of leaving the drain. (5,000 psi rated) Includes cowl & tail, use with 1/4" coupler

AD B6R1FC \$188



BANDIT (3/8")

1 front jet & 6 rear jets

Designed to enter a blockage quickly and with max thrust. Suits Python jetter.

AD BT6R1F10 \$150



SCREWDRIVER (3/8")

1 front jet & 6 rear jets

Designed to get through the toughest root blockages. Suits Python jetter.

AD SD6R1F10 \$152



EXTENSION BARS (for larger drains)

Designed to extend the length of a the nozzle to prevent them turning around in a pipe.



100mm	AD EXT100	\$173
150mm	AD EXT150	\$173
250mm	AD EXT250	\$195
350mm	AD EXT350	\$195

TURBO ROOT MULCHER (drains to 6")

Rotating rear jet

Used after a penetrator style nozzle has broken through the blockage. Quickly strips tree roots, grease & debris from the drain.



AD RR8TCF \$381

Replacement parts

1. Brass turbo CTN255-055H \$173 2. End bend AD SS8TM \$209 AD HT8MSF \$35 3. Male plug

Use with extension bars for larger drains.

DOUBLE TURBO ROOT MULCHER (for larger drains to 24")

The Double Turbo Root Mulcher nozzle has the power of 2 turbines so large pipes can be cleaned. This gives a standard jetter the power effectiveness of a larger machine without the



Replacement parts

AD RRDB

1. Brass turbo CTN255-055H \$173 2 End hend AD RRDRRASE \$321 3. Male tail AD HT12-M \$34

Use with extension bars for larger drains.

COUPLERS, TAILS, CONES & ACCESSORIES

Couplers	¼" brass	AD QR8BR2	\$45
	¾" ss	C200245500	\$67
Tail	1/8" female	AD HT4	\$31
	⅓" male	AD HT4M	\$31
	¼" female	AD HT8F	\$31
	¼" male	AD HT8M	\$31
	3/8" male	AD HT12-M	\$34
Cone	1/8" plastic	AD PC4	\$22
	¾" plastic	AD PC8	\$25
Tip cleane	r	AD TC	\$22







AUSSIE REDFLEX SEWER HOSE

The super strong thermoplastic coating means the hose is stiffer but harder wearing. (5,000 psi 1/4 BSP M ends)

♦ 1/4" for general drain clearing (60m)

AHOSE RF6-60M

AHOSE RF8-60M \$837 ♦ 3/16" for gullies & tight corners (60m)

 3/8" for high flow jetters (60m) (3/8" M ends) AHOSER8 3/8 60M \$1,019



AUSSIE SUPER WORM HOSE (15M)

1/4", 5,000 psi rated, super flexible sewer hose, ideal for small drains and tight bends.

Complete with compressor nozzle & quick fit

(1/8 BSP M ends)



AHOSER8 1/8 15M \$436

NEW HOSE RESTRAINT



Stainless steel hose restraint sock with carabiner & bracket. Connects between hose and gun or mini reel couplings. Use to restrain the hose in the event of a coupling failure. Required with Class B machines under AS/NZS4233.1

AD HRSS10 (3/8" thermoplastic hose) \$130 AD HRSS8 (1/4" thermoplastic hose) \$103 **AHRANCHORPLATE** \$8 (attaches restraint to gun/lance or mini reel)

aussiepumps.com.au

02 8865 3500

NO FUEL, NO FUSS ... JUST PLUG & GO



BLACK BOX

- 2,175 psi max pump pressure
- 3,400 psi effective working pressure with Aussie Turbo Master turbo lance
- Compact design
- Heavy duty 4 pole, slow speed motor
- Brass head triplex pump
- Pro gun & Vario lance
- Normal 10 amp plug, 240 volt

- FREE turbo lance ... maximise effective working pressure for fast results
- 8m rubber wire braid professional HP hose
- Thermal dump to protect pump from extended by-pass running
- Detergent injection (not for use with
- Optional heavy duty trolley (supplied flat pack) and hose reel

Specifications

	Pump Pressure	Max rated pressure	EWP with turbo	Flow	Motor	Pump	Weight	Unit Dimensions (Lxwxh) mm
Black Box	1,800 psi (124 bar)	2,175 (140 bar)	3,400 psi	8 lpm	240v 2.6kW 4 pole	Triplex	30 kg	390 x 240 x 230

Options ... stock codes & pricing

Black Box	FKB8.15	\$1,139
Black Box with Smart Cart	FKB8.15TR	\$1,424
Black Box with Smart Cart & 15m hose reel	FKB8.15TRHR	\$2,007

For replacement accessories use these codes ...

Hose	AHW06M22X2X8	8M R2 hose
Gun	M4021108007	AL13 pro gun
Lance	C4723.45.115	Vario lance
Turbo	M4042100004	Turbo lance

Optional accessories FASTER, SMARTER, SAFER

Aussie Black Box with Smart Cart

GO MOBILE ... EASY FIT TROLLEY

Strong & robust trolley, 10" flat free tyres, accessories holder, steel frame (assembled required)

Black Box with trolley FKB8 15TR

Trolley only AGP2100436 \$236 BB mounting kit F43146 \$17

Black Box with Smart Cart & Reel

Aussie Black box fully optioned with trolley and 15m hose reel. Supplied with all fittings required .(assembly required)

Black Box with trolley & reel FKB8.15TRHR

15" flat surface cleaner ... SMART

Clean flat surfaces three times faster, leaving a streak free finish. Steel deck

FNA80166 (15") \$225 700mm lance to suit FNA7103261



Drain jetting, FAST & CONVENIENT

Clear drains fast with a super flexible 1/8" 15m sewer hose. Includes jetting nozzle. Couplings required (see below)

AHOSER8 1/8 15M \$436 C200245500 (Quick coupler) \$62


C1500.06 (M22 coupling) \$10

NEW Foamer ... SPRAY FOAM FAST

LS3 foamer ... Spray detergents, degreasers,

disinfectants without chemicals going through the pump

MPA25152612 Requires coupling to fit to gun C1500 06 \$10



Replacement Pump kits

	•	
FAR1864	Valve kit	\$78
FAR1865	Oil seal kit	\$48
FAR1866	Water seal kit	\$120
FAR2040	O-ring kit	\$20
FAR1279225	Unloader valve	\$278





MONSOON 140

- 'Big Berty' heavy duty triplex pump
- Heavy duty on-off switch with motor protection. Includes circuit breaker with thermal trip & short circuit protection in IP 65 enclosure with padlocking control.
- Heavy duty 4 pole, single phase slow speed motor with 15 amp plug
- Robust stainless steel frame & anti vib mounts
- Steel wheels with flat free tyres

- FREE ASP (Aussie safety protection kit) ... Protects pump from pressure spikes and excess by-pass running
- **Detergent** injection
- Pro accessories
- **Optional Total Stop**





No RTO certification required for operators

Specifications

	Pump Pressure	EWP with turbo	Flow	Motor	Pump	Nozzle size	Stock code	List price
lonsoon cud 140	2,000 psi (140 bar)	3,400 psi	9 lpm	240v 2.2kW	WBL917	035	ABMONSS140	\$2,500

Unit weight & dimensions

	Weight	Freight Dimensions (Lxwxh) mm
Monsoon Scud 140	52 kg	680x580x550

Accessories supplied with machine

Hose	AHW06M22X2X8	8M R2 hose
Gun	M4021108007	AL13 pro gun
Lance	C4723.45.115	Vario lance

Pump service kits ... p84 - 85

Optional accessories FÄSTER, SMARTER, SAFER

Turbo Lance 60% MORE BITE

Increase the effective working pressure (EWP) of your blaster without loading the pump!



4,000 psi Hose Reel Kit .. EASY FIT

Safer & smarter working, includes reel, double wire braid hose, whip hose & mounting plate

AD30001 (15m hose) \$565 Mounting bar to suit frame AHRBARSSMONSML \$159



Aussie Spinner ... FLAT SURFACES

SLASH CLEANING TIMES BY 75%

20" flat surface cleaner Clean flat surfaces four times faster, leaving a streak free finish suits AB40 (standard nozzles included)

AGPDFSC20 \$1.247



Drain jetting, FAST & CONVENIENT

Clear drains fast with a super flexible 1/8" 15m sewer hose. Includes jetting nozzle. Couplings required (see below)

AHOSER8 1/8 15M \$436 C200245500 (Quick coupler) \$62 C1500.06 (M22 coupling) \$10



Tele-wand ... REACH FURTHER

Ideal for reaching eaves & washing windows, extends to 5.5m, includes FREE harness. Quik Tip nozzle sold separately.



AGPDLTG18 \$431 Quik Tip nozzle C915035Q \$20

NEW Foamer ... SPRAY FOAM FAST

LS3 foamer ...

Spray detergents, degreasers, disinfectants without chemicals going through the pump

MPA25152612 Requires coupling to fit to gun C1500.06



HEAVY DUTY | RELIABLE | CLASS A



- 'Big Berty' heavy duty triplex pump
- Heavy duty 4 pole IP55 rated slow speed motor
- Heavy duty on-off switch with motor protection. Includes circuit breaker with thermal trip & short circuit protection in IP 65 enclosure with padlocking . control.
- **NEW** stainless steel frame & anti vib mounts
- Heavy duty on-off switch with overload protection
- FREE ASP (Aussie safety protection kit) .. Protects pump from pressure spikes and excess by-pass running
- Steel wheels with flat free tyres

Detergent injection

required for operators

- Easy fit 30 m hose reel option
- Pro accessories
- 3 phase plug not supplied
- **Optional Total Stop**



Specifications

	Pump Pressure	EWP with turbo	Flow	Motor	Pump	Nozzle size	Stock code	List price
Monsoon Scud 200	3,000 psi (200 bar)	4,785 psi	15 lpm	415v 5.5kW 4 pole	TTL1520	045	ABMONSS200	\$3,592
Monsoon Scud 300	3,000 psi (200 bar)	4,785 psi	21 lpm	415v 7.5kW 4 pole	TTL2120	065	ABMONSS300	\$4,283
Monsoon Scud 400	4,300 psi (300 bar)	6,785 psi	13 lpm	415v 7.5kW 4 pole	TTL1330	035	ABMONSS400	\$4,964
Monsoon Scud 400 Maxi	4,000 psi (275 bar)	6,485 psi	20 lpm	415v 11kW 4 pole	TTL2028	050	ABMONSS400-A	\$6,706

Unit weights & dimensions

•		
	Weight	Freight Dim (Lxwxh) mm
Monsoon Scud 200	70 kg	700x580x550
Monsoon Scud 300	90 kg	1100x800x750
Monsoon Scud 400	90 kg	1100x800x750
Monsoon Scud 400	120 kg	1100x800x750

Accessories supplied with machine

Hose	AHW06M22X2X10	10m R2 3/8" with couplings
Gun	M4022209003	AL55 4,500 psi Pro Gun
Lance	C3924.01	700mm Stainless Steel Dual Lance
Nozzle	C915M C915500MSS	2 x Laser Cut (15° & detergent)

Pump service kits ... p86 - 87

Optional accessories FASTER, SMARTER, SAFER

Turbo Lance 60% MORE BITE

p 59

Increase the effective working pressure (EWP) of your blaster without loading the pump!



CTN255--___ (Mon 200 & 300) \$214 CTN310-_ (Mon 400 & Mon 400 M) \$262 (insert nozzle size)

Tele-wand ... REACH further

Ideal for reaching eaves & washing windows, extends to 5.5m, includes FREE harness. Quik Tip nozzle sold separately.

AGPDLTG18 \$431 AGPDCLTG18A Heavy duty \$502 QT nozzle C915___Q \$20 (insert nozzle size)

CLEAN FLAT SURFACES FAST

SLASH CLEANING TIMES BY 75%

Clean flat surfaces four times faster, leaving a streak free finish. Standard

20" Spinner \$1,247 AGPDFSCS22Z 22" Cyclone \$1,565



Grit Blast Kit ... SURFACE PREP

Remove paint & rust fast

M202903460 (Mon 200 & 300) \$233 (head, lance, nozzle, probe & hose) \$359 (Mon 400)

MTM160172 (head, probe & hose, NB nozzle & lance required)

Extra length hose ... CONVENIENT

Cleaning large plant?... reach further with these extra length Aussie Blue-Pro hoses, 5,800 psi rated, R2 wire braid hose, 3/8 female ends (M22 & M24 couplings sold separately)



AHW06FB6FB6X20 (20m) \$330 AHW06FB6FB6X30 (30m) \$499 AHW06FB6FB6X50 (50m) \$772 M212003540 (M22 QC) \$21 (2 required)

4,000 psi Hose Reel Kit .. EASY FIT

Safer & smarter working, includes reel, 30m double wire braid hose, whip hose & mounting plate

AHRPLATEMONLRG

ADHR40100D (hose reel kit) \$845 mounting bar



Drain Clearing Kit, SAFE & SIMPLE

Includes Aussie Viper Mini Reel with 60 metres of 3/16" sewer hose. Full Aussie Jetters Tool Box, including quick coupler to fit to end of blaster high pressure hose. Includes Safety Plate.





ADRAINKIT \$3,285



- 'Big Berty' heavy duty pumps designed for long, continuous operation at extremely high pressures.
- Heavy duty on-off switch with motor protection. Includes circuit breaker with thermal trip & short circuit protection in IP 65 enclosure with padlocking control.
- Heavy duty, 4 pole, three phase IP55 rated slow speed motor
- NEW Heavy duty stainless steel frame with anti-vibration dampeners, big flat free tyres & steel wheels.

- FREE ASP (Aussie Safety Protection) kit
 ... Protects pump from pressure spikes
 and excess by-pass running
- Easy fit hose reel option
- Pro accessories
- 3 phase plug not supplied

Aussie Mine Spec Versions include:

- Emergency stop
- Double insulated wire
- Lifting bar









No RTO certification required for operators

Specifications

	Pump Pressure	EWP with turbo	Flow	415v Motor	Pump	Nozzle size	Stock code	List price
Hurricane A	5,000 psi (350 bar)	8,500 psi	16 lpm	12.5kW	KTL1635	035	ABHURRICANESS	\$7,940
NEW Mine Spec Versions								

NEW Mine Spec Versions

Monsoon 400 Maxi A MS	4,000 psi (275 bar)	6,485 psi	20 lpm	11kW	TTL2028	050	ABMONSS400MMS	\$7,840
Hurricane A MS	5,000 psi (350 bar)	8,500 psi	16 lpm	12.5kW	KTL1635	035	ABHURRICANESSMS	\$8,720

Unit weight & dimensions

	Weight	Freight Dim (Lxwxh) mm
Monsoon 400 Maxi A	120 kg	1100x800x750
Hurricane A	145 kg	1100x800x450

Accessories supplied with Hurricane

Hose	AHW06FB6FB6X10	10m R2 3/8"			
Gun	MPA30450010	RL 56 5,000 psi pro gun			
Lance	MPA40025800	800mm single lance			
Nozzle	C915035M	Laser cut nozzle			
Pump service kits p86 - 87					

Optional accessories FASTER, SMARTER, SAFER

Turbo Lance 60% MORE BITE

Turbo lance/gun kit.... Increase the effective working pressure of your blaster!



Grit Blast Kit ... SURFACE PREP

p 76

p 59

Remove paint & rust fast (head, probe & hose, NB nozzle & lance required)

00

MTM160172 \$359

CLEAN FLAT SURFACES EXTRA FAST p 75

SLASH CLEANING TIMES

Aussie 28" stainless steel 5,000 psi flat surface cleaner. Clean large areas with less water, less effort with a streak free finish.



HANT28 **\$2,607** HANT4C (Multi-twister) **\$3,258**

Extra length hose ... CONVENIENT

Cleaning large plant?...

reach further with these extra length

Aussie Blue-Pro hoses, 5,800 psi rated,

R2 wire braid hose, 3/8 female ends (M24 couplings sold separately)



M212003540 (M22 QC) **\$21** (2 required) MPA26065050 (M24 QC) **\$40** (2 required)

5,000 psi Stainless Steel Hose Reel

5,000 psi rated, takes up to 80m of 3/8" hose, universal foot mount. Fits to frame on petrol versions only, otherwise wall mount.

A4418SS-REEL (ss reel only) AHW06FB6FB6X1 (1m whip hose) \$31 AE-E-90-0808 (Elbow ½"FF) \$30 AA-A-0608 (1/2"to 3/8"nipple) \$8 AA-A-90-0606 (3/8"elbow) \$22 MPA26065050 **\$40** (2 required) (M24 QC) AHRPLATEMONLRG mounting bar


Drain Clearing Kit, SAFE & SIMPLE

Includes Aussie Viper Mini Reel with 60 metres of 3/16" sewer hose. Full Aussie Jetters Tool Box, including quick coupler to fit to end of blaster high pressure hose. Includes Safety Plate.

ADRAINKIT \$3,285









- 'Big Berty' heavy duty pumps designed for long, continuous operation at extremely high pressures (* Not Raptor 12).
- Heavy duty on-off switch with motor protection. Includes circuit breaker with thermal trip & short circuit protection in IP 65 enclosure with padlocking control.
- Heavy duty stainless steel frame with anti-vibration dampeners, 13" flat free tyres & steel wheels.
- Heavy duty 4 pole three phase IP55 rated slow speed motor

- Double flange motor drive (* Not Raptor 12).
- FREE ASP (Aussie Safety Protection) kit ... Protects pump from pressure spikes and excess by-pass running
- Emergency stop
- FREE hose restraint valued at \$130
- 10 metres of 500 bar hose
- PA gun and 1050mm lance
- Class B machine requires operator RTO certification



Scan to see

Raptor demo

Specifications

Specifications								
	Pump Pressure	EWP with turbo	Flow	415v Motor	Pump	Nozzle size	Stock code	List price
Raptor 12	7,300 psi (500 bar)	12,000 psi	12 lpm	12.5kW	Udor GHC12/50	020	ABRAPTOR/12EMOT	\$11,270
Raptor 16	7,300 psi (500 bar)	12,000 psi	16 lpm	18.5kW	Bertolini RA1650	030	ABRAPTOR-16MOT	\$16,620
Raptor 21	7,300 psi (500 bar)	12,000 psi	21 lpm	21kW	Bertolini RA2150	035	ABRAPTOR/21EMOT	\$23,142

Unit weights & dimensions

0		
	Weight	Freight Dim (Lxwxh) mm
Raptor 12	130 kg	1100x800x1000
Raptor 16	185 kg	1100x800x1000
Raptor 21	220 kg	1100x800x1000

Accessories supplied with machine

Hose	A3641443109	10M 3/8" 500 bar
Gun/lance	MPA30540000	RL57 500 bar pro gun & 1050mm lance
Nozzle	See chart	Ceramic tip 500 bar nozzle 15°

Pump service kits ... p87-88

Optional 500 BAR accessories FASTER, SMARTER, SAFER

Turbo Master 500 MORE BITE

Increase the effective working pressure (EWP) of your blaster without loading the pump!

500 bar (7,300 psi) includes turbo head, gun, 800mm lance, nozzle & quick coupling nipple



Foot Valve ... MORE CONTROL

Stainless steel foot valve adds a second level of operator control, in addition to gun trigger, includes 3m whip hose AST500-M24



Grit Blast Kit ... SURFACE PREP

TPS 450, 500 bar (7,300 psi) c/w probe, plastic hose, lance, gun, nozzle & quick coupling nipple



500 bar Hose Reels & **Extra Length Hose**

500 bar reel,(7,300 psi) rated, takes up to 30m hose, universal foot mount. Does not fit onto frame, wall mount only. HAR700 \$1.452



3/8" R2 HP hose, 3/8M BSP ends, 150°C rated, for quick couplings refer p 65

A3641443209 (20m) \$976 A3641443309 (30m) \$1,246

Ceramic Nozzles ... LAST LONGER

Aussie White Tip 500 bar 0° & 15°, nozzle, ceramic insert , inlet 1/4" NPT M ... \$142





aussiepumps.com.au All prices AU\$, exclude GST, ex Sydney warehouse, July 2021

Aussie Pumps

SAFE OPERATOR PPE to 500 bar ... p 80

> AS/NZS4233.1 **CLASS B** machine Refer standard for more details

HYDRO TEK US









P39-41

1,500 psi - 4,000 psi single & three phase

Cleaning contractors, farmers, workshops, vehicle detailing, transport depots, machinery wash-down, council workshops

PORTABLE ENGINE DRIVE



Cleaning contractors, schools, hospitals, hire companies, farmers





INDUSTRIAL ENGINE DRIVE

P43-45

4,000 psi - 5,000 psi Hydrotek series

Contract cleaning, shipyards, large machinery wash-down, graffiti removal, amenities cleaning, council workshops



P46

4,000 psi, 75 dBA, 12v & 110v

Council workshops, cleaning contractors, car-parks, nightwork street scapes, mine sites



P47-48

4,000 psi - 5,000 psi Hydrotek series

Contract cleaning, shipyards, large machinery washdown, graffiti removal, amenities cleaning, council workshops



MINE SPEC HYDROTEKS

4,000 psi - 5,000 psi Hydrotek series

Big machinery washdown, shipyards & mine sites

CLEAN & CAPTURE ... HYDRO-LOOP

EPA compliant ... no wastewater enters drain Fast, environmentally friendly, clean & green.

Contract cleaning, shipyards, large machinery washdown, graffiti removal, amenities cleaning, council workshops







aussiepumps.com.au All prices AU\$, exclude GST, ex Sydney warehouse, July 2021



ELECTRIC DRIVE HOT WASH & STEAM CLEANERS

BUILT TO ENDURE AUSTRALIAN CONDITIONS

High pressure steam cleaners not only clean effectively, but steam kills micro-organisms within seconds without the use of chemical disinfectants.

Aussie Pumps has developed a range of hot wash & steam cleaners specifically for Australian conditions.

These machines are designed particularly with primary producers and earthmoving contractors in mind. A step up from European models, they feature triplex pumps, 4 pole motors, steel chassis with 4 wheels, stainless steel covers and are made to last.

Cleaning with hot water is faster, uses less chemicals & offers a more hygienic result than using cold water.

The Aussie Sizzler Hot wash, single phase, temperatures to 80°C mean this simple unit delivers on performance & longevity.

The Aussie Super Indy range includes single and three phase steamers delivering steam up to 120°C and pressures to 3,000 psi.

The Aussie Admiral range ... the ultimate in hard working steam cleaners for high demand wash bays, with pressures as high as 4,000 psi for faster cleaning and temperatures to 130°C.

STEP UP TO STEAM!

NEW AUSSIE SIZZLER HOT WASH

COMPACT | SIMPLE TO USE | BUILT TOUGH



SAVE TIME & CLEAN CHEMICAL FREE, WITH AUSSIE'S NEW COMPACT, HOT WATER BLASTER

- Heavy duty, high efficiency triplex pump with brass head & independent brass unloader (1 year pump warranty)
- Adjustable temperature to 80°C
- 4 pole slow speed, air cooled motor with thermal cut-out (10 amp plug fitted)
- Stainless steel cover for protection
- Double loop mild steel coil
- Low maintenance stainless steel boiler, high efficiency with low diesel consumption (3.2 kg/h at full temp)
- Cover lifts off for easy access to internals for maintenance and service.
- Steel chassis with four large wheels for manoeuvrability
- New accessories storage holder
- 18 litre diesel tank (high density polyethylene)

Optional accessories FASTER, SMARTER, SAFER

Turbo Lance 60% MORE BITE

Increase the effective working pressure (EWP) of your blaster without loading the pump!



CLEAN FLAT SURFACES FAST

SLASH CLEANING TIMES BY 75% Clean flat surfaces four times faster,

leaving a streak free finish. Standard nozzles included.

AGPDFSCS22Z **\$1,565** (22" Cyclone, stainless steel)



5,000 psi Stainless Steel Hose Reel

Store extra length hoses, suited for hot water hose up to 5,000 psi, must be wall mounted.

HAR150	(ss reel only)	\$660
HAR151	(holds up to 75m)	\$831
AHW06FB6FB6X2	(2m whip hose)	\$45
MPA13.5051.51	(3/8" nipple)	\$44
M212003540	(M22 OC)	\$21

- Multifunction safety control ...
 - Delayed Total Stop ... stops machine 30 seconds after the gun trigger closes ... SAVES FUEL
 - Micro-leak detection ... Stops the machine in case of leaks in hydraulic circuit
 - Nozzle clogged control ... Stops the machine if the nozzle in the end of the lance is blocked
 - Flooding prevention system
 - Intelligent Auto Switch Off ... Switches off machine after 20 minutes of non use.
 - Dry running Protection ... stops the machine when no water is supplied
 - Ignition boiler delay ... Ensures low fume emissions when boiler starts up.
- Optional stainless steel protective roll frame & lifting bar (as shown in image)

Specifications

Specificat									
	Pressure	EWP with turbo	Flow	Max Temp	Motor	Pump	Nozzle size	Weight	Unit dimensions (Lxwxh) mm
Aussie Sizzler	1,800 psi (130 bar)	3,100 psi	10 lpm	80°C	240v, 2.7kW, 4 pole	Interpump	035	100 kg	820 x 630 x 870

Stock codes & prices

Aussie Sizzler	FS-D1310P4M	\$4,773
SS Protective frame	AFRAMES/SIZZLER	\$743

Accessories supplied with machine

Hose	AHW06M22X2X8	8m R2 3/8
Gun	M4022209003	AL55 4,500 psi Pro Gun
Lance	C3905.14	700mm single lance
Nozzle	C915035M	Laser Cut (15°)



DESIGNED TOUGH FOR AUSSIE CONDITIONS



SUPER INDY SERIES

- Slow speed, 4 pole, IP56 motor (1400 rpm) for reliable long life performance.
- Heavy duty slow speed triplex pump with brass head & ceramic pistons (1 year warranty)
- Mild steel heavy duty coil with 2 year coil warranty
- Stainless steel coil option with 3 year coil warranty
- 18 litre diesel fuel tank
- High pressure detergent injection
- Stainless steel cover, 250mm wheels & heavy duty steel chassis with bumper

- Flexible coupling between motor and pump for a smoother, cooler drive
- Low water cut-out warning light control, prevents damage to machine
- Low fuel sensor & warning light
- Timed Total Stop—auto shut down
- Safety thermostat to protect pump
- Micro-leak detection with warning light
- 15 amp plug fitted on single phase unit. No plug supplied on three phase unit
- Class A ... no operator certification required

Specifications

Super Indy Mk 3	Pressure	EWP with turbo	Flow	Max Temp	4 pole Motor	Pump	Nozzle size	Weight	Freight Dim (LxWxH)
Single phase	1,500 psi (100 bar)	2,600 psi	12 lpm	120°C	240v 2.2kW 15 amp plug	Interpump EL1713DX	055	120kg	1070 x 740 x 920 mm
Three phase	3,000 psi (200 bar)	4,785 psi	16 lpm	120°C	415v 5.5kW	Interpump WS151DX	045	190kg	1070 x 740 x 920 mm

Coil options

	Mild steel coil		Stainless steel coil	
Super Indy Mk 3 Single phase	FS/INDDS1012MV3 (IDAC40280)	\$5,984	FS/INDDX1012MV3 (IDAC40281)	\$6,898
Super Indy Mk 3 Three phase	FS/INDDS2016TV3 (IDAC40282)	\$6,818	FS/IND3DX2016T (IDAC40283)	\$7,848

Replacement accessories

Hose	AHW06M22X2X8	8m R2 3/8
Gun	M4022209003	AL55 4,500 psi Pro Gun
Lance	C3905.14	700mm single lance
Nozzle	C915 M	Laser Cut (15°)

MADE TOUGH FOR

Optional accessories FASTER, SMARTER, SAFER

Turbo Kit 60% MORE BITE

Increase the effective working pressure (EWP) of your blaster without loading the pump!



(insert nozzle size) \$214

CLEAN FLAT SURFACES FAST

SLASH CLEANING TIMES BY 75% Stainless steel flat surface cleaners

Clean four times faster, leaving a streak free finish. Standard nozzles included



AGPDFSC22Z

(22" Cyclone, 80°C max) \$1,565

HANT28

(28" Twister, 120°C max) \$2,413



Extra length hose ... CONVENIENT

Cleaning large plant?... reach further with these extra length

Aussie Blue-Pro hoses, 5,800 psi rated. R2 wire braid hose, 3/8 female ends (M22 couplings sold separately)



AHW06FB6FB6X10 (10m) \$199 AHW06FB6FB6X20 (20m) \$330 AHW06FB6FB6X30 (30m) AHW06FB6FB6X50 (50m) \$772

M212003540 (M22 QC) \$21 (2 required)

5,000 psi Stainless Steel Hose Reel

Store extra length hoses, suited for hot water hose up to 5,000 psi, must be wall



HAR150 (ss reel only) HAR151 \$831 (holds up to 75m) AHW06FB6FB6X2 (2m whip hose) \$45 MPA13.5051.51 (3/8" nipple) \$44 M212003540 (M22 QC)

Wet/Dry Vacs ... SUPER SUCKERS

VF13 10 litres \$430

detailing

VC44

VC61

Pick up waste water or use for vehicle



3,000 PSI & 4,000 PSI ... SUPER HEAVY DUTY SERIES



- Slow speed, 4 pole, IP56 motor (1400 rpm) for reliable long life performance
- Heavy duty slow speed triplex pump with brass head & ceramic pistons
- Mild steel heavy duty coil with 2 year coil warranty
- Stainless steel coil option with 3 year coil warranty
- 18 litre diesel fuel tank
- High pressure detergent injection
- Stainless steel cover, 250mm wheels & heavy duty steel chassis with bumper

- Flexible coupling between motor and pump for a smoother, cooler drive.
- Low water cut-out warning light control, prevents damage to machine
- Low fuel sensor & warning light
- Timed Total Stop—auto shut down
- Safety thermostat to protect pump
- Micro-leak detection with warning light
- No plug supplied
- Class A ... no operator certification required

Specifications

	Pressure	EWP with turbo	Flow	Max Temp	4 pole Motor	Pump	Nozzle size	Weight	Freight Dim (lxwxh)
Admiral Mk 3	3,000 psi (200 bar)	4,785 psi	19 lpm	130°C	415v 6.6kW	Interpump WS102DX	065	220kg	1070 x 740 x 920 mm
Admiral 4000	4,000 psi (275 bar)	6,485 psi	15 lpm	130°C	415v 6.6kW	Interpump WS251DX	040	190kg	1070 x 740 x 920 mm

Coil options

Gun

Lance

Nozzle

	Mild steel coil		Stainless steel coil	
Admiral Mk 3	FHD191 ADMIRAL IDAC40566	\$7,940	FHD190ADMIRALSS IDAC40571	\$8,945
Admiral 4000	FHD275ADMIRAL IDAC40648	\$8,945		CLASS A
Accessories sup	plied with machine			BLASTER AS/NZS 4233.1
Hose	AHW06M22X2X8	8m R2 3/8	· ·	M3/INZS 4233.1

AL55 4,500 psi Pro Gun

700mm single lance

Laser Cut (15°)



Optional accessories FASTER, SMARTER, SAFER

Turbo Kit 60% MORE BITE

p 59

Increase the effective working pressure (EWP) of your blaster without loading the pump!



CTN310-__

(insert nozzle size) \$262

CLEAN FLAT SURFACES FAST

SLASH CLEANING TIMES BY 75% Stainless steel flat surface cleaners

Clean four times faster, leaving a strea free finish. Standard nozzles included

AGPDFSC22Z \$1,565 (22"Cyclone 80°C max) HANT28 \$2,413 (28" Twister 120°C max)



Extra length hose ... CONVENIENT

Cleaning large plant?...

reach further with these extra length **Aussie Blue-Pro hoses**, 5,800 psi rated, R2 wire braid hose, 3/8 female ends (M22 couplings sold separately)



AHW06FB6FB6X10 (10m) \$199
AHW06FB6FB6X20 (20m) \$330
AHW06FB6FB6X30 (30m) \$499
AHW06FB6FB6X50 (50m) \$772
M212003540 (M22 QC) \$21 (2 required)

5,000 psi Stainless Steel Hose Reel p 73

Store extra length hoses, suited for hot water hose up to 5,000 psi, must be wall





 HAR150
 (ss reel only)
 \$660

 HAR151
 (holds up to 75m)
 \$83

 AHW06FB6FB6X2
 (2m whip hose)
 \$45

 MPA13.5051.51
 (3/8" nipple)
 \$44

 M212003540
 (M22 QC)
 \$21

Wet/Dry Vacs ... SUPER SUCKERS

Pick up waste water or use for vehicle detailing

VF13 10 litres \$430 VC44 30 litres \$504 VC61 50 litres \$754 VC72 75 litres \$933



Drain Clearing Kit, SAFE & SIMPLE

Includes Aussie Viper Mini Reel with 60 metres of 3/16" sewer hose. Full Aussie Jetters Tool Box, including quick coupler to fit to end of blaster high pressure hose. Includes Safety Plate.

ADRAINKIT

\$3,285



C3905.14

C915 _ _ _ M

M4022209003



HOT TO TROT ... MOBILE STEAMERS

4,000 PSI HEATWAVE

HONDA MOBILE STEAM CLEANER







- Compact, portable hot water pressure washer, just connect to the tap.
- 12 volt, diesel fired burner
- Honda GX390 petrol engine
- Spiralast coil with lifetime warranty
- Flat free tyres on steel wheels
- Stainless steel frame with integrated handle
- Direct drive industrial triplex pump
- Integrated burst disc and safety relief valve
- Hose & pro accessories
- Battery ordered separately

Specifications

Aussie Heatwave A 4,000 psi (275 bar) 13 lpm 130°C GX390 e/start GP triplex (3200 rpm) 165 kg 1.2x0.7x0.9	Safety Class	Pressure	Flow	Max Temp	Honda Engine	Pump	Weight	Dimensions (LxWxH) m
	Α	4,000 psi (275 bar)	13 lpm	130°C	GX390 e/start	GP triplex (3200 rpm)	165 kg	1.2x0.7x0.9

Stock codes & pricing

Accessories supplied with machine

Hose	AHW06M22X2X15	15m R2 3/8"
Gun	CGPDG5010	5,000 psi pro gun
Lance	C3905.16 CD10073	1200mm single lance QC for nozzle
Nozzle	C915Q	Quick tip nozzle

HOT LINK ... 12V DIESEL FIRED BURNER

CONVERTS A COLD WATER BLASTER INTO A HOT WATER UNIT

Suits any cold water pressure cleaner to 4,000 psi with flows to 20 lpm

12 volt diesel fired burner

Built-in diesel fuel tank (11 litres).

Flow switch control

Requires 14 amp charge

Integrated burst disc and safety relief valve

2.7 metres of 5,000 psi hose

Stainless steel frame with stainless steel boiler housing and powder coated steel chassis

Requires a 12 volt power source

Specification	,,,,							
	s/code	Safety Class	Max Pump Pressure	Max Flow	Max Temp	Weight	Dimensions (LxWxH) m	
Hot Link	HCPHL5DC	Α	4,000 psi (275 bar)	20 lpm	99°C	127 kg	0.91 x 0.43 x 0.83	\$4,690

Optional accessories FASTER, SMARTER, SAFER

Turbo Kit 60% MORE BITE

Turbo lance/gun kit.... Increase the effective working pressure of your blaster!



CLEAN FLAT SURFACES FAST

SLASH CLEANING TIMES BY 75% Stainless steel flat surface cleaners Clean four times faster, leaving a streak free finish. Standard nozzles

AGPDFSC22Z \$1.565 (22"Cyclone 80°C max) HANT28 \$2,413

(28" Twister 120°C max)



p 59

Extra length hose ... CONVENIENT

Cleaning large plant?...

reach further with these extra length Aussie Blue-Pro hoses, 5,800 psi rated, R2 wire braid hose, 3/8 female ends

(M22 couplings sold separately)

AHW06FB6FB6X10 (10m) \$199 AHW06FB6FB6X20 (20m) \$330 AHW06FB6FB6X30 (30m) \$499 AHW06FB6FB6X50 (50m) \$772

(M22 QC) \$21 (2 required) M212003540

5,000 psi Stainless Steel Hose Reel

Store extra length hoses, suited for hot water hose up to 5,000 psi, must be wall mounted.

HAR150 (ss reel only) HAR151 (holds up to 75m) \$831 AHW06FB6FB6X2 (2m whip hose) \$45 MPA13.5051.51 (3/8" nipple) \$44 M212003540 (M22 QC) \$21

Drain Clearing Kit, SAFE & SIMPLE

Includes Aussie Viper Mini Reel with 60 metres of 3/16" sewer hose. Full Aussie Jetters Tool Box, including quick coupler to fit to end of blaster high pressure hose Includes Safety Plate.





ADRAINKIT \$3.285

Grit Blast Kit ... SURFACE PREP











NEW HYDRO-HUSH EASY ON THE EARS

75dBA)

PAGE 46

The Aussie Hydroteks are compact, high pressure, mobile steam cleaners with serious cleaning power. They are designed to perform heavy duty cleaning without needing any outside electrical power.

An invaluable tool for councils, property management companies, service companies, mechanics or anyone requiring a mobile cleaning solution for dirt, grease and grime.

Key features

- Industrial petrol/diesel engines
- Heavy duty triplex pump
- Rugged 'Pro-Tect-It' frame with stainless steel panels for corrosion resistance
- 12v or 110v low voltage diesel fired burner system
- Available skid mounted, trailer mounted
- Clean & capture system option
- Mine spec versions ... super tough





AUSSIE HYDROTEK ... PETROL BRILLIANT DESIGN, TOUGH ON GRIME



- Heavy duty triplex pump with brass
- Adjustable temperature up to 130°C, steam melts grease without using chemicals.
- Water tight electrical box with battery.
- Robust "Pro-tect" steel frame with builtin lifting eyes for transportation.

Optional accessories FASTER, SMARTER, SAFER

Turbo Kit 60% MORE BITE

Turbo lance/gun kit.... Increase the effective working pressure of your blaster!



CTN400-___GLK

(insert nozzle size)

\$430

CLEAN FLAT SURFACES FAST

SLASH CLEANING TIMES BY 75% Stainless steel flat surface cleaners Clean four times faster, leaving a streak free finish. Standard nozzles included

AGPDESC227 \$1.565 (22"Cyclone 80°C max) HANT28 \$2,413 (28" Twister 120°C max)



Extra length hose ... CONVENIENT

Cleaning large plant?... reach further with these extra length Aussie Blue-Pro hoses, 5,800 psi rated, R2 wire braid hose, 3/8 female ends (M22 couplings sold separately)

AHW06FB6FB6X10 (10m) \$199 AHW06FB6FB6X20 (20m) \$330 AHW06FB6FB6X30 (30m) \$499 AHW06FB6FB6X50 (50m) \$772

M212003540 (M22 QC) \$21 (2 required)

5,000 psi Stainless Steel Hose Reel p 73

Store extra length hoses, suited for hot water hose up to 5,000 psi, must be wall mounted



HAR150	(ss reel only)	\$660
HAR151	(holds up to 75m)	\$830
AHW06FB6FB6X2	(2m whip hose)	\$45
MPA13.5051.51	(3/8" nipple)	\$44
M212003540	(M22 QC)	\$21

Drain Clearing Kit, SAFE & SIMPLE

Includes Aussie Viper Mini Reel with 60 metres of 3/16" sewer hose. Full Aussie Jetters Tool Box, including quick coupler to fit to end of blaster high pressure hose. Includes Safety Plate.

ADRAINKIT

\$3,285







pump head

4,000 psi

EWP Safety Pressure Engine Nozzle size Loop Class with Temp option COMMERCIAL SERIES ... up to 20 hrs per week, 12v low voltage burner 045 (15°, 40°) 035 (25° 4,000 psi HSS40005HH 130°C No lpm INDUSTRIAL SERIES ... over 20 hrs per week, 110v burner with on-board generator

130°C

Stock codes & pricing

HSC40005HAF#

	Weight & Dimensions (LxWxH) m								
HSS40005HH	HSS40005HH	204 kg	1.2x0.66x1.02	\$17,480					
HSC40005HAF#	HSC40005HAF	306 kg	1.3x0.9x1.0	\$20,025					

6,485

Accessories supplied with machine

Hose	AHW06M22X2X15	15m R2 3/8"
Gun	CGPDG5010	5,000 psi pro gun
Lance	C3905.16 + CD10073	1200mm single lance
Nozzle	C915Q	Quick tip nozzle
Nozzle	C915Q	Quick tip nozzle

• Stainless steel panels and boiler cover.

*Two gun operation available on AF

versions (reduces flow to 10 lpm per

Bertolini


025,035,045,

050 (all 15°)

Battery ordered separately

AUSSIE HYDROTEK ... DIESEL BRILLIANT DESIGN, TOUGH ON GRIME

Aussie Pumps

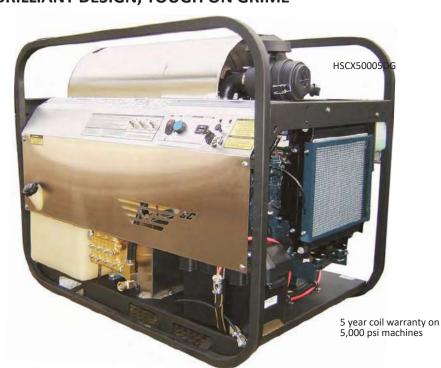

- Heavy duty triplex pump with brass pump
- Adjustable temperature up to 130°C, steam melts grease without using chemicals
- Water tight electrical box with battery
- Robust "Pro-tect" steel frame with builtin lifting eyes for transportation
- Stainless steel panels and boiler cover
- "Two gun operation available on AF versions (reduces flow to 10 lpm per gun)



Specifications







see p 47- 48

	Safety Class	Pressure	EWP with turbo	Flow lpm	Burner voltage	Engine	Pump	Nozzle size	Loop option
HSCX40005DB12	Α	4,000 psi (275 bar)	6,485 psi	20	12v	Kubota 17HP	Interpump TSF 1819	050 (Q type, 15°,25°,40°)	No
HSCX40005DG	Α	4,000 psi (275 bar)	6,485 psi	20	110v	Kubota 17HP	Interpump TSF 1819	050 (Q type, 15°,25°,40°)	Yes
HSCX50005DG	В	5,000 psi (350 bar)	8,500 psi	18	110v	Kubota 17HP	Interpump TSF 1821	040 (M, 15°,25°,40°)	Yes

Stock codes & pricing

Hose

Gun

Lance

Accessories supplied with machine

	Weight & Dimensions (LxWxH) m								
HSCX40005DB12	HSCX40005DB12	310 kg	1.3 x 0.82 x 1.2	\$28,933					
HSCX40005DG	HSCX40005DG	310 kg	1.3 x 0.82 x 1.2	\$30,177					
HSCX50005DG*	HSCX50005DG	395 kg	1.3 x 0.9 x 1.0	\$32,830					

5,000 psi pro gun

1200mm single lance

AHW06M22X2X15 15m R2 3/8"



supplied with emergency stop & FREE hose restraint

CLASS B

Refer standard for more details

Class B machines

Optional accessories FASTER, SMARTER, SAFER

Turbo Kit 60% MORE BITE

Turbo lance/gun kit.... Increase the effective working pressure of your blaster!



CTN400-_ _ _GLK (insert nozzle size) \$430 CTN400-___GLKM24 (insert nozzle size) \$441

CLEAN FLAT SURFACES FAST

SLASH CLEANING TIMES BY 75% Stainless steel flat surface cleaners Clean four times faster, leaving a streak free finish. Standard nozzles

(22"Cyclone 80°C max) \$2,413 (28" Twister 120°C max)

AGPDFSC22Z \$1.565



Extra length hose ... CONVENIENT

Cleaning large plant?...

reach further with these extra length Aussie Blue-Pro hoses, 5,800 psi rated, R2 wire braid hose, 3/8 female ends (M22 & M24 couplings sold separately

AHW06FB6FB6X10 (10m) \$199 AHW06FB6FB6X20 (20m) \$330 AHW06FB6FB6X30 (30m) \$499

AHW06FB6FB6X50 (50m)

(M22 QC) \$21 (2 required) M212003540 MPA26065050 (M24 QC) \$40 (2 required)

5,000 psi Stainless Steel Hose Reel

\$772

Store extra length hoses, suited for hot water hose up to 5,000 psi, must be wa mounted



Drain Clearing Kit, SAFE & SIMPLE

Includes Aussie Viper Mini Reel with 60 metres of 3/16" sewer hose. Full Aussie Jetters Tool Box, including quick coupler to fit to end of blaster high pressure hose. Includes Safety Plate.



\$3,285





aussiepumps.com.au All prices AU\$, exclude GST, ex Sydney warehouse, July 2021

CGPDG5010

C3905.16 +

CD10073

NEW AUSSIE HYDRO-TEK HYDRO-HUSH

Cleaning while the city sleeps



- Kubota diesel engine with low oil/Hi temp cut out, silenced muffler with spark arrester & emergency stop
- Noise readings 75dBA at 7m
- 4,000 psi heavy duty pump
- 12v & 110v diesel fired burner systems
- Noise shielding, insulated panels
- Extra large built-in diesel fuel tank for extended running (136L)
- Water tight electrical box with battery
- Robust "Pro-tect" stainless steel frame with built-in lifting eyes for transportation.

- Lifetime warranty on coil
- Stainless steel panels & boiler cover

Trailer Spec ...

Heavy duty Australian made flat bed trailer (Single axle on HSS units & tandem axle on HSC units)

- Hot dipped galvanised finish
- New wheels & tyres & wheels
- Fitted with brakes
- Heavy duty tool box for storage of wash down accessories ... HSC units only.
- Trailer provided with on road NSW blue slip ready for registration.

Optional accessories FASTER, SMARTER, SAFER

Turbo Lance Kit 60% MORE BITE p 59

Turbo lance/gun kit.... Increase the effective working pressure of your blaster!



(insert nozzle size)

\$430

CLEAN FLAT SURFACES EXTRA FAST p 75

SLASH CLEANING TIMES BY 75% Stainless steel flat surface cleaners Clean four times faster, leaving a

streak free finish. Standard nozzles included

AGPDFSC22Z \$1,565 (22"Cyclone 80°C max) HANT28 \$2,413 (28" Twister 120°C max)



Drain Clearing Kit, SAFE & SIMPLE

Includes **Aussie Viper Mini Reel** with 60 metres of 3/16" sewer hose. Full **Aussie Jetters Tool Box**, including quick coupler to fit to end of blaster high pressure hose.

Includes Safety Plate.

ADRAINKIT \$







Specifications

	Safety Class	Pressure	EWP with turbo	Flow	Max °C	Burner voltage	Engine	Pump	Nozzle size	Loop option
HSCX40005D12-HUSH	Α	4,000 psi (275 bar)	6,485 psi	20 lpm	121	12v	Kubota 20HP	Interpump TSF 1819	050 (Q type, 15°,25°,40°)	No
HSCX40005D-HUSH	Α	4,000 psi (275 bar)	6,485 psi	20 lpm	121	110v	Kubota 20HP	Interpump TSF 1819	050 (Q type, 15°,25°,40°)	Yes

Stock codes & pricing

Stock codes & pricing	Stock codes a prienty								
	Hydrotek Unit only			(Hydrot	mount version ek + 1,000L tank & stacker hose reels)		Trailer mount version (Hydrotek + 1,000L tank & double stacker hose reels)		
		Dim (LxWxH) m			Dim (LxWxH) m			Dim (LxWxH) m	
HSCX40005D12-HUSH	HSCX40005DB12SI	1.3 x 0.82 x 1.2	\$37,999	HSCX40005DSM	2.03 x 1.3 x 1.2	\$47,655	HSCX40005DJAW	3.8 x 2.3 x 1.7	\$54,780
HSCX40005D-HUSH	HSCX40005DBSI	1.3 x 0.82 x 1.2	\$39,980	HSCX40005D12SM	2.03 x 1.3 x 1.2	\$49,064	HSCX40005D12JAW	3.8 x 2.3 x 1.7	\$58,970

Accessories supplied with machine

Hose	AHW06M22X2X15	15m R2 3/8"
Gun	CGPDG5010	5,000 psi pro gun
Lance	C3905.16 + CD10073	1200mm single lance

6

Aussie Pumps



HYDRO-TEK MOBI STEAM BLASTERS

The **Hydrotek series** are high pressure, mobile steam cleaners with serious cleaning power. They are self contained so no external power or water source is required.



A skid mounted mobile steam cleaner with it's own water supply that is ideal for on site cleaning for plant and equipment!

- Aussie Hydrotek self contained steam cleaner
- 1,000L water tank with float, drain valve, low level cut out sensor, lid with strainer and level indicator (Additional sizes available.)
- Heavy duty skid base with anti-vibration dampeners and lifting points (cube mounted option available)

- Double stacker hose reel (supplied separately)
 - High pressure reel and base mount with 30 metres of 3/8" R2 high pressure outlet hose and screw quick couplings
 - Low pressure reel and 30 metres ¾" heavy duty reinforced supply hose
- "Two gun operation available on selected models

Optional accessories FASTER, SMARTER, SAFER

Turbo Kit 60% MORE BITE

Turbo lance/gun kit.... Increase the effective working pressure of your blaster!



(insert nozzle size)

\$430

CLEAN FLAT SURFACES FAST

SLASH CLEANING TIMES BY 75% Stainless steel flat surface cleaners

Clean four times faster, leaving a streak free finish. Standard nozzles included

AGPDFSC22Z **\$1,565** (22"Cyclone 80°C max) HANT28 **\$2,413** (28" Twister 120°C max)



Drain Clearing Kit, SAFE & SIMPLE

Includes Aussie Viper Mini Reel with 60 metres of 3/16" sewer hose. Full Aussie Jetters Tool Box, including quick coupler to fit to end of blaster high pressure hose and safety plate.






ADRAINKIT \$3,285









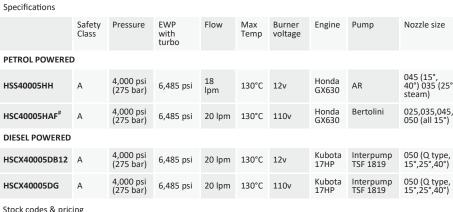

	Weight & Dimensions (LxWxH) m								
HSS40005HH	HSS40005HHSM	1150 kg	2.03 x 1.3 x 1.2	\$25,988					
HSC40005HAF#	HSC40005HAFSM	1250 kg	2.03 x 1.3 x 1.2	\$28,554					
HSCX40005DB12	HSCX40005DB12SM	1300 kg	2.03 x 1.3 x 1.2	\$33,051					
HSCX40005DG	HSCX40005DGSM	1300 kg	2.03 x 1.3 x 1.2	\$37,628					



Accessories supplied with machine

Hose	AHW06M22X2X10	10m R2 3/8"
Gun	CGPDG5010	5,000 psi pro gun
Lance	C3905.16 + CD10073	1200mm single lance

SEE PAGE 46 FOR HYDRO-HUSH VERSION ... 75dBA



HYDROTEK JAW SYSTEMS ... JUST ADD WATER

MOBILE CLEANING POWER

Heavy duty self contained systems with integrated water tank ... truly independent cleaning for professional cleaning contractors. Ideal for urban graffiti removal or remote cleaning applications

- Hydrotek self contained steam cleaner .. Diesel or petrol powered with diesel fired
- Poly impact resistant water tank with position locking lid & water filter (larger tanks available on request)
- 20" Aussie Spinner flat surface cleaner
- Heavy duty stainless steel hose reel with 30 m high pressure hose
- Low pressure hose reel with 30 metres of low pressure supply hose
- Hand gun with stainless steel 700mm dual lance & nozzle kit (except on machines fitted for dual gun operation)

Safety Class

- "Two gun operation available on selected models (reduces flow to 10 lpm per gun)
- Tool box options

Trailer Spec ...

Heavy duty Australian made flat bed trailer (Single axle on HSS units & tandem axle on HSC

- Hot dipped galvanised finish
- New wheels & tyres & wheels
- Fitted with brakes

Burner voltage

Temp

130°C

130°C

130°C

130°C

- Heavy duty tool box for storage of wash down accessories ... HSC units only.
- Trailer provided with on road NSW blue slip ready for registration.

Honda

GX630

Kubota 17HP

Bertolini

Optional hose reel for two gun set -up

Optional accessories FASTER, SMARTER, SAFER

Turbo Lance Kit 60% MORE BITE

Turbo lance/gun kit.... Increase the effective working pressure of your blaster!



Nozzle size

045 (15°,

40°) 035 (25° steam)

025,035,04 5, 050 (all 15°)

050 (Q type, 15°,25°,40°)

(insert nozzle size)

\$430

CLEAN FLAT SURFACES EXTRA FAST

SLASH CLEANING TIMES BY 75% Stainless steel flat surface cleaners

Clean four times faster, leaving a streak free finish. Standard nozzles included

AGPDFSC22Z **\$1,565** (22"Cyclone 80°C max) HANT28 \$2,413



(28" Twister 120°C max)

Drain Clearing Kit, SAFE & SIMPLE

with 60 metres of 3/16" sewer hose. Full Aussie Jetters Tool Box, including quick coupler to fit to end of blaster high pressure hose Includes Safety Plate

ADRAINKIT



Includes Aussie Viper Mini Reel



DIESEL POWERED HSCX40005DB12 A

Stock codes & pricing

Specifications

PETROL POWERED

HSS40005HH

HSC40005HAF

HSCX40005DG

Dimensions (LxWxH) m HSS40005HH HSS40005HHJAW 4 x 2 x 1.8 \$33,988 HSC40005HAF HSC40005HAFJAW \$36,547 HSCX40005DB12 HSCX40005DB12IAW \$40.796 4 x 2 x 1 8 HSCX40005DG HSCX40005DGJAW 4 x 2 x 1.8 \$49,404

FWP /

turbo

6.485 psi

20 lpm

20 lpm

20 lpm

Accessories supplied with machine

AHW06M22X2X30 30m R2 3/8" CGPDG5010 Gun 5,000 psi pro gun C3905.16 + CD10073 1200mm single lance

4,000 psi (275 bar)

SEE PAGE 46 FOR HYDRO-HUSH VERSION ... 75dBA

see p 49-50

HYDROTEK MINE SPEC SERIES

.. mobile steam cleaning



Lockable battery isolator **HYDRO TEK.US**

Stainless steel protection panels & boiler

Diesel powered burner with variable temperature control

cover

Built-in diesel fuel tank. (68 L)

- Water tight electrical box with battery
- 4,000 psi machines ... Lifetime warranty 5,000 psi machines ... 5 year coil warranty

The HSCX series "Hammerhead" are diesel powered hot water mobile wash units with serious cleaning power.

They are engineered for performance, durability and corrosion resistance.

- Powerful Kubota diesel, multi cylinder
- Heavy duty triplex pump with nickel plated pump head

Specifications

	Safety Class	Pressure	EWP with turbo	Flow	Max Temp	Burner voltage	Engine	Pump	Nozzle size
DIESEL POWERED									
HSCX40005D12	Α	4,000 psi (275 bar)	6,485 psi	20 lpm	130° C	12v	Kubota 17HP	Interpump TSF 1819	050 (Q type, 15°,25°,40°)
HSC50005D*	В	5,000 psi (350 bar)	8,500 psi	18 lpm	130° C	110v	Kubota 20HP	Interpump TSF 1821	040 (M type, 15°,25°,40°)

Stock codes & pricing

	Weight Dimensions (LxWxH) m					
HSCX40005D12	HSCX40005D12MS	270 kg	1.3x0.86x1.0	\$34,339		
HSC50005D*	HSC50005DMS*	294 kg	1.4x0.86x1.0	\$37,743		

Accessories supplied with machine

Hose	AHW06M22X2X10	15m R2 3/8"
Gun	CGPDG5010	5,000 psi pro gun
Lance	C3905.16 + CD10073	1200mm single lance



Class B machines supplied with emergency stop & FREE hose restraint

Optional accessories FASTER, SMARTER, SAFER

Turbo Kit 60% MORE BITE

Turbo lance/gun kit.... Increase the effective working pressure of your blaster!



CLEAN FLAT SURFACES FAST

SLASH CLEANING TIMES BY 75% Stainless steel flat surface cleaners Clean four times faster, leaving a streak free finish. Standard nozzles included

AGPDFSC22Z \$1.565 (22"Cyclone 80°C max) HANT28 \$2,413 (28" Twister 120°C max)



Extra length hose ... CONVENIENT

Cleaning large plant?...

reach further with these extra length Aussie Blue-Pro hoses, 5,800 psi rated, R2 wire braid hose, 3/8 female ends (M22 & M24 couplings sold separately)

AHW06FB6FB6X10 (10m) AHW06FB6FB6X20 (20m) \$330 AHW06FB6FB6X30 (30m) \$499 AHW06FB6FB6X50 (50m) \$772 M212003540 (M22 QC) \$21 (2 required) MPA26065050 (M24 QC) \$40 (2 required)

5,000 psi Stainless Steel Hose Reel

Store extra length hoses, suited for hot water hose up to 5,000 psi, must be wall or trailer mounted.

HAR150	(ss reel only)	\$660
HAR151	(holds up to 75m)	\$831
AHW06FB6FB6X2	(2m whip hose)	\$45
MPA13.5051.51	(3/8" nipple)	\$44
M212003540	(M22 QC)	\$21
MDARGEGED	(M24 OC)	\$40

Drain Clearing Kit, SAFE & SIMPLE

Includes Aussie Viper Mini Reel with 60 metres of 3/16" sewer hose. Full Aussie Jetters Tool Box, including quick coupler to fit to end of blaster high pressure hose. Includes Safety Plate.



ADRAINKIT \$3,285



Personal Protective Gear 500 bar

Overalls Aprons



- Gloves **Jackets**
- **Boots** Trousers

MINE SPEC STEAM CLEANERS





A skid or trailer mounted Mine Spec series mobile steam cleaner with it's own water supply. Ideal for on site cleaning!

Aussie Mine Spec Skid/Trailer mount details

- Aussie Hydrotek self contained steam cleaner
- 1,000L water tank with float, drain valve, low level cut out sensor, lid with strainer and level indicator (Additional sizes available.)
- Heavy duty skid base or trailer with anti-vibration dampeners and lifting points (cube mounted option available)
- Double stacker unit (supplied separately) with
 - High pressure reel and base mount with 30 metres of 3/8" R2 high pressure outlet hose and screw quick couplings
 - low pressure reel and 30 metres 34" heavy duty reinforced supply hose

Aussie Mine Spec trailer specs ...

Heavy duty tandem axle trailer

- Hot dipped galvanised finish
- New 15" 6 stud Land Cruiser pattern wheels
- New 31.5 mud pattern tyres
- Extra wide mudguards to suit
- AL-KO Ring coupling with hand brake plate
- Supplied with Brakes
- Heavy Duty tool box for wash down accessories
- Vin numbered, weighed and blue slipped ready for Registration

Optional Extreme Series trailer ... +\$9,880

4.5 Tonne GVM Australian made tandem axle flat bed trailer will be provided with the following specifications:-

- Hot dipped galvanised finish
- Tandem AL-KO 2.5 tonne IRS torsion tube suspended axles fitted with 6 stud hubs & 3,000 kg bearing sets
- Four 15" white spoke wheels with off road mud pattern tyres & checker plate mudguards
- Heavy duty landing leg & two stabilizer legs
- Hitch attach options
- Checker plate front and rear mount decks
- Electric brakes standard, other options available

Aussie Mine spec includes

- Emergency stop
- Fire extinguisher (2 Kg)
- Lockable battery isolator





Class B machines supplied with emergency stop & **FREE hose restraint**

Specifications

	Safety Class	Pressure	EWP with turbo	Flow	Max Temp	Burner voltage	Engine	Pump	Nozzle size
DIESEL POWERED									
HSCX40005D12	Α	4,000 psi (275 bar)	6,485 psi	20 lpm	130°C	12v	Kubota 17HP	Interpump TSF 1819	050 (Q type, 15°,25°,40°)
HSC50005D*	В	5,000 psi (350 bar)	8,500 psi	18 lpm	130°C	110v	Kubota 20HP	Interpump TSF 1821	040 (M type, 15°,25°,40°)

Stock codes & pricing

	Skid mount version (Hydrotek + 1,000L tank & double stacker hose reels)				Trailer mount version (Hydrotek + 1,000L tank & double stacker hose reels)		
		Weight	Dim (LxWxH) m			Dim (LxWxH) m	
HSCX40005D12	HSCX40005D12MSM	420 kg	2.03 x 1.3 x 1.2	\$39,077	HSCX40005D12MTR	4 x 2 x 1.8	[#] \$51,152
HSC50005D*	HSC50005DMSM	480 kg	2.03 x 1.3 x 1.2	\$44,252	HSC50005DMTR	4 x 2 x 1.8	[#] \$53,820

Accessories supplied with machine

Hose	AHW06M22X2X30	30m R2 3/8"
Gun	CGPDG5010	5,000 psi pro gun
Lance	C3905.16 + CD10073	1200mm single lance







Coles

HYDRO-LOOP...IT'S CLEAN & GREEN



The Hydro-Loop system means fast, efficient cleaning, with a unique 'Clean and Capture' system. You can comply with EPA regulations.

That's right...the site is not contaminated, but left in pristine condition! This is not just a machine ... it's a business opportunity without the ties of a franchise.

You have the support of **Aussie's** marketing machine and the freedom to build your business, your way.

You set your own price, work your own hours and keep all your profits.

Successful **Aussie Hydro-Loop Club** members are motivated, and have the drive to generate work from car parks, shopping centres, service stations and property managers.

What is the Aussie Hydro-Loop?

It's a self contained, trailer mounted, hot-water pressure washer with built in recovery unit, filters and tank. These units combine the cleaning power of high pressure and steam with a vacuum filtration system that collects the waste water, preventing it from entering storm drains.

The wastewater is collected via either the **Hydro Twister** flat surface cleaner or a Scupper placed at a dammed drain point. The water is then filtered through 5 stages and returned to the supply tank for reuse.

System features

- Aussie Hydrotek engine drive industrial steam cleaner
- Vacuum filtration system with two stage motor, and two replaceable cartridge filters
- 1,000 litre poly impact resistant water tank
 (750 litres on Junior)
- Double axle trailer with swivel jockey wheel and spare (registration approval pending). Junior version is mounted on a single axle trailer.
- Double stacker hose reels (US made) ...
 - One stainless steel reel with 30m of high pressure hose
 - One hose reel with 30 metres of low pressure garden hose.
- Heavy duty 5,000 psi rated hand gun
- Stainless steel 1200mm single lance with "Snap-On" nozzle kit
- 24.5" heavy duty Twister Vac rotary floor cleaner (Option on Junior Loop)
- 1½" mesh strainer with bleed valve, 60 micron
- 1.8m rubber, sand filled boom, 3m sand dam tubes, sand not included
- 50mm x 15m spiral vacuum hose with scupper attachment (galvanised vac hose reel on Maxi)





HYDRO-LOOP JUNIOR

Extra mobile, for fast set up & cleaning



- Aussie Hydrotek engine drive industrial steam cleaner
- Vacuum filtration system with two stage motor, and two replaceable cartridge filters (NEW AZV88)
- 750 litre poly impact resistant water tank
- Single axle trailer

- A stainless steel high pressure hose reel
- Package includes containment berms, scupper & vacuum hose
- Optional 24.5" heavy duty Twister Vac rotary floor cleaner to clean & recover wastewater

Specifications

	Safety Class	Pressure	EWP with turbo	Flow	Max Temp	Engine
HSC40005HAF [#]	Α	4,000 psi (275 bar)	6,485 psi	20 lpm	130°C	Honda GX630

	Dimensions (LxWxH) m					
HSC40005HAF#	HSC40005HAFVRJN	3.7 x 2 x 1.8	\$36,850			

HYDRO-LOOP MAXI

Heavy duty systems suited to large jobs



Specifications

The state of							
	Safety Class	Pressure	EWP with turbo	Flow	Max Temp	Engine	Pump
Petrol version							
HSC40005HAF#	Α	4,000 psi (275 bar)	6,485 psi	20 lpm	130°C	Honda GX630	Bertolini TTK 2130
Diesel versions							
HSCX40005DG	Α	4,000 psi (275 bar)	6,485 psi	20 lpm	130°C	Kubota 17HP	Interpump TSF 1819
HSCX40005D-HUSH	Α	4,000 psi (275 bar)	6,485 psi	20 lpm	130°C	Kubota 20HP	Interpump TSF 1819

Stock codes & pricing

	Dimensions (LxWxH) m				
HSC40005HAF#	HSC40005HAFVR	4 x 2 x 1.8	\$46,488		
HSCX40005DG	HSCX40005DGVR	4 x 2 x 1.8	\$61,440		
HSCX40005D-HUSH	HSCX40005D-HVR	4 x 2 x 1.8	\$72,103		

HYDRO-HUSH LOOP Clean while the city sleeps



- Aussie Hydrotek engine drive industrial steam
- Vacuum filtration system with two stage motor, and two replaceable cartridge filters (NEW AZV88 ... more power for longer recovery lengths)
- 1000 litre poly impact resistant water tank
- Dual axle heavy duty trailer with tool box
- Two stainless steel hose reels: one with 30m of high pressure hose, and the other with 30 metres of low pressure supply hose
- 24.5" heavy duty Twister Vac rotary floor cleaner to clean & recover wastewater
- More Hydrotek options available ... call Aussie for more details

6.

Basic plumbing kit

Stand-by filter kit

Aussie Pumps




BUILD YOUR OWN HYDRO-LOOP SYSTEM

FOR TRUCK OR TRAILER MOUNTING **GET WITH THE EPA REGS!**

You can build your own EPA compliant, environmentally friendly clean and capture system.

You'll need a top quality Hydrotek steam cleaner with onboard generator and a vacuum assisted recover/filtration unit. Choose one of our compatible HSC series Hydrotek

Hydro-Loop component checklist...

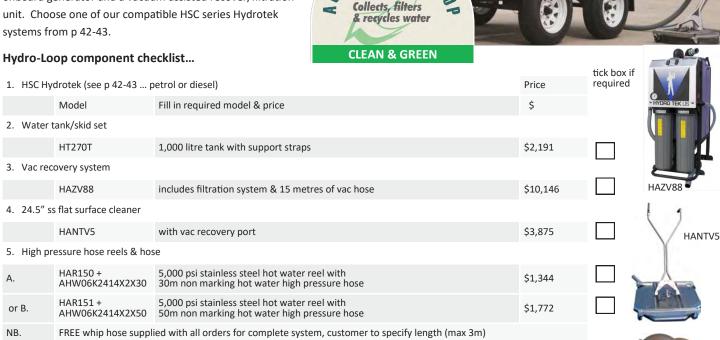

HASF01 additional set of filters ready to swap in as required \$637 Total cost of FREE installation guidelines, footprint & recommended trailer spec selected kit available, suitable for installation by any competent engineering workshop

including suction filter & couplings, details available on request

REPLACEMENT FILTERS & BERMS FOR RECOVERY UNIT

Part Number	Description	
Part Number	Description	
HVFH07	Cartridge, 4.5" x 20", pleated polyester, 20 micron	\$105
HVFH10	Cartridge 4.5" x 20" ,10 micron, pleated carbon	\$177
HVFH25	Cartridge, 4.5" x 20", string wound, 20 micron	\$56
HVFH50	Cartridge 4.5" x 20" ,string wound, 50 micron	\$56
HVB040	Oil skimmer bag	\$154
HVFB41	Duo flow dirt bag	\$93
HVFB05	Bag filter 7 x 32 - 5 micro (fits on tank lid)	\$46
HVFB8S	Capture strainer bag, 800 micron (optional - for recovery only mode)	\$21
HASF01	Filter start up pack , completer series of filters	\$637
HMEV15	Vacuum motor 115v AC	\$428
HPS120	Transfer pump 12v	\$738
HDHV20	Vacuum hose 15 metres x 2"	Poa
HZMAT6	Sand berm 10' - sand not included	\$112
HATP75	Vacuum scupper pick up device 12"	\$341
HZMAT7	Deluxe sand berm 6' - sand not included	\$335
HATP40	Hydro vacuum arch, 6' ground pick device	poa



Always be armed with an extra filters for fast change out when on site.

\$1,200

+GST



The HVFB41 duo-flow dirt bag works as you debris catcher when recovering and processing. Switch to HVFB8S strainer bag when capture pump only is used.



HAR151

HZMAT7 Deluxe berm for water retention and recovery using HATP75 (scupper)

SAVE 10%

HASF01 Start up filter kit contains:

HVFH07 Pleated cartridge filter 4.5" x 20", 20 microns

- HVF10 Carbon cartridge filter 4.5" x 20", 10 microns 1 x
- HVFB05 One bag filter for water tank 7 x 32 5 microns 1 x
- HVFB41 Duo flow dirt bag, 400 micron mesh top, 100 micron bottom mesh bag



HIGH PRESSURE ACCESSORIES



GUNS & LANCES p56

TURBOS p58

NOZZLES p60

MOTORS, ENGINES & SERVICE KITS

p62

UNLOADERS, **THERMAL DUMP SAFETY VALVES**

p64



COUPLINGS, SWIVELS, GAUGES, INJECTORS, FILTERS

p66



HOT WATER BOILER PARTS **p68**



HOSE & HOSE REELS p72



ACCESSORIES GRIT BLAST KITS, FOAMERS, **TELEWANDS, SPINNERS,** CARTS, WHEELS

p74



500 BAR ACCESSORIES p78



500 BAR PPE

p80






AUSSIE TOP GUNS ... COMPLETE PRO GUN/LANCE KITS

SAVE MONEY, SAVE TIME ... HAPPINESS IS THE FEEL OF A NEW GUN



AUSSIE 4,000 PSI PRO-GUN KIT-DUAL






- 4,000 psi stainless steel dual lance (1019mm)
- 2 x Laser cut nozzles (including one detergent, low pressure nozzle)

	nozzle	single buy	10 pack buy
			(each)
APROGUN-DUAL-035	035	\$310	\$233
APROGUN-DUAL-045	045	\$310	\$233

PA 5,000 PSI PRO-GUN KIT



- 5,000 psi rated 800mm stainless steel single lance with melted
- Laser cut nozzle & nipple to connect hose sold separately

MPA3045600	gun/lance kit	\$213
MPA13.5050.51	nipple	\$37
C915 M	nozzle	\$22



AUSSIE 5,000 PSI PRO-GUN KIT—SINGLE

- 5,000 psi Aussie Pro Gun
- (M22 inlet, 4,000 psi or M24 5,000 psi rated options)
- 5,000 psi rated stainless steel single lance
- Laser cut nozzle (030, 035, 045)
- Packed weight 2kg
- Boxed dimensions 1180mm x 210mm x 45mm (900mm kit)

	lance	nozzle	single buy	10 pack buy
				(each)
APROGUN-900-030	900mm	030	\$175	\$131
APROGUN-900-035	900mm	035	\$175	\$131
APGUN-900-035M24	900mm	035	\$186	\$140
APROGUN-900-045	900mm	045	\$175	\$131
APGUN-900-045M24	900mm	045	\$186	\$140
APROGUN-1200-035	1200mm	035	\$188	\$141
APROGUN-1200-045	1200mm	045	\$188	\$141

NEW PA 500 BAR PRO-GUN KIT



- RL 57 7,250 psi (500 bar), 28 lpm, 160°C, permissible pressure 8,000 psi (Inlet %" BSP F)
- 5,800 psi (400 bar) 1050mm lance with melted handle, permissible pressure 6,400 psi, 160°C, Outlet ¼" NPT F
- Ceramic nozzle sold separately (page 60)

MPA30473000 gun/lance kit \$621



WARNING ... LEAKING GUNS ARE DANGEROUS!





GREAT RANGE, HUGE STOCKS, EXCEPTIONAL PRICES



Match the symbols for best compatibility between gun, lance, turbo and hose

HOBBY GUN UPGRADE KIT

(Pro kit for hobby machines)

Hobby gun kit complete with AL13 gun, Vario lance & 8 metres of wire braid pro high pressure hose Includes 14mm to 15mm coupling adaptor



AGPDGLNH120 \$151

NEW COMMERCIAL AL13

(Aussie Cougar & AB22, AB30)



AL13 (with M22 inlet)

3,340 psi (230 bar), 30 lpm, 60°C Permissible pressure 3,700 psi

M22 QC M M22 QC F Outlet

300mm lance extension with user friendly grip

Use with vario lance or single lance

1 tecomec

M4021108007 \$66

NEW PROFESSIONAL AL55

(all Aussie 3,000 & 4,000 psi blasters & steam cleaners)

AL55 (with M22 & swivel)

4,500 psi (310 bar), 45 lpm, 160°C Permissible pressure 5,075 psi

M22 OC F

M22 QC M Inlet 🚜 tecomec

Outlet 300mm lance extension, use with single or double lanc

M4022209003

AGP100882 o-ring (suits couplings with back-up ring) \$0.38 C01177407600 back up ring (suits couplings with back-up ring) \$5

INDUSTRIAL VEGA + EXTENSION

PA VEGA gun & S3 extension

4,500 psi (310 bar), 40 lpm, 160°C Permissible pressure 5,100 psi, 1.1kg 370mm melted handle, stainless steel pipe 3/8" BSP M (with swivel)

Outlet M22 OC F

MPA30208300 \$157

(25 pack bulk buy ... call for details)

INDUSTRIAL SPRAY GUN

(all Aussie 5,000 psi blasters & steam cleaners)

5,000 psi (350 bar), 40 lpm, 160°C

%" G F ¼" G F Outlet

extended single lance

BEST BUY Use with extended double lance or

CGPDG5010 \$85

(20 pack bulk buy ... call for details)

Replacement safety clip

INDUSTRIAL SPRAY GUN

(with swivel)

\$93

RL37 with swivel

4,500 psi (310 bar), 40 lpm, 160°C

Permissible pressure 5,000 psi, 564 gms

%" BSP F (with swivel) Inlet

Outlet 1/4" BSP F

Use with extended double lance

or extended single lance

MPA30122000

(15 pack bulk buy ... call for details)

INDUSTRIAL RL56 COMPENSATED

Spray Gun (used on Aussie Predators & Hurricanes)

5,100 psi (350 bar), 30 lpm, 160°C Permissible pressure 5,650 psi, 672gms

Inlet 3/8" RSP F Outlet 1/4" BSP F

(8 pack bulk buy ... call for details)



8,000 PSI RL 84 SPRAY GUN

(all Aussie Raptor Hydro-blasters)

7,300 psi (500 bar), 80 lpm, 100°C, 1.3kg

Permissible pressure 8,100 psi

½" BSP F Inlet Outlet 1/2" BSP F Use P/A single lance MPA30540000

(300mm shoulder rest MPA30506000 \$53)



aussiepumps.com.au









Match the symbols for best compatibility between gun, lance, turbo and hose

T10 VARIO ZOOM NOZZLE & LANCE





3,000 psi (200 bar), 30 lpm, 60°C, Permissible pressure 3,200 psi

585mm Inlet M22 Use with AI 13

tecomec

C4723.45.115 \$89

LANCE EXTENSION







Stainless steel extension with melted handle 4,000 psi (275 bar), permissible pressure 5,000 psi,

40 lpm, 150°C, Inlet ¼" G M, Outlet ¼" G M

(If used with AL13 or AL55 gun requires nipple C1500.05 \$9) C3804 00 \$40

300 mm



STAINLESS SINGLE LANCE







tecomec

with melted handle, tip protector & nozzle holder

(If used with AL13 or AL55 gun requires nipple C1500.05 \$9)

4,500 psi (310 bar), permissible pressure 5,075 psi, 40 lpm, 150°C, Inlet ¼" G M, Outlet ¼" NPT F

1200 mm C3905.16 \$69 400 mm C3930.00 \$40 700 mm C3905.14 \$46 1500 mm C3905.17 \$83 900 mm C3905.15 \$54 2000 mm C3905.19 **\$100**

Requires M series nozzle, sold separately, p60

To use with Q series (Quik Tip) nozzles add fixed QC (CD10073 \$26) Replacement nozzle protector C3718.02 \$9

SINGLE LANCE WITH QC





Convenient nozzle changeover



4,000 psi (275 bar), 40 lpm, 60°C

M22 M Inlet Outlet OC

400 mm FNA7103550 \$48 700 mm FNA7103261 \$74

Requires Q series nozzle, sold separately, p60

STAINLESS DOUBLE LANCE





Infinite pressure control with the twist of the wrist

Heavy duty, stainless steel double lance, suits all pro guns **3,625 psi (250 bar),** 40 lpm, 150°C, permissible pressure 4,060 psi

Length 684mm Inlet M22 M Outlet 2x1/4" NPT F


C3924.01 S/code:

BEST BUY

Require two M series nozzles, sold separately, p60



PA EXTENDED SINGLE LANCE





5,000 psi (350 bar), 30 lpm, 160°C, permissible pressure 5,650 psi (390 bar),

1/4" BSP M Inlet 1/4" NPT F Outlet

800 mm MPA40025800 \$110 MPA40026100 \$132 1050 mm

Requires M series nozzle, sold separately, p60 (8 pack bulk buy ... call for details)



STAINLESS DOUBLE LANCE with extension



Heavy duty, stainless steel double lance, suits all pro guns **3,625 psi (250 bar),** 40 lpm, 150°C, permissible pressure 4,060 psi

Length 1019mm Inlet ¼" G M Outlet 2 x 1/4" NPT F S/code: C3916.03 tecomec \$168

Require two M series nozzles, sold separately, p60

RL 800 500 BAR PA SINGLE S/S LANCE



\$418

Requires M series nozzle, sold separately, p60

MPA30500092

1250mm







SAVE WATER & CUT TIMES ... TURBO BOOST

Aussie turbos use the water's velocity to increase the effective working pressure (EWP). Let Aussie Turbomaster do the work for you!

AUSSIE TURBOMASTER





Commercial series (220 bar)

3,200 psi, 60 lpm, EWP up to 4,500 psi, 500mm, M22 inlet

Nozzle size:

Suits: Cougar, AB30, F140, Black Box, Scud 100 M4042100004 lance & head \$157

AUSSIE TURBOMASTER 310







Professional series, 500mm lance & head

4,400 psi (310 bar) 24 lpm, EWP up to 6,294 psi

Max temp: 90°C Inlet (lance) M22 x 1.5 M Weight: 600 gms

CTN310-lance & head \$262


Sizes available ... 030, 035, 045

PRO TURBO GUN KITS ... FAST, TOOL FREE CHANGEOVER



Professional turbo gun lance kit 255 bar, 310 bar & 350 bar EWP up to 8,500 psi*, 900mm lance

Max temp: 90°C Inlet (gun) ... see below



Up to 3,500 psi, boosts EWP to max 4,785 psi* (All Brands) suits AB30 CTN255-030GLK

(M22)\$309 CTN255-045GLK suits Scud 350 (M22) \$309 Up to 4,400 psi, boosts EWP to max 6,295 psi* (All Brands) CTN310-030GLK suits AB40 \$335 (M22)Up to 5,000 psi, boosts EWP to max 8,500 psi* (All Brands) CTN400-035GLK suits Scud 400, Atlas \$430 (M22)CTN400-050GLK suits Ultra A, Mon 400M (M22)\$430 CTN400-035GLKM24 Pred A, Hurricane (M24) \$441 CTN400-040GLKM24 HSC 5,000 psi (M24)\$441 CTN400-045GLKM24 Pred A diesel (M24) \$441

AUSSIE TURBOMASTER 255







Professional series, 500mm lance & head

3,700 psi (255 bar) 40 lpm, EWP up to 4,785 psi, 300

Max temp: 90°C Inlet (lance) M22 x 1.5 M Weight: 450 gms

\$214 lance & head CTN255-

Sizes available ... 030, 035, 045, 050

AUSSIE TURBOMASTER 400



Professional series, 500mm lance & head 5,800 psi (400 bar) 40 lpm, EWP up to 8,500 psi

Max temp: 90°C Inlet (lance) M22 x 1.5 M Weight: 900 gms

CTN400lance & head \$394 Sizes available ... 030, 035, 045, 050, 055, 075

500 BAR TURBO GUN KIT



7,300 psi, 500 bar, 40 lpm, EWP up to 12,000 psi RL 57 spray gun with 1050mm lance, gun, with QC M24 nipple & 500 bar turbo head.

CTN500-020GLK suits Raptor 12 \$2,244 CTN500-030GLK suits Raptor 16,18 \$2,244 sCTN500-030GLK suits Raptor 16,18 \$2,244

AUSSIE TURBOMASTER HEADS

Semi pro series 3,400 psi (234 bar) EWP up to 4,785 psi Max temp: 90°C

Call for bulk pricing

Professional series 3,700 psi (255 bar) EWP up to 4,785 psi Max temp: 90°C 1/4" F QC plug Inlet 300 gms Weight



(*dependant on pump capability)

Professional series 4.400 psi (310 bar) EWP to 6,294 psi Max temp: 90°C 1/4" F Inlet Weight 450 gms



\$222

Professional series 5,800 psi (400 bar) EWP to 8.500 psi Max temp: 90°C ¾" F Weight 750 gms

CTN400-___H

Sizes available ...



500 bar series 7.300 psi, 500 bar EWP to 12,000 psi Max temp: 90°C 1/4" F Inlet Weight 700 gms



CTN500-___H

Sizes available ...

020, 025, 030, 035, 040, 045, 050, 055, 060, 065, 070, 075,

Repair kit

CTN500- REP \$1,122



FNΙΔ4Ω143

CTN255-___H

Sizes available ... 020, 025, 030, 035, 040, 045, 050, 055, 060, 065, 070, 075, 100, 150

Repair kit CTN255-REP \$111 Sizes available ... 030, 035, 045

CTN310-___H

Repair kit CTN310- REP

\$121

Repair kit CTN400-REP **\$145**

030, 035, 040, 045, 050, 055,

060, 065, 070, 075, 080, 085



HIGH PRESSURE NOZZLES

CHANGE THAT NOZZLE

SINGLE BUY NOZZLES

Look up size & angle of required nozzle in selection table then add a 'M' for a Laser Cut nozzle or 'Q' for a Quik Tip nozzle

Laser Cut (Inlet: 1/4" NPT)



Add 'M' to code (eg C900080M) (NOT AVAILABLE IN 40

BEST BUY

\$22

Detergent Nozzle

C915500MSS \$22

Quik Tip

Add 'Q' to code (eg C900080Q)

\$20

Detergent Nozzle (Black 65°)

C9654000 \$20

LASER CUT 'M' SERIES NOZZLE 5 PACKS

S/code	Qty in pack	Tip angle							
C915M-P1	5	15	\$96						
Packs available for sizes 020 to 065									
C915500MSS-P1	5	Detergent	\$96						



Worn nozzles cause loss of pressure & can lead to machine failure. Nozzles should be changed on a regular basis.

Drain cleaning nozzles ... see p 30

Nozzle selection table

-				
Size	O ° (pencil jet)	15° (fan)	25 ° (fan)	40° (fan)
020	C900020	C915020	C925020	C940020
025	C900025	C915025	C925025	C940025
030	C900030	C915030	C925030	C940030
035	C900035	C915035	C925035	C940035
040	C900040	C915040	C925040	C940040
045	C900045	C915045	C925045	C940045
050	C900050	C915050	C925050	C940050
055	C900055	C915055	C925055	C940055
060	C900060	C915060	C925060	C940060
065	C900065	C915065	C925065	C940065
070	C900070	C915070	C925070	C940070
075	C900075	C915075	C925075	C940075
080	C900080	C915080	C925080	C940080
085	C900085	C915085	C925085	C940085
090	C900090	C915090	C925090	C940090
095	C900095	C915095	C925095	C940095
100	C900100	C915100	C925100	C940100
105	C900105	C915105	C925105	C940105
110	C900110	C915110	C925110	C940110
115	C900115	C915115	C925115	C940115
120	C900120	C915120	C925120	C940120
125	C900125	C915125	C925125	C940125

Quik Tip (Q) nozzles 5 pack...

QUIK TIP 'Q' SERIES NOZZLE 5 PACKS



Tip: Use a fixed quick coupler to connect a Q series nozzle to a lance with a 1/4" NPT female outlet (see below)

S/code Nozzle size C105082Q 030 \$74 C105083Q 035 \$74 C1050840 040 \$74 C105085Q 045 \$74 C105087Q 055



Red ... 0° Pencil jet for maximum effect Cleaning heavily

stained areas

Green ... 25°

General purpose nozzle for larger areas

White ... 40° Lightly stained flat surfaces

Black ... 65 Low pressure detergent nozzle







GP FIXED QUICK COUPLING

Max pressure 6,000 psi (410 bar), stainless steel quick connect couplers to connect Aussie Quik Tip nozzles to end of lance

	S/code	Inlet	Outlet	
Α	CD10072	1/4" QC	¼ G - F	\$25
В	CD10073	1/4" QC	1⁄4 G - M	\$25



AUSSIE WHITE TIP ... 500 bar

Ceramic Tipped Nozzles SAFER, LONGER LASTING

500 bar 0°& 15°, nozzle material ceramic, inlet 1/4" NPT M ... \$142 each

Size	O° (pencil jet)	15° (fan)
025	M0124006100	M0124006110
030	M0124006200	M0124006210
035	M0124006300	M0124006310
040	M0124006400	M0124006410
045	M0124006500	M0124006510
050	M0124006600	M0124006610







Change your nozzle regularly; nozzles wear with use and can use How to Read the Chart cause your pump and system to fail.

Correct nozzle sizing is essential for your machine's correct performance.

- 1. Main chart area is flow in litres per minute.
- 2. Look up the pump psi in the heading and read down that column to the approximate flow. Read off the MEG size in the row heading.
- 3. Drop one size because calculation should always be made using 93% of pump flow.

		Flow	in I/	min	at th	e ind	icate	d pre	essur	es																	
MEG	Sizing for vario & grit-blast	BAR	30 BAR	40 BAR	50 BAR	60 BAR	70 BAR		90 BAR	100 BAR	110 BAR	120 BAR	130 BAR	140 BAR	150 BAR	160 BAR	180 BAR	200 BAR		250 BAR	280 BAR	310 BAR		370 BAR	400 BAR		500 BAR
20	heads	290 psi	435 psi			870 psi	1015 psi		l .				1885 psi	2030 psi			2610 psi			3625 psi	4060 psi	4560 psi	1				7250 psi
020	0,99	2	2,5	2,8	3,2	3,5	3,7	4	4,2	4,5	4,7	4,9	5,1	5,3	5,5	5,7	6	6,4	6,7	7,6	7.7	8.1	8.2	8.8	9.2	9.8	10.3
025	1,00	2,5	3.1	3.5	4	4.3	4.7	5	5.3	5.6	5.9	6.1	6.4	6.6	6.9	7.1	7.5	7.9	8.3	8.9	9.4	9.9	10.3	10.8	11.2	11.9	12.5
030	1,09	3,1	3,7	4,3	4,8	5,3	5,7	6,1	6,3	6,8	7,2	7,4	7,7	8	8,3	8,7	9,2	9,6	10	10.8	11.4	12	12.5	13.1	13.6	14.4	15.2
035	1,15	3,6	4,4	5,1	5,6	6,2	6,7	7,3	7,7	8,1	8,4	8,8	9,2	9,6	9,9	10,4	10,9	11,4	12	12.6	13.4	14.1	14.8	15.4	16.0	17.0	17.9
040	1,19	4,2	5,2	5,9	6,6	7,3	7,8	8,4	8,9	9,4	9,8	10,3	10,7	11,1	11,5	11,9	12,4	13,2	14,1	14.1	14.7	16.0	16.9	17.5	18.2	19.3	20.3
045	1,27	4,5	5,5	6,4	7,1	7,8	8,4	9	9,6	10,2	10,6	11,2	11,6	11,8	12,5	12,6	13,2	14,4	15	16.3	17.2	18.1	19.0	19.5	20.6	21.8	23.0
050	1,35	5	6,2	7,1	8	8,7	9,4	10	10,7	11,3	11,7	12,1	12,9	13,4	13,8	14,3	15,1	15,9	16,9	17.9	18.9	19.9	20.9	21.8	22.7	24.2	25.5
055	1,4	5,6	6,8	7,8	8,7	9,6	10,3	11,1	11,8	12,4	13	13,5	14,1	14,7	15,2	15,7	16,4	17,5	18,6	19.8	20.9	22.0	23.0	24.0	25.0	26.5	28.0
060	1,47	6	7,4	8,6	9,6	10,4	11,3	12,1	12,8	13,6	14,2	14,9	15,5	16	16,6	17,2	18	19,2	20,4	21.5	22.9	24.1	25.3	26.4	27.4	29.1	30.6
065	1,52	6,6	8	9,3	10,4	11,3	12,3	13,2	14	14,7	15,5	16,1	16,7	17,4	18	18,6	19,4	20,7	22	22.9	24.8	26.1	27.3	28.5	29.6	31.4	33.1
070	1,6	7,1	8,6	10	11,2	12,2	13,2	14,1	15	15,8	16,6	17,3	18	18,7	19,3	20,1	21,3	22,3	23,7	25.3	26.8	28.2	29.5	30.8	32.0	33.9	35.8
075	1,65	7,6	9,3	10,7	12	13,1	14,2	15,2	16,1	16,9	17,7	18,5	19,2	20	20,7	21,4	22,6	23,8	25,3	27.0	28.6	30.1	31.5	32.9	34.2	36.2	38.2
080	1,7	8	9,8	11,3	12,7	14	11,1	16,1	17,1	18	18,9	19,7	20,5	21,3	22	22,8	23,8	25,4	27	28.8	30.5	32.0	33.6	35.0	36.4	36.8	40.7
085	1,75	8,5	10,4	12,1	13,5	14,8	16	17,1	18,1	19,1	20	20,9	21,7	22,5	23,4	24	25,5	27	28,2	30.7	32.5	34.2	35.8	37.3	38.8	41.2	43.4
090	1,8	9.8	11.5	13.3	14.8	16.3	17.6	18.8	19.9	21.0	22.0	23.0	23.9	24.8	25.7	26.6	28.2	29.7	31.1	33.2	33.5	37.0	38.7	40.4	42.0	44.5	47.0
095	1,85	9.7	11.9	13.4	15.4	16.8	18.1	19.4	20.0	21.7	22.7	23.8	24.7	25.9	26.9	27.8	29.5	31.1	32.6	34.8	36.8	38.7	40.6	42.3	44.0	46.7	49.2
100	1,9	10	12.3	14.2	16.0	17.8	19.2	20.6	21.8	23.0	24.1	25.2	26.2	27.2	28.2	29.1	30.9	32.5	34.1	35.4	38.5	40.5	42.4	44.2	46.0	48.8	51.4
110	1,98	11.1	13.6	15.7	17.6	19.3	20.8	22.2	23.6	24.9	26.2	27.4	28.5	29.6	30.6	31.6	33.5	35.4	37.1	39.5	41.8	44.0	46.1	48.1	50.0	53.0	55.9
120	2,08	12.1	14.8	17.2	19.2	21.0	22.7	24.3	25.8	27.1	28.1	29.4	36.0	31.8	32.9	34.0	36.0	38.0	39.8	42.4	45.0	47.6	50.2	51.9	54.0	57.3	60.4
125	2,13	12.7	15.6	18.0	20.1	22.0	23.8	25.5	27.0	28.5	29.5	30.8	32.1	33.3	34.5	35.6	37.8	39.8	41.8	44.5	46.9	49.3	51.6	53.9	56.0	59.4	62.6
130	2,16	13.2	16.1	18.6	20.8	22.8	24.6	26.3	27.9	29.4	30.8	32.2	33.5	34.8	36.0	37.2	38.9	42.5	44.5	47.4	50.2	52.8	55.3	57.7	60.0	63.6	67.1
140	2,26	14.2	17.4	20.0	22.4	24.5	26.5	28.4	30.1	31.7	33.2	34.7	36.1	37.5	38.8	40.1	42.5	44.8	47.0	50.1	53.2	56.3	59.4	61.7	64.4	67.9	71.6
150	2,34	15.1	18.5	21.3	23.9	26.1	28.3	30.2	32.1	33.8	35.6	37.2	38.7	40.2	41.6	43.0	45.6	48.0	50.4	53.7	57.0	59.9	62.7	65.4	68.0	72.1	76.0
160	2,41	16.2	19.8	22.9	25.6	28.0	30.3	32.4	34.4	36.2	37.8	39.5	41.1	42.7	44.2	45.6	48.4	51.0	53.5	57.0	60.2	63.4	66.4	69.2	72.0	76.4	80.5
180	2,54	18.2	22.3	25.7	29.0	31.8	34.3	36.7	38.6	41.0	43.0	44.9	46.7	48.5	50.2	51.9	55.0	58.0	60.8	64.8	68.6	72.2	75.6	78.9	82.0	87.0	91.7
200	2,69	20.1	24.7	28.5	32.5	35.6	38.5	41.1	43.6	46.0	48.2	50.4	52.4	54.4	56.3	58.2	61.7	65.1	68.2	72.7	77.0	81.0	84.8	88.5	92.0	97.6	102.9
250	2,99	25.2	30.9	35.7	39.8	43.6	47.1	50.4	53.4	56.4	59.1	61.8	64.3	67.0	69.1	71.3	75.1	79.8	84.0	89.3	94.6	99.9	105.2	109.8	114.1	120.9	127.5



YANMAR ENGINES & ACCESSORIES

Model	Stock Code	Description	List Price
Yanmar (L-N series)			
L48N recoil start	EL48N5-MTMRYI	4.8HP, 3/4" keyway shaft, recoil	\$2,220
L48N electric start	EL48N5-METMRYI	4.8HP, 3/4" keyway shaft, electric	\$2,870
L48N recoil start	EL48N5-PTMYI	4.8HP, 3/4" pump shaft (threaded), recoil	\$2,220
L48N electric start	EL48N5-PETMYI	4.8HP, 3/4" pump shaft (threaded), electric	\$2,870
L70N recoil start	EL70N5-MTMRYI	7HP, 1" keyway shaft, recoil	\$2,830
L70N electric start	EL70N5-METMRYI	7HP, 1" keyway shaft, electric	\$3,480
L70N electric start	EL70N5-PEATMYI	7HP, 3/4" pump shaft (threaded), electric	\$3,480
L70N electric start	EL70N5-PETMYI	7HP, 1" pump shaft (threaded), electric	\$3,480
L100N electric start	EL100N5-METMRYI	10HP, 1" keyway shaft, electric	\$3,990
Engine Care Kits			
L48N	EAPFKL48N	Includes air filter element, fuel filter element, oil filter strainer, fuel filter strainer, 1 litre of SAE40 oil	
L70N & L100N	EAPFKL100N	Includes air filter element, fuel filter element, oil filter strainer, fuel filter strainer, 2 litres of SAE40 oil	\$195

PE-Nano PE-Manual

Yes

Yes

Yes

Yes

PE-Auto

Yes

Yes

Yes

Yes \$3,591





Yanmar engine care kit

Yanmar engine protection kits for
L series engines





OPTIONAL EXTRAS

7 Day Repeatable Start/Stop Timer

Daily Start/Stop Timer (Mon-Sun)

Keyless Start & Stop

Battery Monitoring

99hr Run Timer Fault Indicator Fault Error Log 2 Wire Start/Stop Twin Float Start/Stop Loss of Prime

Low Oil Pressure Protection

Tachometer

Hourmeter

Remote Stop (E-stop) (must be bought with PE panel)	\$427	\$427	\$427
Remote 3/4G Monitoring & Control Telemetry Package			\$5,719 (includes PE Auto)
Transducer for pump Pressure & Protection		\$427	\$427
8 pin customer plug for auto start		\$120	\$120

Yes

Yes

Yes

ENGINE FUEL COMSUMPTION RATES

Honda			
	fuel tank size (I)	Fuel consumption at 3600 rpm (lph)	Approx. running time (hours)
GX120	2	1	2.00
GX160	3.1	1.4	2.21
GX200	3.1	1.7	1.82
GX240	5.3	2.1	2.52
GX270	5.3	2.5	2.12
GX390	6.1	3.7	1.65

Running times are calculated from engine manufacturers figures and are based on 100%.

Times will vary depending on site conditions.

RECOMMENDED ENGINE OIL ... SAE 10W-30

HATZ DIESEL ENGINES & ACCESSORIES

			/ / /
Model	S/code	Description	
Hatz (B se	eries)		
1B20	E1B20	4.2HP recoil start	\$1,820
1B30E	E1B30E	6.4HP electric start	\$2,732
1B40E	E1B40E	9HP electric start	\$3,694
1B50E	E1B50E	11HP electric start	\$4,147

Hatz Engine Service Kits

Service kit includes air filter, fuel filter, head gasket, O-rings & engine oil

			_
1B20	EH85280455	Includes air filter, fuel filter, head gasket, o-rings, 1 litre of 15W-40 oil	\$177
1B30E	EH85280456	Includes air filter, fuel filter, head gasket, o-rings, 1 litre of 15W-40 oil	\$184
1B40E/ 1B50E	EH85280457	Includes air filter, fuel filter, head gasket, o-rings, 2 litres of 15W-40 oil	\$212

Yanmar

	fuel tank size (I)	Fuel consumption at 3600 rpm (lph)	Approx. running time (hours)	Fuel consumption at 3000 rpm (lph)	Approx. running time (hours)
L48	2.4	1.2	2.00	1.05	2.29
L70	3.3	1.7	1.94	1.55	2.13
L100	5.4	2.5	2.16	2.2	2.45

Hatz

	fuel tank size (l)	Fuel consumption at 3600 rpm (lph)	Approx. running time (hours)	Fuel consumpti 3000 rpm
1B20	3	1.05	2.86	0.9
1B30E	5	1.68	2.98	1.45
1B40E	5	2.35	2.13	1.95
1B50E	5	2.54	1.97	2.05

Fuel consumption at 3000 rpm (lph)	Approx. running time (hours)
0.9	3.33
1.45	3.45
1.95	2.56
2.05	2.44



* *

GREAT RANGE, HUGE STOCKS, EXCEPTIONAL PRICES

MONSOON ELECTRIC MOTORS ... HOLLOW SHAFT



Suit direct coupling to most pump models, four pole 1450 rpm, 50Hz, slow speed IP56 spray protection. As used in the Aussie Monsoon series.

- Quality Italian made
- 12 months warranty
- Easy fit & compact

*c/w 16 amp capacitor

S/code	kW	НР	Motor	Shaft mm		Suits	
A140060M001	2.2	3	1 phase, 240V	24	*IP56	WEL/WBL	\$588
A140060T001	5.5	7.5	3 phase, 415V	24	IP56	TTV/TTL	\$788
A140060T002	7.5	10	3 phase, 415V	24	IP56	TTV/TTL	\$1,425
A140060T004	7.5	10	3 phase, 415V	30	IP56	KT/KTV	\$1,425
A140060T025	11	15	3 phase, 415V	24	IP56	TTL/TTK	\$1,680
A140060T003	11	15	3 phase, 415V	30	IP56	KT/KTV	\$1,680
A140060T020	12.5	17	3 phase, 415V	24	IP56	KTL	\$1,820
A140060T024	12.5	17	3 phase, 415V	24	IP56	KT/KTV/HDS	\$1,820
A140060T009	12.5	17	3 phase, 415V	30	IP56	TTK/RA	\$1,820
A140060T026	15	20	3 phase, 415V	24	IP56	RA/RAL/RAS	\$2,486







GREAT RANGE, HUGE STOCKS, EXCEPTIONAL PRICES

BERTOLINI APR 120

2,000 psi (140 bar), 15 lpm, 60°C Inlet ½" BSP M OutletM22x1.5 M Internal (2 x 3/4" **Bypass** Weight 900 gms **Detergent injection** BAPRI20ADJ \$205 No Detergent injection BAPR I 20 \$205

Repair kit ... BAPRI20REP \$88 Banjo Bolts to suit Outlet ... %"... B050157532 \$26 Inlet ... %" ... B050156532 \$38

O-rings to suit %" bolt (2 required) B803181202 \$3

BERTOLINI APR 140

(Suits Stella 200, AB40)

4,000 psi (275 bar), 21 lpm, 60°C 1/2" BSP M Inlet Outlet M22x1.5 M **Bypass** Internal (½", ¾") Weight 1.2kg Detergent injection BAPR I40ADJ \$253 Banjo Bolts to suit

Outlet ... %"... B050157532 \$26 O-rings to suit %" (2 required) B803181202 \$3 Inlet ... ½"... B050158532 \$26

O-rings to suit 1/2" bolt (2 required) B803198002 \$2

VRT3-310 (suits Hydrotek units including Heatwave)

4,500 psi (310 bar) rated pressure

3/8" NPT F

Flows to 40 lpm Inlet %" NPT F Outlet 3/8" NPT F

HUU323 \$284

VB350 (used on Scuds)

5,000 psi (350 bar), 40 lpm, 90°C

3/8" BSP M

¾" BSP F

1/2" BSP F

920 gms

\$273

5,650 psi permissible pressure

Bypass

Inlet

Outlet

Bypass

Weight

BVB350



BERTOLINI APR 135

(used on AB30)

3,500 psi (240 bar), 15 lpm, 60°C 1/2" BSP M Outlet M22x1.5 M Internal (2 x %") Bypass Weight 1.2kg Detergent injection BAPR-I-35ADJ \$220 Banjo Bolts to suit Outlet ... %" ... B050157532 Inlet ... %" ... B050156532

O-rings to suit %" bolt (2 required per bolt) B803181202 \$3

VRT3 MULTIFUNCTION

inc safety valve, thermal dump & injector

4,060 psi (280 bar) rated pressure 4,500 (310 bar) permissible pressure, 30 lpm, thermal dump activates at 56°C

Inlet 3/8" BSP M %" BSP M Outlet 3/8" BSP F Bypass Weight 970 gms

M4072000019 \$169



<u>tecomec</u>

VRT3 (suits Stella 100 & some Scuds)

3,200 psi (220 bar) rated pressure 3,630 (250 bar) permissible pressure, 30 lpm, with gauge port, blue spring

Inlet 3/8" BSP F Outlet %" BSP F **Bypass** Weight 790 gms

3/8" BSP F M215010400 **\$144 tecomec**

VB53 (AISI 303) (used on Raptors)

02 8865 3500

8,000 psi (550 bar), 80 lpm, 90°C

½" BSP F Inlet Outlet ½" BSP F 1/2" BSP F **Bypass** Weight 1.03kg

BVB53 \$1.121



(used on Super Indys)

3,190 psi (220 bar) rated pressure

3,625 psi permissible pressure

30 lpm, 90°C

%" BSP F Outlet

M4072401001 \$119

Banjo Bolts to suit IP W151 or above valve

By pass G %" & G 1/2"

M4073900000 \$83



4,000 PSI VRF2

(used on Admirals)

4,060 psi (280 bar) rated pressure 4,500 psi permissible pressure

30 lpm, 90°C

Outlet 3/8" BSP F Weight 545gms

M4072401000 \$181

Banjo Bolts to suit By pass G ¾" & G ½"

M4073900000 \$83



VRT100

(replaces 80/280 on large flow machines)

4,640 psi (320 bar),

5,075 psi permissible pressure

100 lpm, 90°C Inlet 1/2" BSP F

Outlet 1/2" BSP F 2 x 1/2" BSP F **Bypass** Weight 1.17kg

M4072000033 \$269 **tecomec**

VB60/600 ZERO

8,700 psi (600 bar) permissible pressure, 60 lpm, 60°C

Inlet 1/2" BSP F Outlet ½" BSP F **Bypass** ½" BSP F

MPA60260000 \$1.309



(5 pack bulk buy ... \$232 each)







ACCESSORIES UP TO 600 BAR (8,700 PSI)

VB200/280

4,060 psi (280 bar) rated pressure 4,500 (310 bar) permissible pressure,

200 lpm, 90°C

Inlet %" BSP F Outlet ¾" BSP F **Bypass** %" BSP F 3.48kg Weight

MPA60430000





K1 (INTERPUMP)

3,625 psi (250 bar) rated pressure

41 lpm, 90°C

Inlet 3/8" BSP F Outlet ¾" BSP M ½" BSP M **Bypass**

\$300 BIZK1





K7 (INTERPUMP)

3,000 psi (210 bar) rated pressure

41 lpm, 90°C

Inlet %" BSP F Outlet %" BSP M

½" BSP F **Bypass**

BIZK70 \$315



Safety Valves Protects pump and unloader from pressure spikes (not pre-set).



Thermal Dump Valves

THERMAL DUMP VALVES

Dumps water at pre-determined temperature to protect pump when on bypass. Dump temp 63°C, max pressure

145 psi, hose barb 7mm (15 pack bulk buy ... call for details)



MPA60063000 1/4" BSP M \$40 MPA60063050 3/8" BSP M \$40 MPA60063070 1/2" BSP M \$40 AGP100558 1/2" MPT (AB42) \$32

MG1000

3,600 psi (250 bar),

30 lpm, 90°C

Inlet: 3/8" BSP M

MTM00033003



VS240

3,500 psi (240 bar)

4,200 psi permissible pressure

24 lpm, 60°C

%" BSP M Inlet

MPA60156000 \$71 (15 pack bulk buy ... call for details)





VS350

5,000 psi (350 bar), 25 lpm, 90°C

5,650 psi permissible pressure

Inlet: 3/8" BSP F %" BSP F **Bypass:** Weight: 480 gms

MPA60058000 (5 pack bulk buy ...

\$88)




HYDROTEK BURST DISK & PRESSURE RELEASE VALVE

8,000 psi (550 bar)

Inlet: 3/8" MPT

HUPB85 \$120



HUPO45 \$97





VS500

7,300 psi (500 bar), 80 lpm, 90°C

8,100 psi permissible pressure

Inlet: 1/2" BSP M ¾" BSP F Bypass: Weight 1.46kg

MPA60520000 \$523





VS660

9,500 psi (660 bar),

10,450 psi permissible pressure 60 lpm, 90°C

Inlet: 3/8" BSP F

Bypass: 1/2" BSP F Weight 1.84 kg

MPA60064500 \$1,092



VS1500

1,500psi (105 bar), 180lpm,

60°C, suits C3006 series Inlet G ¾"

Bypass G 1" M

BVS1500 REG \$489





VS450-300

4,350 psi (300 bar), 450 lpm, 90°C 4,800 psi permissible pressure

Inlet: 1¼" BSP F Bypass: 11/4" BSP F

MPA60413000 \$1,358









GREAT RANGE, HUGE STOCKS, EXCEPTIONAL PRICES

FIXED QC REDUCERS (M22)



Max pressure 4,000 psi (275 bar), max flow 30 lpm, max temp 150°C (Long thread) Outlet: M22x1.5

	S/code	Inlet	Single buy	25 pack buy (SAVE 25%)
1	C1500.05	¼ G- F	\$10	\$188 (\$7.52 each)
2	C1500.06	¼ G- M	\$10	\$188 (\$7.52each)
3	C1500.180	% G- F	\$10	\$188 (\$7.52 each)
4	C1500.24	3/8 G- M	\$10	\$188 (\$7.52 each)
	M212003660 (short thread)	M22 M	\$15	\$282 (\$11.28 each)



QUICK COUPLINGS (M22)



Max pressure 4,000 psi (275 bar), max flow 30 lpm, max temp 150°C (short thread) Outlet: M22x1.5

	S/code		Inlet	Single buy	25 pack buy (SAVE 25%)
*	M212003550	1	¼ G- M	\$21	\$394 (\$16 each)
*	M212003530	2	¼ G- F	\$21	\$394 (\$16 each)
*	M212003540 (MPA26025050)	1	% G- M	\$21	\$394 (\$16 each)
*	M212003520	2	% G- F	\$21	\$394 (\$16 each)

(note some versions come with back-up ring) tecomec

REPLACEMENT O-RINGS

Suit 1/4" snap couplings

*	AGP100882 (single o-ring)	\$0.38
4	AGP100882-25 (25 pack) AGP100882-100 (100 pack)	\$9
	AGP100882-100 (100 pack)	\$32

After turning off your pressure cleaner, release the pressure in the hose by pulling the gun trigger before uncoupling accessories ... this will extend the life of the coupling o-rings

Do not use plumbers tape on quick couplings because eventually the thread will jam. If the coupling is leaking replace the o-ring.



14" SS GP QCS & PLUGS



Max pressure 6,000 psi (410 bar), stainless steel quick connect couplers and plugs, max temp 80°C



		S/code	Inlet	Outlet	
*	1	CD10072	1/4" QC	¼ G - F	\$25
*	2	CD10073	1/4" QC	¼ G - M	\$25
	3	CD10076	1/4" QC	¼ G - F	\$12
	4	CD10077	1/4" QC	¼ G - M	\$12

34" SS GP QCS & PLUGS



Max pressure 5,000 psi (350 bar), Stainless steel quick connect couplers & plugs, max temp 80°C

	S/code	Inlet	Outlet	
1	CD10074	% QC	¾ G - F	\$37
2	CD10075	3% QC	3/8 G - M	\$37
3	CD10078	3/8 QC	¾ G - F	\$18
4	CD10079	¾ QC	% G - M	\$18

REPLACEMENT O-RINGS

Suit 1/4" snap couplings	G.
* AGP100882 (single o-ring)	\$0.38
* AGP100882-25 (25 pack)	\$9
* AGP100882-100 (100 pack)	\$32
Suit 3/8" snap couplings	
AGP100881 (single o-ring)	\$0.38
AGP100881-25 (25 pack)	\$9
AGP100881-100 (100 pack)	\$32

Use couplings and nipples from the same manufacturer to minimize the risk of leaks

Ensure the couplings are grit free before connecting to extend life of o-ring





SWIVELS, COUPLINGS & NIPPLES TO 600 BAR

HIGH PRESSURE NIPPLES ... 4000 PSI / 7300 PSI











SEALING WASHERS

Copper washers

S/code	Size	
MTM39.0276	1/4"	\$0.65
MTM39.0277	3/8"	\$0.76



4,300 psi, 300 bar Brass high pressure nipples, must be used with sealing washers

S/code	Inlet	Outlet	
MTM35.0070	1/4"	1/4"	\$10
MTM35.0247	3/8"	3/8"	\$15

7,300 psi, 500 bar stainless steel high pressure nipples, must be used with sealing washers

	S/code	Inlet	Outlet	
	MPA13.5050.51	1/4"	1/4"	\$37
Α	MPA13.5051.51	3/8"	3/8"	\$44
В	MPA13.5061.51	3/8"	1/2"	\$51
	MPA13.5052.51	1/2"	1/2"	\$39

Steel washer with rubber insert

S/code	Size	
MTM39.0280	1/4"	\$2
MTM39.0281	3/8"	\$2
C7888812	1/2"	\$4



PA AR8 350 BAR QC (M24)







Max pressure 5,000 psi (350 bar), max flow 30 lpm (10 pack bulk buy ... call for details)

	S/code	Inlet	Outlet	
В	MPA26065030	1/4 BSP M	M24 F	\$40
В	MPA26065050	¾ BSP M	M24 F	\$40
Α	MPA26063020	1/4 BSP F	M24 M	\$21
Α	MPA26063040	¾ BSP F	M24 M	\$21
Α	MPA26063050	3/8 BSP M	M24 M	\$21

PA AR9 600 BAR QC (M24)





	S/code	Inlet	Outlet	
Α	MPA26094040	3∕8 F	M24 M	\$58
Α	MPA26094050	3⁄8 M	M24 M	\$58
Α	MPA26094070	½ M	M24 M	\$58
В	MPA26095050	¾ M	M24 QC	\$137
В	MPA26095040	3∕8 F	M24 QC	\$137
В	MPA26095070	½ M	M24 QC	\$137

80 lpm, 160°C (10 pack bulk buy ... call for

RECOMMENDED SEALANT

Loxeal sealant for high pressure joints, 250ml bottles

S/code	Strength	
MTM22.0094	Thread locking (Loxeal 54.03)	\$131
MTM22.0095	Permanent (Loxeal 83.54)	\$134





PA SWIVELS

3,650 psi (250 bar)

max permissible pressure 4,050 psi 40 lpm, 160°C

% BSP M tapers 60° Inlet 3% BSP F Outlet

SW 90 - 90° SWIVEL

3,625 psi (250 bar)

max permissible pressure 4,050 psi 40 lpm, 160°C



details)



SW 600 STAINLESS STEEL

8,700 psi (600 bar)

max permissible pressure 9,570 psi 60 lpm, 100°C

Inlet %" BSP F

3/8" BSP M Nozzle

MPA30584000 \$539





5,100 psi (350 bar)

max permissible pressure 5,650 psi

40 lpm, 160°C

MPA26105000

3% BSP N Inlet Outlet % BSP F

MPA26106100 (10 pack bulk buy ... call for details)



S/code	Inlet	Outlet	
MPA26130020	1/4 BSP M	1/4 BSP F	\$144
MPA26130040	¾ BSP M	% BSP F	\$151
MPA26130042	¾ BSP M	1/4 BSP F	\$158
Repair kit	MPA26130)524	\$37



GREAT RANGE, HUGE STOCKS, EXCEPTIONAL PRICES

DETERGENT INJECTORS

Stainless steel chemical injector

5,100 psi (350 bar), 90°C Hose barb 7_mm Inlet 3/8 BSP M Outlet 3/8 BSP M 30 lpm Flow

MPA21011921 \$165

Complete detergent injector kit

4,060 psi (280 bar), 150°C M22x1.5 F Inlet Outlet M22x1.5 M

FZX1763 11-15 lpm C0501.05 replacement filter \$5

Flush injection system after using detergent to prevent clogging



HIGH PRESSURE GAUGES

1/4" NPT inlet

- High quality
- Easy read



S/code		
AGCDR0102	6,000 psi (415 bar)	\$51
AGAUGE700BAR	10,000 psi (700 bar)	\$77
AGAUGE1000BAR	14,503 psi (1,000 bar)	\$358
B069870973	Pump valve cap to take gauge	\$28

Test Kits

Aussie pressure test set includes gauge and fittings for testing pump output pressure & Bertolini Pump Maintenance Guide



300 bar ATESTSET \$106 350 bar ... ATESTSET-350BAR \$133

PUMP PROTECTION TO EXTEND MACHINE LIFE

INLET STRAINER

145 psi (10 bar), 30 lpm, 40°C Inlet 1/2" BSP F 80 mesh

MPA28030020

MPA28030000





\$49

\$49

BRASS STRAINER

50 mesh strainer Inlet BSP F Outlet BSP F



Inlet/Outlet

AY STRAINER-200	1/2"	\$29
AY STRAINER3/4	3/4"	\$34
AYSTRAINER1"	1"	\$40

5" CARTRIDGE FILTER



60 micron filters

(cartridge element not included)

1" BSP F Inlet 1" BSP F Outlet

C73429011 \$59

Cartridge element C73429300 \$18 Mounting bracket C73269098 \$21

IN-LINE PUMP SAVER

Outlet

1/2" BSP F

1/2" BSP M

with low pressure hose fitting and 3/4M



Outlet

MPA28030020P

34" BSP F

\$70

tecomec

Inlet/Outlet

SUCTION FILTER

80 mesh filter

55 lpm, 40°C

145 psi (10 bar),

M8105038 ½" BSP F \$32 M8105042 34" BSP F \$32

PLASTIC Y STRAINER

145 psi (10 bar) 80 lpm, 40°C Inlet ¾" BSP F 80 mesh



MPA28015000



\$70

FLOATS (used in Jetter break tanks)

145 psi (10 bar) 60°C

Inlet ¾" BSP M





BALL VALVES (TO 500 BAR)

Max temp 80°C, max pressure 7,000 psi

S/code	Inlet	Outlet	
MTM00089501	¼ BSP F	¼ BSP F	\$61
MTM00089502	% BSP F	3/8 BSP F	\$71
MTM00089503	½ BSP F	½ BSP F	\$77

34" BSP F







HOT WATER & STEAM CLEANER PARTS

FUEL PUMPS, ELECTRODES, THERMOSTATS, SOLENOID COILS, NOZZLES, TRANSFORMERS













Suits	Fuel Pumps		Solenoid coils		Electrodes			Thermostats	
Stella 100/200	FCDR.1603	\$339	FCDR1483	\$72	FTX0003	(pair)	\$52	FPG.0001	\$165
Sizzler	FPPGS40004	\$322	FMEBE43704	\$62	FMECA18232	(need 2 per machine)	\$49	FMETK40014 (154°C) FMETK34839 (65°C)	\$70 \$114
Super Indy, TK (Top Pro), HD190 Admiral, HD275 Admiral	FPPGS40005	\$414	FMEBE43704	\$62	FMECA12525	(need 2 per machine)	\$101	FMETK40011 (150°C) FMETK40007 (65°C)	\$139 \$141
Hydrotek (110v)	HBPA10	\$264	HBPV14	\$51	HBME10	(pair)	\$71	HECH55	\$159
Hydrotek (12v)	HBPA15 (with solenoid)	\$399	HBPV15	\$58	HBME10	(pair)	\$71	HECH50	\$188
Heatwave	HBPA15 (with solenoid)	\$399			HBME10	(pair)	\$71	HECH50	\$188

FUEL NOZZLES, TRANSFORMERS, IGNITORS, PCB BOARDS



Suits	Burner nozzles		Transformers & Ignitors		PCB boards		
Stella 100/200	FDA030H6928	\$52	FZX0461	\$243		-	
Sizzler	FUGBR18630	\$90	FMETR88630	\$215	FMECE40049	Total Stop (EC1)	\$270
Super Indy Mk 2/3,	FUGBR22576	\$110	FMETR88630	\$215	FMECE48676 FMECE40004	Total Stop (EC) Low water cut out (EC2)	\$288 \$338
HD190 Admiral, HD275 Admiral	FUGBR31344	\$110	FMETR88630	\$215	FMECE48676 FMECE40004	Total Stop (EC) Low water cut out (EC2)	\$288 \$338
Heatwave	HBZ175	\$32	HBMT12 (Power light ignitor)	\$451			
Hydrotek (110v)	HBZ (insert size of	poa	HBMT14 (110v ignitor) \$621		-		
Hydrotek (12v)	nozzle)	роа					

HOT WATER COILS FOR AUSSIE HOT WATER/STEAM CLEANERS ... GREAT LOW PRICES



S/code	Suits		
FTX01259	C: II 400 0 000	Mild steel coil	\$1,408
FTX01259SS	- Stella 100 & 200	Stainless steel coil	\$2,394
FLAGR40031 (NEW)	Sizzler	Mild steel coil	\$1,543
FLAFN40469 (NEW)	Company to the Circular school	Mild steel coil DS1012 Mk 2 & Mk3	\$1,468
FLAFN40891	- Super Indy Single phase	Stainless steel coil DX1012M Mk 3	\$1,705
FLAFN40044 (NEW)	Consulado These shace Consulado	Mild steel coil DS2016 Mk 2 & Mk 3	\$1,543
FLAFN47175	- Super Indy Three phase Super Indy	Stainless steel coil DX2106T Mk 3	\$2,815
FLAFN38136	- Admiral Mk 2	Double mild steel coil (IDAC88458)	\$2,111
FLAFN43585	- Admirai IVIK 2	Stainless steel coil (IDAC40336)	\$3,863
FLAFN40464	Admiral 4000 Admiral Mk3	Double mild steel coil (IDAC40648) & (IDAC40566)	\$2,217
FLAFN46850	Admiral Mk 3	Stainless steel coil (IDAC40571)	\$4,163
HBC144	Hydrotek Heatwave	coil	\$1,751
HBC480	Hydrotek 3,000-4,000 psi	coil (pre 2013)	\$2,724
HBC580	Hydrotek 5,000 psi	coil (pre 2013)	\$5,920
HBC225	Hydrotek for SC series, 2013 onwards	complete coil wrap assembly	\$4,183
HBC484	Hydrotek for SC series, 2013 onwards	complete coil only	\$3,114







TOP QUALITY HP HOSE AT VALUE PACKED PRICES

HIGH PRESSURE CLEANING HOSES ... GREAT PRICES

Super high quality Aussie Pump high pressure hose range rated up to 600 bar, 8,700 psi



Check condition of hoses daily & replace regularly.

Most water blasting injuries are caused by worn or damaged hoses.

3/8TH R2 (DOUBLE wire braid hose) to 4,785

PIGTAIL WRAPPED, COLD

WATER HOSE

4,785 psi black hose,

pigtail wrapped for

dragging on rough surfaces and general

psi (330 bar)

extra hose protection against abrasion from

ware.

WHIP HOSES

CONNECTING HOSE REELS TO MACHINES

3/8" R2 wire braid hose 5,800 psi (400 bar) & hot water (with female 3/8" ends)



Length	S/code	
1m	AHW06FB6FB6X1	\$31
2m	AHW06FB6FB6X2	\$45
3m	AHW06FB6FB6X3	\$62
4m	AHW06FB6FB6X4	\$77

HOBBY GUN/LANCE HOSE UPGRADE KIT

Hobby gun kit complete with AL13 gun, Vario lance & 8 metres of wire braid pro high pressure hose

Includes 14mm to 15mm coupling adaptor

\$151

AGPDGLNH120



3/8 FEMALE ENDS (see couplings below)

10m	AR206FB6FB6PT10	\$285
30m	AR206FB6FB6PT30	\$777

M22 couplings swaged on

10m **AKENNHOSEKIT1** \$327

AUSSIE BLUE-PRO M22 ENDS

3/8" R2 (double wire braid hose) to 5,800 psi (400 bar) with M22 swaged couplings. Suits both cold & hot water machines. Non marking hose, suits all brands of professional pressure cleaners

- 5,800 psi rated hose
- Max water temp 155°C
- Suit all Class A professional blasters to
- M22 couplings crimped (4,000 psi rated)

AUSSIE BLUE-PRO FEMALE ENDS

%" R2 (double wire braid hose) to 5,800 psi (400 bar) with female swaged ends. Suits both cold & hot water machines Non marking hose, suits all brands of professional pressure cleaners

- 5,800 psi rated hose
- Max water temp 155°C
- % F ends (couplings ordered separately)
- Suit all Class A blasters to 5,000 psi professional blasters



DAMAGED & WORN HOSE CAN CAUSE SERIOUS INJURIES!



Check your hose daily for abrasion and replace at the first sign of wear.



8m	AHW06M22X2X8	\$142
10m	AHW06M22X2X10	\$177



2m	AHW06FB6FB6X2	\$45
10m	AHW06FB6FB6X10	\$199
20m	AHW06FB6FB6X20	\$330
30m	AHW06FB6FB6X30	\$499
50m	AHW06FB6FB6X50	\$772
100m	AHW06FB6FB6X100	\$1,534

DON'T FORGET COUPLINGS





M22 QC (4,000 psi)

M24 QC (5,000 psi)

Couplings, & associated o-rings, for hoses

I	2 required	\$21 each
ı	AGP100882 (o-ring for M22 coupling)	\$0.40 each
ı	MPA26065050 (QC M24) 2 required	\$40 each





HIGH PRESSURE HOSE

Under AS/NZ 4233.2:2103 ,Section 6 paras 6.4.2 & 6.4.3 cover marking of hoses assemblies, hoses used on Class B machines must be certified.

5,000 PSI AUSSIE BLUE-PRO **CLASS B CERTIFIED**

Certified Aussie Blue-Pro hose 3/8" R2 (double wire braid hose) to 5,800 psi (400 bar) with female swaged ends. Suits both cold & hot water machines Non marking hose, suits all brands of professional pressure cleaners

- Suit all Class B blasters to 5,000 psi professional blasters
- Individual hose test certificate
- 5,800 psi rated hose
- Max water temp 155°C
- % Fends

2m	AHW06FB6FB6X2C	\$115
10m	AHW06FB6FB6X10C	\$269
20m	AHW06FB6FB6X20C	\$400
30m	AHW06FB6FB6X30C	\$570
50m	AHW06FB6FB6X50C	\$842
100m	AHW06FB6FB6X100C	\$1,604



SPECIALIST SEWER CLEANING HOSE

More flexible, hard wearing, smaller diameter, extra long lengths



7,300 PSI (500 BAR) **ULTRA HIGH PRESSURE HOSE**

%" R2 wire braid hose, 3/8 M BSP ends, 150° C rated, for Quick Couplings refer p 54

- 7,300 psi rated (500 bar)
- Max water temp 150°C,
- % M ends
- Individual hose test certificate
- suit all Aussie Raptors & other 500 bar blasters

Additional coupler may be required to fit replacement hose to gun (refer p65 AR9 500 bar couplings)

10m	A3641443109	\$666
20m	A3641443209	\$976
30m	A3641443309	\$1,246



8,700 PSI (600 BAR) **ULTRA HIGH PRESSURE HOSE**

R2 wire braid hose, M24 couplings, 150°C

- 8.700 psi rated (600 bar)
- Individual hose test certificate



10m	A3686976109	poa
20m	A3686976209	\$1,132
30m	A3686976309	\$1,450

NEW HOSE RESTRAINT

Stainless steel hose restraint sock with carabiner & bracket. Connects between hose and gun or mini reel couplings. Use to restrain the hose in the event of a coupling failure . Required with Class B machines under AS/NZS4233.1



AD HRSS10 (3/8" thermoplastic hose) \$130 AD HRSS8 (1/4" thermoplastic hose) \$103 AHRANCHORPLATE \$8 (attaches restraint to gun/lance or mini reel)

AUSSIE REDFLEX SEWER HOSE

The super strong thermoplastic coating means the hose is stiffer but harder wearing. (5,000 psi,1/4 BSP M ends)

- 1/4" for general drain clearing (60m) AHOSE RF8-60M \$837
- 3/16" for gullies & tight corners (60m) AHOSE RF6-60M \$766
- 3/8" for large flow machines (60m) (3/8" M ends) AHOSER8 3/8 60M \$1,019



AUSSIE SUPER WORM HOSE (15 METRES)

1/8", 5,000 psi rated, super flexible sewer hose, ideal for small drains and tight bends. Complete with compressor nozzle & quick fit tail.

AHOSER8 1/8 15M NOW \$436







WORK SAFE ... REMOVE TRIP HAZARDS & EXTEND HOSE LIFE

AUSSIE 'REEL MATE' HOSE REEL KITS WITH HOSE GREAT VALUE

The best value when you're buying both reel & hose!

Includes hose reel, R2 double braid hp hose, whip hose & mount.

Mount to machine frame, truck bed or wall ... IT'S EASY!



GENERAL PUMP				
Model	Reel mate 3,50	00	Reel Mate 4,0	00
S/code	AD30001		ADHR40100D	
Pressure rating	3,500 psi (240	bar)	4,000 psi (275	bar)
Hose length	15m		30m	
Hose type	R2 5/16"		R2 ¾"	
Whip hose	0.25m		1.4m	
Inlet	M22 F QC		M22 F QC	
Outlet	M22 F QC		M22 F QC	
Foot print suits Scuds	✓		~	
Weight	12 kg		25 kg	
Boxed dimensions LxWxH	300 x 290 x 34	0mm	400 x 350 x 45	0mm
	\$565		\$845	
Replacement swivel	AGP100887	\$86	AGP2103051	\$101
Repair kit	AGP2100278	\$27	AGP2100278	\$27
QC nipple to connect to gun	C1500.24	\$10	C1500.24	\$10
Replacement handle	AGP100056	\$15	AGP100056	\$15
Replacement hose	AHW06M22X2X1	15 \$320	AHW06M22X2X3	30 \$541

AUSSIE HOSE REELS ...

Extend hose life & improve safety ... store extra long hose lengths (hose sold separately). Whip hose included.





AGP100056 \$15

HOSE REEL CARTS ... GO MOBILE

Available with 15m or 30m hose reel kits. Assembly of cart and mounting of hose reel required

Model	Reel Cart 3,500	Reel Cart 4,000	
S/codes	AD30001 (reel) AGP2100436 (cart)	ADHR40100D (reel) AGP2100436 (cart)	
Pressure rating	3,500 psi (240 bar)	4,000 psi (275 bar)	
Hose length	15m	30m	
Hose type	R2 5/16"	R2 ¾"	
Whip hose	0.25m	1.4m	
	\$800	\$1,081	



Replacement handle

Additional couplings may be required



AGP100056

\$15

NEW AUSSIE RETRACTABLE HOSE REEL KITS ... **CONVENIENT & SAFER (5,000 psi)**

\$1,906

Wash bay essential ... INDUSTRIAL



Includes 20 metre 400 bar high pressure hose with M22 coupling. Made in USA.

A76000HP106-20

More options available ... call for details



5,000 PSI HEAVY DUTY HOSE REEL ... 4418

Takes up to 80m of 3/2" 5,000 psi hose

- Locking pin
- Friction brake
- Heavy duty mounting plate
- 5,000 psi hose and whip hose sold separately
- 1/2" M inlet and 3/8" outlet

\$680 **A4418-REEL**

Whip hose (2m) 5,000 psi cold/hot water AHW06FB6FB6X2 \$45 ½" x ¾" Replacement swivel AD MNRS4418 \$171 Swivel repair kit AD MNRRK \$40 Replacement handle A2589 \$44





STAINLESS STEEL REELS HOT WATER RATED

The Hydrotek hose reels are made with rust-proof stainless & zinc plated steel to withstand harsh environments. 304 stainless steel hose reel, rated to 120°C, for use with hot water pressure

-WAYDE-UN-USYA			
Hydrotek Reel 425 (pivoting reel)	Double Stack Hydrotek Reel 325 (two reels + frame)		
HAR425	HAR325		
5,000 psi (350 bar)	5,000 psi (350 bar)		
45m	75m (each)		
% F	% F		

Hydrotek Reel 151 Hydrotek Reel 150 HAR150 **HAR151** 5,000 psi (350 bar) 5,000 psi (350 bar) 30m 3/8 F 3⁄8 F % F % F 12 kg 12 kg 470 x 470 x 480 470 x 470 x 480

Hydrotek Reel 700 Hydrotek Reel 152 HAR152 HAR700 7,300 psi (500 bar) Low pressure 25m (of 3/4" hose) 30m % F % F % F 12 kg 12 kg 470 x 470 x 480 470 x 470 x 480

45 kg \$1,704

Whip hose Replacement swivel Swivel Repair kit

Refer p 60, specify fittings required when ordering HDR058 \$180 HDR058 \$180 HDR059 HDR059 \$40 \$40

HDR058 \$180 HDR058 \$180 HDR059 HDR059 \$40 \$40

12 kg

\$899



HAR150 ... friction brake with infinite drag settings to prevent freespooling.



HAR151 ... 5,000 psi swivel locking pin & super heavy duty mounting plate

HAR152 ... low pressure swivel locking pin & super heavy duty mounting plate



HAR425... Pivoting reel, for machine or wall mounting, friction brake, 360° rotation (gun & hose sold separately)



SAVE SPACE ... HAR325 2 reels, double stacked, one HAR151 + one low pressure supply reel with capacity for 45m low pressure hose



Hose reels extend hose life & add safety & convenience.

5,000 PSI STAINLESS STEEL HOSE REEL ... 4418 SS

Takes up to 80m of 36" 5,000 psi hose

- Locking pin
- Friction brake
- Heavy duty mounting plate
- 1/2" M inlet and 3/8" outlet
- 5,000 psi hose & whip hose sold separately

A4418SS-REEL \$890



AUSSIE DRAIN CLEANING KIT

Convert your pressure washer to a drain cleaning jetter. Includes Aussie Viper Mini Reel with 60 metres of 3/16" sewer hose. Full Aussie Jetters Tool Box, including quick coupler to fit to end of blaster high pressure hose and safety plate.

ADRAINKIT \$3,338







More drain jetting accessories p 30

S/code

Max pressure

Max temp





CUT CLEANING TIMES UP TO 75% & SAVE WATER

FLAT SURFACE CLEANERS

Fast, streak free cleaning ... ideal for large flat

High pressure flat surface cleaners 'float on water'. These spinners are designed to operate from any electric or engine drive pressure cleaner giving a streak free finish.

- Cut cleaning times up 75%
- Use less water, save fuel, cut machine wear
- Eliminate overspray

Match nozzle size to your machine

Size your nozzle requirement using the pressure and flow of your blaster (see nozzle selection table p 61)

Divide nozzle size required by number of nozzles in spinner.

Order new nozzles if required.







Model	22" Cyclone		
S/code	AGPDFSCS22Z		
Max pressure	4,000 psi (275 bar)		
Max temp	80°C		
Max flow rate	30 lpm		
Inlet	3/8" NPT-F (M22 nipple C1500.24 & CD10079 QC plug included)		
Boxed measurements	900 x 580 x 340	mm	
Weight	11 kg		
Cleaning speed	25m² per min		
No of nozzles	3 x 020		
	\$1,565		
Replacement parts			
Gun	AGPDCG4000FSC	\$110	
Rotary swivel	AGP2103220	\$431	
Swivel repair kit (major)	AGP2100372	\$254	
Swivel repair kit (minor)	AGP2100203	\$67	
Nylon brush skirt	AGP2103223	\$179	
Rotary arm	AGP2103224	\$96	

11 lpm
1/4" QC plug
380 x 390 x 160mm
2.2 kg
10m² per min
2
\$225
FNA7103261 \$74
Wal and a second
W

FNA80166

3,600 psi

60°C

AGP2660059

AGP2530009

AGP2660045

C925020M

\$179

\$96

\$189

Nylon brush skirt

Rotary arm

Plastic deck

Nozzles (each)

FASTER, SMARTER CLEANING







Model	28" Hydro Twister		
S/code	HANT28		
Max pressure	4,000 psi (275 bar)		
Max temp	120°C		
Max flow rate	35 lpm		
Inlet	M22 male		
Boxed measurements	1350 x 720 x 160 mm		
Weight	15 kg		
Cleaning speed	35m² per min		
No of nozzles	2 x 027		
	\$2,607		
Replacement parts			
Rotary swivel	HVAM04 \$449		
Swivel repair kit (major)	HVAM00 \$239		
Rotary arm	HVAM25 \$226		
Caster (x1)	HHT300 \$29		

Model	24.5" Twister Vac		
S/code	HANTV5		
Max pressure	4,000 psi (275 bar)		
Max temp			
Max flow rate	rate 25 lpm		
Inlet	M22 male		
Boxed measurements	1360 x 720 x 160mr		
Weight	15 kg		
Cleaning speed	25m² per m	nin	
No of nozzles	2 x 030		
	\$4,167		
Replacement parts			
Rotary swivel	HVAM04	\$449	
Swivel repair kit (major)	HVAM00	\$239	
Nylon brush set	HHLH97	\$150	
Rotary arm	HVAM24	\$289	
Caster (x1)	HHT300	\$29	
Nozzles (each)	HNM270	\$17	

NEW Contractor Multi Twister ...

4 easy to select functions in one tool

- 28" flat surface cleaner
- Gum spotter nozzle
- Water broom for quick rinse
- NEW! Edging tool
- Quick connect fittings for fast changeover
- Gum spot nozzle, under deck prevents overspray
- The edging tool ... cleans the strip along the edge of walls, pillars, or buildings
- Rear casters lock to clean in a straight line
- Rear splash guard keeps operator dry



Model	28" Multi Twister
S/code	HANT4C
Max pressure	4,000 psi (275 bar)
Max temp	120 °C
Max Flow rate	21 lpm
Inlet	M22 male
Boxed measurements	1350 x 720 x 160mm
Weight	15 kg
Cleaning speed	35m² per min
No of nozzles	2 X 027
	\$3,258
Replacement parts	

Replacement parts				
Rotary swivel	HVAM04	\$449		
Swivel repair kit (major)	HVAM00	\$239		
Nylon brush skirt	HHLH72	\$150		
Rotary arm	HNSB02	\$237		
Caster (x1)	HHT300	\$29		
Nozzles	HNM202	\$17		
(require two of each)	HNM102	\$17		

Nozzles (each)

HNM270 \$17



AUSSIE TELE-WAND ...


19' (5.5m) telescopic Tele-wand, great for washing under eaves or windows, includes FREE harness kit valued at \$44



Replacement parts

AGPDCG4000TS Harness kit AGPD20015

COMMERCIAL



NB: Requires Quik Tip nozzle, sold separately (see p 60)

> Shipping weight 5kg Boxed dimensions (mm): 2090 x 180 x 70

INDUSTRIAL

Retracted length 2.3m Extends to 5.5m 40 lpm, 90°C, Aluminium outer poles Inlet ... 3/8" NPT-F (M22 nipple C1500.24 & CD10079 QC plug included)

4,000 psi (275 bar), 1/4" QC outlet

AGPDCLTG18A \$502

NB: Requires Quik Tip nozzle, sold separately (see p 60)

> Shipping weight 5kg Boxed dimensions (mm): 2090 x 180 x 70

GRIT BLAST KITS ... REMOVE PAINT OR RUST FASTER

S/code

TPS450/ GLK

PROFESSIONAL GRIT BLAST KITS

TS 33 3,200 psi (220 bar), Permissible pressure 3,625 psi Tungsten carbide tip, 500mm zinc probe, 6m hose, 400mm lance with M22 coupling & 035 nozzle

M202903460



5,000 psi (350 bar) professional, (nozzle not included, use 0° nozzle) 8 metres of nylon braided hose & sand probe

Inlet

(note additional couplings & lance may be required)

MTM160172 \$359

500 BAR GRIT BLASTER

TPS 450 Kit (500 Bar, 7,300 PSI) grit blast kit, c/w probe, plastic hose, 800mm lance, gun, nozzle & nipple for quick coupling

(specify nozzle size required)	. ,
REPLACEMENT PARTS	
C4700.18 Head only	\$651
C4604.04 Hose barb	\$130
Repair kit for head (C650419)	\$315

\$1,559





TS12 SAND BLASTER

500 Bar, 7,300 PSI grit blast head with a flat spray pattern ,80 lpm, 90°C

Inlet 1/4" BSP F 1/4" NPT M (15°) Nozzle

S/code	
MPA25.0450.00 Head only	\$881
MPA25.0300.20 Hose barb	\$130





FOAMERS

Spray detergents, degreasers disinfectants without chemicals going through the pump.

2,600 psi (180 bar) LS3

max permissible pressure 12 lpm, 60°C, 1 litre capacity

Inlet ¼" BSP F

(requires C1500.06 coupling



3,200 psi (220 bar) LS12

max permissible pressure 25 lpm, 60°C, 2 litre capacity Inlet ¼" BSP F Nozzle 1.5mm

MPA25184215 **\$187** (requires C1500.06 coupling to fit to gun, \$10, p66)



Can shoot detergent up to 3 stories.

5,000 psi (350 bar) max pressure 21 lpm, 60°C, 10m of inlet hose, Inlet ¼" BSP F Nozzle 3 nozzles, 1.25,

1.5 & 1.7mm

MTM140289 \$233







GUTTER CLEANER

DITCH THE LADDER

FNA7103261 \$74)

Unique design attaches in place of a Quik Tip nozzle and enables gutter cleaning with a normal lance. Can also be used with a turbo head. (Quik Tip nozzle sold separately p60) Outlet: 1/4" M tale Inlet: QC AGPD20011 \$40 (fixes to a lance with QC


ACID VENTURI

Clean brickwork fast!

Inlet: 1/4 BSP M Ratio 6:1 Hose barb 7_{mm} CGMA025 \$67



WHEELS ... TOP QUALITY STEEL WHEELS WITH PNEUMATIC & FLAT FREE TYRES



		_		_		
	S/code	Size	Suits		Axle size	
Α	A400015	10"	AB Scud 30/40 & Monsoon 14	0/200 flat free	16mm (5/8")	\$40
В	A400016-HD	13"	Scud 350-400, Ultra & Predato diesel powered units	or, flat free for	16mm (5/8")	\$69
	ACAP16MM		Wheel cap		16mm (5/8")	\$2
С	HAHS10	10"	Hydrotek wheel kit (4 wheels HSS series only	& axle kit), suits	19mm (3/4")	\$281
D	AWHEELCOBRA	10"	Cobra/King Cobra		19mm (3/4")	\$97
Ε	AWHEELDIESEL	16"	Diesel Raptors & Predators		25mm (1")	\$111

NEW AUSSIE SMART CART

Strong & robust universal trolley • 10" flat free wheels Suits mounting of pumps, pressure cleaners, generators and hose reels Suits up to 7HP engines Base 37cm long x 27cm AGP2100436 \$236

NEW MISTING LANCE

Generate a fine misting spray to dampen down dust on construction sites.

Double CTN255 turbo heads (3,785 psi, 255 bar), German made 900mm steel lance, M22 nipple

CTN255-030TWINML

\$585





500 BAR ACCESSORIES

(suit Aussie Raptor Hydro-blasters)

500 BAR GUN LANCE KIT



8,000 psi SPRAY Gun (all Aussie Raptors)

RL84

7,300 psi(500 bar), 80 lpm, 100°C Permissible pressure 8,100 psi

Inlet 1/3" RSP F Outlet 1/2" BSP F

Use P/A single lance MPA30540000 \$510

(300mm shoulder rest MPA30501921 \$54)



RL 800 500 BAR PA SINGLE S/S LANCE

RL 57 7,250 psi (500 bar), 28 lpm, 160°C, permissible pressure 8,000 psi (Inlet 3/8" BSP F)

- 5,800 psi (400 bar) 1050mm lance with melted handle, permissible pressure 6,400 psi, 160°C, Outlet 1/4" NPT F
- Ceramic nozzle or turbo head sold separately

\$621

MPA30473000 gun/lance kit



Suits RL84, 7,300 psi (500 bar),

Permissible pressure 8,100 psi, 200 lpm, 43°C, Inlet 1/2" BSP M, Outlet 1/4" NPT F

400mm MPA30500040 \$226 800mm MPA30500080 \$267 1250mm MPA30500092 \$418

Requires ceramic tip nozzle sold separately



TURBO HEADS

500 bar series

7,200 psi, 500 bar, 40 lpm EWP up to 12,000 psi Max temp: 90°C

Inlet ¼" F



16)
18)
21)

More sizes available

Repair kit

CTN500-___REP \$1,222

500 BAR CERAMIC TIP NOZZLES

Aussie White Tip 500 bar 0°& 15° nozzles,

nozzle material ceramic, inlet 1/4" NPT M ...

\$142 each

025

030 035

040

045

050



O° (pencil jet)	15° (fan)
M0124006100	M0124006110
M0124006200	M0124006210
M0124006300	M0124006310
M0124006400	M0124006410
M0124006500	M0124006510
M0124006600	M0124006610

PA AR9 QC (M24)

Max pressure 8,700 psi (600 bar), max flow 80 lpm, 160°C



В

		S/code	Inlet	Outlet	
	Α	MPA26094040	¾″ F	M24 M	\$58
	Α	MPA26094050	3∕8″ M	M24 M	\$58
	Α	MPA26094070	½" M	M24 M	\$58
	В	MPA26095050	¾″ M	M24 QC	\$137
	В	MPA26095070	½" M	M24 QC	\$137

UNLOADER VB53 (Aisi 303)

8,000 psi (550 bar), 80 lpm, 90°C Inlet 1/2" BSP F

Outlet 1/2" BSP F Bypass ½" BSP F

BVB53 **\$1,122**





UNLOADER VB60/600 ZERO

8,700 psi (600 bar) permissible pressure, 60

lpm, 60°C Inlet 1/2" BSP F Outlet 1/2" BSP F Bypass 1/2" BSP F

MPA60260000 \$1,309





SAFETY VALVE VS500

7,300 psi(500 bar), 80 lpm, 90 8,100 psi permissible pressure

Inlet: ½" BSP M

¾" BSP F Bypass:

MPA60520000 \$523



(more options p 65)

\$130

\$103

7,300 PSI HOSE ... BLASTERS UP TO 500 BAR

	Length	S/coae		
	10m	A3641443109	\$666	
7,300 psi (500 bar)	20m	A3641443209	\$976	3/8 M BSP ends, 150°C
(300 bai)	30m	A3641443309	\$1,246	rated, certified for Class

HOSE RESTRAINTS ... OH&S REQUIREMENT

All class B machines must have a hose restraint to comply with the Australian safety standard. Hose ruptures account for 90% of operator injuries, protect your operators!

AD HRSS10 (3/8" thermoplastic hose) AD HRSS8 (1/4" thermoplastic hose)



ST 500 FOOT VALVES & WHIP HOSE



Stainless steel housing, & valve, rubber feet, includes 3m whip hose max 500 bar, 40 lpm, 150°C

Inlet M24 M Outlet M24 M

AST500-M24 \$975

350 BAR (40lpm max flow) AST350-2605 **\$578**



Replacement 500 bar whip hose, 3m

Inlet M24 F Outlet M24 F

S/code

A3641443039 \$440



\$1.559

500 BAR HYDRO-BLASTERS ...



TS12 SAND BLASTER

spray pattern ,80 lpm, 90°C

Inlet ¼" BSP F Nozzle ¼" Npt M (15°)

MPA25.0450.00

S/code

Head only MPA25.0300.20

Hose barb

500 Bar, 7,300 PSI grit blast head with a flat

\$881

\$130

GRIT BLAST KITS ... REMOVE PAINT OR RUST FASTER

500 BAR GRIT BLASTER

TPS450/ GLK

TPS 450 Kit (**500 Bar, 7,300 PSI**) grit blast kit, c/w probe, plastic hose, 800mm lance, gun, nozzle & nipple for quick coupling

(specify nozzle size required)	, ,
REPLACEMENT PARTS	
C4700.18 Head only	\$651
C4604.04 Hose barb	\$130

Repair kit for head (C650419) \$315



COMPLETE TURBO KITS

500 BAR TURBO KIT

500 bar (7,300 psi) includes turbo head, gun, 800mm lance, nozzle & quick coupling nipple



PPE to 500 BAR pages 80-81

Aussie run essential operator safety awareness courses to train operators in the safe use of our class B hydro-blasters



AUSSIE SAFE-OPERATOR SAFETY AWARENESS TRAINING ...



STAY SAFE ... PERSONAL PROTECTION UP TO 500 BAR

Aussie Pumps

500 BAR HOSE SHROUDS



Hose ruptures account for 90% of operator injuries.

The hose shroud is placed on the hose at the connection to the gun. This provides effective protection for the operator as it has been tested for 500 bar / 7500 psi. An adjustable strap holds the hose shroud securely in place.

Length: 750 mm Diameter: 41 mm Weight 0.2 kg ATST56600455920 \$252



PROTECTION LEVEL 5/5/2 ROTOR 500 bar/7500 psi FLAT 500 bar/7500 psi SINGLE 200 bar/3000 psi

C € 89/686/EEC

Comfort, Function and Safety - Pro Operator

Dyneema® is the world's strongest fibre.

(15 times stronger than steel on a weight for weight basis). This makes it possible to offer high levels of protection against water jetting hazards even with lightweight fabric. Being much thinner and more flexible than traditional materials, such as leather, cotton and metals, products made with Dyneema® fibre will be very comfortable. Employees will appreciate this comfort, combined with higher protection, and consequently are more likely to wear them at all times.

Dyneema® is a registered trademark of Royal DSM N.V

APRON

The full area of the Apron has built-in protection. Good alternative protection in warm environments.

- Adjustable neckband .. adjusts position of apron
- Adjustable waistband ... takes weight off the neck
- Easy to put on & take off
- Recommended for work on flat surfaces
- One size
- Weight 0.7 kg

ATSTP5623025 \$573



GLOVES

Pack of 12 pairs of gloves, Size 8 or 11

\$2.063 ATSTP5600025/xx (xx = size)

Individual pairs of gloves, size 8 or 11 ATSTP5600025xxS (xx = size)

\$215

HEAD PROTECTION .. 3,000 BAR

Helmet with safety visor & hearing protectors.

- Comfortable
- Adjustable fit
- Replaceable visor that can be set in folded up position
- 3 point chin strap

- Adjustable hearing protectors for optimum protection & comfort
- Weight 0.85kg
- Temp range -30°C to 150°C

\$576 ATST51K0216890





Conversion table for shoe sizes

US	UK
9	8
9½	9
10½	10
11½	11
12	11½
13	12½
13½	13½
	9 9½ 10½ 11½ 12 13

AUSSIE STOP-JET BOOTS ... CE CERTIFIED TO 500 BAR

Designed for comfort, performance and grip. Completely vulcanised rubber boots fitted with steel toecaps and sole inserts. Black areas on uppers indicate areas that withstand high pressure water jets up to 500 bar.

- Adjustable top strap
- Waterproof
- Textile inner lining for comfort
- Easy to pull on
- Sizes 42-48

ATST5652025xx \$524

Prot. Level	Pressure bar (psi)	Flow (I/m)	Nozzle type	Dist. (mm)	Speed (m/s)	Result
5/5/3	500 (7500)	16.9	Rotary jet	75	0.5	No penetration
5/5/3	500 (7500)	16.9	15° fan jet	75	0.5	No penetration
5/5/3	300 (4,350)	13.1	Pencil jet	75	0.5	No penetration





OVERALL WITH HOOD

3-layer functional overall which is CE certified for protection against water jets to 500 bar. Excellent for the toughest conditions! Lined for high comfort. Waterproof and dirt repellent outside.

Weight 2.5 kg / 5.5 lbs. (Overall size L). Sizes XS-3XL

ATSTP5640025xxx (xxx = size)

\$1.763

Hi-vis option...

ATHV5640025xxx (xxx =size)

\$1.953

ID pocket

Knife pocket on right leg

Ventilation zips in armpits

Pockets for knee pads

Reinforced knees

Adjustable cuffs

- Detachable hood with 3 adjustments
- 2 pockets with water proof
- Inside are cuffs ... prevent leakage
- Elasticated waist
- Zippers at bottom of legs
- Water proof front zipper with overlapping flap

JACKET WITH HOOD

3-layer functional jacket which is CE certified for protection against water jets to 500 bar. Very comfortable and flexible. Lined for high comfort. Waterproof and dirt repellent outside. Thoughtful details such as opening ventilation in the armpit, comfortable cuffs and adjustable hood.

Weight 1.6 kg / 3.5 lbs. (Jacket size L). Sizes XS-3XL

ATSTP5622025xxx (xxx =size) \$1,154

Hi-vis option...

ATHV5622025xxx (xxx =size) \$1,301

3-layer functional trousers which are CE certified for protection against High Pressure Cleaning. Very easy to put on and off. Adjustable elastic waist for perfect fit. Waterproof and dirt repellent outside. Practical details such as knife pocket, leg pocket and dual loops for belt. Zippers down on the legs allows them to widen to facilitate donning the boots.

Sizes XS-3XL

Hi-vis option...

ATHV5632025xxx (xxx = size) \$1,029

Jacket, Trousers, & Overall	Height (cm)	Chest (cm)	
XS	160-167 (5′3″-5′6″)	84 (33")	
S	168-175 (5'6"-5'9")	92 (36")	
М	176-180 (5′9″-5′11″)	100 (39")	
L	181-186 (5′11″-6′1″)	108 (43")	
XL	187-192 (6'2"-6'4")	116 (46")	
2XL	193-200 (6'4"-6'7")	124 (49")	
3XL	201-206 (6′7″-6′9″)	132 (52")	

TROUSERS

Weight 1.3 kg / 2.9 lbs. (Trousers size L).

ATSTP5632025xxx (xxx = size) \$881

of B	

HI VIS VEST

Comfortable vest with protection on both the front and back. Water & dirt repellent outside

- Protection all around the vest
- Good for warm environment
- Special pocket for phone

Weight 1 kg / 2.2 lbs. (Overall size L). Sizes S-3XL

ATST5620025HVVxx (xx =size) \$1,328

SAFE OPERATOR TRAINING

New Australian Standards on the use of high pressure water jetting systems (AS:NZS4233.1-2013) states that operators of Class A pressure cleaners, typically to 4,000 psi, must be trained in identifying risk and the safe use of the equipment.

For Class B machines, 5,000 psi and above, or high flow blasters, operators must undergo formal training in high pressure jetting and be certified.

Aussie Pumps run safety training courses with a huge emphasis on safety awareness. The training program details, in a very down to earth way, the value of using indispensable labour saving equipment, without running the risk of disablement or injury.

Call Aussie Pumps for more details of the FREE courses.





STAY COOL ... REDUCE THE RISK OF HEAT STRESS

DURATION?

Lasts for 90 minutes in a 60°C/140°F environment, or 4 hours at 45°C/113°F normal work.

RE-CHARGE?

Re-charges in 4 hours in room temperature (20°C/68°F), or 10-15 mins in a fridge.

WHAT ABOUT THE ELEMENTS?

Consist of a non toxic, non flammable blend of salts which is known to be the most effective ingredients for this temperature range. Can be used and re-charged over and over again. Guaranteed for 1000 cycles, if properly maintained. TEMPTECH elements within the vest can be replaced if damaged.

FIFXI

MULTI

Cooling Vest Multi has 20 TEMPTECH elements that provide effective heat absorption. Also available in flame retardant material

Recommended to use tight to the body, with a T-shirt underneath, and a covering garment on top.

Weight 2,1 kg.

Size S/M-4XL/5XL

S/code: ATSTC3010P028xx (xx=size code)

\$598

20 additional TEMPTECH elements

S/code: ATSTC3090P28020

\$380

Flame retardant option

Size S/M-4XL/5XL S/code: ATSTC3026P028xx (xx=size code)

\$677





Cooling Vest Flexi is designed to be smooth and easy to put on. It closes with velcros at the shoulders and sides. The Flexi vest has 16 TEMPTECH elements that absorb excessive heat. Also available in fire-resistant Nomex material. Recommended to use tight to the body, with a T-shirt underneath, and a covering garment. Weight 1.6 kg.

One size fits all.

S/code: ATSTC3000P02801

\$490

16 additional TEMPTECH elements S/code: ATSTC3090P28016

\$304

Fire resistant (Nomex) option

S/code: ATSTC3008P02801 \$869



Vest type	Polyester	Flame retardant	Nomex
Flexi	Standard	No	Option
MULTI	Standard	Option	No

HOW IT WORKS

Through our unique concept - using TEMPTECH elements with a 28°C transition temperature - we utilize this fact of nature to store energy, and absorb excessive heat.

Everybody knows that ice melts at temperatures above 0°C but not everybody knows that the moment of transition from solid to liquid uses up to 50 times more energy compared to a rise of 1°C when an object already is in either liquid or solid condition.

The TEMPTECH element recharges in normal room temperature (20°) in about 4 hours - faster if in a cooler environment – and is guaranteed to last more than 1000 cycles.

Applications

- Water jetting
- Fire & Rescue services
- Mining
- Police
- **Athletes**
- Oil platforms
- Chemical industry
- Steel industry
- Refineries
- **Nuclear plants**
- Paper mills
- Military services
- Hazmat
- Diving
- Road workers



Size table (cm)	Chest	Size code
S-M	84-100	20
L-XL	100-116	24
2XL-3XL	116-132	26
4XL-5XL	132-148	28







BERTOLINI DIRECT DRIVE

FS, WBG, TWGS, TMG, WBL



BERTOLINI

HEAVY DUTY 140 - 300 BAR WBL, TTL, TTK

p86

p84



BERTOLINI

HEAVY DUTY 350 - 500 BAR RAS, RAL, RA

p88



BERTOLINI

ULTRA HIGH PRESSURE

p89



BERTOLINI

HIGH FLOW/ PRESSURE

p90



BERTOLINI

STAINLESS STEEL PROCESS PUMPS TAM, KA

p91



BERTOLINI MOTOR PUMPS

CK, C3006

p92



TECH TALK

SYSTEM REQUIREMENTS

p93



UDOR DIAPHRAGM PUMPS

ZETA, KAPPA, DELTA

p94





Cougar Axial Pump



Got a third world pump that's failed?

Upgrade with this **great value** axial pump that suits Honda 5.5HP engines

Model	COUGAR PUMP (F520002-AAA)
S/code	F90029 BEST
Pump type	Axial
Pump pressure	3,100 psi (210 bar)
Flow	9 lpm
Suits Engine	Honda GC160/GC190 GX160/GX200 or equivalent ¾" keyed shaft
Required HP	5.5
Pump speed	3200 rpm
Used on	Cougar Mk 2/3
Shaft diameter	Hollow ¾"
Max temp	60°C
Weight	2 kg
	\$415

BERTOLINI PUMPS

DIRECT DRIVE FOR ENGINE MOUNTING









NEW 4	l year warranty	RE21 RAA
Model	WBXG 3025	TMG 4035
S/code	BWBXG3025	BTMG4035
Pump type	Triplex	Triplex
Pump pressure	3,000 psi (200 bar)	4,000 psi (280 bar)
Flow	10 lpm	13 lpm
Suits engine (or equivalent)	Honda GX200 ¾" keyed shaft	Honda GX390 1" keyed shaft
Required HP	6.5HP	13HP
Pump speed	3450 rpm	3450 rpm
Used on	Scud AB30	Scud AB40
Interchanges with Interpump	TT1511 C¾"	WW 964
Shaft diameter	Hollow ¾"	Hollow 1"
Max temp	60°C	60°C
Recommended nozzle size	035	030
Weight	6	10.8
Dimensions	206 x 199 x 131	252 x 249 x 149
	\$821	\$997

REPLACEMENT PUMP KITS ... IT'S EASY TO REPLACE A WORN OUT PUMP OR UPGRADE TO BERTOLINI

Smart replacement options, easy & cost effective. Kits (supplied unassembled) include

Bertolini pump, unloader valve, safety valve, thermal dump and pressure gauge (where indicated). Full instructions included.

Direct engine drive pump kits

Pump Mode	I S/code	Unloader	Safety valve	Thermal Dump	
WBXG3025 [#]	BWBXG3025KIT	BAPR-I-35ADJ	MTM00033003	MPA60063050	\$1,016
TMG4035 [#]	BTMG4035KIT	BAPRI 40ADJ	MTM00033003	MPA60063070	\$1,204

Electric drive pump kits

Pump Model	S/code	Unloader	Safety valve	Thermal Dump	Pressure Gauge	
WBL917	BWBL917KIT	BAPRI20ADJ	-	MPA60063050	AGCDR0102	\$823


Small Hydraulic drive pump kits

Pump Model	S/code	Unloader	Safety valve	Thermal Dump	Pressure Gauge	
THY2715	BTHY2715KIT	BAPR-I-35ADJ	MTM00033003	MPA60063070	AGCDR0102	\$1,676
WHY1520	BWHY1520KIT	BAPR-I-35ADJ	MTM00033003	MPA60063050	AGCDR0102	\$1,214

NOTE Aussie Pumps strongly recommends replacing the nozzle in the lance when purchasing a replacement pump kit. Purchase a 5 pack of nozzles with your pump kit and get a **10%** discount! (p60 for details)

NOTE: kits marked # do not contain a pressure gauge. A gauge is required during set-up of the unloader and safety value. Purchase of a test kit for this procedure is therefore recommended. A Test Kit

SAVE 10% on buying parts individually!



ASP (Aussie Safety Protection) kits, include thermal dump valve & safety valve. Protects operator & machine against excessive bypass & pressure spikes.

Aussie pressure test set includes gauge and fittings for testing pump output pressure and Bertolini Pump Selection Guide ATESTSET \$106











BERTOLINI PUMPS

WBL SERIES ... SLOW SPEED SUIT ELECTRIC MOTOR MOUNTING OR GEARBOX DRIVE

- Super Cool Fin System ... die cast alloy crankcase, ribbed for efficient cooling, with high thermal conductivity
- **Premium oversized bearings**
- Forged steel crankshaft for coupling to motor/engine
- Large stainless steel plunger rods that have undergone a special nitrating treatment. As a result the rods are harder and smoother for longer seal life.
- Oversized aluminium con rods for max strength
- Rapid action, mirror finish stainless steel 316 check valves for corrosion resistance
- High quality pistons for long life





ELECTRIC MOTOR VERSION 24mm pump shaft

Model	WBL 917
S/code	BWBL917
Pump type	Triplex
Pump pressure	2,000 psi (140 bar)
Flow	9 lpm
Motor	4 pole
Required kW	2.2kW
Pump speed	1450 rpm
Used on	Monsoon 140
Max temp	60°C
Recommended nozzle size	035
Weight	5.8
Dimensions	206.7 x 154.5 x 131mm
	\$648



KEYED SHAFT FOR GEARBOX 24mm pump shaft

Model	WBL 1114
S/code	BWBL1114
Pump type	Triplex
Pump pressure	2,000 psi (140 bar)
Flow	11 lpm
Suits engine (or equivalent)	Honda GX 160 ¾" keyed shaft
Required HP	5.5
Pump speed	1450 rpm
Used on	BB100EY
Max temp	60°C
Recommended nozzle size	035
Weight	5.8
Dimensions	206.7 x 154.5 x 131mm
	\$900

Gearbox reqd \$543 (B318699973) For pump kits & gearbox see page 86

DIRECT DRIVE & SMALL SLOW SPEED BERTOLINI PUMP SERVICE PARTS

PUMP MODEL

	Part No.	Description	WEL 744 WEL 733	WBL 1114	WBL 917 WBL 1111	WS 899G	WBG 2030	WHY 1520	THY 2715	TWSG 3013 TWSG 3016	WBXG 3025	TMG 4035	
	BKIT1	(15 pieces)	~			~				~			\$108
Valve Kit	BKIT123	(15 pieces)							~			~	\$128
	BKIT141	(12 pieces)		~	~		~	~			~		\$49
	BKIT166	(12 pieces)		~	~		~	~			~		\$159
Malesa and life	BKIT3	(12 pieces)	~			~							\$72
Valve cap kit	BKIT18	(12 pieces)								~			\$181
	BKIT67	(12 pieces)							~			~	\$142
	BKIT12	(15 pieces)	~	~	~			~					\$152
	BKIT60	(12 pieces)				~							\$116
Minor Seal Kit	BKIT21	(15 pieces)								~		i e	\$222
Minor Seal Kit	BKIT73	(15 pieces)					~				~		\$116
	BKIT74	(15 pieces)										~	\$115
	BKIT177	(18 pieces)							~				tba
	BKIT10	(18 pieces)	~										\$236
	BKIT70	(21 pieces)		~	~			~					\$195
	BKIT61	(18 pieces)				~							\$251
·	BKIT20	(21 pieces)								~			\$323
	BKIT68	(21 pieces)					~				~		\$251
	BKIT69	(21 pieces)										~	\$237
	BKIT176	(24 pieces)							~				tba
	BKIT14	(3 pieces)								~			\$41
Oil Seal Kit	BKIT64	(3 pieces)	_					~			~		\$44
	BKIT65	(3 pieces)										~	\$50
	BKIT78	(9 pieces)										~	\$71
	BKIT82	(8 pieces)					~	~					\$72
Full oil seal &	BKIT83	(8 pieces)		~	~								\$72
sight glass kit	BKIT169	(8 pieces)									~		\$66
	BKIT189	(9 pieces)							_				tba
	B050010182	18mm	~	~	~			~		~			\$108
5 .	B040010182	15mm				~	~				~		\$81
Piston	B070007182	15mm										~	\$94
	B080070182	20mm							_				\$198
a: 1 . a!	B853505002	%" threaded	~			~				~			\$17
Sight Glass	B040120322	Clip On		~	_		~	~			~	~	\$8
	B852570002	¾" Yellow	~			~				~			\$15
Breather Plugs	B049832973	¼" Orange	~	~	_		~		_		~	~	\$15
Gearbox	B318699973	Ø 24mm/ 3/4" Shaft	~	~									\$543







BERTOLINI PUMPS

HEAVY DUTY, SLOW SPEED (1450 RPM) PUMPS FOR ENGINE MOUNTING



- Intelligent packing seal system;
 - High pressure seal self lubricating with variable expansion dependant on
 - Anti extrusion ring made of PTFE & graphite protects pistons, precision engineered fit
 - Low pressure seal reduces friction on pistons
- Special Easylube gear oil used for break in period of pump

- Stainless steel Tenifer treated piston rod, hardened and polished ... extremely wear resistant
- Valve caps are designed to eliminate water under pressure in threads ... torque reduced by 40%, therefore easy to remove without risk of damage
- Super Cool Fin System ... die cast alloy crankcase, ribbed for efficient cooling, with high thermal conductivity
- Hardened surface of piston guides ensure smooth operation

TTL SERIES

SAE 75W 90

24mm pump shaft			NEW				
Model	TTL 1520	TTL 2120	TTL2028	TTL 1330			
S/code	BTTL1520	BTTL2120	BTTL2028	BTTL1330			
Safety classification	Class A	Class A	Class A	Class A			
Pump pressure	3,045 psi (200 bar)	3,045 psi (200 bar)	4,000 psi (280 bar)	4,350 psi (300 bar)			
Flow	15 lpm	21 lpm	20 lpm	13 lpm			
Suits engine (or equivalent)	Honda GX390	Honda GX390	Honda GX630	Honda GX390			
Required HP	13 HP	13 HP	23 HP	13 HP			
Pump speed (rpm)	1450						
Replacement for	TTV2015	TTV2021		KTV4040*			
Used on	Scud 350	Scud 351	Ultra A/ Cobra A	Scud 400			
Interchanges with Interpump	WS 201	WS202					
Max temp		74°C (85°C v	with hot seals fitted)				
Recommended nozzle size	045	060	050	035			
Weight	14.2 kg	14.2 kg	14.2 kg	14.2 kg			
Dimensions	272 x 192 x 146						
	\$1,536	\$1,650	\$1,846	\$1,775			
Gearbox regd	RTI 121 HP8	-18 (B318870	0973)	\$863			

4 year warranty

NEW KTL SERIES TTK SERIES

24mm pu	mp shaft	24mm pump shaft						
TTK 3021	TTK 2130		KTL 1635	KTL 2035				
BTTK3021	BTTK2130		BKTL1635	BKTL2035				
Class B	Class B		Class A	Class B				
3,045 (210 bar)	4,350 (300 bar)		5,000 (350 bar)	5,000 (350 bar)				
29 lpm	21 lpm		16 lpm	20 lpm				
Honda GX630	Honda GX630		Honda GX630	Honda GX630				
23 HP	23 HP		23 HP	23 HP				
	1450		1450					
KKV2028*	KTV3021*							
Monsoon 300	Ultra/Cobra		King Cobra A					
W 2030	W 3021							
74°C (85°C wi	th hot seals fitted)		74°C (85°C with hot seals fitted					
055	055		035	045				
15.7 kg	15.7 kg		15.7 kg	15.7 kg				
302.6 x 192 x 146			302.6 x 192 x 146					
\$2,119	\$2,119		\$2,246	\$2,246				
RTI 121 HP7-18 (B319110973) \$863 (used with GX630)								

RTI 121 HP20+ (B319111973) \$912 (used with GX690)

REPLACEMENT PUMP KITS ... SAVE 10%

SMART REPLACEMENT OPTIONS, EASY & COST EFFECTIVE

Kits (supplied unassembled) include Bertolini pump, unloader valve, safety valve, thermal dump and pressure gauge. Full instructions included.

Pump Model	S/code	Unloader valve	Safety valve	Thermal dump Valve	Pressure gauge	
WBL1114	BWBL1114KIT	BAPRI20ADJ	MTM00033003	MPA60063050	-	\$1,074
TTL1520	BTTL1520KIT	M215010400	MTM00033003	MPA60063070	AGCDR0102	\$1,659
TTL2120	BTTL2120KIT	M215010400	MTM00033003	MPA60063070	AGCDR0102	\$1,761
TTL1330	BTTL1330KIT	BVB350	MPA60156000	MPA60063070	AGCDR0102	\$1,987
TTL2028	BTTL2028KIT	BVB350	MPA60156000	MPA60063070	AGCDR0102	\$2,051
TTK3021	BTTK3021KIT	M215010400	MPA60156000	MPA60063070	AGCDR0102	\$2,205
TTK2130	BTTK2130KIT	BVB350	MPA60156000	MPA60063070	AGCDR0102	\$2,298
KTL1635	BKTL1635KIT	BVB350	MPA60058000	MPA60063070	AGCDR0102	\$2,448
KTL2035	BKTL2035KIT	BVB350	MPA60058000	MPA60063070	AGCDR0102	\$2,448

ASP (Aussie Safety Protection) kits, include thermal dump valve & safety valve, Protects operator & machine against excessive bypass & pressure spikes.

NOTE Aussie Pumps strongly recommends replacing the nozzle in the lance when purchasing a replacement pump kit. Purchase a 5 pack of nozzles with your pump kit and get a 10% discount! (p60

BERTOLINI GEARBOXES

FOR PETROL/DIESEL ENGINES SAE FLANGE

Model	S/code	PTO Engine	Pump Shaft (mm)	Suits Pump models	
RTI 126 HP3-5	B318699973	3/4"	24	WEL,TW, KWE, WBL	\$543
RTI 121 HP8-18	B318870973	1"	24	TTV, TTL	\$863
RTI 121 HP7-18	B319110973	1"	24	TTK, KTL, KKL	\$863
RTI 121 HP8-18	B318855973	1"	30	KTV, KKV	\$863
RTI 121 HP20+	B319111973	1 1/8"	24	KTL	\$912





Larger gearboxes listed on page 86


 $^{^{*}}$ these old style pumps have a 30mm shaft, if upgrading to a TTL or TTK the gearbox will also need to be changed







Valve kit

HEAVY DUTY SLOW SPEED BERTOLINI PUMP SERVICE PARTS

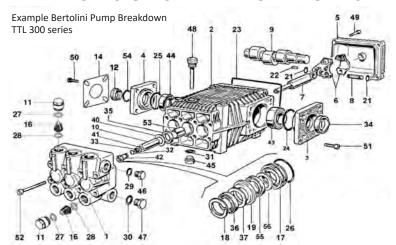





Full oil seal & sight glass kit



Valve cap kit

KIT 37

Oil seal kit

0

							PUMP MC	DEL										
	Part No.		TTV 2015 TTV 2021	KTV 3015 TV 3021 KTV 4040	KKV 2028	HDS 5057	TTL 1520 TTL 2120	TTL 1330 TTL 1530		TTK 3021	TTK 2130 (4365)	KTL 1635 KTL 2035	RAL 2035	NEW RAL 2035-P 2535-P	RAS 4482	NEW RAS 4482 Premium	RA 316	
	BKIT123 BKIT249 - HW	12 pieces	~	~			~	~	~		~	~	~	~				\$128 (\$179)
	BKIT40	12 pieces			~													\$216
Valve Kit	BKIT93	12 pieces				~												\$144
	BKIT148	12 pieces								_					_	_		\$194
	BKIT253 - HW														·			(\$312)
	BKIT209 BKIT67	18 pieces 12 pieces	-	~			~	~	~	~	~	~	-	-	_	-	~	\$267 \$142
Valve	BKIT132	12 pieces	•	•	-		•	•	_	•	-	•	-	<u> </u>	<u> </u>	•		\$205
cap kit	BKIT211	18 pieces			_												~	\$470
	BKIT89 (BKIT311 s/no 15 BKIT200 - HW	18 pieces	~	~			~				~							\$224 (\$844)
	BKIT90 BKIT201 - HW	18 pieces			~					~								\$256 (\$1237)
Minor	BKIT95 (BKIT309 s/no 150 BKIT199 - HW	18 pieces 070568 up)				~		~	~									\$220 (\$844)
Seal Kit	BKIT309	18 pieces										~						\$220
	BKIT153	19 pieces													~			\$241
	BKIT283	19 pieces														~		\$229
	BKIT164 BKIT271	19 pieces											~					\$331 \$229
	BKIT219 - HW BKIT227	13 pieces												•				(\$890)
	(BKIT277 premium BKIT86	series) 24 pieces															~	\$764
	(BKIT312 s/no 15 BKIT87		~	~			~			~	~							\$417 \$409
	BKIT96	24 pieces			_					-								
	(BKIT310 s/no 150					~		~	~									\$436
Major	BKIT310	24 pieces										~						\$436
Seal Kit	BKIT152	25 pieces													~			\$310
	BKIT282	25 pieces														~		\$310
	BKIT165	25 pieces											~					\$518
	BKIT270	25 pieces												~				\$310
	BKIT228 (BKIT276 premiur																~	\$1,005
Oil Seal	BKIT37	3 pieces	~	~	~	~	~	~	~	~	~	~						\$53
Kit	BKIT146	3 pieces											~	~	~	~	~	\$65
Full oil	BKIT127	10 pieces	~				~	~	~									\$127
seal & sight	BKIT98 BKIT147	9 pieces 11 pieces		~	~	~				~	~	~	_	-	_	_		\$119 \$118
glass kit	BKIT210	10 pieces															~	\$99
3	B060009182	20mm	~	~			~				~						-	\$116
	B060010182	22mm			~					~								\$144
Piston	B060055182	18mm				~		~	~			~						\$174
	B080070182	20mm											~	~	~	~	~	\$198
Sight	B853515502	¾ threaded (with o-ring)		~	~	~				~	~	~	~	~	~	~	~	\$22
Glass & o-ring	B060059322	Clip On	~				~	~	~	~	~		~	~				\$33
Oil Breather	B060020322		~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	\$15
	B318870973	Ø 24mm/ 1" Shaft	~				~	~	~									\$863
	B319110973	Ø 24mm/ 1" Shaft								~	~	~						\$863
Gearbox	B319111973	Ø 24mm/ 1 1/8" Shaft										~						\$912
	B318855973	Ø 30mm/ 1" Shaft		~	~													\$863
	B318880973	Ø 30mm/ 1 1/8" Shaft				~							~	~	~	~	~	\$912









HEAVY DUTY PUMPS FOR ENGINE MOUNTING, TO 7,300 PSI

Outstanding build quality and innovative design features provide efficient operation, easy maintenance and pump long life. Ideal for industrial and continuous running applications.











RAS SERIES 30mm pump shaft

Model	RAS 4482-P NEW PREMIUM SERIES
S/code	BRAS4482
Pump pressure	4,300 psi (300 bar)
Flow	31 lpm
Suits engine (or equivalent)	31HP Vanguard
Pump speed	1725 rpm
Replacement for	
Used on	Python
Equivalent to Interpump	-
Shaft diameter	30mm
Max temp	74°C
Recommended nozzle size	070
Weight	18.5 kg
Dimensions LxWxH (mm)	324 x 281 x 228
	\$2.596

RAL SERIES

\$2,352

3	0m	m	pump	shaft

RAL 2035-P NEW PREMIUM SERIES	RAL 2535-P NEW PREMIUM SERIES
BRAL2035	BRAL2535
5,075 psi (350 bar)	5,075 psi (350 bar)
20 lpm	25 lpm
Honda GX690 or 27HP Vanguard	27HP Vanguard
1450) rpm
HDS5057	
Predator	Predator Plus
W 3521	WW 3025
30mm	30mm
74°C (85°C with	hot seals fitted)
045	055
18.5 kg	18.5 kg
324 x 28	81 x 228

\$2,477

RA	316	se	ries
30m	ım pı	ımp :	shaft

Model	RA 1650	RA 1850	RA 2150	RA 2450		
S/code	BRA1650	BRA1850	BRA2150	BRA2450		
Pump pressure	7,250 psi (500) bar)				
Flow	16 lpm	18 lpm	21 lpm	24 lpm		
Required HP	20.7 (15.4 kW)	23 (17.3kW)	28 (21kW)	31 (23.4kW)		
Pump speed	1450					
Shaft diameter		30m	m			
Max temp		74°	С			
Recommended nozzle size	025	030	035	040		
Weight	20.8 kg					
Dimensions LxWxH (mm)	321 x 282 x 228					
	\$3,558	\$3,558	\$3,558	\$3,558		

Bertolini Slow Speed Pump Parts Kits ... see p 87

REPLACEMENT PUMP KITS ... SAVE 10%

SMART REPLACEMENT OPTIONS, EASY & COST EFFECTIVE

Kit (unassembled) includes Bertolini pump, unloader valve, safety valve, thermal dump and pressure gauge.

Pump Model	S/code	Unloader valve	Safety valve	Thermal dump Valve	Pressure gauge	
RAL2035	BRAL2035KIT	BVB350	MPA60058000	MPA60063070	AGCDR0102	\$2,544
RAL2535	BRAL2535KIT	BVB350	MPA60058000	MPA60063070	AGCDR0102	\$2,429
RAS4482	BRAS4482KIT	BVB350	MPA60058000	MPA60063070	AGCDR0102	\$2,763



ASP (Aussie Safety Protection)

kits, includes thermal dump valve & safety valve. Protects operator & machine against excessive bypass & pressure spikes.

NOTE Aussie Pumps strongly recommends replacing the nozzle in the lance when purchasing a replacement pump kit. Purchase a 5 pack of nozzles with your pump kit and get a 10% discount! (p60 for details)

BERTOLINI GEARBOXES

FOR PETROL/DIESEL ENGINES SAE FLANGE

Model	S/code	PTO Engine	Pump Shaft (mm)	Suits Pump models	
RTI 121 HP20	B318880973	1 1/8"	30	RAL, RAS, RA, HD	\$912
RTI 123 HP35	B319219973	1 1/8"	30	RA RB	\$977

NEW HEAVY DUTY RTI 123 GEARBOX

- low power absorption
- high efficiency
- double bearings



Smaller gearboxes listed on page 84









ULTRA HIGH PRESSURE PUMPS TO 10,875 PSI

Designed for ultra high pressure applications in heavy industry

CAX SERIES

40mm pump shaft

- 316 stainless steel pump head, valve caps, piston bolt & screws
- High temperature packing system with 316 ss intermediate ring, ss retainer & PTFE anti-extrusion ring
- Rapid action check valves with spring, poppet & seat made of 316 ss
- Compact design, easy to install
- Strong, state of the art components
- Suit reverse osmosis, desalination, food processing pharmaceutical & chemical industries

Model	CAX 3060	CAX 2475
S/code	BCAX3060	BCAX2475
Pump pressure	8,700 psi (600 bar)	10,875 psi (750 bar)
Flow	31 lpm	25 lpm
Required HP	50	(37.3kW)
Pump speed	1	000 rpm
Shaft diameter		40mm
Max temp		60°C
Weight		87.9 kg
Dimensions LxWxH (mm)	572	x 465 x 288
	\$14,979	\$14,979





4 year warranty

BERTOLINI PUMPS HIGH FLOW PUMPS TO 144 LPM

CPQ SERIES



RD SERIES

- Forged brass head
- Stainless steel check valves
- Highly polished solid ceramic pistons, reduce friction & prolong seal life
- Patented du-dry plunger rod bushing, PTFE coated, reduces friction for smooth operation
- Compact diecast aluminium crankcase for high strength and anodized for corrosion
- Premium oversized tapered roller bearings designed for heavier loads & extended

Model	CPQ9020	CPQ1316	CPQ1413	CPQ1613	
S/code	BCPQ9020	BCPQ1316	BCPQ1413	BCPQ1613	
Pump pressure	2,900 psi (200 bar)	2,320 psi (160 bar)	1,885 psi (130 bar)	1,885 psi (130 bar)	
Flow	87 lpm	125 lpm	140 lpm	144 lpm	
Required HP	45.7 (34.1kW)	52.6 (39.2kW)	48 (35.8kW)	52.8 (39.4kW)	
Pump speed		1000	1000 rpm		
Shaft diameter	30mm	36mm	40mm	40mm	
Max temp	60°C				
Weight	55 kg				
Dimensions LxWxH		449 x 372x	2x 240 mm		
	\$5,101	\$5,321	\$5,539	\$5,539	

Model	RD 7515
S/code	BRD7515
Pump pressure	2,175 psi (150 bar)
Flow	73lpm
Required HP	30 (22.1kW)
Pump speed	1450 rpm
Shaft diameter	30mm
Max temp	74°C
Weight	20.5 kg
Dimensions LxWxH	340 x 280 x 178 mm
	\$2,407











- Double diameter stainless steel piston guide with a radial ring that doesn't come into contact with the moving rod thus eliminating wear and improving lubrication
- Patented du-dry plunger rod bushing, PTFE coated, reduces friction for smooth operation
- Premium oversized tapered roller bearings designed for heavier loads & extended operations
- Compact diecast aluminium crankcase for high strength and anodized for corrosion resistance
- ♦ Forged brass head
- Double "V" packing self-lubricating elastomer sealing system for maximum seal life.
- Rapid action check valves with 316 stainless steel spring, poppet & seat.
- Interlocking "self-aligning" connecting rods capable of high loads made of two parts to facilitate installation and removal. It reduces friction and wear due to overheating.

CX SERIES

NEW 4 year warranty

		A12-08 / IN		
Model	CX 1025	CX 1515	CX 1715	
S/code	BCX1025	BCX1515	BCX1715	
Pump pressure	3,600 psi (250 bar)	2,175 psi (150 bar)	2,175 psi (150 bar)	
Flow	97 lpm	153 lpm	173 lpm	
Required kW (electric)	48	45	51	
Pump speed	1000 rpm			
Shaft diameter				
Max temp		60°C		
Weight		83 kg		
Dimensions LxWxH	537 x 465 x 294 mm			
	\$9,138	\$9,138	\$9,138	



For full line-up check online aussiepumps.com.au

BERTOLINI GEARBOXES FOR PETROL / DIESEL ENGINES SAE FLANGE

Model	PTO Engine	Pump Shaft (mm)	S/code	Suits Pump models	
RTI 126 HP3-5	3/4"	24	B318699973	WEL,TW,KWE, WBL	\$543
RTI 121 HP8-18	1"	24	B318870973	TTV, TTL	\$863
RTI 121 HP7-18	1"	24	B319110973	TTK, KTL, KKL	\$863
RTI 121 HP8-18	1"	30	B318855973	KTV,KKV	\$863
RTI 121 HP20+	1 1/8"	24	B319111973	KTL	\$912
RTI 121 HP20	1 1/8"	30	B318880973	RAL,RAL-H,RAS,RAS-H, HD	\$912
RTI 123 HP35 (NEW)	1 1/8"	30	B319219973	RA RB	\$977
RTA 126 HP5	3/4"		B318701973	C35	\$495
RTA 160 HP7-10	1"		B318720973	C53	\$674
RTA 153 HP10-18	1"		B318642973	C63-73PR	\$1,651
RTA 162 HP10-18	1"		B318644973	C63-73PR	\$1,704





BERTOLINI STAINLESS STEEL PROCESS PUMPS

- 316 stainless steel pump head, valve caps, piston bolt & screws
- High temperature packing system with 316 ss intermediate ring, ss retainer & PTFE anti-extrusion ring (TAM series)
- Rapid action check valves with spring, poppet & seat made of 316 ss
- Compact design, easy to install
- Strong, state of the art components
- Suit reverse osmosis, desalination, food processing pharmaceutical & chemical industries



TAM SERIES 24 mm pump shaft



Model	TAM 1215	TAM 1315	TAM 1515	TAM 1715	TAM 2015			
S/code	BTAM 1215	BTAM 1315	BTAM 1515	BTAM 1715	BTAM 2015			
Pump type		Triplex						
Pump pressure			2,175 psi (150 bar)				
Flow	12 lpm	13 lpm	15 lpm	17 lpm	20 lpm			
Required HP	4.6	5.1	5.9	6.6	7.7			
Required kW	3.4	3.8	4.4	4.9	5.7			
Pump speed			1450 rpm					
Shaft diameter		24mm						
Max temp	85°C							
Weight		10.6						
Dimensions LxWxH		2.	52 x 187.5 x 127 m	m				
	\$3,380	\$3,380	\$3,460	\$3,601	\$3,601			

KA SERIES 24 mm pump shaft





BERTOLINI®
pumps
4 year warranty

Model	KA 2815	KA 3215	KA 3815	KA 4215			
S/code	BKA 2815	BKA 3215	BKA 3815	BKA 4215			
Pump pressure		2,175 ps	osi (150 bar)				
Flow	28.6 lpm	32.5 lpm	37.7 lpm	41.6 lpm			
Required HP	11.3	12.8	14.9	16.4			
Required kW	8.4	9.6	11.1	12.3			
Pump speed		1450	0 rpm				
Shaft diameter		24	mm				
Max temp		74°C (85°C with	n hot seals fitted)				
Weight		1	9.3				
Dimensions LxWxH	318 x 192 x 146 mm						
	\$4,508	\$4,673	\$4,761	\$4,795			

BERTOLINI MOTOR PUMPS

- Efficient 4 pole, three phase motors
- High quality flexible coupling made of cast iron .. Absorb vibrations from motor
- Heavy duty pumps for continuous use applications
- Pressure regulation valve with automatic bypass
- Strong, heavy duty steel welded frame with lifting eyes
- Steel coupling guard for maximum protection
- Glycerine filled pressure gauge with stainless steel case
- Pre-charged pulsation dampener on pump discharge for smooth operation
- 80 mesh filtration inlet strainer
- Anti vibration mounts under frame
- NB: No switch supplied

CK SERIES

Inlet	Diameter	1¼" BSP (40mm)			
	Min pressure	-3 psi			
	Max pressure	87 psi			
	Max temp	60°C (85°C with hot seals fitted)			
Outlet	Diameter	3/4" BSP			
	Valve - Out	1" BSP			
	By pass	1" BSP			
Base	Dimensions (mm)	1230 x 640			
	Weight	65 kg			





MOTOR PUMP		Three phase motor					Flow	Weight		
UNIT	Pump	50hZ- 400V	KW	Amps	RPM	bar	PSI	lpm	(kg)	
73.9203.97.3	CK 2216	160L 4 POLE	15	29.5	1450	100	1450	63	270	
73.9206.97.3	CK 2216	180L 4 POLE	22	42	1450	150	2175	63	326	
73.9204.97.3	CK 2220	180M 4 POLE	18.5	35	1450	100	1450	80	312	
73.9207.97.3	CK 2220	200L 4 POLE	30	56.6	1450	150	2175	80	382	
73.9205.97.3	CKL 2226	180L 4 POLE	22	42	1450	100	1450	97	326	DOA
73.9208.97.3	CKL 2226	200L 4 POLE	30	56.6	1450	150	2175	97	382	POA
73.9209.97.3	CKL 2233	200L 4 POLE	30	56.6	1450	120	1740	126	382	
73.9200.97.3	CK 1224	200L 6 POLE	18.5	37.3	975	80	1160	97	371	
73.9201.97.3	CK 1229	200L 6 POLE	22	43.9	975	80	1160	124	380	
73.9202.97.3	CK 1235	200L 6 POLE	22	43.9	975	70	1015	150	380	



C3006 SERIES

Inlet	Diameter	1¼" BSP				
	Min pressure	-3 psi				
	Max pressure	87 psi				
	Max temp	60°C				
Outlet	Diameter	3/4" BSP				
	Valve - Out	1" BSP (1¼"BSP - C1258)				
	By pass	1" BSP (1½"BSP - C1258)				
Base	Dimensions (mm)	200 L: 1230 x 640 225M & 250M: 1370 x 640				
	Weight	70 kg				





MOTOR PUMP		Three phase m					Flow	Weight		
UNIT	Pump	50hZ- 400V	KW	Amps	RPM	bar	PSI	lpm	(kg)	
76.9202.97.3	C 1538	200L 4 POLE	30	56.6	1450	100	1450	151	410	
76.9200.97.3	C 1248	225M 6 POLE	30	58.9	975	80	1160	192	475	POA
76.9201.97.3	C 1258	250M 6 POLE	37	69.3	975	70	1015	245	591	





ENERGY SAVING / PUMP CORRECT USE

It is quite normal that the pump flow is oversized in comparison with the application.

Ideally, the water recirculated through the regulating valve should not exceed 10-15% of the pump flow.

If it exceeds this, besides being inefficient, the recirculating water will heat up causing stress on seals and valves, and increasing the risk of cavitation in the pump. It is therefore recommended that the pump capacity is reduced to the actual system needs by moderating the pump R.P.M.

FAQ

Question: How much you must reduce the pump R.P.M. in order to get a lower capacity?

Answer: Required R.P.M. = Expected capacity x Max R.P.M. allowed

Max allowed capacity

Question: What diameter engine/motor pulley is required to achieve these R.P.M.?

Answer: External diameter of the engine/ motor pulley = External diameter of the pumps pulley x R.P.M. pump

R.P.M. motor/engine

Question: What if it is not possible to replace the engine/motor pulley?

Answer: External diameter of the pump pulley = External diameter engine/motor pulley x R.P.M engine/motor

Pump R.P.M.

Question: If the engine/motor is running at lower R.P.M. than the max. R.P.M indicated in the label, what is the max capacity

achievable?

Answer: Achievable max capacity = Engine /Motor R.P.M: x <u>Max capacity indicated in the label</u>

Max. R.P.M. indicated in the label


Question: What is the approximate power required to achieve the max performances allowed?


Answer: Required power (electric motors HP) = Max capacity (L/min) x Max pressure (bar)

385

Required power (petrol/diesel engines HP) = electric motors HP x 1.3

TYPICAL PUMP INSTALLATION

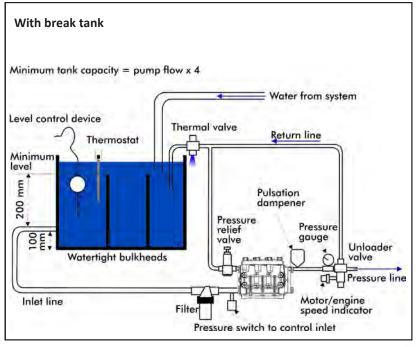







Top quality Udor diaphragm pumps designed for long, trouble free life in ag spray applications. Pumps offer limited self priming from $1\ 1/2\ m$.

Designed for mounting on petrol or diesel engines.

- · Broad acre spraying
- High pressure water transfer
- Spot spraying
- Machine wash down
- Sheep jetting
- Golf and turf
- Sugar cane
- Vegetable
- Viticulture
- Olives
- Cotton
- Positive displacement diaphragm design
- · Large capacity oil bath in crankcase
- · Compatible with most fluids including liquid fertilizers
- · Handles fluids to 60 degrees F (15 degrees C)
- Multiple diaphragm design
- Interchanges with other brands



- \Rightarrow Delivers consistent flow right through the pressure range
- ⇒ Cool running, reliable
- ⇒ Super versatile
- ⇒ Compatible with high temperature applications
- ⇒ Smooth running
- ⇒ Permits easy upgrade

PUMP KITS ... FOR ENGINE DRIVE APPLICATIONS All kits include pump & gearbox, control units not included

Model	Stock Code	No of diaphr.	Flow (I/m)	Bar	PSI	Suits engine	НР	kW	kg	RPM	Recommended control unit (sold separately)	
KAPPA 43	SKAPPA43ASSY	3	44	40	568	3/4" keyed Q shaft Honda GX200 (Yanmar L48)	4.2	3.1	10	550	SDS3/40 (\$372)	\$2,103
DELTA 75	SDELTA75ASSY	3	75	40	568	1" keyed Q shaft Honda GX270 (Yanmar L100)	7.7	5.7	19	550	SDS3/40 (\$372)	\$3,827
DELTA 125	SDELTA125ASSY	5	125	40	568	1" keyed Q shaft Honda GX390 (Yanmar L100)	12.3	9	27	550	VRG150 (\$549)	\$4,620
DELTA 151	SKDELTA151ASSY	4	153	50	710	Honda GX690 (Kohler 23HP)	19.5	14.3	36	550	VRG150 (\$549)	\$6,498

Replacement gearboxes

S160-3/4" VAZ	S160 Gearbox for Zeta 85	SGEARREDS160VAZ	\$883
S160-3/4" GR	S160 Gearbox for Kappa 43	S4425507175	\$883
M164-1"VA	Gearbox for Delta 75	S5033A4	\$1,064
M164-1"VA	Gearbox for Delta 125	S5033A4	\$1,064
M162-1"VA	Gearbox for Kappa 151	S442285034B5	\$1,791









100 bar - 500 bar, Flows to 21 lpm

p96



HIGH PRESSURE

Diesel drive

140 bar - 500 bar, Flows to 21 lpm

p97



HIGH PRESSURE

Mine spec

200 bar - 500 bar, Flows to 21 lpm

p97



HIGH FLOW

Petrol, diesel & mine spec

p98





20 bar - 40 bar, Flows to 125 lpm





HIGH PRESSURE HYDROSTATIC TESTERS



Super high pressure hydrostatic testers driven by petrol & diesel engines. Machines come in sturdy ergonomic frame, four wheel trolleys with big flat free tyres.

- Leak detection in water pipelines
- Hydrostatic testing of boilers
- Hydrostatic testing of pressure vessels
- Oil or gas pipeline testing
- Hydrostatic testing of pumps, valves or fire mains

- Super high pressures to 500 bar (7,300 psi)
- · Big flows to 20 lpm
- · Simple piston pump design
- · Double pressure gauge with lock of valve
- · Integrated control valve
- · Gearbox drive
- Stainless steel frame trolley with four big flat free tyres (pneumatic on larger diesel units)
- · Electric drive available on request

Benefits:

- Can handle wide range of tests
- Fast pump up to pressure
- Easy to service
- Easy to check for leaks
- Adjust to required pressure
- No exposed moving parts, safer
- Easy to move on site



PETROL DRIVE		* electric start option available										
Model	S/code	Pump Pressure (psi)	Pump model	Flow rate (lpm)	Engine	Pump (rpm)	Box Size (LxWxH) mm	Wt (kg)				
BB100 HTP*	ABB100KGX200HTP	2,000 (140 bar)	WBL1114	11	Honda 6.5HP GX200 recoil	1450	620x540x580	45	\$4,168			
Scud 350 HTP*	ABBSS350/390HTP	3,000 (200 bar)	TTL1520	15	Honda 13HP GX390 recoil	1450	1100x800x950	110#	\$6,108			
Predator A HTP	ABSSPRED-A/GX630HTP	5,000 (350 bar)	RAL2035	20	Honda 28HP GX690 e/start	1450	1100x800x1130	130	\$10,873			
Raptor 18 HTP	ABSSRAP/VAN18HTP	7,300 (500 bar)	RA1850	18	Vanguard 35HP e/start	1450	1100x800x1000	135	\$18,843			

 $KPA = bar \times 100$

Optional Wash-Down Kits ... Gun/lance & high pressure hose kits enable hydrostatic tester to be used as a blaster... page 97









Aussie Mine Boss Hydrostatic Testers

Aussie Mine Spec Features:

- 38mm Scud gal frame with anti vib mounts
- Steel wheels with pneumatic tyres
- **Emergency stop**
- Fire extinguisher
- Dry cell battery
- Double insulated wiring
- Optional bunded tray



	EL		

these units are shipped on a skid, dimensions & weight include skid.

Model	S/code	Pump Pressure (psi)	Pump model	Flow rate (lpm)	Engine	Pump (rpm)	Boxed Dimensions (LxWxH) mm	Wt (kg)	
Scud 100 D HTP	ABBSS100DHTP	2,000 (140 bar)	WBL1114	11	YANMAR L48 4.8HP recoil	1450	680 x 400 x 340	70	\$6,084
Scud 350 D HTP	ABBSS350L100HTP	3,000 (200 bar)	TTL1520	15	YANMAR L100E 10HP e/start	1450	1100x800x950	160#	\$10,617
Scud 400 D HTP	ABBSS400DHTP	4,000 (275 bar)	TTL1330	13	YANMAR L100E 10HP e/start	1450	1100x800x950	160#	\$10,993
Predator A DHTP	ABSSPRED-A/KDEHTP	5,000 (350 bar)	KTL	21	KOHLER KD477 23HP e/start	1450	1250x800x1130	250	\$22,359
Raptor D HTP 16	ABRAPTOR16DHTP	7,300 (500 bar)	RA1650	16	KOHLER KD477 23HP e/start	1450	1200x1200x1500	250	\$23,159
Raptor 450 D HTP	ABRAP450KDEHTP	6,525 (450 bar)	RA1850	18	KOHLER KD477 23HP e/start	1450	1200x1200x1500	250	\$23,159
Raptor D HTP 18	ABRAP18KDEHTP	7,300 (500 bar)	RA1850	18	KOHLER KD625 28HP e/start	1450	1200x1200x1500	280	\$26,361

Aussie Mine Boss option

Scud 350 D HTP	ABBSS350DHTPMS	3,000 (200 bar)	TTL1520	15	YANMAR L100E 10HP e/start	1450	1100x800x950	175#	\$13,285
Predator A DHTP	ABSCPREDAKDEHTPM	5,000 (350 bar)	RAL2035	21	KOHLER KD477 23HP e/start	1450	1250x800x1130	265	\$24,897
Raptor D HTP 16	ABRAP16DHTPMS	7,300 (500 bar)	RA1650	16	KOHLER KD477 23HP e/start	1450	1200x1200x1500	265	\$25,694
Raptor D HTP 18	ABRAP18KDEHTPMS	7,300 (500 bar)	RA1850	18	KOHLER KD625 28HP e/start	1450	1200x1200x1500	295	\$28,895

KPA = bar x 100

Optional Wash-Down Kits ... Gun/lance & high pressure hose kits enable hydrostatic tester to be used as a blaster

Suits	Gun/lance kit		10 metres of high pressure	hose
HTPs to 4,000 psi	APROGUN-900-035 APROGUN-900-045	\$175 \$175	10m 5,800 PSI (AHW06M22X2X10)	\$177
5,000 psi HTPs	MPA30456000 C915 M (nozzle)	\$213 \$22	10m 5,800 PSI (AHW06M24X2X10)	\$279
500 bar HTPs	MPA30473000 + nozzle	\$621 \$142	10m 500 bar (A3641443109)	\$666





HIGH FLOW HYDROSTATIC TESTERS



This range of hydrostatic testers consist of reliable Udor diaphragm pumps driven by petrol or diesel engines.

- High flow pumps to 125 litres Applications: per minute, pressures to 4,000 kPa
- Reliable Udor pumps standard
- Simple diaphragm design pump
- In line strainers standard
- Double pressure gauge and lock off valve system
- Integrated control system
- Gear box drive, enclosed
- Heavy duty trolley with four big flat free tyres

& weight include skid.

these units are shipped on a skid, dimensions

- Leak detection in water pipelines
- Hydrostatic testing of boilers
- Hydrostatic testing of pressure vessels
- Oil or gas pipeline testing
- Hydrostatic testing of pumps, valves or fire mains

HONDA PETROL ... 3 YEAR ENGINE WARRANTY

Model	S/code	Max Pump Pressure (psi)	Max Flow (lpm)	Engine	Pump (rpm)	Boxed Dimensions (LxWxH) mm
Kappa 43 HTP*	SKAPPA43/HTP200	580 (40 bar) 4,000 kPa	44	HONDA 6.5HP recoil start	550	1100x800x900
Delta 75 HTP*	SDELTA75HTP390	580 (40 bar) 4,000 kPa	73	HONDA 13HP recoil start	550	1100x800x950
Delta 125 HTP*	SDELTA125HTP390	435 (30 bar) 3,000 kPa	125	HONDA 13HP recoil start	550	1100x800x950

* electric start option available

Weight

\$5,648

\$6,709

\$8,428

(kg)

50

YANMAR DIESEL 2 YEAR EN	IGINE WARRANTY

Note: Pressure and flow figures are expressed as pump maximums. Horsepower limitations may affect pressure/flow combinations.

Model	S/code	Max Pump Pressure (psi)	Max Flow (lpm)	Engine	Pump (rpm)	Boxed Dimensions (LxWxH) mm	Weight (kg)	
ZETA 85 D HTP	SZETA85/L48HTP	290 (20 bar) 2,000 kPa	85	YANMAR 4.8HP recoil	550	1100x800x950	65 [#]	\$7,970
ZEIA 85 D HIP	SZETA85/L48EHTP	290 (20 bar) 2,000 kPa	85	YANMAR 4.8HP electric start	550	1100x800x950	65 [#]	\$9,082
Kappa 43 D HTP	SKAPPA43HTPL48E	580 (40 bar) 4,000 kPa	44	YANMAR 4.8HP electric start	550	1100x800x950	65 [#]	\$9,082
Delta 75 D HTP	SDELTA75L100HTP	580 (40 bar) 4,000 kPa	75	YANMAR 10HP electric start	550	1100x800x950	160#	\$11.213
Delta 125 D HTP	SDELTA125HTP100	435 (30 bar) 3,000 kPa	125	YANMAR 10HP electric start	550	1100x800x950	170#	\$11,751

Aussie Mine Boss option

includes following extras

- 38mm super robust gal frame
- Balanced lifting bar
- **Emergency stop**
- Double insulated wiring



- Lockable battery isolation
- Dry cell battery
- Integrated fire extinguisher
- **Bunded tray**



Wash down kit ...

Turbo 400 gun with 30m of 10mm single wire braid hose

SHOSEKIT1



Model	S/code	Max Pump Pressure (psi)	Max Flow (lpm)	Engine	Pump (rpm)	Boxed Dimensions (LxWxH) mm	Weight (kg)	
Delta 75 D HTP	SDELTA75L100HTM	580 (40 bar) 4,000 kPa	75	YANMAR 10HP electric start	550	1100x800x950	175#	\$13,214
Delta 125 D HTP	SDELTA125L100HTM	435 (30 bar) 3,000 kPa	125	YANMAR 10HP electric start	550	1100x800x950	185#	\$13,771





NEW CLEAN AIR SERIES EUROPE'S FINEST

COMMERCIAL WET/DRY VACS p100



p101



JUMBO VACS

p102



DRUM VACS

p102



PUMP OUT VACS

p103



CARPET EXTRACTORS

p103



ACCESSORIES

p104



Aussie Dumps

Aussie Pumps

AUSTRALIA

10 LITRE WET/DRY ... VF13

71.5dBA



Model	VF13
S/code	VF13
Capacity	10 litres
Motor	1 x 1200 watt, 240 volt
Air Flow	250 m ³ /h
Air Flow	70 l/s
Noise Level	71.5 dBA at 7m
Weight	8 kg
Boxed dimensions	400 x 380 x 600 mm
	\$430

Replacement (VKF052) \$125 Microweb filter

AUSSIE VACS



..99.9% filtration

32mm accessory kit

30 LITRE WET/DRY ... VC44

SUPER QUIET





- Professional 40mm accessory kit
- Unique Aussie Microweb ... 99.9% filtration, reusable filter
- 7 metre durable power cable

Model	VC44
S/code	VC44
Capacity	30 litres
Motor	1 x 1200 watt, 240 volt
Water lift	2200 mm
Air Flow	70 l/s
Accessory size	40 mm
Weight	12 kg
Boxed dimensions	440 x 440 x 800
	\$504

Accessories & options for VC44

Replacement (VKF055) \$125 Microweb filter



40mm accessory kit

Accessories & options for VF13

Multipurpose carpet &

floor tool

32 MM ACCESSORIES

- Heavy duty, 3 metre, crush proof hose
- Multipurpose carpet & floor tool
- Squeegee with swivel
- 3 piece chrome wand assembly including handle
- Crevice tool
- Venetian blind tool
- Round brush

Blind tool

OPTIONAL ACCESSORIES

- Turbo brush, air driven (s/code V72042 \$213)
- Paper bags, set of five (s/code V40096



Squeegee with swivel

VHH012M(male) & VHH012F (female)

40 MM ACCESSORIES

3 metre flexible crush proof hose

2 piece chrome wand assembly

Crevice tool VLL002N

Round brush VZZ061

Hard floor brush with swivel (420mm) VKS011

VHOSE38MMX3

Squeegee with swivel (420mm) VKS013

Adaptor to suit round brush VAD001



Hard floor brush with swivel

OPTIONAL ACCESSORIES

Aluminium carpet brush

(suits 40mm accessory kit) (VKS012 \$70)

(VSF802 \$29) Paper bag

Reusable nylon filter, protects

VC61 Microweb filter (VSF065 \$59)

Drain kit (VKT013 \$104)





50 & 75 LITRE WET/DRY

INDUSTRIAL STRENGTH

- Impact resist polypropylene barrel
- Heavy duty wheel kit
- Professional 40mm accessory kit
- Unique Aussie Microweb ... 99.9% filtration, reusable filter
- 7 metre durable power cable



40mm accessory kit

Model	VC61	VC72	VC73
S/code	VC61	VC72	VC73
Capacity	50 litres	75 litres	75 litres
Motor	1 x 1200 watt, 240 volt 10 amp plug	2 x 1200 watt, 240 volt 10 amp plug	3 x 1200 watt, 240 volt 15 amp plug
Water lift	2200 mm	2400 mm	2600 mm
Air Flow	70 l/s	119 l/s	181 l/s
Accessory size	40 mm	40 mm	40 mm
Weight	22 kg	28 kg	31 kg
Boxed dimensions LxWxH (mm)	570 x 530 x 920	660 x 580 x 1000	660 x 580 x 1000
	\$754	\$933	\$1,078
Replacement Microweb filter	(VKF056) \$167	(VKF056) \$167	(VKF056) \$167

What is Microweb?

It's a unique filter media constructed from a homopolymer acrylic fibre. It has a microporous membrane applied to the collection surface. This provides a low pressure drop, causes the dust to 'cake', facilitates better dust release and improves collection efficiency.



Microweb is essential for dust from limestone, biochemical, lead, sugar, cement, Gyprock, precious metals, pigments and fertilizers.



Accessories & options for VC61/72/73



40 MM ACCESSORIES

3 metre flexible crush proof hose VHOSE38MMX3 2 piece chrome wand assembly VHH012M(male) including handle VHH012F (female) Crevice tool VLL002N Round brush V77061

Hard floor brush with swivel (420mm) VKS011 VKS013 Squeegee with swivel (420mm) VAD001 Adaptor to suit round brush



OPTIONAL ACCESSORIES

Aluminium carpet brush (suits 40mm accessory kit)

(VKS012 \$70) (VSF802 \$29) Paper bag

Reusable nylon filter, protects Microweb filter (VSF065 \$54)

DRAIN KIT

Drain kit, fits to any barrel vac to enable tank to be drained without lifting barrel

VKT013



JUMBO WET/DRY

INDUSTRIAL STRENGTH



90mm accessories



Model	Jumbo
S/code	VC83
Capacity	75 litres
Motor	3 x 1200 watt, 240 volt 15 amp plug
Water lift	2600 mm
Air Flow	181 l/s
Accessory size	50 & 90 mm
Weight	31kg
Boxed dims LxWxH (mm)	640 x 700 x 1000
	\$1,467

Replacement Microweb filter (VKF056) \$167

50 MM ACCESSORIES

- 3 metre flexible crush proof hose
- One piece chromed steel wand with handle
- Crevice tool
- Round brush
- Heavy duty hard floor tool available for wet/dry applications
- Accessory adaptor

90MM ACCESSORIES

- Super strength 3 metre sinflex hose assembly
- 1 metre heavy duty 90mm poly suction tube
- Poly suction spout (length 310mm)

OPTIONAL ACCESSORIES

- Paper bag (VSF802 \$29)
- Reusable nylon filter, protects Microweb filter (VSF065 \$59)
- Drain kit (VKT013 \$104)

AUSSIE DRUM VACWORKSHOP CLEAN-UP



- Standard 200 litre steel drum for easy disposal/replacement.
- Heavy duty steel collar
- Professional 40mm accessory kit with standard version (see p 99)
- 50mm & 90mm accessories with Jumbo version (see above)

(see above)					
Model	DRUM VAC	JUMBO DRUM VAC			
S/code	VDRUMVAC40MM	VDRUMVAC50MM/90			
Capacity	200	O litres			
Motor	3 x 1200 watt, 240 volt, 15 amp plug				
Water lift	2600 mm				
Air Flow	18	81 l/s			
Accessory size	40 mm	50 & 90 mm			
Weight	6	63 kg			
Boxed dimensions	570 x	530 x 970			
	\$2,821	\$3,067			
Trolley (VDRUMDOLLIE)	\$681				

Unique Aussie Microweb 99.9% filtration, reusable filter

7 metre durable power cable

...99.9% filtration





75 LITRE PUMP OUT VAC

WET AREA SPECIALIST

INDUSTRIAL STRENGTH

- Impact resist polypropylene barrel
- Heavy duty wheel kit
- 40mm flexible crush proof hose (3m)
- ♦ Heavy duty squeegee tool
- 7 metre durable power cable
- Pump-out system
- Note: no filter fitted, not suitable for dust collection

POMPA MOTORE 1 MOTORE 2	
0	
	POMPA MOTORE 1 MOTORE 2

Model	VC72MX
S/code	VC72MX
Capacity	75 litres
Motor	2 x 1200 watt, 240 volt
Water lift	2400 mm
Air Flow	119 l/s
Accessory size	40 mm
Weight	32 kg
Boxed dimensions LxWxH (mm)	660 x 580 x 1000
	\$1,944







AUSSIE CARPET EXTRACTOR



A heavy duty carpet extractor designed for domestic and commercial applications. Forces detergent water deep into the carpet then extracts dirty water into the recovery tank.

Units feature a 50 litre stainless steel recovery tank, and 30 litre polypropylene solution tank mounted on a manoeuvrable trolley.

Model	VL450
S/code	VL450
Capacity	50 litres
Motor	2
Air Flow	119 m³/h
Delivery	2 lpm
Pump	1/3HP Shurflo
Weight	33 kg
Boxed dimensions	670 x 810 x 1010
	\$2.667

Standard Accessories

- Chrome wand with carpet extractor, with 2 jets , 280 mm width
- Upholstery tool with single jet



0. 10.1			
Stock Code		Description	
32mm Accessories (sta	ındard wi	th all vacs)	
V68220X3		Heavy duty, 3 metre, crush proof hose	\$78
VZZ002	Α	Multipurpose carpet & floor tool	\$76
VKC002	В	3 piece chrome wand assembly including handle	\$67
VLL01N	С	Crevice tool	\$13
VZZ077N	D	Venetian blind tool	\$13
VZZ021N	E	Round brush	\$21
Optional 32mm Access	ories		
V68220		Extension hose (per metre)	\$26
V69035		Hose joiner	\$19
40mm Standard Acces	sories		
VAK40MM		Complete kit	\$327
VHOSE38MMX3		3 metre flexible crush proof hose	\$83
VHH012M (to hose) VHH012F (to tools)	A B	2 piece chrome wand assembly including handle (male or female)	\$34 each
VLL002N	C	Crevice tool	\$15
VZZ061	D	Round brush	\$22
VKS011	E	Hard floor brush with swivel (length 420mm)	\$80
VKS013	F	Squeegee with swivel (length 420mm)	\$89
VAD001	G	Accessory adaptor to suit round brush	\$15
		, soccosor, adaptor to said round or asi	V 23
Optional 40mm Access VKS012	ories	Aluminium carnot brush with swivel	\$70
VKA011		Aluminium carpet brush with swivel	\$720
VKR001		Outrigger (650mm) with mounting bracket	\$66
VHOSE38MM		Hard floor brushes to suit outrigger (two needed)	
VEE005N		Extension hose (per metre) 38mm hose cuff (hose to wand fitting)	\$29 \$20
VEE004N		38mm hose tail (hose to tank fitting)	\$18
V69052			\$24
VI A013		38mm hose jointer	\$26
50mm Accessories		Rubber squeegee to suit VKS013 (two required)	\$20
VK0100		Complete kit	\$484
VKT005		3 metre flexible crush proof hose	\$164 \$74
VHH005		One piece chromed steel wand with handle	
VLL003		Crevice tool Round brush	\$31
VZZ101			\$31
VZZ091		Hard floor tool for wet/dry applications	\$238
VAD002		Accessory adaptor	\$15
90mm Accessories		0 11 12	4450
VK0101		Complete kit	\$469
VKT006		Super strength 3 metre synflex hose assy	\$486
VHH019		Heavy duty 90mm polysuction tube	\$111
VLL005		Poly suction spout (length 310mm)	\$57
Paper Bags			
V40048		Suits Whisper (5 pack)	\$37
V40096		Suits VY13F1 (5 pack)	\$40
V40064		Suits Dorsal (10 pack)	\$37
V44715		Suits VC44, VC61, VC62, VC73, VC83/3 (1 only -22 litre capacity)	\$20
VSF802		Suits VC44, VC61, VC72, VC73, VC83/3 (1 only -40 litre capacity)	\$29
Filter Protectors		пос сарасну)	
VSF065		Nylon filter protector, prevents filter clogging from	\$59
		fine dust, suits VC61/62, VC72/73/83, Drum vac	·





Drain Kit

Drain kit, fits to any barrel vac to enable tank to be drained without lifting VKT013 barrel



\$104

Microweb Micro Filters (99.9% filtration) for a healthy clean			
VKF052	suits Clean Air VY13F1	\$125	
VKF055	suits VC44	\$125	
VKF056	suits VC61/62, VC72/73/83, Drum Vac	\$167	
Complete Hea	ds		
VKE005	Suits VF13	\$258	
VKE012	Suits VC44	\$316	
VKE013	Suits VC61 (single motor option)	\$616	
VKE014	Suits VC62, VC72 (two motor option)	\$646	
VKE026	Suits VC72MX pump out vac (two motors)	\$665	
VKE015	Suits VC73, VC83 (three motor option)	\$911	





Triplex Pump Trouble shooting guide - common to all pressure cleaners

Symptoms	Cause	Action	User check	Service Agent only
	No gun/lance assembly fitted	Fit gun/lance assembly	1	
	Unloader jammed	Replace unloader valve		
No pressure	Worn unloader valve	Replace unloader valve		$\overline{\checkmark}$
	Debris in pump valves	Wash out pump , flush manifold and install inlet water filter, clean valves		V
	Pump is sucking air	Check that hoses and fittings are tight	$\overline{\mathbf{A}}$	V
	Insufficient water supply	Check supply, clean or replace water filter if fitted	\square	$\overline{\mathbf{A}}$
Pump runs	Nozzle worn, missing or incorrect	Check size is correct, replace if worn	\square	$\overline{\mathbf{A}}$
normally but	Valves worn or dirty	Replace valves		$\overline{\mathbf{V}}$
pressure is low or	Unloader seat worn or damaged	Replace unloader valve		$\overline{\checkmark}$
drops	Worn piston packing	Replace packing		V
opo	Relief valve jammed, plugged or improperly adjusted	Clean, adjust relief valve		Ø
	Cracked pistons caused by dry running	Replace pistons		V
	Pump sucking air	Check that hoses and fittings are tight		$\overline{\checkmark}$
Pressure fluctuates	Valves are worn, dirty or stuck	Clean or replace valves		
	Worn piston packings	Replace piston packings		Ø
Back pressure in supply hose when on by-pass	Low pressure valves dirty or worn	Clean or replace low pressure valves		V
, i	Insufficient water supply	Check supply, clean or replace water filter if fitted.		V
	Pump is sucking air from empty detergent tank	Refill the detergent tank	Ø	V
High pressure hose vibrates	Pump sucking air from hoses or fittings	Check that hoses and fittings are tight	\square	$\overline{\checkmark}$
vibiates	Air in water circuit	Check for leaks. Tighten all fittings. Disconnect high pressure hose and let machine run until water is flowing constantly without air	Ø	V
	Valves dirty or stuck	Clean or replace valves		Ø
	Pump sucking air	Check hoses and fittings are tight	\square	V
Machine is noisy	Water too hot	Reduce temperature to below 60°C	\square	$\overline{\checkmark}$
iviacinine is noisy	Valves worn, dirty or stuck	Clean or replace valves		V
	Worn bearings	Replace bearings		V
Pump oil is milky	Worn packings & oil seals	Replace packings & oil seals		Ø
(water in oil)	High humidity in air	Check and change oil more frequently		Ø
	Sand or dirt entering system	Check supply, use only clean water and fit water filter if required		Ø
	Safety valve activated due to pressure spike	Reset safety valve, if it keeps activating refurbish or replace unloader		V
Water dripping from pump	Thermal dump activated	Activated if water temperature exceeds 60°C. Should reset once water in pump cools. If not, replace		Ø
	Piston seals worn/damaged	Replace piston seals		
	O-rings of piston guide or retainer worn	Replace o-rings		Ø
	Travel plug in use on pump	Replace with breather plug		Ø
Oil leak	Loose drain plug	Check drain plug fitted correctly	\square	
	Worn oil seals	Replace oil seals		
Halaadar	Oil level too high	Drain excess oil	\square	<u> </u>
Unloader	Water filter dictu	Clean water nozzle		
'knocking' in use	Water filter dirty Gun is leaking	Clean water filter Clean inside gun removing any deposits or build-up	(V)	N N
Unloader valve is	Air in water circuit	Check for leaks. Tighten all fittings. Disconnect high pressure hose and let machine run until water is flowing constantly without air		V
'knocking' when gun is closed	Damaged high pressure hose	Check and replace	\square	\square
guir is closed	Faulty unloader valve	Replace unloader valve		\square
	Lance not set to low pressure	Adjust lance or fit detergent nozzle	$\overline{\mathbf{Z}}$	_
No detergent	Empty detergent tank	Refill detergent tank	\square	
supplied	Detergent valve stuck	Clean or replace	_	$\overline{\mathbf{A}}$
- Philips	Intake hose and/or filter dirty	Check and clean	$\overline{\mathbf{A}}$	\square
Pressure gauge shows high pressure	Unloader valve set too high above operating pressure	Adjust the unloader at the operating pressure		<u> </u>
fluctuations when shutting off gun	Dirty valve	Clean unloader valve (removing lime deposits etc). Grease parts before installing		V
Leaky unloader at	Nozzle too small	Check nozzle size correct		Ø
nominal pressure	Worn out unloader valve	Replace unloader valve		\square

This guide is for trained technicians ... contact your Aussie service centre for assistance.





Symptoms	Cause	Action	User Service User Agent check only
----------	-------	--------	--

Electric drive pressure cleaners

Machine does not	Power not connected	Check plug, cable and switch	V	
start	Wrong voltage	Check mains voltage	V	
Start	Power cable damaged	Replace cable		\square
	Voltage supply is too low	Check power supply for correct voltage	V	
Motor hums but	Pump is stuck	Manually turn motor		
does not run	Spray gun not activated	Activate spray gun when switching on	V	
	Cross section of extension lead too small	Use correct dimension extension lead	$\overline{\checkmark}$	
Motor stops	Cut out switch activated due to overheating	Check power supply is correct.	\square	
suddenly	<u> </u>	Disconnect machine and allow to cool off for a few minutes.		
	Unit run on excessive extension lead	Remove lead	$\overline{\mathbf{A}}$	
	Power lead or plug damaged	Fix or replace		$\overline{\mathbf{A}}$
Motor trips out	Excessive pressure build up	Check pressure, nozzle size, unloader setting		$\overline{\checkmark}$
	Motor down to earth e.g. water ingress	Electrician to test, fix or replace		
	Suction amperage cut-out set too low	Reset to correct setting		\square

Engine drive pressure cleaners For further assistance with engine trouble shooting consult the manufacturers handbook

Machine does not start	Battery dead	Recharge or replace battery	V
	Battery cables disconnected	Clean connections and reconnect cables	$ \overline{\checkmark} $
	Engine, pump or gearbox is seized	Replace or repair seized part	
	Low oil shutdown is activated	Add oil to engine, consult user guide	
	Low on fuel	Add fuel	
Revs dip under			
load, when gun	Engine needs service	Consult engine service centre	
trigger is pressed			

Hot water & Steam cleaners

	Water in the fuel tank	Empty fuel tank, clean and refill with clean fuel		V
	Fuel pressure incorrect	Adjust fuel pressure		$\overline{\mathbf{A}}$
	Air throttle adjusted incorrectly	Adjust air intake on fan		$\overline{\checkmark}$
	Electrodes positioned incorrectly	Clean, adjust or replace as required		V
Burner is smoking	Fuel nozzle dirty	Clean fuel nozzle		$\overline{\checkmark}$
	Fuel nozzle worn or damaged	Change fuel nozzle		$\overline{\mathbf{A}}$
	Heating coil blocked by soot	Remove & clean heating coil		\square
	Fuel pump dirty	Replace fuel pump		\square
	Fuel solenoid valve not working	Replace fuel solenoid		$\overline{\mathbf{A}}$
	Burner switch not on	Turn switch on burner	\square	
	Diesel fuel level low	Add diesel	\square	
	Trigger on spray gun not pulled	Squeeze trigger to fire burner	\square	
	Fuel filter blocked	Clean and replace if necessary		$\overline{\mathbf{A}}$
Burner will not fire	Overload on burner motor tripped	Consult service manual		V
	Low water pump pressure	Trouble shoot pump (see page 105)		$\overline{\mathbf{A}}$
	Fuel blockage	Check fuel system for flow, clear blockage		\square
	Electrode gap incorrect	Reset		
	No power to electrodes	Trace power & replace faulty parts		V
	Fuel tank is empty (burner will produce white smoke)	Refill the fuel tank	Ø	
	Suction filter is dirty	Remove filter and clean using fuel and a brush		\square
	Water in fuel	Empty fuel tank, clean and refill with clean fuel		\square
D	Pressure switch not functioning	Replace pressure switch		\square
Burner cuts out	Ignition transformer faulty	Replace transformer		\square
during operation	Rotation of electrodes	Adjust electrodes		\square
	Fuel nozzle is dirty	Clean fuel nozzle		V
	Fuel nozzle is worn Fuel pump is faulty	Replace fuel pump		
	Fuel solenoid valve not working	Replace solenoid valve		$\overline{\mathbf{A}}$
	Fuse burnt out	Check & replace		V
Water does not	Thermostat adjusted too low	Adjust thermostat	Ø	
	Thermostat is faulty	Replace thermostat		$\overline{\mathbf{A}}$
reach working	Scale build up in water circuit	De-scale inside of coil		$\overline{\mathbf{V}}$
temperature	Burner sooted	Remove & clean outside of coil & inside of cove		\square

This guide is for trained technicians ... contact your Aussie service centre for assistance.





Aussie Pump's general terms of sale represent a statement of contracts to supply equipment between Australian Pump Industries Pty Ltd and its customers.

Prices

- Prices printed in the Aussie Pumps price list are current at date of issue and are subject to change without notice. Prices charged will be those ruling at the date of delivery.
- All retail prices quoted are recommendations only. There is no obligation to comply with these recommendations.
- The validity of any quote given by Aussie Pumps will be 30 calendar days unless stated otherwise in the quotation. We reserve the right to withdraw quotations in writing before the end of the validity
- In line with industry standards, minimum order value of \$50+GST applies to all customer orders.

Special Construction Products

- Pressure cleaners or any other product, not listed as a standard product in the price list may be manufactured by Aussie Pumps against specific customer order and specification. These units are not eligible for return under the stock swap program.
- It is the purchaser's responsibility to satisfy itself of the suitability of any special order products being built by Aussie Pumps for the buyer's purpose based on the information provided by Aussie Pumps • in its quotation.
- Special orders as described above are irrevocable and not subject to cancellation or deferment.
- Warranties applicable to special order products as described above are the same as that which applies to all standard Aussie Pumps product, other than for those items supplied to Aussie Pumps by third parties for which Aussie Pumps will assign the original supplier's warranty to the buyer of the "special order product".

Goods Returned Policy

- Return of goods for credit will not be accepted without our prior written approval. There is no obligation on the part of Australian Pump to accept goods returned for credit without prior approval. Return authority label must be attached to outside of box. Return is conditional upon the products being returned;
 - Freight prepaid in unused condition and in original packaging. Obsolete products are not eligible for return.
 - Products returned for credit must be unsoiled, undamaged, in resalable condition and not more than 12 months old.
 - All returned products must be accompanied by a copy of the original delivery docket.
 - A written statement including the original invoice number, the date of purchase and full reasons for the return.
- Credit value of the goods returned will be at the absolute discretion of Aussie Pumps and will be limited to the original amount invoiced for that product. A restocking charge, the amount of which shall be at the absolute discretion of Aussie Pumps but will be not less than 25% of the original price of the product, will be applied to cover restock, reserves the right to alter specifications without notice. repackaging, documentation and administration charges.

Incorrectly Supplied, Missing or Damaged Goods

- Aussie Pumps must be notified, in writing, within three (3) working days of delivery of any goods incorrectly supplied so that prompt replacement with the correct products can be arranged.
- All deliveries should be inspected for missing or damaged goods before the buyer signs for the goods. Missing or damaged goods should be noted on the consignment note. Any claims for missing goods or for products supplied in damaged condition must be reported to Aussie Pumps, in writing, within three (3) working days for the claim to be considered. N.B. Our terms are ex works. Claims

for damage in transit will not be considered.

Warranty

- All Aussie Pumps products are guaranteed to be free from faulty workmanship or material as detailed in the warranty card supplied with each product and as detailed in the operator's manual that is supplied with the goods.
- All engine warranty claims should be made directly to the service agent for the engine manufacturer and warranty is subject to their terms & conditions.
- Federal battery warranty is covered by Ryde Batteries, 1300 133 980. Call to find their nearest nominated agent.
- Repairs carried out by Aussie Pumps Service Division on products outside the guarantee period are guaranteed to be free of faulty workmanship or material for a period of three (3) months after the repair.
- Warranty is deemed to apply to failures due to faulty workmanship or materials and does not apply to fair wear and tear, improper installation or application, the user's failure to carry out maintenance, or as a result of the product's use for purposes for which it was not designed.
- Aussie Pumps is not liable for any loss of profit or consequential or indirect special loss arising from defects in any of its products.
- Aussie Pumps will not be liable for damage or injury of any kind whatsoever arising directly or indirectly from product defects.
- Aussie Pumps' liability under the terms of the company's guarantee or warranty is limited to any one of the following:
 - replacement of the product with a suitable equivalent
 - repair of the product
 - return of the product for refund of purchase price
 - payment for the cost of having the product repaired
 - supply of replacement services
 - payment of the cost of having services supplied again
 - Aussie Pumps reserves the right to choose the lowest cost option of the above.
- N.B. All prices are ex works Castle Hill warehouse. If purchaser chooses to use our carrier insurance is purchaser's responsibility. We do offer freight insurance at 2% of the value of the goods shipped.

DEMONSTRATION/FIELD DAY STOCK - In the event that goods are loaned to a customer for demonstration or display, the customer is responsible for return of the goods in BRAND NEW CONDITION. Any parts, labour or packaging required to put the loaned items back into brand new condition will be charged to the customer at normal rates.

N.B. The customer is deemed to be the person / customer to whom Australian Pump Industries loans the goods.

Due to our program of continuous product development Australian Pump

Note:

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

The benefits under the Aussie Pump warranty are in addition to other rights under Australian Consumer Law.

Aussie Dumps More than just pressure cleaners





















Reliable Products ... Reliable People

Australian Pump Industries Pty Ltd

7 Gladstone Road, Castle Hill NSW 2154 Ph: (02) 8865 3500 Fax: (02) 9894 4240 aussiepumps.com.au | info@aussiepumps.com.au

All prices exclude GST & are recommended prices only. Freight, insurance, pre delivery & installation costs are excluded. Prices effective from 1/07/2021 but are subject to change without notice. All items have been included in good faith based on our knowledge or product availability at the time of publication. Australian Pump reserves the right to change specifications & prices without notice.



