

# Auto Bard


Modify `auto_gpt` to `auto_bard`. using the AI function of OpenAI to ensure that each JSON is correct.





We have try auto claude preformance  
which is better than GPT3.5 turbo

How Bard performance?

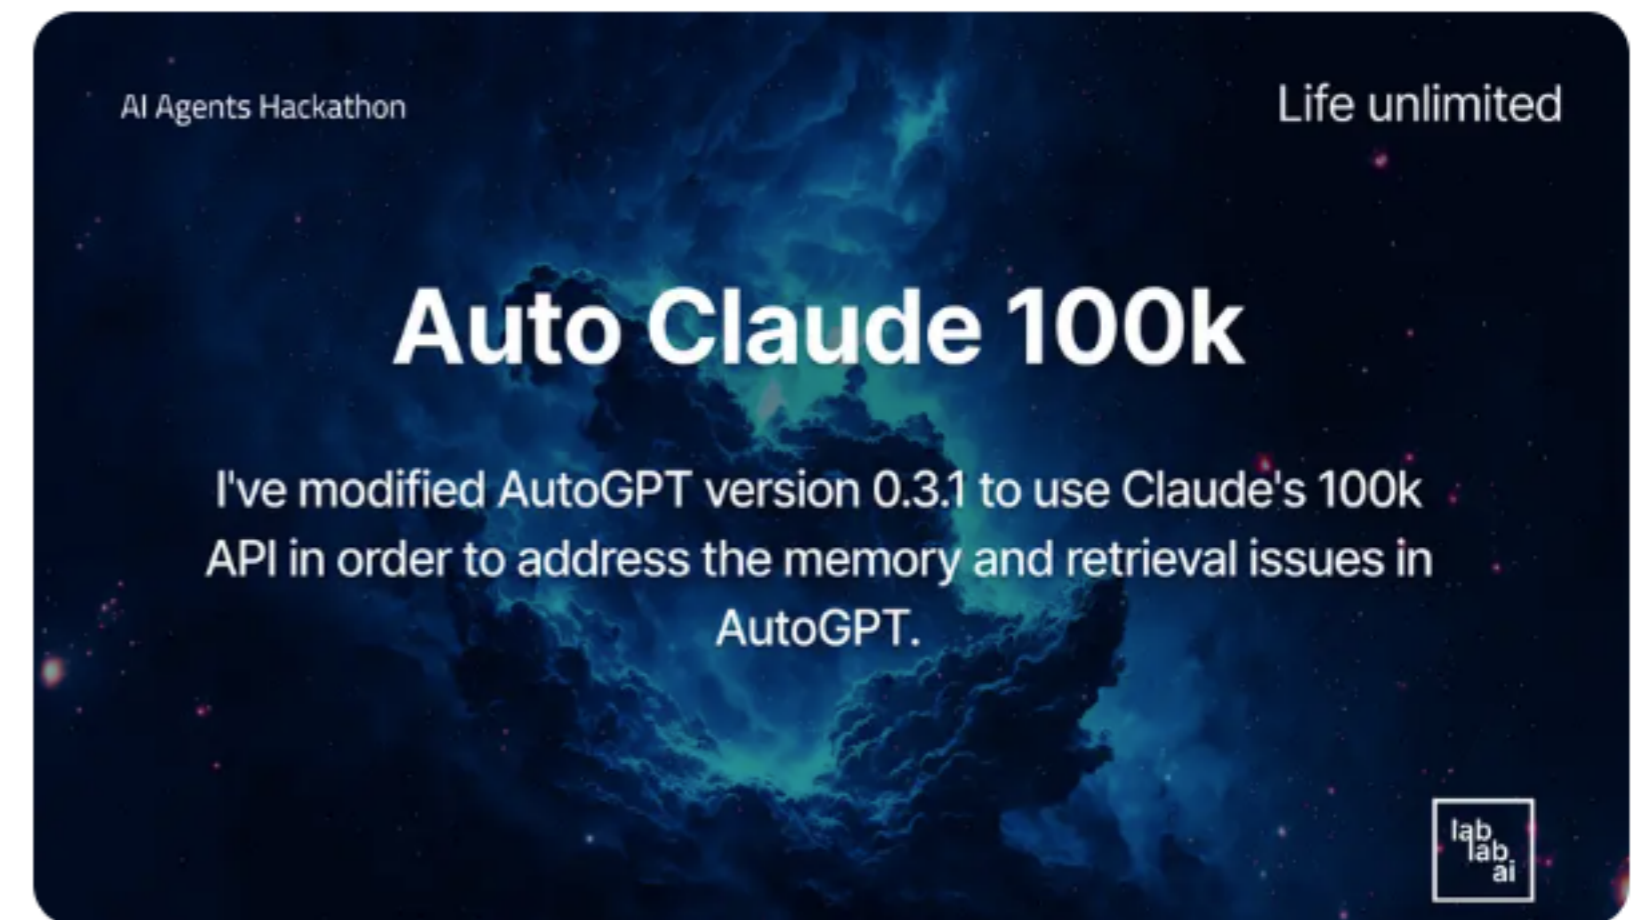

[Hackathon link](#)

## **Auto Claude 100k**

Claude provides an API that accepts up to 100k tokens. AutoGPT faces challenges with memory and retrieval, which you can learn about at <https://docs.agpt.co/challeng...>

We use google PaLM2 api instead of openai api

But find PaLM 2 would produce abnormal json

```
# resp = sendReq(pmt)
resp = bard_chat(str(prompt.raw()))

if "without seeking user assistance" in str(prompt.raw()): # fix json
    # fix json error
    resp = ai_fix_json(resp)

print("=====resp=====")
print(resp)
print("=====resp=====\n")
```

So we use ai function of openai to correct json

In auto\_gpt

claude\_100k > gpt 3.5 turbo > palm2