

REV	DESCRIPTION OF REVISION	E.C.N.	BY	APPROVED	DATE
Α	GLASS STOP WAS .043 REF. EYELET REV. B ON 10-07-10		E.C.	E.T.W.	3-06-15

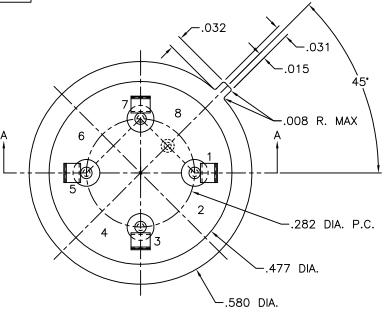

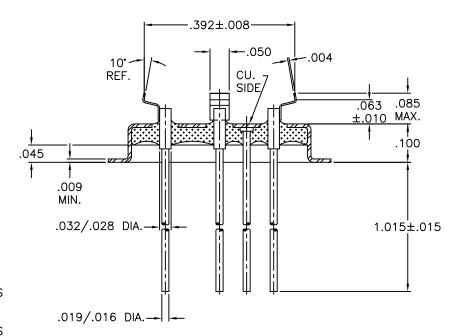

## SECTION A-A

## MATERIAL:

EYELET - 30/70 COPPER CLAD KOVAR.
GLASS - 7052 OR EQUAL, CLEAR.
LEADS - ASTM F-15 ALLOY, KOVAR.
MOUNT - 205 NICKEL, FULL HARD.

## PLATING:

- 1. OPTION: RoHS COMPLIANT ELECTROLESS NICKEL PLATE OF 100 MICROINCHES MINIMUM FINAL PLATE.
- 2. OPTION: RoHS COMPLIANT ELECTROLESS NICKEL PLATE OF 100 MICROINCHES MINIMUM FOLLOWED BY A ROHS COMPLIANT LEAD FREE SOLDER COAT, ON LEADS ONLY.
- 3. OPTION: RoHS COMPLIANT ELECTROLESS NICKEL PLATE OF 100 MICROINCHES MINIMUM FOLLOWED BY A GOLD FLASH OF .99999 PURE 24 KART GOLD UP TO A MAX. OF 8 MICROINCHES.

DRAWN BY:	MATERIAL:			Т	OLERANCING	PER ANSI	Y14.5					
E.T.W. 06-23-08	SEE ABOVE			.x	± .005			1	S)LTI	MISSION, TEL: 913	6700 W. 47th TERR. MISSION, KS. 66203 TEL: 913-432-2487	
CHECKED BY:	APP. SPECS	SUPERSEDES	NEXT ASSY		± .005	ANG		lι	Legacy Technologies Inc.		FAX: 913-432-0570	
E.T.W.				UNLESS OTHERWISE SPECIFIED			-3,					
06-23-08				SCALE	<sup>:</sup> 4:1	FINISH: UNLESS OTHERWISE SI	PECIFIED V	PART NUM	MBER:			٨
APPROVED BY: TITLE: HC-37/U (COLD WELD TO-8)						CW	/-TO8-BW-F-VN4	50D RoHS		Α		
			W/ V-CLIPS					FILE:	HC00011A	PAGE	1	оғ 1