


Email: sales@pacwesthi.com



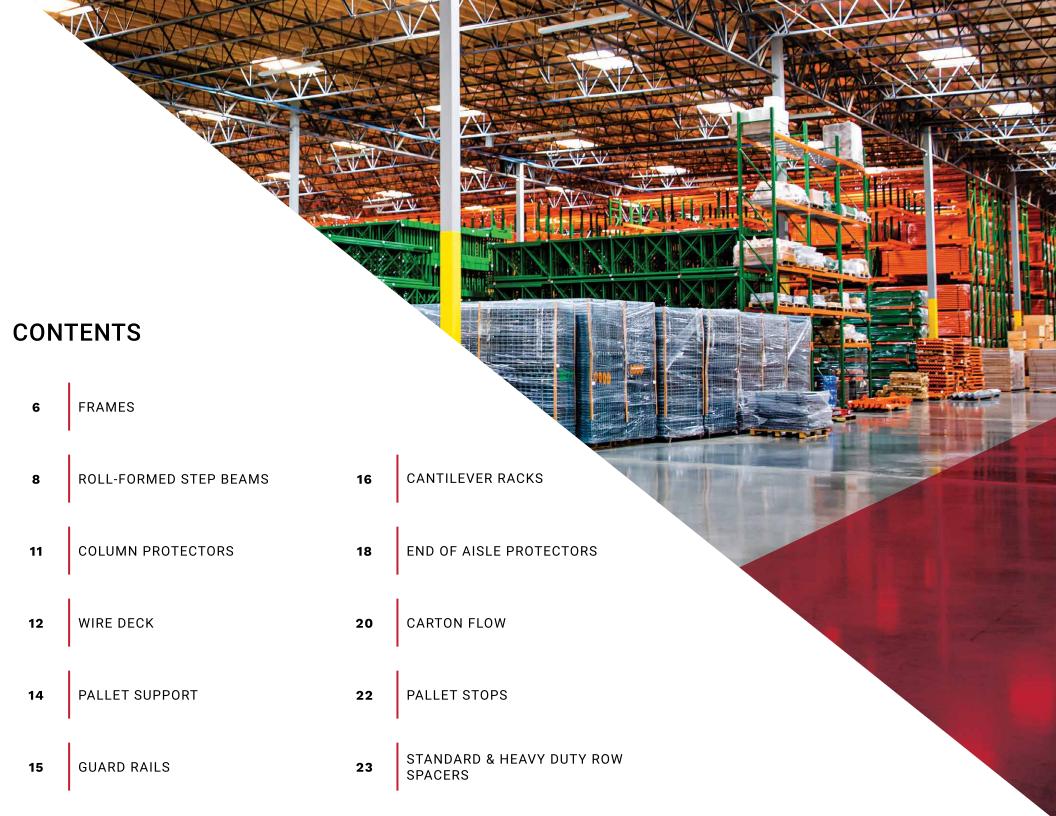

Frame Capacities	Frame Capacities - 3" x 3"							
Unsupported Span	15 Gauge	14 Gauge	13 Gauge	12 Gauge	11 Gauge			
36"	<u>23,400</u>	<u>27,100</u>	31,200	<u>36,400</u>	38,900			
42"	<u>20,600</u>	24,000	27,600	32,200	34,500			
48"	<u>19,900</u>	<u>23,100</u>	26,600	<u>31,000</u>	33,200			
54"	<u>19,100</u>	<u>22,100</u>	25,400	<u>29,600</u>	31,700			
60"	<u>18,100</u>	<u>21,100</u>	24,200	28,200	30,100			
66"	<u>17,200</u>	<u>19,900</u>	22,900	<u>26,600</u>	28,400			
72"	<u>16,100</u>	<u>18,700</u>	21,500	<u>24,900</u>	26,600			
78"	<u>15,100</u>	<u>17,500</u>	20,000	<u>23,200</u>	24,800			
84"	<u>14,000</u>	<u>16,200</u>	18,600	<u>21,500</u>	22,900			
90"	<u>12,900</u>	<u>15,000</u>	17,100	<u>19,800</u>	21,100			
96"	<u>11,800</u>	<u>13,700</u>	15,600	<u>18,100</u>	19,300			
102"	<u>10,900</u>	<u>12,600</u>	14,300	<u>16,600</u>	17,600			
108"	<u>10,000</u>	<u>11,600</u>	13,200	<u>15,200</u>	16,200			
114"	<u>9,200</u>	<u>10,600</u>	12,100	<u>14,000</u>	14,900			
120"	<u>8,500</u>	<u>9,800</u>	11,200	<u>12,900</u>	13,700			

<sup>\*\*\*</sup>Capacities that are Bold and Underlined are Items We Stock in Large Quantities

Frame Capacities - 4"	x 3"			
Unsupported Span	14 Gauge	13 Gauge	12 Gauge	11 Gauge
36"	38,700	44,200	<u>53,500</u>	57,300
42"	36,500	41,700	<u>50,400</u>	53,900
48"	35,600	40,700	<u>49,100</u>	52,600
54"	34,600	39,600	<u>47,700</u>	51,000
60"	33,500	38,300	<u>46,000</u>	49,300
66"	32,300	36,900	<u>44,300</u>	47,400
72"	31,000	35,400	<u>42,400</u>	45,400
78"	29,600	33,800	<u>40,500</u>	43,300
84"	28,200	32,200	<u>38,500</u>	41,100
90"	26,700	30,500	<u>36,400</u>	38,900
96"	25,300	28,800	<u>34,300</u>	36,600
102"	23,800	27,100	<u>32,200</u>	34,300
108"	22,300	25,400	<u>30,100</u>	32,100
114"	20,800	23,700	<u>28,000</u>	29,800
120"	19,300	22,000	<u>25,900</u>	27,700

<sup>\*\*\*</sup>Capacities that are Bold and Underlined are Items We Stock in Large Quantities

Notes: Capacities Are Determined Per ANSI 2012 and RMI 2012. • Capacities Are Based On Static Loads Only Of K=1.2. Consult Seismic Engineer For Seismic Loads. • Capacities Are Based On Unsupported Span of Column Members and Y=42" Frame Panel Heights. • Capacities Are Only Valid When Used With Ultra Rack Beams. • Unsupported spans are clear vertical distances between the floor and the first beam level, as well as the vertical distances between adjacent beam levels.

Custom sizes, colors, and specials are available from factory production.



Beams 1	6 Gauge - 3	Pin						
Length	2-1/2"	3"	3-1/2"	4"	4-1/2"	5"	5-1/2"	6"
48"	4,680	<u>5,830</u>	7,160	8,650	10,300	12,080	14,010	16,070
54"	4,240	5,260	6,430	7,750	9,210	10,790	12,500	14,330
60"	3,890	4,800	<u>5,850</u>	7,030	8,340	9,760	11,300	12,930
72"	3,050	4,110	<u>4,980</u>	5,950	7,030	8,210	9,480	10,840
84"	2,330	3,240	4,350	5,180	6,100	7,110	8,190	9,350
90"	2,070	2,860	3,880	4,870	5,720	6,660	7,680	8,760
96"	<u>1,850</u>	<u>2,550</u>	<u>3,450</u>	<u>4,570</u>	<u>5,400</u>	6,270	7,220	8,240
102"	1,670	2,290	3,090	4,080	5,110	5,930	6,820	7,780
108"	1,510	2,070	2,780	3,670	4,750	5,360	6,460	7,360
114"	1,380	1,880	2,530	3,330	4,290	5,360	6,140	6,990
120"	1,270	1,720	2,300	3,030	3,900	4,950	5,720	6,510
126"	1,170	1,580	2,110	2,760	3,560	4,510	5,300	6,020
132"	1,080	1,460	1,940	2,540	3,270	4,130	4,920	5,590
138"	1,000	1,350	1,800	2,340	3,010	3,800	4,580	5,190
144"	930	1,260	1,670	2,170	2,780	3,510	4,270	4,840

<sup>\*\*\*</sup>Capacities that are Bold and Underlined are Items We Stock in Large Quantities

Beams 10	5 Gauge - 4	Pin						
Length	2-1/2"	3"	3-1/2"	4"	4-1/2"	5"	5-1/2"	6"
48"	4,950	6,080	7,390	8,860	10,490	12,260	14,170	16,220
54"	4,500	5,500	6,660	7,960	9,400	10,980	12,660	14,470
60"	4,140	5,040	6,080	7,240	8,530	9,940	11,450	13,080
72"	3,320	4,340	5,190	6,150	7,220	8,380	9,650	10,990
84"	2,560	3,490	4,560	5,380	6,290	7,280	8,350	9,500
90"	2,280	3,090	4,130	5,070	5,910	6,830	7,830	8,910
96"	2,050	<u>2,770</u>	<u>3,680</u>	<u>4,790</u>	<u>5,580</u>	<u>6,450</u>	<u>7,370</u>	8,380
102"	1,850	2,490	3,300	4,310	5,290	6,100	6,980	7,920
108"	1,680	2,260	2,980	<u>3,880</u>	4,970	<u>5,790</u>	6,620	7,510
114"	1,540	2,060	2,720	3,520	4,500	5,520	6,300	7,140
120"	1,410	1,890	2,480	<u>3,210</u>	4,090	<u>5,140</u>	5,870	6,650
126"	1,300	1,740	2,280	2,940	3,740	4,700	5,450	6,160
132"	1,210	1,610	2,100	2,710	3,440	4,310	5,060	5,720
138"	1,120	1,490	1,950	2,500	3,180	3,970	4,710	5,320
144"	1,050	1,390	1,810	2,320	2,940	<u>3,670</u>	4,400	4,960

Notes: Capacities Based Upon Pair of Beams • Capacities Are Determined Per ANSI 2012 and RMI 2012 • Design Engineer Must Be Consulted For Loads of 10,000 lbs. or more Uniform Distribution of Weight Is Assumed Along The Entire Length of Both Beams • Capacities Are For Static Loads Only. Consult Seismic Engineer For Seismic Loads Values Shown Reflect The Capacity of The Beams Based On The Lesser of It's Strength In Bending or L/180 Deflection Criteria. Metrics table is measured in pounds. Consult UMH or E.O.R. for 192\* Beam Capacities. Drop beams, adjustable beams and other engineered beams available upon request. 2-1/2\* face height beam is standard in 16 gauge only.

Custom sizes, colors, and specials are available from factory production.




BEAMS 14 GA	UGE - 3 PIN						
Length	3"	3-1/2"	4"	4-1/2"	5"	5-1/2"	6"
96"	3,130	4,300	5,770	7,070	8,270	9,560	10,940
102"	2,810	3,850	5,140	6,690	7,810	9,020	10,320
108"	2,540	3,460	4,620	6,040	7,410	8,540	9,770
114"	2,300	3,130	4,180	5,450	6,970	8,120	9,270
120"	2,100	2,860	3,790	4,940	6,320	7,570	8,640
126"	1,930	2,610	3,460	4,510	5,760	7,020	8,020
132"	1,770	2,400	3,180	4,130	5,270	6,530	7,450
138"	1,640	2,210	2,930	3,800	4,840	6,060	6,940
144"	1,520	2,050	2,710	3,510	4,460	5,590	6,480
156"	1,330	1,780	2,340	3,020	3,830	4,790	5,640

BEAMS 14 GA	UGE - 4 PIN						
Length	3"	3-1/2"	4"	4-1/2"	5"	5-1/2"	6"
96"	3,360	4,540	6,010	7,270	8,450	9,720	11,090
102"	3,020	4,070	5,380	6,880	7,990	9,180	10,480
108"	2,730	3,670	4,840	6,260	7,580	8,710	9,920
114"	2,490	3,330	4,380	5,660	7,180	8,290	9,430
120"	2,270	3,040	3,990	5,140	6,520	7,730	8,790
126"	2,090	2,790	3,650	4,690	5,950	7,170	8,160
132"	1,930	2,570	3,350	4,310	5,450	6,680	7,590
138"	1,790	2,370	3,090	3,970	5,010	6,230	7,070
144"	1,660	2,200	2,860	3,670	<u>4,630</u>	<u>5,760</u>	<u>6,610</u>
156"	1,450	1,910	2,480	3,160	3,980	4,950	5,750

BEAMS 13 GAUGE - 4 PIN						
Length	5"	5-1/2"	6"			
138"	5,440	6,840	8,000			
144"	5,010	6,300	<u>7,440</u>			
156"	4,300	5,400	6,480			

<sup>\*\*\*</sup>Capacities that are Bold and Underlined are Items We Stock in Large Quantities

Notes: Capacities Based Upon Pair of Beams • Capacities Are Determined Per ANSI 2012 and RMI 2012 • Design Engineer Must Be Consulted For Loads of 10,000 lbs. or more Uniform Distribution of Weight Is Assumed Along The Entire Length of Both Beams • Capacities Are For Static Loads Only. Consult Seismic Engineer For Seismic Loads Values Shown Reflect The Capacity of The Beams Based On The Lesser of It's Strength In Bending or L/180 Deflection Criteria. Metrics table is measured in pounds. Consult UMH or E.O.R. for 192" Beam Capacities. Drop beams, adjustable beams and other engineered beams available upon request. 2-1/2" face height beam is standard in 16 gauge only.

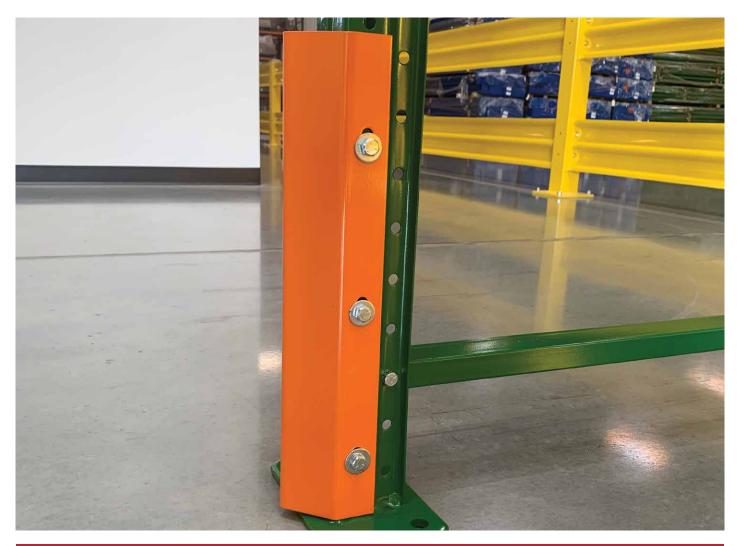

Column Protectors	
Description	
New Column Protectors, 6" Height, 3" Width, Bolt On	
New Column Protectors, 12" Height, 3" Width, Bolt On	
New Column Protectors, 18" Height, 3" Width, Bolt On	
New Column Protectors, 24" Height, 3" Width, Bolt On	
New Column Protectors, 6" Height, 4" Width, Bolt On	
New Column Protectors, 12" Height, 4" Width, Bolt On	
New Column Protectors, 18" Height, 4" Width, Bolt On	
New Column Protectors, 24" Height, 4" Width, Bolt On	



<sup>\*\*\*</sup>Capacities that are Bold and Underlined are Items We Stock in Large Quantities



- 2-1/2" X 4" Wire Pattern Supports the Bottom of the Pallets/Boxes in a Uniform Distributed Way
- Provides Fall Through Protection
- I Open Wire Grid With > 50% Open Area Complies with Fire Codes Regarding Overhead Fire Suppression Systems
- I Step Support and Waterfall Available




# **Wire Decks**

### Description

New Wire Decks, 24" Depth, 46" Width, Capacity: 2,000#, Style: Full Step Channel New Wire Decks, 36" Depth, 46" Width, Capacity: 2,000#, Style: Full Step Channel New Wire Decks, 36" Depth, 46" Width, Capacity: 2,500#, Style: Full Step Channel New Wire Decks, 36" Depth, 52" Width, Capacity: 2,500#, Style: Full Step Channel New Wire Decks, 36" Depth, 58" Width, Capacity: 3,000#, Style: Full Step Channel New Wire Decks, 42" Depth, 46" Width, Capacity: 2,000#, Style: Full Step Channel New Wire Decks, 42" Depth, 46" Width, Capacity: 2,500#, Style: Full Step Channel New Wire Decks, 42" Depth, 46" Width, Capacity: 3,000#, Style: Full Step Channel New Wire Decks, 42" Depth, 52" Width, Capacity: 2,000#, Style: Full Step Channel New Wire Decks, 42" Depth, 52" Width, Capacity: 2,500#, Style: Full Step Channel New Wire Decks, 42" Depth, 52" Width, Capacity: 3,000#, Style: Full Step Channel New Wire Decks, 42" Depth, 58" Width, Capacity: 2,500#, Style: Full Step Channel New Wire Decks, 44" Depth, 46" Width, Capacity: 2,500#, Style: Full Step Channel New Wire Decks, 44" Depth, 52" Width, Capacity: 2,500#, Style: Full Step Channel New Wire Decks, 48" Depth, 46" Width, Capacity: 2,500#, Style: Full Step Channel New Wire Decks, 48" Depth, 52" Width, Capacity: 2,500#, Style: Full Step Channel New Wire Decks, 48" Depth, 58" Width, Capacity: 2,500#, Style: Full Step Channel New Wire Decks, 60" Depth, 46" Width, Capacity: 2,500#, Style: Full Step Channel

Custom sizes, colors, and specials are available from factory production.

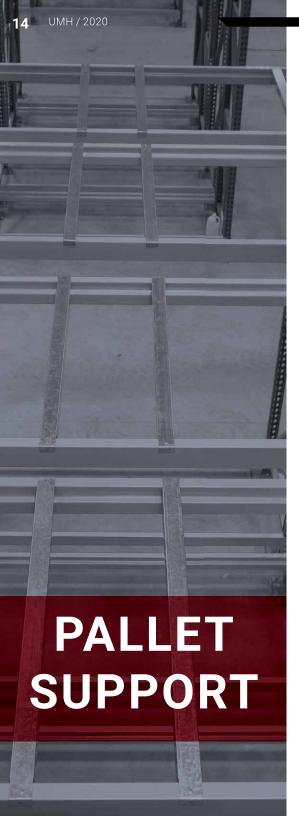



## **Pallet Support**

# Description

# New Pallet Supports, 24" Depth, Flanged

New Pallet Supports, 30" Depth, Flanged

New Pallet Supports, 36" Depth, Flanged

New Pallet Supports, 42" Depth, Flanged

New Pallet Supports, 44" Depth, Flanged

New Pallet Supports, 48" Depth, Flanged

New Pallet Supports, 54" Depth, Flanged

New Pallet Supports, 60" Depth, Flanged

New Pallet Supports, 24" Depth, Drop In

New Pallet Supports, 24 Depth, Drop II

New Pallet Supports, 30" Depth, Drop In

New Pallet Supports, 36" Depth, Drop In

New Pallet Supports, 42" Depth, Drop In

New Pallet Supports, 4" Depth, Drop In

New Pallet Supports, 48" Depth, Drop In

New Pallet Supports, 54" Depth, Drop In

New Pallet Supports, 60" Depth, Drop In



<b>Guard Rail</b>
-------------------

Desc		

New Guard Rail Post, 18" Height, Centered on 10" x 10" x 1/2" Baseplate, 3 Way Rail Design, Grey Cap

New Guard Rail Post, 18" Height, Offset on 10" x 10" x 1/2" Baseplate, 3 Way Rail Design, Grey Cap

New Guard Rail Post, 42" Height, Centered on 10" x 10" x 1/2" Baseplate, 3 Way Rail Design, Grey Cap

New Guard Rail Post, 42" Height, Offset on 10" x 10" x 1/2" Baseplate, 3 Way Rail Design, Grey Cap

New Guard Rail, 18" Length (Center of Posts), Bolted Style

New Guard Rail, 24" Length (Center of Posts), Bolted Style

New Guard Rail, 36" Length (Center of Posts), Bolted Style

New Guard Rail, 48" Length (Center of Posts), Bolted Style

New Guard Rail, 60" Length (Center of Posts), Bolted Style


New Guard Rail, 72" Length (Center of Posts), Bolted Style

New Guard Rail, 84" Length (Center of Posts), Bolted Style

New Guard Rail, 96" Length (Center of Posts), Bolted Style


New Guard Rail, 108" Length (Center of Posts), Bolted Style

New Guard Rail, 120" Length (Center of Posts), Bolted Style

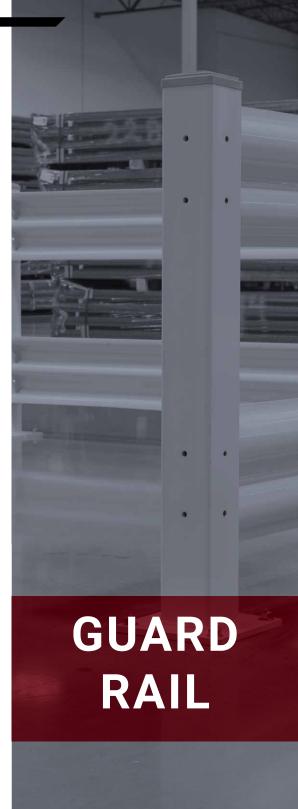

<sup>\*\*\*</sup> Anchors Sold Seperately


<sup>\*\*\*</sup>Items that are Bold and Underlined are Items We Stock in Large Quantities

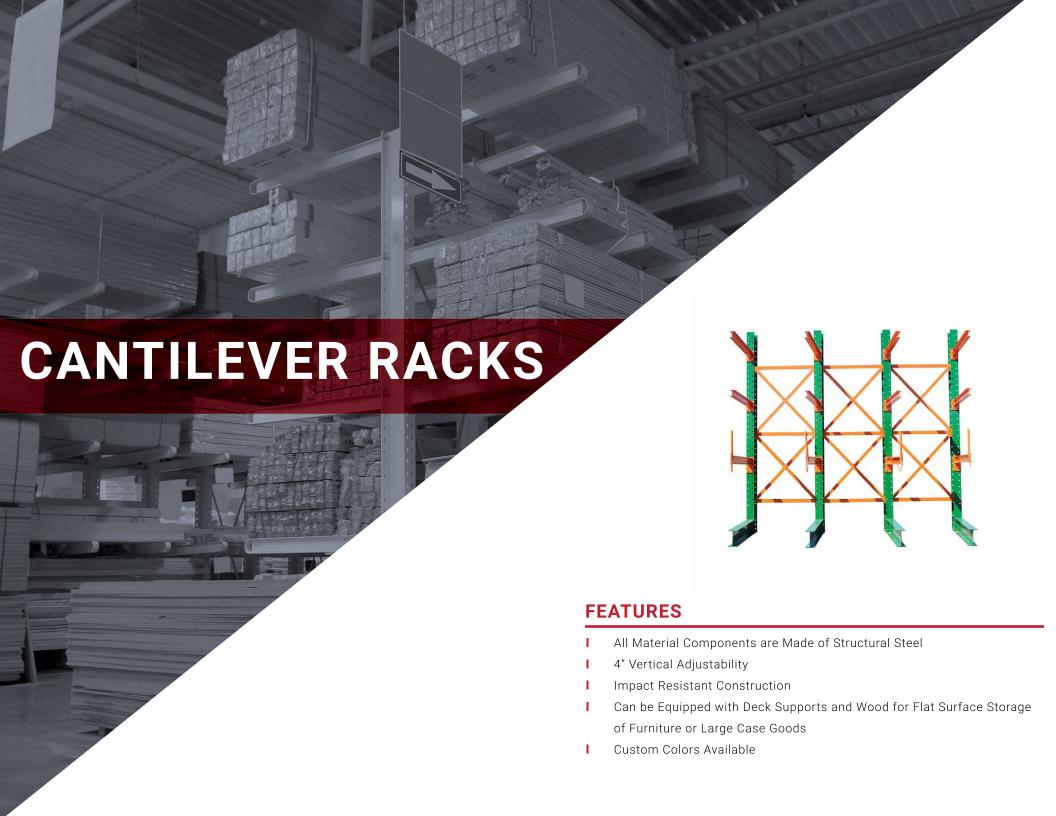

Cantilever Racks	
Description	Capacity
Cantilever Arms, 24" Length, 4" Face, Structural	7,580
Cantilever Arms, 24" Length, 4-3/4" Face, Structural	12,280
Cantilever Arms, 36" Length, 4" Face, Structural	<u>4,540</u>
Cantilever Arms, 36" Length, 4-3/4" Face, Structural	7,360
Cantilever Arms, 42" Length, 4" Face, Structural	3,770
Cantilever Arms, 42" Length, 4-3/4" Face, Structural	6,120
Cantilever Arms, 48" Length, 4" Face, Structural	<u>3,230</u>
Cantilever Arms, 48" Length, 4-3/4" Face, Structural	<u>5,240</u>
Cantilever Arms, 60" Length, 4" Face, Structural	2,490
Cantilever Arms, 60" Length, 4-3/4" Face, Structural	<u>4,060</u>
Cantilever Bases, 24" Length, Single Sided, Structural	N/A
Cantilever Bases, 36" Length, Single Sided, Structural	N/A
Cantilever Bases, 48" Length, Single Sided, Structural	N/A
Cantilever Bases, 60" Length, Single Sided, Structural	N/A
Cantilever Bases, 72" Length, Single Sided, Structural	N/A
Cantilever Columns, 96" Height, 10" Depth, Double Sided, Structural	N/A
Cantilever Columns, 120" Height, 10" Depth, Doubled Sided, Structural	N/A
Cantilever Columns, 144" Height, 10" Depth, Doubled Sided, Structural	N/A
Cantilever Columns, 192" Height, 10" Depth, Double Sided, Structural	N/A
Cantilever Columns, 240" Height, 10" Depth, Double Sided, Structural	N/A
Cantilever Columns, 264" Height, 10" Depth, Double Sided, Structural	N/A
Cantilever Columns, 288" Height, 10" Depth, Double Sided, Structural	N/A
Cantilever Horizontal Bracing, 36" Width	N/A
Cantilever Horizontal Bracing, 48" Width	N/A
Cantilever Horizontal Bracing, 60" Width	N/A
Cantilever Horizontal Bracing, 72" Width	N/A
Cantilever Horizontal Bracing, 84" Width	N/A
Cantilever Horizontal Bracing, 96" Width	N/A
Cantilever X-Bracing Sets, 36" Width	N/A
Cantilever X-Bracing Sets, 48" Width	N/A
Cantilever X-Bracing Sets, 60" Width	N/A
Cantilever X-Bracing Sets, 72" Width	N/A
Cantilever X-Bracing Sets, 84" Width	N/A
Cantilever X-Bracing Sets, 96" Width	N/A
Cantilever Pipe Stops, 18" High	N/A

<sup>\*\*\*</sup>Items that are Bold and Underlined are Items We Stock in Large Quantities



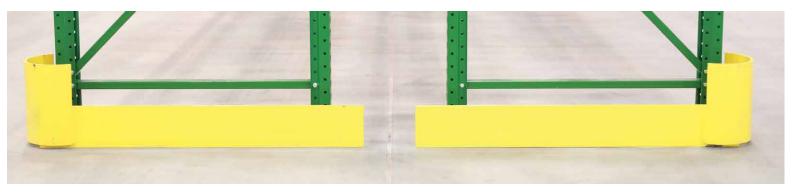

End of Aisle I	Protectors
	Description
	New End of Aisles, 36" Length, Double Sided
	New End of Aisles, 36" Length, Left Sided
	New End of Aisles, 36" Length, Right Sided
	New End of Aisles, 42" Length, Double Sided
	New End of Aisles, 42" Length, Left Sided
	New End of Aisles, 42" Length, Right Sided
	New End of Aisles, 48" Length, Double Sided
	New End of Aisles, 48" Length, Left Sided
	New End of Aisles, 48" Length, Right Sided
	New End of Aisles, 54" Length, Double Sided
	New End of Aisles, 54" Length, Left Sided
	New End of Aisles, 54" Length, Right Sided
	New End of Aisles, 60" Length, Double Sided
	New End of Aisles, 60" Length, Left Sided
	New End of Aisles, 60" Length, Right Sided
	New End of Aisles, 72" Length, Double Sided
	New End of Aisles, 72" Length, Left Sided
	New End of Aisles, 72" Length, Right Sided
	New End of Aisles, 84" Length, Double Sided
	New End of Aisles, 84" Length, Left Sided
	New End of Aisles, 84" Length, Right Sided
	New End of Aisles, 96" Length, Double Sided
	New End of Aisles, 96" Length, Left Sided
	New End of Aisles, 96" Length, Right Sided

<sup>\*\*\*</sup>Items that are Bold and Underlined are Items We Stock in Large Quantities

Additional Sizes and Colors Available Upon Request. Customize to Order.





<b>Carton Flow</b>	
	Description
	New Carton Flow Lanes, 90" Deep (Fits 96" O/O), 12" Wide, 1.9" Plastic Wheels on 3" Centers, Step Beam Connection
	New Carton Flow Lanes, 90" Deep (Fits 96" O/O), 12" Wide, 1.9" Plastic Wheels on 2" Centers, Step Beam Connection
	New Carton Flow Lanes, 90" Deep (Fits 96" O/O), 16" Wide, 1.9" Plastic Wheels on 3" Centers, Step Beam Connection
	New Carton Flow Lanes, 90" Deep (Fits 96" O/O), 16" Wide, 1.9" Plastic Wheels on 2" Centers, Step Beam Connection
	New Carton Flow Lanes, 96" Deep (Fits 102" O/O), 12" Wide, 1.9" Plastic Wheels on 3" Centers, Step Beam Connection
	New Carton Flow Lanes, 96" Deep (Fits 102" O/O), 12" Wide, 1.9" Plastic Wheels on 2" Centers, Step Beam Connection
	New Carton Flow Lanes, 96" Deep (Fits 102" O/O), 16" Wide, 1.9" Plastic Wheels on 3" Centers, Step Beam Connection
	New Carton Flow Lanes, 96" Deep (Fits 102" O/O), 16" Wide, 1.9" Plastic Wheels on 2" Centers, Step Beam Connection
	New Carton Flow Lanes, 138" Deep (Fits 144" O/O), 12" Wide, 1.9" Plastic Wheels on 3" Centers, Step Beam Connection
	New Carton Flow Lanes, 138" Deep (Fits 144" O/O), 12" Wide, 1.9" Plastic Wheels on 2" Centers, Step Beam Connection
	New Carton Flow Lanes, 138" Deep (Fits 144" O/O), 16" Wide, 1.9" Plastic Wheels on 3" Centers, Step Beam Connection
	New Carton Flow Lanes, 138" Deep (Fits 144" O/O), 16" Wide, 1.9" Plastic Wheels on 2" Centers, Step Beam Connection

 $<sup>\</sup>ensuremath{^{\star\star\star}}\xspace$  ltems that are Bold and Underlined are Items We Stock in Large Quantities







Pal	llot	C+	۸n	v.

#### Description

Description				
New Pallet Stops Beams, 48" Length, 4" Offset, 3 Pins Connector				
New Pallet Stops Beams, 96" Length, 3" Offset, 3 Pins Connector				
New Pallet Stops Beams, 102" Length, 3" Offset, 3 Pins Connector				
New Pallet Stops Beams, 108" Length, 3" Offset, 3 Pins Connector				
New Pallet Stops Beams, 120" Length, 3" Offset, 3 Pins Connector				
New Pallet Stops Beams, 132" Length, 3" Offset, 3 Pins Connector				
New Pallet Stops Beams, 144" Length, 3" Offset, 3 Pins Connector				
New Pallet Stops Beams, 156" Length, 3" Offset, 3 Pins Connector				

# **FEATURES**

- Powder Coated Orange Color for High Visibility
- I Provides Adequate 3" Flu Space for Fire Codes
- Provides Additional Pallet Safety

Standard & Heavy Duty Row Spacers			
	Description		
	New Row Spacers, 6" Length		
	New Row Spacers, 8" Length		
	New Row Spacers, 10" Length		
	New Row Spacers, 12" Length		
	New Row Spacers, 14" Length		
	New Row Spacers, 16" Length		
	New Row Spacers, 18" Length		
	New Row Spacers, 20" Length		
	New Row Spacers, 22" Length		
	New Row Spacers, 24" Length		
	New Heavy Duty Row Spacers, 6" Length		
	New Heavy Duty Row Spacers, 8" Length		
	New Heavy Duty Row Spacers, 10" Length		
	New Heavy Duty Row Spacers, 12" Length		
	New Heavy Duty Row Spacers, 14" Length		
	New Heavy Duty Row Spacers, 16" Length		
	New Heavy Duty Row Spacers, 18" Length		
	New Heavy Duty Row Spacers, 20" Length		
	New Heavy Duty Row Spacers, 22" Length		
	New Heavy Duty Row Spacers, 24" Length		
	New Heavy Duty Row Spacers, 6" Length,		



New Heavy Duty Row Spacers, 10" Length, Fits 4" x 3" Columns

#### New Heavy Duty Row Spacers, 12" Length, Fits 4" x 3" Columns

New Heavy Duty Row Spacers, 14" Length, Fits 4" x 3" Columns

New Heavy Duty Row Spacers, 16" Length, Fits 4" x 3" Columns

#### New Heavy Duty Row Spacers, 18" Length, Fits 4" x 3" Columns


New Heavy Duty Row Spacers, 20" Length, Fits 4" x 3" Columns

New Heavy Duty Row Spacers, 22" Length, Fits 4" x 3" Columns


New Heavy Duty Row Spacers, 24" Length, Fits 4" x 3" Columns









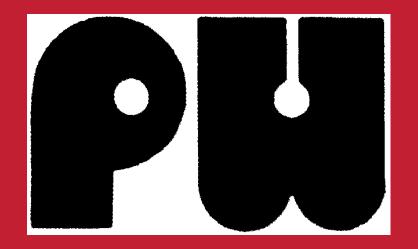

Pacific Western LLC 94-155 Leowaena Street Waipahu, HI 96797

Tel: 808-671-2817

Contact: Rafael Li

Email: Rafael@pacwesthi.com

# **DLING** INC