





PRINCIPAL FEATURES

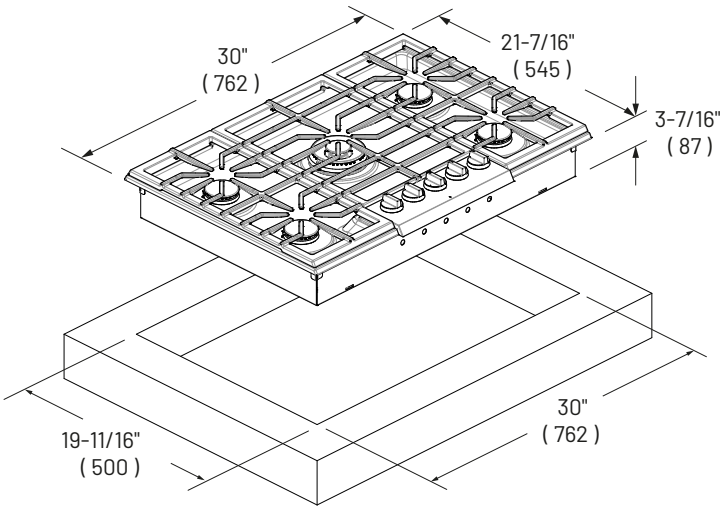

Knob control with back light system

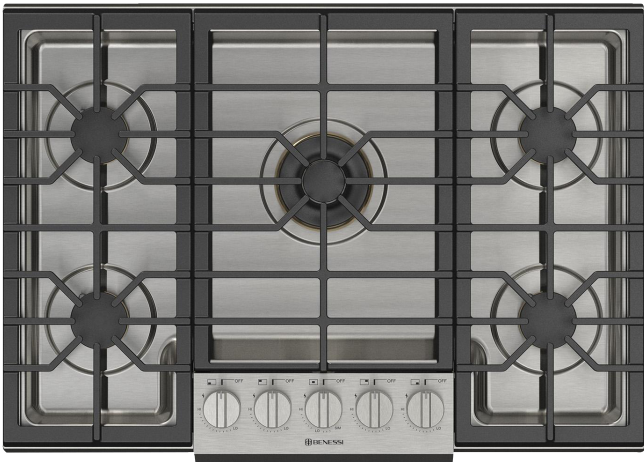

4 Single Burners



1 Central Dual Crescendo Burner



Heavy Duty Grates



Continuous Grate Surface



Heavy Duty Control Panel

OPTIONAL ACCESORIES

- BFMWOK Wok ring
- BFMSIM Simmer plate
- NOTE:
Wok ring (BFMWOK) to be used with centre burner only.

SPECIFICATIONS

SPECIFICATIONS

- 3 Heavy duty continuous cast iron grates
- Heavy Gauge 304 Stainless Steel Burner Bowl
- 1 Solid Brass Dual Flame Burner with 20.000 BTU Max (NG)
- 2 Solid Brass Semirapid Burners with 8.000 BTU Max (NG)
- 2 Solid Brass Semirapid Burners with 6.300 BTU Max (NG)
- Backlit Control Knob indicates burner operation (White)
- Backlit Control Knob indicates residual heat (Red)
- Heavy duty control panel
- Large cooking area
- Full pot stability
- Natural Gas (LP Convertible)



This product meets ADA (Americans with Disabilities Act) requirements. Please check with your local municipality's codes and stipulations for additional details to ensure compliance.

MODEL CODE		30" PROFESSIONAL PRO GAS COOK TOP - BKCT30PRO	
Series	600		
Finish	Stainless Steel		
CONTROL PANEL			
Control Type	Knobs control with back light system		
COOKTOP			
Type	GAS (NG or LP)		
Cooking Surface	Matte Black Enamel		
GAS COOKTOP FEATURES			
Electric Re-ignition system	•		
Flame-out sensing	•		
Dual Crown Brass Burner	•		
Simmer Plate	Optional		
Small Pot Insert (for single burners only)	Optional		
Wok Ring (for dual burner only)	Optional		
Heavy Duty Cast Iron Grates	3		
Cooking Zones	5		
Burners types	All Brass		
Power (Max/Min)(Front-L)	6300 (BTU/h) - 1848W / 1300 (BTU/h) - 382W		
Power (Max/Min)(Rear-L)	8000 (BTU/h) - 2345W / 1300 (BTU/h) - 382W		
Power (Max/Min)(Center)	Dual Flame / Simmer Burner		
	20000 (BTU/h) - 5880W / 750 (BTU/h) - 220W		
Power (Max/Min)(Rear-R)	8000 (BTU/h) - 2345W / 1300 (BTU/h) - 382W		
Power (Max/Min)(Front-R)	6300 (BTU/h) - 1848W / 1300 (BTU/h) - 382W		
DIMENSIONS WEIGHTS			
Overall dim - Width	30"	762 mm	
Overall dim - Height	3-7/16"	87 mm	
Overall dim - Depth	21-7/16"	545 mm	
Cut-out - Width (min - max)	28-1/2", 28-11/16"	724 mm - 729 mm	
Cut-out - Height (min)	3-3/8"	87 mm	
Cut-out - Depth (min - max)	19-9/16",19-3/4"	497 mm - 502 mm	
Gross weight Net weight	28.8 kg - 63.5 lb 21.6 kg - 47,6 lb		
POWER / RATINGS (120 V, 60 HZ)			
Amps	0.1A		
Max Power	48600 (BTU/h) - 14266W		
Power Cable Cable length	Nema 5-15P 53"(1350 mm)		
INSTRUCTIONS FOR USE			
Use & Care Manual / Installation Manual	English / French / Spanish		