

TRT Crane Pads evenly distribute outrigger crane loads. Quality engineering ensures all TRT Crane Pads adhere to the CICA industry standards.

PAD-039-T

PAD WEIGHT: 765kg

MINIMUM FOOT SIZE: Ø300mm

MAXIMUM SPAN: 1000mm

MAXIMUM LOAD: 150T

Ground Pressure Rating		
WIDTH (mm)		1630
LENGTH (mm)		2370
CONTACT AREA (m ²)		3.9
GROUND PRESSURE	kg / m ²	kPa
25 TONNE	6471	63
50 TONNE	12943	127
100 TONNE	25886	254
150 TONNE	38829	381

UNLESS OTHERWISE STATED
 GENERAL TOLERANCES
 0.00 = ± 0.05
 0.0 = ± 0.2
 0 = ± 0.5
 ANGLES
 0 = ± 0.5°
 THIRD ANGLE PROJECTION
 SURFACE FINISH (µm)
 1.6
 THIS DRAWING IS © COPYRIGHT AND IS THE PROPERTY OF TIDD ROSS TODD LTD.
 IT IS FURNISHED TO YOU FOR CONFIDENTIAL INFORMATION PURPOSES ONLY AND IS NOT TO BE DISCLOSED TO ANYONE ELSE OR USED FOR MANUFACTURING PURPOSES WITHOUT THE EXPRESS WRITTEN PERMISSION OF TIDD ROSS TODD LTD.

WELDING: ALL INFORMATION SHALL COMPLY WITH NZ/AS 1554:2000 PT 1 CATEGORY SP UNLESS OTHERWISE STATED AND SHALL BE WELDED TO A QUALIFIED PROCEDURE, BY A WELDER QUALIFIED FOR THE APPROPRIATE POSITION AND SUPERVISED BY A WELDING SUPERVISOR

REV	DATE	COMMENT	NAME
F	26/05/2023	UPDATED TOLERANCE & THICKNESSES	DT
E	24/11/22	ADDED SERIAL NO. TAG	DT
D	12/09/22	WEB END REVISED, LOGO UPDATED, CORNER RODS ADDED	MJ
C	25/05/21	UPDATED TOP PLATE TO 10MM, UPDATED PAD WEIGHT	JH
B	28/04/21	UPDATED POCKETS TO NEW STANDARD	JH
A	06/07/20	FIRST ISSUE	JH






TIDD ROSS TODD LTD
 48 Maui Street, Hamilton,
 New Zealand
 Phone: +64 7 849 4839
 Email: trt@trt.co.nz
 Website: trt.co.nz
 ISO9001:2015

	NAME	DATE
DRAWN	JH	06/07/20
CHK'D	-	-
APPV'D	-	-

TITLE: CRANE PAD 2370 X 1630 ASSY		SHEET 3 OF 6		DWG NO. PAD-039		REVISION F	
DO NOT SCALE DRAWINGS IN mm's		STATUS - M		SCALE:1:15			

IF IN DOUBT PLEASE ASK

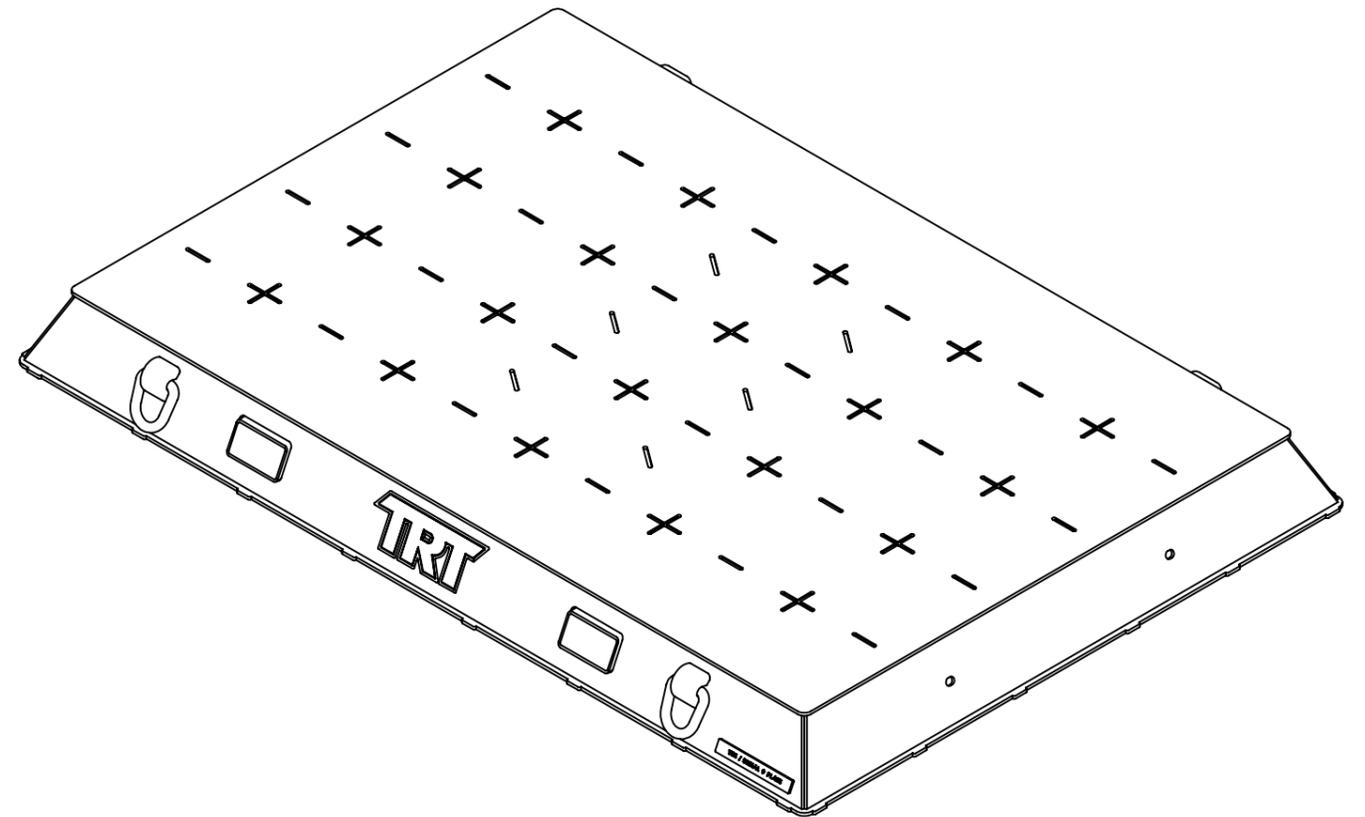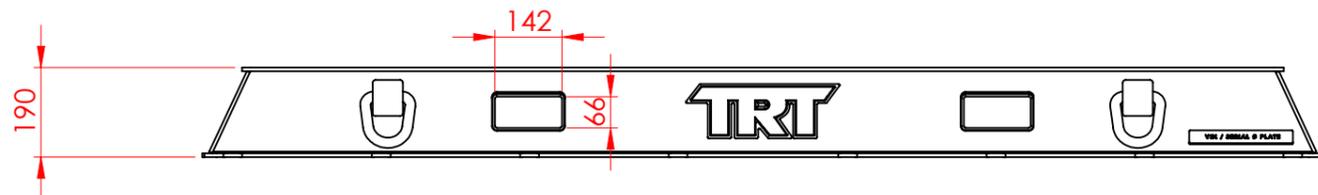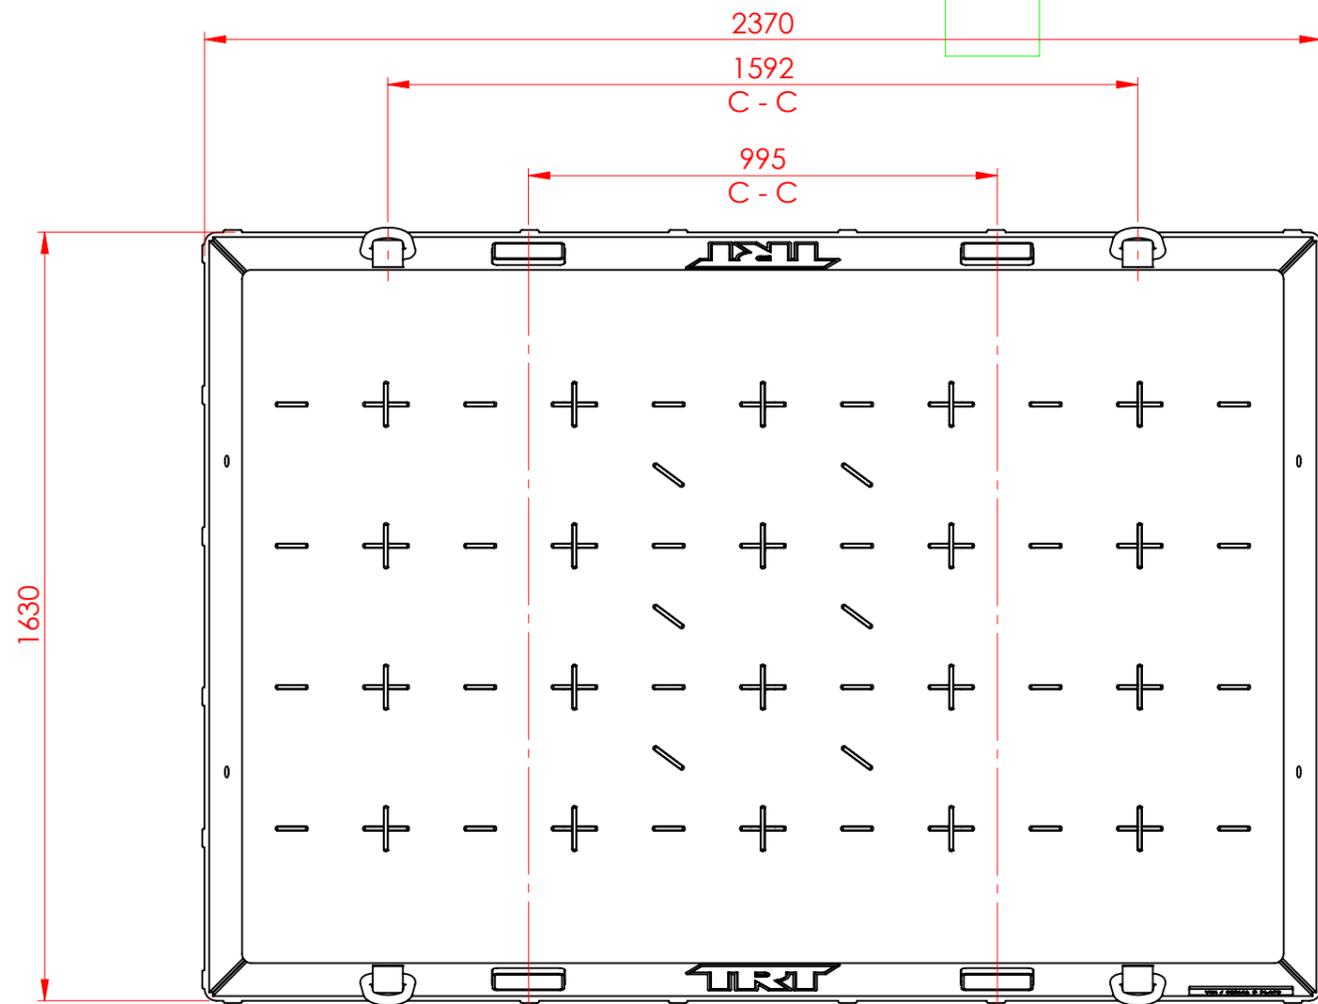

TRT Crane Pads evenly distribute outrigger crane loads. Quality engineering ensures all TRT Crane Pads adhere to the CICA industry standards.

PAD-039-DP

PAD WEIGHT: 805kg

MINIMUM FOOT SIZE: Ø300mm

MAXIMUM SPAN: 1000mm

MAXIMUM LOAD: 150T

Ground Pressure Rating		
WIDTH (mm)		1630
LENGTH (mm)		2370
CONTACT AREA (m ²)		3.9
GROUND PRESSURE	kg / m ²	kPa
25 TONNE	6471	63
50 TONNE	12943	127
100 TONNE	25886	254
150 TONNE	38829	381

UNLESS OTHERWISE STATED
 GENERAL TOLERANCES: 0.00 = ± 0.05, 0.0 = ± 0.2, 0 = ± 0.5
 ANGLES: 0 = ± 0.5°
 THIRD ANGLE PROJECTION
 SURFACE FINISH (µm): 1.6
 THIS DRAWING IS © COPYRIGHT AND IS THE PROPERTY OF TIDD ROSS TODD LTD.
 IT IS FURNISHED TO YOU FOR CONFIDENTIAL INFORMATION PURPOSES ONLY AND IS NOT TO BE DISCLOSED TO ANYONE ELSE OR USED FOR MANUFACTURING PURPOSES WITHOUT THE EXPRESS WRITTEN PERMISSION OF TIDD ROSS TODD LTD.

REV	DATE	COMMENT	NAME
F	26/05/2023	UPDATED TOLERANCE & THICKNESSES	DT
E	24/11/22	ADDED SERIAL NO. TAG	DT
D	12/09/22	WEB END REVISED, LOGO UPDATED, CORNER RODS ADDED	MJ
C	25/05/21	UPDATED TOP PLATE TO 10MM, UPDATED PAD WEIGHT	JH
B	28/04/21	UPDATED POCKETS TO NEW STANDARD	JH
A	06/07/20	FIRST ISSUE	JH



TIDD ROSS TODD LTD
 48 Maui Street, Hamilton, New Zealand
 Phone: +64 7 849 4839
 Email: trt@trt.co.nz
 Website: trt.co.nz
 ISO9001:2015

NAME	DATE	TITLE:
DRAWN: JH	06/07/20	CRANE PAD 2370 X 1630 ASSY
CHK'D: -	-	
APPV'D: -	-	
DO NOT SCALE DRAWINGS IN mm's	STATUS - M	SHEET 6 OF 6 SCALE: 1:15
		DWG NO. PAD-039 REVISION F