

UB500 Series Top Swiveling Overhaul Balls



All sizes are RFID EQUIPPED



With
S320
Eye Hook



With
S1316 A
SHUR-LOC®
Eye Hook



Both styles available with
optional McKissick®
Wedge Socket Assembly
or S-421 **TERMINATOR**
Wedge Socket



UWO 422T
TERMINATOR
Wedge Only

- Sizes 4 Tons through 30 Tons available with Crosby's S1316A "Positive Locking" SHUR-LOC® hook which may be used for lifting personnel. Meets the intent of OSHA Rule 1926.1431(g)(1)(i)(A) and 1926.1501(g)(4)(iv)(B).
- Design Factor 4:1.
- The top swivel design on the UB500 assures the ball remains stationary if the Wireline spins.
- The swivel incorporates a sealed roller thrust bearing together with a grease fitting for easy lubrication.
- Each ball can be equipped with the new McKissick® US-422T

Wedge Socket which can be easily adjusted to fit various sizes of Wireline by changing the wedge (Ensure that correct wedge is used for selected Wireline size).

- All hooks used on UB500 Overhaul Balls (S320, S320N & S1316A) are forged from alloy steel. The S320 and S320N hooks come complete with latches.
- The S320 hook (PL latch) and the S320N hook (S4320 latch), with the proper latch attached, may be used for personnel lifting when secured with proper device (Bolt, nut and pin for the PL latch; Cotter pin for the S4320 latch). Meets the intent of OSHA Rule 1926.1431(g)(1)(i)(A) and 1926.1501(g)(4)(iv)(B).

Overhaul Ball Assembly

Optional US-422T Wedge Sockets

McKissick® UB500 Model No.	UB500 "E" Eye Hook Stock No.	UB500 "S" SHUR-LOC® Stock No.	Working Load Limit (Tons)	Weight Each (lbs.)	Wireline Size (in.)	Model No.	Wedge Socket Assy. Stock No.	Weight Each (lbs.)	Wedge Only Stock No.	Weight Each (lbs.)
MB4T35	1036000*	1036005	4	58	3/8	US4T	1044300	4.6	1047310	0.6
MB4T85	1036009*	1036018	4	102	7/16	US4T	1044309	4.6	1047301	0.6
MB4T150	1036027*	1036032	4	162	1/2	US4T	1044318	4.6	1047329	0.6
MB4T200	1036036*	1036041	4	201	1/2	US5T	1044327	8.5	1047338	1.0
MB7T85	1036045*	1036050	7	109	9/16	US5T	1044336	8.5	1047347	1.0
MB7T150	1036054*	1036063	7	170	5/8	US5T	1044345	8.5	1047356	1.0
MB7T200	1036072*	1036077	7	210	5/8	US6T	1044354	9.4	1047365	1.4
MB7T285	1036081*	1036086	7	321	3/4	US6T	1044363	9.4	1047374	1.4
MB10T150	1036090*	1036095	10	216	5/8 3/4 7/8 1 1-1/8 1-1/4	US6T US6T US8T US8T US10T US10T	1044354 1044363 1044404 1044417 1044426 1044435	9.4 9.4 20.8 20.8 46.5 46.5	1047365 1047374 1047425 1047431 1047440 1047459	2.3 2.4 5.3 6.0 9.6 10.5
MB10T200	1036099*	1036108	10	260						
MB10T285	1036117*	1036122	10	365						
MB10T350	1036126*	1036131	10	403						
MB10T650	1036135*	1036140	10	718						
MB12T150	1036144*	1036520	12	216	5/8 3/4 7/8 1 1-1/8 1-1/4	US8AT US8AT US8T US8T US10T US10T	1044372 1044381 1044404 1044417 1044426 1044435	17.5 17.5 20.8 20.8 46.5 46.5	1047383 1047392 1047425 1047431 1047440 1047459	3.1 3.4 5.3 6.0 9.6 10.5
MB12T200	1036153*	1036529	12	258						
MB12T285	1036171*	1036538	12	365						
MB12T350	1036180*	1036547	12	403						
MB12T650	1036189*	1036556	12	718						
MB15T200	1036198*	1036565	15	298						
MB15T350	1036207*	1036574	15	456						
MB15T650	1036216*	1036583	15	753						
MB15T1150	1036225*	1036592	15	1311						
MB20T200	1036234*	1036611	20	298						
MB20T350	1036243*	1036620	20	456						
MB20T650	1036252*	1036629	20	753						
MB20T1150	1036261*	1036638	20	1311						
MB25T350	1036270	1036647	25	533						
MB25T650	1036279	1036656	25	865						
MB25T1150	1036288	1036665	25	1421						
MB30T650	1036297	1036674	30	865						
MB30T1150	1036306	1036683	30	1421						


* Utilizes Crosby "N" style hooks with integrated latch. Replacement latch kit is S-4320. PL latch and S-4055 latch will not fit. Standard Crosby S-5 Thrust style swivels can not be used with UB500 Overhaul Balls. For replacement swivels, contact Crosby Customer Service.



UB-500 NON SWIVEL OVERHAUL BALLS




All sizes are RFID EQUIPPED.

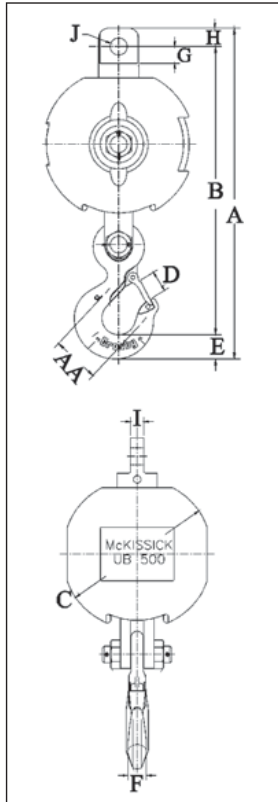

UB-500E Top Swivel Overhaul Balls with 320 Eye Hooks

Model No.*	UB-500 "E" Stock No.	Dimensions (in.)										
		A	B	C	D	E	F	G	H	I	J	AA
MB4T35*	1036000	20.09	17.27	7.50	1.36	1.44	1.12	1.88	1.38	.88	1.31	2.5
MB4T85*	1036009	20.98	18.16	9.25	1.36	1.44	1.12	1.88	1.38	.88	1.31	2.5
MB4T150*	1036027	21.98	19.16	11.25	1.36	1.44	1.12	1.88	1.38	.88	1.31	2.5
MB4T200*	1036036	22.35	19.53	12.50	1.36	1.44	1.12	1.88	1.38	.88	1.31	2.5
MB7T85*	1036045	23.18	20.36	9.25	1.61	1.81	1.38	1.88	1.38	.88	1.31	3.0
MB7T150*	1036054	24.56	21.36	11.25	1.61	1.81	1.38	1.88	1.38	.88	1.31	3.0
MB7T200*	1036072	24.89	21.71	12.50	1.61	1.81	1.38	1.88	1.38	.88	1.31	3.0
MB7T285*	1036081	25.86	22.67	13.88	1.61	1.81	1.38	1.88	1.38	.88	1.31	3.0
MB10T150*	1036090	31.44	27.19	11.25	2.08	2.25	1.62	2.75	2.00	1.25	1.78	4.0
MB10T200*	1036099	31.81	27.56	12.50	2.08	2.25	1.62	2.75	2.00	1.25	1.78	4.0
MB10T285*	1036117	32.75	28.50	13.88	2.08	2.25	1.62	2.75	2.00	1.25	1.78	4.0
MB10T350*	1036126	33.31	29.06	15.00	2.08	2.25	1.62	2.75	2.00	1.25	1.78	4.0
MB10T650*	1036135	34.79	30.54	17.94	2.08	2.25	1.62	2.75	2.00	1.25	1.78	4.0
MB12T150*	1036144	31.44	27.19	11.25	2.08	2.25	1.62	2.75	2.00	1.25	1.78	4.0
MB12T200*	1036153	31.81	27.56	12.50	2.08	2.25	1.62	2.75	2.00	1.25	1.78	4.0
MB12T285*	1036171	32.75	28.50	13.88	2.08	2.25	1.62	2.75	2.00	1.25	1.78	4.0
MB12T350*	1036180	33.31	29.06	15.00	2.08	2.25	1.62	2.75	2.00	1.25	1.78	4.0
MB12T650*	1036189	35.79	30.54	17.94	2.08	2.25	1.62	2.75	2.00	1.25	1.78	4.0
MB15T200*	1036198	37.59	32.59	12.50	3.02	3.00	2.38	2.38	2.00	1.25	1.78	5.0
MB15T350*	1036207	38.81	33.81	15.00	3.02	3.00	2.38	2.38	2.00	1.25	1.78	5.0
MB15T650*	1036216	40.22	35.22	17.94	3.02	3.00	2.38	2.38	2.00	1.25	1.78	5.0
MB15T1150*	1036225	42.22	37.22	21.62	3.02	3.00	2.38	2.38	2.00	1.25	1.78	5.0
MB20T200*	1036234	37.59	32.59	12.50	3.02	3.00	2.38	2.38	2.00	1.25	1.78	5.0
MB20T350*	1036243	38.81	33.81	15.00	3.02	3.00	2.38	2.38	2.00	1.25	1.78	5.0
MB20T650*	1036252	40.22	35.22	17.94	3.02	3.00	2.38	2.38	2.00	1.25	1.78	5.0
MB20T1150*	1036261	42.22	37.22	21.62	3.02	3.00	2.38	2.38	2.00	1.25	1.78	5.0
MB25T350	1036270	47.18	40.18	15.00	3.00	3.62	3.00	3.31	2.75	1.75	1.78	6.5
MB25T650	1036279	49.12	42.75	17.94	3.00	3.62	3.00	3.31	2.75	1.75	1.78	6.5
MB25T1150	1036288	51.06	44.69	21.62	3.00	3.62	3.00	3.31	2.75	1.75	1.78	6.5
MB30T650	1036297	49.12	42.75	17.94	3.00	3.62	3.00	3.31	2.75	1.75	1.78	6.5
MB30T1150	1036306	51.06	44.69	21.62	3.00	3.62	3.00	3.31	2.75	1.75	1.78	6.5

* 4 Ton thru 20 Ton models use Crosby "N" style hooks with integrated latch. All sizes are RFID EQUIPPED.

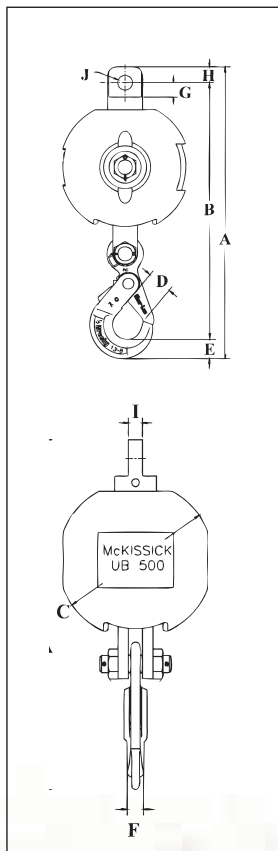

UB-500S Top Swivel Overhaul Balls with SHUR-LOC® Hooks

Model No.	UB-500 "S" Stock No.	Dimensions (in.)									
		A	B	C	D	E	F	G	H	I	J
MB4T35	1036005	20.66	18.18	7.50	1.83	1.15	.94	1.88	1.38	.88	1.31
MB4T85	1036018	21.55	19.05	9.25	1.83	1.15	.94	1.88	1.38	.88	1.31
MB4T150	1036032	22.55	20.05	11.25	1.83	1.15	.94	1.88	1.38	.88	1.31
MB4T200	1036041	22.92	20.42	12.50	1.83	1.15	.94	1.88	1.38	.88	1.31
MB7T85	1036050	23.90	21.30	9.25	2.11	1.66	1.16	1.88	1.38	.88	1.31
MB7T150	1036063	25.28	22.30	11.25	2.11	1.66	1.16	1.88	1.38	.88	1.31
MB7T200	1036077	25.61	22.65	12.50	2.11	1.66	1.16	1.88	1.38	.88	1.31
MB7T285	1036086	26.58	23.61	13.88	2.11	1.66	1.16	1.88	1.38	.88	1.31
MB10T150	1036095	31.24	27.19	11.25	2.49	2.06	1.50	2.75	2.00	1.25	1.78
MB10T200	1036108	31.61	27.56	12.50	2.49	2.06	1.50	2.75	2.00	1.25	1.78
MB10T285	1036122	32.55	28.50	13.88	2.49	2.06	1.50	2.75	2.00	1.25	1.78
MB10T350	1036131	33.11	29.06	15.00	2.49	2.06	1.50	2.75	2.00	1.25	1.78
MB10T650	1036140	34.59	30.54	17.94	2.49	2.06	1.50	2.75	2.00	1.25	1.78
MB12T150	1036520	33.37	29.15	11.25	3.52	2.22	2.03	2.75	2.00	1.25	1.78
MB12T200	1036529	33.75	29.53	12.50	3.52	2.22	2.03	2.75	2.00	1.25	1.78
MB12T285	1036538	34.68	30.46	13.68	3.52	2.22	2.03	2.75	2.00	1.25	1.78
MB12T350	1036547	35.25	31.03	15.00	3.52	2.22	2.03	2.75	2.00	1.25	1.78
MB12T650	1036556	36.72	32.50	17.94	3.52	2.22	2.03	2.75	2.00	1.25	1.78
MB15T200	1036565	36.67	32.22	12.5	3.83	2.45	2.20	2.38	2.00	1.25	1.78
MB15T350	1036574	37.89	33.44	15.0	3.83	2.45	2.20	2.38	2.00	1.25	1.78
MB15T650	1036583	39.30	34.85	17.94	3.83	2.45	2.20	2.38	2.00	1.25	1.78
MB15T1150	1036592	41.30	36.85	21.63	3.83	2.45	2.20	2.38	2.00	1.25	1.78
MB20T200	1036611	36.67	32.33	12.50	3.83	2.45	2.20	2.38	2.00	1.25	1.78
MB20T350	1036620	37.89	33.44	15.0	3.83	2.45	2.20	2.38	2.00	1.25	1.78
MB20T650	1036629	39.30	34.85	17.94	3.83	2.45	2.20	2.75	2.00	1.25	1.78
MB20T1150	1036638	41.30	36.85	21.63	3.83	2.45	2.20	2.75	2.00	1.25	1.78
MB25T350	1036647	46.17	40.21	15.00	4.09	3.21	2.68	3.50	2.75	1.75	1.78
MB25T650	1036656	48.11	42.15	17.94	4.09	3.21	2.68	3.50	2.75	1.75	1.78
MB25T1150	1036665	50.04	44.08	21.63	4.09	3.21	2.68	3.50	2.75	1.75	1.78
MB30T650	1036674	48.11	42.15	17.94	4.09	3.21	2.68	3.50	2.75	1.75	1.78
MB30T1150	1036683	50.04	44.08	21.63	4.09	3.21	2.68	3.50	2.75	1.75	1.78

All sizes are RFID EQUIPPED.

UB500 Series Non Swiveling Overhaul Balls



All sizes are RFID EQUIPPED



Key to McKissick® UB500 Utility Overhaul Ball Model Number				
MB	4	T	35	E
↓	↓	↓	↓	↓
McKissick® Utility Overhead Ball	Working Load Limit (Tons)	Swivel Style T = Top NS = Non	Ball Only Weight	Hook Style E = 320 or 320N S = SHUR-LOC® Eye Hook



S320
Eye Hook



S1316 A
SHUR-LOC®
Eye Hook



Both styles available with
optional McKissick®
Wedge Socket Assembly
or S-421 **TERMINATOR**
Wedge Socket



UWO 422T
TERMINATOR
Wedge Only

- Sizes 4 Tons through 15 Tons available with Crosby's S1316A "Positive Locking" SHUR-LOC® hook which may be used for lifting personnel. Meets the intent of OSHA Rule 1926.1431(g)(1)(i)(A) and 1926.1501(g)(4)(iv)(B).
- Design Factor 4:1.
- Each ball can be equipped with the new McKissick® US-422T Wedge Socket which can be easily adjusted to fit various sizes of Wireline by changing the wedge (Ensure that correct wedge is used for selected Wireline size).
- All hooks used on UB500 Overhaul Balls (S320, S320N & S1316A) are forged from alloy steel. The S320 and S320N hooks come complete with latches.
- The S320 hook (PL latch) and the S320N hook (S4320 latch), with the proper latch attached, may be used for personnel lifting when secured with proper device (Bolt, nut and pin for the PL latch; Cotter pin for the S4320 latch). Meets the intent of OSHA Rule 1926.1431(g)(1)(i)(A) and 1926.1501(g)(4)(iv)(B).

Overhaul Ball Assembly

Optional US-422T Wedge Sockets

McKissick® UB500 Model No.	UB500 "E" Eye Hook Stock No.	UB500 "S" SHUR-LOC® Stock No.	Working Load Limit (Tons)	Weight Each (lbs.)	Wireline Size (in.)	Model No.	Wedge Socket Assy. Stock No.	Weight Each (lbs.)	Wedge Only Stock No.	Weight Each (lbs.)
MB4NS35	1036402*	1036407	4	54						
MB4NS85	1036411*	1036416	4	98	3/8	US4T	1044300	4.6	1047310	0.6
MB4NS150	1036420*	1036425	4	158	7/16	US4T	1044309	4.6	1047301	0.6
MB4NS200	1036429*	1036434	4	200	1/2	US4T	1044318	4.6	1047329	0.6
					1/2	US5T	1044327	8.5	1047338	1.0
MS7NS85	1036438*	1036443	7	104	9/16	US5T	1044336	8.5	1047347	1.0
MB7NS150	1036447*	1036452	7	165	5/8	US5T	1044345	8.5	1047356	1.0
MB7NS200	1036456*	1036461	7	205	5/8	US6T	1044354	9.4	1047365	1.4
MB7NS285	1036465*	1036470	7	316	3/4	US6T	1044363	9.4	1047374	1.4
MB10NS150	1036474*	1036479	10	198						
MB10NS200	1036483*	1036488	10	242						
MB10NS285	1036492*	1036497	10	347						
MB10NS350	1036501*	1036506	10	385	5/8	US6T	1044354	9.4	1047365	1.4
MB10NS650	1036510*	1036511	10	700	3/4	US6T	1044363	9.4	1047374	1.4
					7/8	US8T	1044404	20.8	1047425	7.6
MB12NS150	1036519*	—	12	198	1	US8T	1044417	20.8	1047431	8.6
MB12NS200	1036528*	—	12	240	1-1/8	US10T	1044426	46.5	1047440	12.5
MB12NS285	1036537*	—	12	347	1-1/4	US10T	1044435	46.5	1047459	15.0
MB12NS350	1036546*	—	12	385						
MB12NS650	1036555*	—	12	700						
MB15NS200	1036564*	—	15	267	5/8	US8AT	1044372	17.5	1047383	4.3
MB15NS350	1036573*	—	15	425	3/4	US8AT	1044381	17.5	1047392	4.8
MB15NS650	1036582*	—	15	722	7/8	US8T	1044404	20.8	1047425	7.6
					1	US8T	1044417	20.8	1047431	8.6
MB15NS1150	1036591*	—	15	1280	1-1/8	US10T	1044426	46.5	1047440	12.5
					1-1/4	US10T	1044435	46.5	1047459	15.0


* Utilizes Crosby "N" style hooks with integrated latch. Replacement latch kit is S-4320. PL latch and S-4055 latch will not fit.



UB-500 NON SWIVEL OVERHAUL BALLS




All sizes are RFID EQUIPPED.

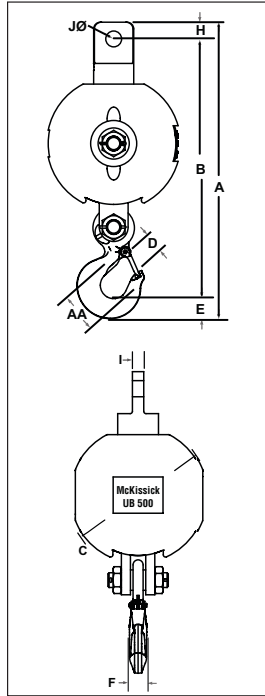

UB-500NS Non Swivel Overhaul Balls with 320N Eye Hooks

Model No.	UB-500 "E" Stock No.	Dimensions (in.)									
		A	B	C	D	E	F	H	I	J	AA
MB4NS35	1036402	20.09	17.27	7.5	1.36	1.44	1.12	1.38	0.75	1.31	2.5
MB4NS85	1036411	20.98	18.16	9.25	1.36	1.44	1.12	1.38	0.75	1.31	2.5
MB4NS150	1036420	21.98	19.16	11.25	1.36	1.44	1.12	1.38	0.75	1.31	2.5
MB4NS200	1036429	22.35	19.53	12.5	1.36	1.44	1.12	1.38	0.75	1.31	2.5
MB7NS85	1036438	23.18	20.36	9.25	1.61	1.81	1.38	1.38	0.75	1.31	3.0
MB7NS150	1036447	24.56	21.36	11.25	1.61	1.81	1.38	1.38	0.75	1.31	3.0
MB7NS200	1036456	24.89	21.71	12.5	1.61	1.81	1.38	1.38	0.75	1.31	3.0
MB7NS285	1036465	25.86	22.67	13.88	1.61	1.81	1.38	1.38	0.75	1.31	3.0
MB10NS150	1036474	31.44	27.19	11.25	2.08	2.25	1.62	2.00	1.25	1.78	4.0
MB10NS200	1036483	31.81	27.56	12.5	2.08	2.25	1.62	2.00	1.25	1.78	4.0
MB10NS285	1036492	32.75	28.5	13.88	2.08	2.25	1.62	2.00	1.25	1.78	4.0
MB10NS350	1036501	33.31	29.06	15.00	2.08	2.25	1.62	2.00	1.25	1.78	4.0
MB10NS650	1036510	34.79	30.54	17.94	2.08	2.25	1.62	2.00	1.25	1.78	4.0
MB12NS150	1036519	31.44	27.19	11.25	2.08	2.25	1.62	2.00	1.25	1.78	4.0
MB12NS200	1036528	31.81	27.56	12.5	2.08	2.25	1.62	2.00	1.25	1.78	4.0
MB12NS285	1036537	32.75	28.5	13.88	2.08	2.25	1.62	2.00	1.25	1.78	4.0
MB12NS350	1036546	33.31	29.06	15.00	2.08	2.25	1.62	2.00	1.25	1.78	4.0
MB12NS650	1036555	35.79	30.54	17.94	2.08	2.25	1.62	2.00	1.25	1.78	4.0
MB15NS200	1036564	37.59	32.59	12.5	3.02	3.00	2.38	2.00	1.25	1.78	5.0
MB15NS350	1036573	38.81	33.81	15.00	3.02	3.00	2.38	2.00	1.25	1.78	5.0
MB15NS650	1036582	40.22	35.22	17.94	3.02	3.00	2.38	2.00	1.25	1.78	5.0
MB15NS1150	1036591	42.22	37.22	21.62	3.02	3.00	2.38	2.00	1.25	1.78	5.0

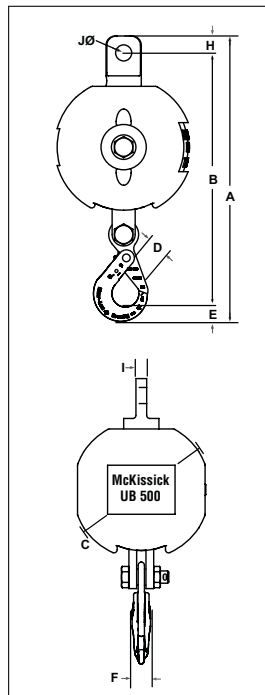

UB-500NS Non Swivel Overhaul Balls with SHUR-LOC® Hooks

Model No.	UB-500 "S" Stock No.	Dimensions (in.)								
		A	B	C	D	E	F	H	I	J
MB4NS35	1036407	20.66	18.18	7.5	1.83	1.15	0.94	1.38	0.75	1.31
MB4NS85	1036416	21.55	19.05	9.25	1.83	1.15	0.94	1.38	0.75	1.31
MB4NS150	1036425	22.55	20.05	11.25	1.83	1.15	0.94	1.38	0.75	1.31
MB4NS200	1036434	22.92	20.42	12.5	1.83	1.15	0.94	1.38	0.75	1.31
MB7NS85	1036443	23.9	21.3	9.25	2.11	1.66	1.16	1.38	0.75	1.31
MB7NS150	1036452	25.28	22.3	11.25	2.11	1.66	1.16	1.38	0.75	1.31
MB7NS200	1036461	25.61	22.65	12.5	2.11	1.66	1.16	1.38	0.75	1.31
MB7NS285	1036470	26.58	23.61	13.88	2.11	1.66	1.16	1.38	0.75	1.31
MB10NS150	1036479	31.24	27.19	11.25	2.49	2.06	1.5	2.00	1.25	1.78
MB10NS200	1036488	31.61	27.56	12.5	2.49	2.06	1.5	2.00	1.25	1.78
MB10NS285	1036497	32.55	28.5	13.88	2.49	2.06	1.5	2.00	1.25	1.78
MB10NS350	1036506	33.11	29.06	15.00	2.49	2.06	1.5	2.00	1.25	1.78
MB10NS650	1036511	34.59	30.54	17.94	2.49	2.06	1.5	2.00	1.25	1.78