



METRO WIRE ROPE CORP.


553 Lehigh Avenue
Union, New Jersey 07083

908-964-3690

FAX 908-964-8990 or 908-810-1904



METRO 3 PART SLING

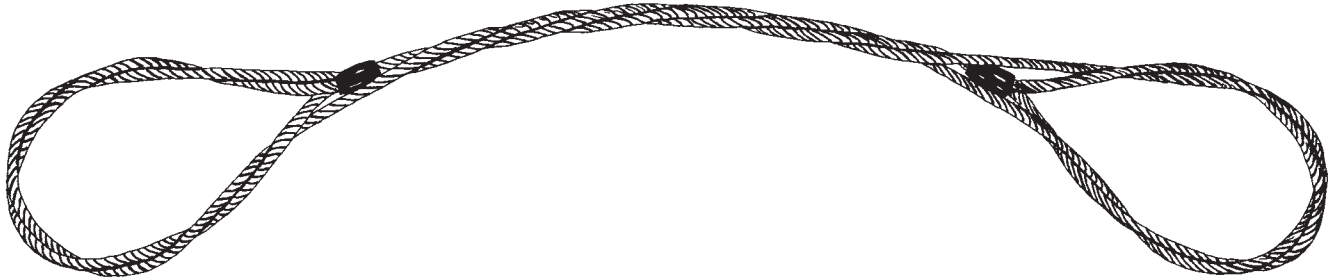

D/d OF 10 FOR COMPONENT
PARTS OF BODY IN VERT; BASKET

D/d OF 5 FOR COMPONENT
PARTS OF LOOP

METRO 3 PART SLING ENGINEERING INFORMATION

RATING IN TONS (2000 LBS) AT A 5 TO 1 FACTOR

Finished Actual Diameter	Composed of 3 Parts of EIP Rope	Vertical	Choker	Basket	Weight Per Ft. Approx.
1/2"	1/4"	1.7	1.3	3.4	.44
5/8"	5/16"	2.6	1.9	5.2	.68
3/4"	3/8"	3.6	2.7	7.2	.99
7/8"	7/16"	4.9	3.7	9.8	1.33
1"	1/2"	6.4	4.8	12.8	1.75
1 1/8"	9/16"	8.0	6.0	16.0	2.24
1 1/4"	5/8"	9.9	7.4	19.8	2.73
1 1/2"	3/4"	14.0	10.5	28.0	3.9
1 3/4"	7/8"	19.0	14.3	38.0	5.4
2"	1"	24.8	18.6	49.6	7.0
2 1/4"	1 1/8"	31.2	23.4	62.4	8.9
2 1/2"	1 1/4"	38.4	28.8	76.8	10.9
2 3/4"	1 3/8"	46.0	34.5	92.0	13.3
3"	1 1/2"	55.0	41.2	110.0	15.8
3 1/4"	1 5/8"	63.4	47.6	126.8	18.5
3 1/2"	1 3/4"	73.0	54.8	146.0	21.5
4"	2"	95.0	71.2	190.0	28.0
4 1/2"	2 1/4"	118.0	88.5	236.0	35.6
5"	2 1/2"	145.0	109.0	290.0	44.0



WARNING

Inspect wire rope or sling and consult industry recommendations and OSHA standards before each use. This wire rope or sling may fail if it is damaged, abused, misused, overused or improperly maintained. Single leg slings should not be allowed to rotate. DEATH or INJURY can occur from improper use or maintenance.

Any Questions? Call METRO WIRE ROPE CORP.