



Fișă tehnică | Număr articol: 2020-5477/1102-953

4-conductor sensor supply terminal block; LED (green); with ground contact; with pluggable signal level; 1 mm<sup>2</sup>; Push-in CAGE CLAMP®; 1,00 mm<sup>2</sup>; orange

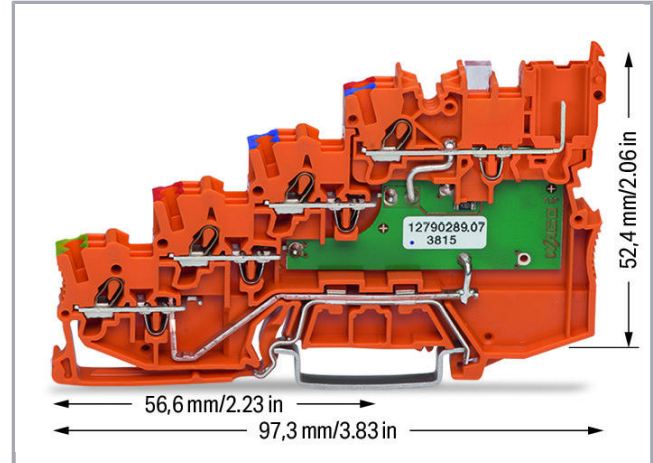


[www.wago.com/2020-5477/1102-953](http://www.wago.com/2020-5477/1102-953)

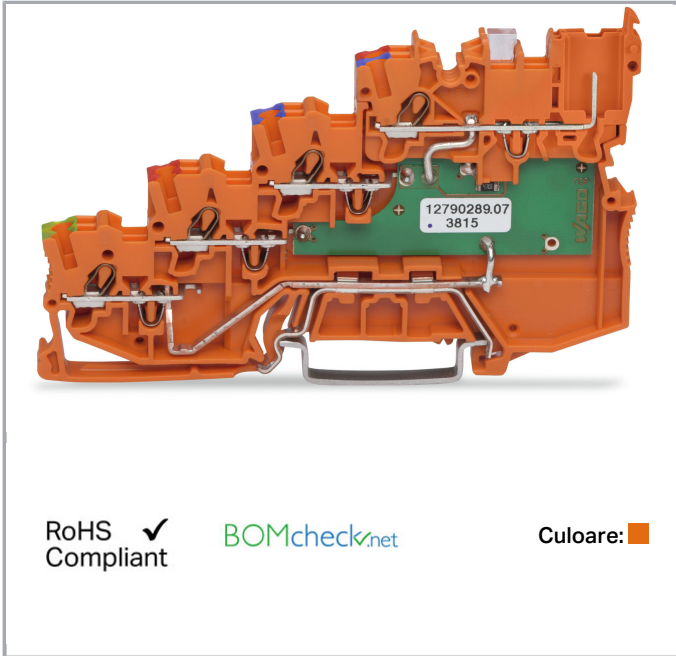

RoHS  Compliant

[BOMcheck.net](https://www.bomcheck.net)

Culoare: ■

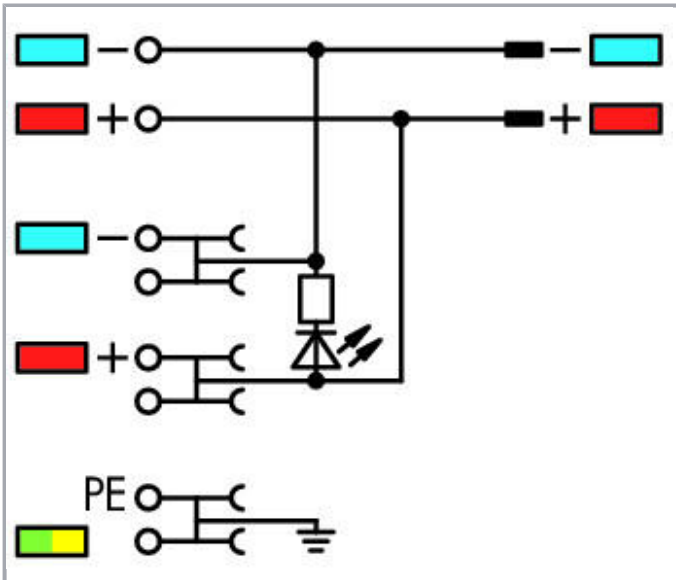

Descriere articol

Supus modificărilor.

WAGO Kontakttechnik GmbH & Co. KG  
/Representative Office Romania  
Sos. Pipera-Tunari nr. 1/1  
building 1, 2nd floor | 077190 Voluntari, Ilfov  
Tel.: +40-(0)31 421 85 68 | Email: info-RO@wago.com

Aveți întrebări despre produsele noastre?  
Vă stăm la dispoziție pentru preluarea apelului la +40 (0) 31 421 85 68.



3.5 mm spacing per signal (2 x 3.5 mm = 7 mm)

The double spacing per pole of this terminal block series maximizes connectivity. For example, ten sensors may be connected using only five sensor terminal blocks plus a power supply terminal block.

## Date

### Electrical data

|                 |      |
|-----------------|------|
| Voltage type 1  | DC   |
| Nominal voltage | 24 V |

### Ratings per IEC/EN 60664-1

|               |        |
|---------------|--------|
| Rated current | 13,5 A |
|---------------|--------|

### Approvals per UL 1059

|                                |         |
|--------------------------------|---------|
| Rated voltage UL (Use Group B) | 300 V   |
| Rated current UL (Use Group B) | 15 A    |
| Rated voltage UL (Use Group C) | 300 V   |
| Rated current UL (Use Group C) | 15 A    |
| Rated voltage UL (Use Group D) | 300 V   |
| Rated current UL (Use Group D) | 15 A    |
| Approvals per                  | UL 1059 |

### Approvals per CSA

|                                 |      |
|---------------------------------|------|
| Rated voltage CSA (Use Group C) | 24 V |
| Rated current CSA (Use Group C) | 10 A |

### Connection data

|  |  |
|--|--|
| Connection technology                                      | Push-in CAGE CLAMP®                          |
| Actuation type   | Push-in<br>Open Tool Slot                    |
| Connectable conductor materials                            | Copper                                       |
| Nominal cross-section                                      | 1 mm <sup>2</sup>                            |
| Solid conductor  | 0.14 ... 1.5 mm <sup>2</sup> / 24 ... 16 AWG |
| Solid conductor; push-in termination                       | 0.5 ... 1.5 mm <sup>2</sup> / 20 ... 16 AWG  |
| Fine-stranded conductor                                    | 0.14 ... 1.5 mm <sup>2</sup> / 24 ... 16 AWG |
| Fine-stranded conductor; with insulated ferrule            | 0.5 ... 0.75 mm <sup>2</sup> / 20 ... 18 AWG |
| Fine-stranded conductor; with ferrule; push-in termination | 0.5 ... 0.75 mm <sup>2</sup> / 20 ... 18 AWG |

Supus modificărilor.



|                                   |   |
|-----------------------------------|---|
| Strip length                      | 9 ... 11 mm / 0.35 ... 0.43 inch  |
| Total number of connection points | 8   |
| Total number of potentials        | 5   |
| Number of levels                  | 1   |
| Wiring type                       | Front-entry wiring  |
| Note (conductor cross-section)    | Depending on the conductor characteristic, a conductor with a smaller cross section can also be inserted via push-in termination. |

**Geometrical Data**

|                                    |                      |
|------------------------------------|----------------------|
| Width                              | 7 mm / 0.276 inch    |
| Height from upper-edge of DIN-rail | 52.4 mm / 2.063 inch |
| Depth                              | 97.3 mm / 3.831 inch |

**Mechanical data**

|               |                     |
|---------------|---------------------|
| Design        | horizontal          |
| Mounting type | DIN-35 rail         |
| Marking level | Center/side marking |


**Material Data**

|                     |                      |
|---------------------|----------------------|
| Color               | orange               |
| Insulation material | Polyamide 66 (PA 66) |
| Weight              | 21,7 g               |

**Commercial data**

|                       |               |
|-----------------------|---------------|
| Packaging type        | BOX           |
| Country of origin     | DE            |
| GTIN                  | 4055143525527 |
| Customs tariff number | 85369010000   |

**Aprobări / certificate****Country specific Approvals**

| Emblemă  | Aprobare                        | Text de aprobare suplimentar | Nume certificat |
|--|---------------------------------|------------------------------|-----------------|
|  | CCA<br>DEKRA Certification B.V. | EN 60947                     | NTR NL<br>7617  |

Supus modificărilor.

WAGO Kontakttechnik GmbH & Co. KG  
 /Representative Office Romania  
 Sos. Pipera-Tunari nr. 1/1  
 building 1, 2nd floor | 077190 Voluntari, Ilfov  
 Tel.: +40-(0)31 421 85 68 | Email: info-RO@wago.com

Aveți întrebări despre produsele noastre?  
 Vă stăm la dispoziție pentru preluarea apelului la +40 (0) 31 421 85 68.



CSA  
DEKRA Certification B.V.

C22.2 No. 158

2516073



KEMA/KEUR  
DEKRA Certification B.V.

EN 60947

71-  
100670

#### UL-Approvals

Emblemă

Aprobare

Text de aprobare suplimentar

Nume  
certificat



UL  
UL International Germany GmbH

UL 1059

E45172

#### Counterpart

#### Produse compatibile

#### End plate



**Nr. articol: 2020-5491**  
End and intermediate plate; 1 mm thick; for 4-conductor terminal blocks; gray

[www.wago.com/2020-5491](http://www.wago.com/2020-5491)

#### check



**Nr. articol: 2000-510**  
TOPJOB®S L-type test plug module; modular; for jumper contact slot; 1,00 mm<sup>2</sup>; gray

[www.wago.com/2000-510](http://www.wago.com/2000-510)



**Nr. articol: 2000-552**  
Modular TOPJOB®S connector; modular; for jumper contact slot; 2-pole; 1,00 mm<sup>2</sup>; gray


















[www.wago.com/2000-552](http://www.wago.com/2000-552)

**Nr. articol: 2000-553**









Supus modificărilor.

WAGO Kontakttechnik GmbH & Co. KG  
/Representative Office Romania  
Sos. Pipera-Tunari nr. 1/1  
building 1, 2nd floor | 077190 Voluntari, Ilfov  
Tel.: +40-(0)31 421 85 68 | Email: [info-RO@wago.com](mailto:info-RO@wago.com)


Aveți întrebări despre produsele noastre?  
Vă stăm la dispoziție pentru preluarea apelului la +40 (0) 31 421 85 68.

|  |   |  |
|--|---|--|
|    | Modular TOPJOB®S connector; modular; for jumper contact slot; 3-pole; 1,00 mm <sup>2</sup> ; gray   | <a href="http://www.wago.com/2000-553">www.wago.com/2000-553</a> |
|    | <b>Nr. articol: 2000-554</b><br>Modular TOPJOB®S connector; modular; for jumper contact slot; 4-pole; 1,00 mm <sup>2</sup> ; gray                                   | <a href="http://www.wago.com/2000-554">www.wago.com/2000-554</a> |
|    | <b>Nr. articol: 2000-555</b><br>Modular TOPJOB®S connector; modular; for jumper contact slot; 5-pole; 1,00 mm <sup>2</sup> ; gray                                   | <a href="http://www.wago.com/2000-555">www.wago.com/2000-555</a> |
|    | <b>Nr. articol: 2000-556</b><br>Modular TOPJOB®S connector; modular; for jumper contact slot; 6-pole; 1,00 mm <sup>2</sup> ; gray                                   | <a href="http://www.wago.com/2000-556">www.wago.com/2000-556</a> |
|    | <b>Nr. articol: 2000-557</b><br>Modular TOPJOB®S connector; modular; for jumper contact slot; 7-pole; 1,00 mm <sup>2</sup> ; gray                                   | <a href="http://www.wago.com/2000-557">www.wago.com/2000-557</a> |
|    | <b>Nr. articol: 2000-558</b><br>Modular TOPJOB®S connector; modular; for jumper contact slot; 8-pole; 1,00 mm <sup>2</sup> ; gray                                   | <a href="http://www.wago.com/2000-558">www.wago.com/2000-558</a> |
|    | <b>Nr. articol: 2000-559</b><br>Modular TOPJOB®S connector; modular; for jumper contact slot; 9-pole; 1,00 mm <sup>2</sup> ; gray                                   | <a href="http://www.wago.com/2000-559">www.wago.com/2000-559</a> |
|    | <b>Nr. articol: 2000-560</b><br>Modular TOPJOB®S connector; modular; for jumper contact slot; 10-pole; 1,00 mm <sup>2</sup> ; gray                                  | <a href="http://www.wago.com/2000-560">www.wago.com/2000-560</a> |
|    | <b>Nr. articol: 2009-174</b><br>Test plug adapter; for 4 mm Ø test plugs; for testing TOPJOB®S rail-mounted terminal blocks; gray                                   | <a href="http://www.wago.com/2009-174">www.wago.com/2009-174</a> |
|  | <b>Nr. articol: 2009-182</b><br>Testing tap; for max. 2.5 mm <sup>2</sup> ; tool-free connection for individual test wires 0.08 - 2.5 mm; gray                      | <a href="http://www.wago.com/2009-182">www.wago.com/2009-182</a> |
| <b>tools</b>   |   |  |
|  | <b>Nr. articol: 210-647</b><br>Operating tool; Blade: 2.5 x 0.4 mm; with a partially insulated shaft  | <a href="http://www.wago.com/210-647">www.wago.com/210-647</a>   |
|  | <b>Nr. articol: 210-648</b><br>Operating tool; Blade: 2.5 x 0.4 mm; with a partially insulated shaft; angled; short   | <a href="http://www.wago.com/210-648">www.wago.com/210-648</a>   |
|  | <b>Nr. articol: 210-719</b><br>Operating tool; Blade: 2.5 x 0.4 mm; with a partially insulated shaft  | <a href="http://www.wago.com/210-719">www.wago.com/210-719</a>   |
| <b>General accessories</b>   |   |  |
|  | <b>Nr. articol: 2020-161</b><br>Start module for 1-conductor female connector; with integrated end plate; 1.5 mm <sup>2</sup> ; 1-pole; 1,50 mm <sup>2</sup> ; gray | <a href="http://www.wago.com/2020-161">www.wago.com/2020-161</a> |
|  | <b>Nr. articol: 2020-164</b><br>Start module for 1-conductor female connector; with integrated end plate; 1.5 mm <sup>2</sup> ; 1-pole; 1,50 mm <sup>2</sup> ; blue | <a href="http://www.wago.com/2020-164">www.wago.com/2020-164</a> |
|  | <b>Nr. articol: 2020-167</b><br>Start module for 1-conductor female connector; 1.5 mm <sup>2</sup> ; 1-pole; 1,50 mm <sup>2</sup> ; green-yellow                    | <a href="http://www.wago.com/2020-167">www.wago.com/2020-167</a> |
|  | <b>Nr. articol: 2020-181</b><br>End module for 1-conductor female connector; 1.5 mm <sup>2</sup> ; 1-pole; 1,50 mm <sup>2</sup> ; gray                              | <a href="http://www.wago.com/2020-181">www.wago.com/2020-181</a> |



Supus modificărilor.

|  |   |  |
|--|---|--|
|  | <b>Nr. articol: 2020-184</b><br>End module for 1-conductor female connector; 1.5 mm <sup>2</sup> ; 1-pole; 1,50 mm <sup>2</sup> ; blue                              | <a href="http://www.wago.com/2020-184">www.wago.com/2020-184</a> |
|  | <b>Nr. articol: 2020-187</b><br>End module for 1-conductor female connector; 1.5 mm <sup>2</sup> ; 1-pole; 1,50 mm <sup>2</sup> ; green-yellow                      | <a href="http://www.wago.com/2020-187">www.wago.com/2020-187</a> |
|  | <b>Nr. articol: 2020-261</b><br>Start module for 2-conductor female connector; with integrated end plate; 1.5 mm <sup>2</sup> ; 1-pole; 1,50 mm <sup>2</sup> ; gray | <a href="http://www.wago.com/2020-261">www.wago.com/2020-261</a> |
|  | <b>Nr. articol: 2020-264</b><br>Start module for 2-conductor female connector; with integrated end plate; 1.5 mm <sup>2</sup> ; 1-pole; 1,50 mm <sup>2</sup> ; blue | <a href="http://www.wago.com/2020-264">www.wago.com/2020-264</a> |
|  | <b>Nr. articol: 2020-267</b><br>Start module for 2-conductor female connector; 1.5 mm <sup>2</sup> ; 1-pole; 1,50 mm <sup>2</sup> ; green-yellow                    | <a href="http://www.wago.com/2020-267">www.wago.com/2020-267</a> |
|  | <b>Nr. articol: 2020-281</b><br>End module for 2-conductor female connector; 1.5 mm <sup>2</sup> ; 1-pole; 1,50 mm <sup>2</sup> ; gray                              | <a href="http://www.wago.com/2020-281">www.wago.com/2020-281</a> |
|  | <b>Nr. articol: 2020-284</b><br>End module for 2-conductor female connector; 1.5 mm <sup>2</sup> ; 1-pole; 1,50 mm <sup>2</sup> ; blue                              | <a href="http://www.wago.com/2020-284">www.wago.com/2020-284</a> |
|  | <b>Nr. articol: 2020-287</b><br>End module for 2-conductor female connector; 1.5 mm <sup>2</sup> ; 1-pole; 1,50 mm <sup>2</sup> ; green-yellow                      | <a href="http://www.wago.com/2020-287">www.wago.com/2020-287</a> |

## Coding

|   |   |  |
|---|---|--|
|  | <b>Nr. articol: 2020-100</b><br>Carrier with 6 coding pins; for coding of female plugs; for carrier terminal blocks; orange | <a href="http://www.wago.com/2020-100">www.wago.com/2020-100</a> |
|---|---|--|

## Carrier rail

|  |   |  |
|--|---|--|
|  | <b>Nr. articol: 210-112</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 25 mm   | <a href="http://www.wago.com/210-112">www.wago.com/210-112</a> |
|  | <b>Nr. articol: 210-113</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; according to EN 60715                    | <a href="http://www.wago.com/210-113">www.wago.com/210-113</a> |
|  | <b>Nr. articol: 210-114</b><br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; similar to EN 60715                     | <a href="http://www.wago.com/210-114">www.wago.com/210-114</a> |
|  | <b>Nr. articol: 210-115</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 18 mm   | <a href="http://www.wago.com/210-115">www.wago.com/210-115</a> |
|  | <b>Nr. articol: 210-118</b><br>Steel carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715                   | <a href="http://www.wago.com/210-118">www.wago.com/210-118</a> |
|  | <b>Nr. articol: 210-196</b><br>Aluminum carrier rail; 35 x 8.2 mm; 1.6 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored | <a href="http://www.wago.com/210-196">www.wago.com/210-196</a> |
|  | <b>Nr. articol: 210-197</b><br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; similar to EN 60715                       | <a href="http://www.wago.com/210-197">www.wago.com/210-197</a> |

**Nr. articol: 210-198**

Supus modificărilor.



Copper carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; copper-colored

[www.wago.com/210-198](http://www.wago.com/210-198)

#### Female plug



**Nr. articol: 2020-102**

1-conductor female plug; 1.5 mm<sup>2</sup>; 2-pole; 1,50 mm<sup>2</sup>; gray

[www.wago.com/2020-102](http://www.wago.com/2020-102)

**Nr. articol: 2020-102/122-000**

1-conductor female plug; Locking lever; 1.5 mm<sup>2</sup>; 2-pole; 1,50 mm<sup>2</sup>; gray

[www.wago.com/2020-102/122-000](http://www.wago.com/2020-102/122-000)

**Nr. articol: 2020-102/132-000**

1-conductor female plug; Strain relief plate; 1.5 mm<sup>2</sup>; 2-pole; 1,50 mm<sup>2</sup>; gray

[www.wago.com/2020-102/132-000](http://www.wago.com/2020-102/132-000)

**Nr. articol: 2020-102/142-000**

1-conductor female plug; Strain relief plate; 1.5 mm<sup>2</sup>; 2-pole; 1,50 mm<sup>2</sup>; gray

[www.wago.com/2020-102/142-000](http://www.wago.com/2020-102/142-000)



**Nr. articol: 2020-103**

1-conductor female plug; 1.5 mm<sup>2</sup>; 3-pole; 1,50 mm<sup>2</sup>; gray

[www.wago.com/2020-103](http://www.wago.com/2020-103)



**Nr. articol: 2020-103/000-036**

1-conductor female plug; 1.5 mm<sup>2</sup>; 3-pole; 1,50 mm<sup>2</sup>; gray, green-yellow

[www.wago.com/2020-103/000-036](http://www.wago.com/2020-103/000-036)



**Nr. articol: 2020-103/000-037**

1-conductor female plug; 1.5 mm<sup>2</sup>; 3-pole; 1,50 mm<sup>2</sup>; green-yellow, gray

[www.wago.com/2020-103/000-037](http://www.wago.com/2020-103/000-037)



**Nr. articol: 2020-103/000-038**

1-conductor female plug; 1.5 mm<sup>2</sup>; 3-pole; 1,50 mm<sup>2</sup>; gray, blue, green-yellow

[www.wago.com/2020-103/000-038](http://www.wago.com/2020-103/000-038)



**Nr. articol: 2020-103/000-039**

1-conductor female plug; 1.5 mm<sup>2</sup>; 3-pole; 1,50 mm<sup>2</sup>; green-yellow, blue, gray

[www.wago.com/2020-103/000-039](http://www.wago.com/2020-103/000-039)

**Nr. articol: 2020-103/122-000**

1-conductor female plug; Locking lever; 1.5 mm<sup>2</sup>; 3-pole; 1,50 mm<sup>2</sup>; gray

[www.wago.com/2020-103/122-000](http://www.wago.com/2020-103/122-000)

**Nr. articol: 2020-103/132-000**

1-conductor female plug; Strain relief plate; 1.5 mm<sup>2</sup>; 3-pole; 1,50 mm<sup>2</sup>; gray

[www.wago.com/2020-103/132-000](http://www.wago.com/2020-103/132-000)

**Nr. articol: 2020-103/142-000**

1-conductor female plug; Strain relief plate; 1.5 mm<sup>2</sup>; 3-pole; 1,50 mm<sup>2</sup>; gray

[www.wago.com/2020-103/142-000](http://www.wago.com/2020-103/142-000)














**Nr. articol: 2020-104**

1-conductor female plug; 1.5 mm<sup>2</sup>; 4-pole; 1,50 mm<sup>2</sup>; gray












[www.wago.com/2020-104](http://www.wago.com/2020-104)

Supus modificărilor.









|  |   |  |
|--|---|--|
|    | <b>Nr. articol: 2020-104/000-036</b><br>1-conductor female plug; 1.5 mm <sup>2</sup> ; 4-pole; 1,50 mm <sup>2</sup> ; gray, green-yellow        | <a href="http://www.wago.com/2020-104/000-036">www.wago.com/2020-104/000-036</a> |
|    | <b>Nr. articol: 2020-104/000-037</b><br>1-conductor female plug; 1.5 mm <sup>2</sup> ; 4-pole; 1,50 mm <sup>2</sup> ; green-yellow, gray        | <a href="http://www.wago.com/2020-104/000-037">www.wago.com/2020-104/000-037</a> |
|    | <b>Nr. articol: 2020-104/000-038</b><br>1-conductor female plug; 1.5 mm <sup>2</sup> ; 4-pole; 1,50 mm <sup>2</sup> ; gray, blue, green-yellow  | <a href="http://www.wago.com/2020-104/000-038">www.wago.com/2020-104/000-038</a> |
|    | <b>Nr. articol: 2020-104/000-039</b><br>1-conductor female plug; 1.5 mm <sup>2</sup> ; 4-pole; 1,50 mm <sup>2</sup> ; green-yellow, blue, gray  | <a href="http://www.wago.com/2020-104/000-039">www.wago.com/2020-104/000-039</a> |
|  | <b>Nr. articol: 2020-104/124-000</b><br>1-conductor female plug; Locking lever; 1.5 mm <sup>2</sup> ; 4-pole; 1,50 mm <sup>2</sup> ; gray       | <a href="http://www.wago.com/2020-104/124-000">www.wago.com/2020-104/124-000</a> |
|  | <b>Nr. articol: 2020-104/133-000</b><br>1-conductor female plug; Strain relief plate; 1.5 mm <sup>2</sup> ; 4-pole; 1,50 mm <sup>2</sup> ; gray | <a href="http://www.wago.com/2020-104/133-000">www.wago.com/2020-104/133-000</a> |
|  | <b>Nr. articol: 2020-104/143-000</b><br>1-conductor female plug; Strain relief plate; 1.5 mm <sup>2</sup> ; 4-pole; 1,50 mm <sup>2</sup> ; gray | <a href="http://www.wago.com/2020-104/143-000">www.wago.com/2020-104/143-000</a> |
|  | <b>Nr. articol: 2020-105</b><br>1-conductor female plug; 1.5 mm <sup>2</sup> ; 5-pole; 1,50 mm <sup>2</sup> ; gray                              | <a href="http://www.wago.com/2020-105">www.wago.com/2020-105</a>                 |
|  | <b>Nr. articol: 2020-105/000-036</b><br>1-conductor female plug; 1.5 mm <sup>2</sup> ; 5-pole; 1,50 mm <sup>2</sup> ; gray, green-yellow        | <a href="http://www.wago.com/2020-105/000-036">www.wago.com/2020-105/000-036</a> |
|  | <b>Nr. articol: 2020-105/000-037</b><br>1-conductor female plug; 1.5 mm <sup>2</sup> ; 5-pole; 1,50 mm <sup>2</sup> ; green-yellow, gray        | <a href="http://www.wago.com/2020-105/000-037">www.wago.com/2020-105/000-037</a> |
|  | <b>Nr. articol: 2020-105/000-038</b><br>1-conductor female plug; 1.5 mm <sup>2</sup> ; 5-pole; 1,50 mm <sup>2</sup> ; gray, blue, green-yellow  | <a href="http://www.wago.com/2020-105/000-038">www.wago.com/2020-105/000-038</a> |
|  | <b>Nr. articol: 2020-105/000-039</b><br>1-conductor female plug; 1.5 mm <sup>2</sup> ; 5-pole; 1,50 mm <sup>2</sup> ; green-yellow, blue, gray  | <a href="http://www.wago.com/2020-105/000-039">www.wago.com/2020-105/000-039</a> |
|  | <b>Nr. articol: 2020-105/124-000</b><br>1-conductor female plug; Locking lever; 1.5 mm <sup>2</sup> ; 5-pole; 1,50 mm <sup>2</sup> ; gray       | <a href="http://www.wago.com/2020-105/124-000">www.wago.com/2020-105/124-000</a> |
|  | <b>Nr. articol: 2020-105/133-000</b><br>1-conductor female plug; Strain relief plate; 1.5 mm <sup>2</sup> ; 5-pole; 1,50 mm <sup>2</sup> ; gray | <a href="http://www.wago.com/2020-105/133-000">www.wago.com/2020-105/133-000</a> |

Supus modificărilor.











|  |   |  |
|--|---|--|
|    | <b>Nr. articol: 2020-105/143-000</b><br>1-conductor female plug; Strain relief plate; 1.5 mm <sup>2</sup> ; 5-pole; 1,50 mm <sup>2</sup> ; gray | <a href="http://www.wago.com/2020-105/143-000">www.wago.com/2020-105/143-000</a> |
|    | <b>Nr. articol: 2020-106</b><br>1-conductor female plug; 1.5 mm <sup>2</sup> ; 6-pole; 1,50 mm <sup>2</sup> ; gray                              | <a href="http://www.wago.com/2020-106">www.wago.com/2020-106</a>                 |
|    | <b>Nr. articol: 2020-106/000-036</b><br>1-conductor female plug; 1.5 mm <sup>2</sup> ; 6-pole; 1,50 mm <sup>2</sup> ; gray, green-yellow        | <a href="http://www.wago.com/2020-106/000-036">www.wago.com/2020-106/000-036</a> |
|    | <b>Nr. articol: 2020-106/000-037</b><br>1-conductor female plug; 1.5 mm <sup>2</sup> ; 6-pole; 1,50 mm <sup>2</sup> ; green-yellow, gray        | <a href="http://www.wago.com/2020-106/000-037">www.wago.com/2020-106/000-037</a> |
|    | <b>Nr. articol: 2020-106/000-038</b><br>1-conductor female plug; 1.5 mm <sup>2</sup> ; 6-pole; 1,50 mm <sup>2</sup> ; gray, blue, green-yellow  | <a href="http://www.wago.com/2020-106/000-038">www.wago.com/2020-106/000-038</a> |
|    | <b>Nr. articol: 2020-106/000-039</b><br>1-conductor female plug; 1.5 mm <sup>2</sup> ; 6-pole; 1,50 mm <sup>2</sup> ; green-yellow, blue, gray  | <a href="http://www.wago.com/2020-106/000-039">www.wago.com/2020-106/000-039</a> |
|  | <b>Nr. articol: 2020-106/124-000</b><br>1-conductor female plug; Locking lever; 1.5 mm <sup>2</sup> ; 6-pole; 1,50 mm <sup>2</sup> ; gray       | <a href="http://www.wago.com/2020-106/124-000">www.wago.com/2020-106/124-000</a> |
|  | <b>Nr. articol: 2020-106/133-000</b><br>1-conductor female plug; Strain relief plate; 1.5 mm <sup>2</sup> ; 6-pole; 1,50 mm <sup>2</sup> ; gray | <a href="http://www.wago.com/2020-106/133-000">www.wago.com/2020-106/133-000</a> |
|  | <b>Nr. articol: 2020-106/143-000</b><br>1-conductor female plug; Strain relief plate; 1.5 mm <sup>2</sup> ; 6-pole; 1,50 mm <sup>2</sup> ; gray | <a href="http://www.wago.com/2020-106/143-000">www.wago.com/2020-106/143-000</a> |
|  | <b>Nr. articol: 2020-107</b><br>1-conductor female plug; 1.5 mm <sup>2</sup> ; 7-pole; 1,50 mm <sup>2</sup> ; gray                              | <a href="http://www.wago.com/2020-107">www.wago.com/2020-107</a>                 |
|  | <b>Nr. articol: 2020-107/000-036</b><br>1-conductor female plug; 1.5 mm <sup>2</sup> ; 7-pole; 1,50 mm <sup>2</sup> ; gray, green-yellow        | <a href="http://www.wago.com/2020-107/000-036">www.wago.com/2020-107/000-036</a> |
|  | <b>Nr. articol: 2020-107/000-037</b><br>1-conductor female plug; 1.5 mm <sup>2</sup> ; 7-pole; 1,50 mm <sup>2</sup> ; green-yellow, gray        | <a href="http://www.wago.com/2020-107/000-037">www.wago.com/2020-107/000-037</a> |
|  | <b>Nr. articol: 2020-107/000-038</b><br>1-conductor female plug; 1.5 mm <sup>2</sup> ; 7-pole; 1,50 mm <sup>2</sup> ; gray, blue, green-yellow  | <a href="http://www.wago.com/2020-107/000-038">www.wago.com/2020-107/000-038</a> |
|  | <b>Nr. articol: 2020-107/000-039</b><br>1-conductor female plug; 1.5 mm <sup>2</sup> ; 7-pole; 1,50 mm <sup>2</sup> ; green-yellow, blue, gray  | <a href="http://www.wago.com/2020-107/000-039">www.wago.com/2020-107/000-039</a> |










Supus modificărilor.

|  |   |  |
|--|---|--|
|  | <b>Nr. articol: 2020-107/124-000</b><br>1-conductor female plug; Locking lever; 1.5 mm <sup>2</sup> ; 7-pole; 1,50 mm <sup>2</sup> ; gray       | <a href="http://www.wago.com/2020-107/124-000">www.wago.com/2020-107/124-000</a> |
|  | <b>Nr. articol: 2020-107/134-000</b><br>1-conductor female plug; Strain relief plate; 1.5 mm <sup>2</sup> ; 7-pole; 1,50 mm <sup>2</sup> ; gray | <a href="http://www.wago.com/2020-107/134-000">www.wago.com/2020-107/134-000</a> |
|  | <b>Nr. articol: 2020-107/144-000</b><br>1-conductor female plug; Strain relief plate; 1.5 mm <sup>2</sup> ; 7-pole; 1,50 mm <sup>2</sup> ; gray | <a href="http://www.wago.com/2020-107/144-000">www.wago.com/2020-107/144-000</a> |
|    | <b>Nr. articol: 2020-108</b><br>1-conductor female plug; 1.5 mm <sup>2</sup> ; 8-pole; 1,50 mm <sup>2</sup> ; gray                              | <a href="http://www.wago.com/2020-108">www.wago.com/2020-108</a>                 |
|    | <b>Nr. articol: 2020-108/000-036</b><br>1-conductor female plug; 1.5 mm <sup>2</sup> ; 8-pole; 1,50 mm <sup>2</sup> ; gray, green-yellow        | <a href="http://www.wago.com/2020-108/000-036">www.wago.com/2020-108/000-036</a> |
|    | <b>Nr. articol: 2020-108/000-037</b><br>1-conductor female plug; 1.5 mm <sup>2</sup> ; 8-pole; 1,50 mm <sup>2</sup> ; green-yellow, gray        | <a href="http://www.wago.com/2020-108/000-037">www.wago.com/2020-108/000-037</a> |
|    | <b>Nr. articol: 2020-108/000-038</b><br>1-conductor female plug; 1.5 mm <sup>2</sup> ; 8-pole; 1,50 mm <sup>2</sup> ; gray, blue, green-yellow  | <a href="http://www.wago.com/2020-108/000-038">www.wago.com/2020-108/000-038</a> |
|  | <b>Nr. articol: 2020-108/000-039</b><br>1-conductor female plug; 1.5 mm <sup>2</sup> ; 8-pole; 1,50 mm <sup>2</sup> ; green-yellow, blue, gray  | <a href="http://www.wago.com/2020-108/000-039">www.wago.com/2020-108/000-039</a> |
|  | <b>Nr. articol: 2020-108/124-000</b><br>1-conductor female plug; Locking lever; 1.5 mm <sup>2</sup> ; 8-pole; 1,50 mm <sup>2</sup> ; gray       | <a href="http://www.wago.com/2020-108/124-000">www.wago.com/2020-108/124-000</a> |
|  | <b>Nr. articol: 2020-108/134-000</b><br>1-conductor female plug; Strain relief plate; 1.5 mm <sup>2</sup> ; 8-pole; 1,50 mm <sup>2</sup> ; gray | <a href="http://www.wago.com/2020-108/134-000">www.wago.com/2020-108/134-000</a> |
|  | <b>Nr. articol: 2020-108/144-000</b><br>1-conductor female plug; Strain relief plate; 1.5 mm <sup>2</sup> ; 8-pole; 1,50 mm <sup>2</sup> ; gray | <a href="http://www.wago.com/2020-108/144-000">www.wago.com/2020-108/144-000</a> |
|  | <b>Nr. articol: 2020-109</b><br>1-conductor female plug; 1.5 mm <sup>2</sup> ; 9-pole; 1,50 mm <sup>2</sup> ; gray                              | <a href="http://www.wago.com/2020-109">www.wago.com/2020-109</a>                 |
|  | <b>Nr. articol: 2020-109/000-036</b><br>1-conductor female plug; 1.5 mm <sup>2</sup> ; 9-pole; 1,50 mm <sup>2</sup> ; gray, green-yellow        | <a href="http://www.wago.com/2020-109/000-036">www.wago.com/2020-109/000-036</a> |
|  | <b>Nr. articol: 2020-109/000-037</b><br>1-conductor female plug; 1.5 mm <sup>2</sup> ; 9-pole; 1,50 mm <sup>2</sup> ; green-yellow, gray        | <a href="http://www.wago.com/2020-109/000-037">www.wago.com/2020-109/000-037</a> |










Supus modificărilor.

|  |  |  |
|--|--|--|
|    | <b>Nr. articol: 2020-109/000-038</b><br>1-conductor female plug; 1.5 mm <sup>2</sup> ; 9-pole; 1,50 mm <sup>2</sup> ; gray, blue, green-yellow   | <a href="http://www.wago.com/2020-109/000-038">www.wago.com/2020-109/000-038</a> |
|    | <b>Nr. articol: 2020-109/000-039</b><br>1-conductor female plug; 1.5 mm <sup>2</sup> ; 9-pole; 1,50 mm <sup>2</sup> ; green-yellow, blue, gray   | <a href="http://www.wago.com/2020-109/000-039">www.wago.com/2020-109/000-039</a> |
|  | <b>Nr. articol: 2020-109/124-000</b><br>1-conductor female plug; Locking lever; 1.5 mm <sup>2</sup> ; 9-pole; 1,50 mm <sup>2</sup> ; gray        | <a href="http://www.wago.com/2020-109/124-000">www.wago.com/2020-109/124-000</a> |
|  | <b>Nr. articol: 2020-109/134-000</b><br>1-conductor female plug; Strain relief plate; 1.5 mm <sup>2</sup> ; 9-pole; 1,50 mm <sup>2</sup> ; gray  | <a href="http://www.wago.com/2020-109/134-000">www.wago.com/2020-109/134-000</a> |
|  | <b>Nr. articol: 2020-109/144-000</b><br>1-conductor female plug; Strain relief plate; 1.5 mm <sup>2</sup> ; 9-pole; 1,50 mm <sup>2</sup> ; gray  | <a href="http://www.wago.com/2020-109/144-000">www.wago.com/2020-109/144-000</a> |
|    | <b>Nr. articol: 2020-110</b><br>1-conductor female plug; 1.5 mm <sup>2</sup> ; 10-pole; 1,50 mm <sup>2</sup> ; gray                              | <a href="http://www.wago.com/2020-110">www.wago.com/2020-110</a>                 |
|    | <b>Nr. articol: 2020-110/000-036</b><br>1-conductor female plug; 1.5 mm <sup>2</sup> ; 10-pole; 1,50 mm <sup>2</sup> ; gray, green-yellow        | <a href="http://www.wago.com/2020-110/000-036">www.wago.com/2020-110/000-036</a> |
|  | <b>Nr. articol: 2020-110/000-037</b><br>1-conductor female plug; 1.5 mm <sup>2</sup> ; 10-pole; 1,50 mm <sup>2</sup> ; green-yellow, gray        | <a href="http://www.wago.com/2020-110/000-037">www.wago.com/2020-110/000-037</a> |
|  | <b>Nr. articol: 2020-110/000-038</b><br>1-conductor female plug; 1.5 mm <sup>2</sup> ; 10-pole; 1,50 mm <sup>2</sup> ; gray, blue, green-yellow  | <a href="http://www.wago.com/2020-110/000-038">www.wago.com/2020-110/000-038</a> |
|  | <b>Nr. articol: 2020-110/000-039</b><br>1-conductor female plug; 1.5 mm <sup>2</sup> ; 10-pole; 1,50 mm <sup>2</sup> ; green-yellow, blue, gray  | <a href="http://www.wago.com/2020-110/000-039">www.wago.com/2020-110/000-039</a> |
|  | <b>Nr. articol: 2020-110/125-000</b><br>1-conductor female plug; Locking lever; 1.5 mm <sup>2</sup> ; 10-pole; 1,50 mm <sup>2</sup> ; gray       | <a href="http://www.wago.com/2020-110/125-000">www.wago.com/2020-110/125-000</a> |
|  | <b>Nr. articol: 2020-110/135-000</b><br>1-conductor female plug; Strain relief plate; 1.5 mm <sup>2</sup> ; 10-pole; 1,50 mm <sup>2</sup> ; gray | <a href="http://www.wago.com/2020-110/135-000">www.wago.com/2020-110/135-000</a> |
|  | <b>Nr. articol: 2020-110/145-000</b><br>1-conductor female plug; Strain relief plate; 1.5 mm <sup>2</sup> ; 10-pole; 1,50 mm <sup>2</sup> ; gray | <a href="http://www.wago.com/2020-110/145-000">www.wago.com/2020-110/145-000</a> |
|  | <b>Nr. articol: 2020-111</b><br>1-conductor female plug; 1.5 mm <sup>2</sup> ; 11-pole; 1,50 mm <sup>2</sup> ; gray                              | <a href="http://www.wago.com/2020-111">www.wago.com/2020-111</a>                 |

Supus modificărilor.

|  |  |  |
|--|--|--|
|    | <b>Nr. articol: 2020-111/000-036</b><br>1-conductor female plug; 1.5 mm <sup>2</sup> ; 11-pole; 1,50 mm <sup>2</sup> ; gray, green-yellow        | <a href="http://www.wago.com/2020-111/000-036">www.wago.com/2020-111/000-036</a> |
|    | <b>Nr. articol: 2020-111/000-037</b><br>1-conductor female plug; 1.5 mm <sup>2</sup> ; 11-pole; 1,50 mm <sup>2</sup> ; green-yellow, gray        | <a href="http://www.wago.com/2020-111/000-037">www.wago.com/2020-111/000-037</a> |
|    | <b>Nr. articol: 2020-111/000-038</b><br>1-conductor female plug; 1.5 mm <sup>2</sup> ; 11-pole; 1,50 mm <sup>2</sup> ; gray, blue, green-yellow  | <a href="http://www.wago.com/2020-111/000-038">www.wago.com/2020-111/000-038</a> |
|    | <b>Nr. articol: 2020-111/000-039</b><br>1-conductor female plug; 1.5 mm <sup>2</sup> ; 11-pole; 1,50 mm <sup>2</sup> ; green-yellow, blue, gray  | <a href="http://www.wago.com/2020-111/000-039">www.wago.com/2020-111/000-039</a> |
|  | <b>Nr. articol: 2020-111/125-000</b><br>1-conductor female plug; Locking lever; 1.5 mm <sup>2</sup> ; 11-pole; 1,50 mm <sup>2</sup> ; gray       | <a href="http://www.wago.com/2020-111/125-000">www.wago.com/2020-111/125-000</a> |
|  | <b>Nr. articol: 2020-111/135-000</b><br>1-conductor female plug; Strain relief plate; 1.5 mm <sup>2</sup> ; 11-pole; 1,50 mm <sup>2</sup> ; gray | <a href="http://www.wago.com/2020-111/135-000">www.wago.com/2020-111/135-000</a> |
|  | <b>Nr. articol: 2020-111/145-000</b><br>1-conductor female plug; Strain relief plate; 1.5 mm <sup>2</sup> ; 11-pole; 1,50 mm <sup>2</sup> ; gray | <a href="http://www.wago.com/2020-111/145-000">www.wago.com/2020-111/145-000</a> |
|  | <b>Nr. articol: 2020-112</b><br>1-conductor female plug; 1.5 mm <sup>2</sup> ; 12-pole; 1,50 mm <sup>2</sup> ; gray                              | <a href="http://www.wago.com/2020-112">www.wago.com/2020-112</a>                 |
|  | <b>Nr. articol: 2020-112/000-036</b><br>1-conductor female plug; 1.5 mm <sup>2</sup> ; 12-pole; 1,50 mm <sup>2</sup> ; gray, green-yellow        | <a href="http://www.wago.com/2020-112/000-036">www.wago.com/2020-112/000-036</a> |
|  | <b>Nr. articol: 2020-112/000-037</b><br>1-conductor female plug; 1.5 mm <sup>2</sup> ; 12-pole; 1,50 mm <sup>2</sup> ; green-yellow, gray        | <a href="http://www.wago.com/2020-112/000-037">www.wago.com/2020-112/000-037</a> |
|  | <b>Nr. articol: 2020-112/000-038</b><br>1-conductor female plug; 1.5 mm <sup>2</sup> ; 12-pole; 1,50 mm <sup>2</sup> ; gray, blue, green-yellow  | <a href="http://www.wago.com/2020-112/000-038">www.wago.com/2020-112/000-038</a> |
|  | <b>Nr. articol: 2020-112/000-039</b><br>1-conductor female plug; 1.5 mm <sup>2</sup> ; 12-pole; 1,50 mm <sup>2</sup> ; green-yellow, blue, gray  | <a href="http://www.wago.com/2020-112/000-039">www.wago.com/2020-112/000-039</a> |
|  | <b>Nr. articol: 2020-112/125-000</b><br>1-conductor female plug; Locking lever; 1.5 mm <sup>2</sup> ; 12-pole; 1,50 mm <sup>2</sup> ; gray       | <a href="http://www.wago.com/2020-112/125-000">www.wago.com/2020-112/125-000</a> |

Supus modificărilor.

|  |  |  |
|--|--|--|
|  | <b>Nr. articol: 2020-112/135-000</b><br>1-conductor female plug; Strain relief plate; 1.5 mm <sup>2</sup> ; 12-pole; 1,50 mm <sup>2</sup> ; gray | <a href="http://www.wago.com/2020-112/135-000">www.wago.com/2020-112/135-000</a> |
|  | <b>Nr. articol: 2020-112/145-000</b><br>1-conductor female plug; Strain relief plate; 1.5 mm <sup>2</sup> ; 12-pole; 1,50 mm <sup>2</sup> ; gray | <a href="http://www.wago.com/2020-112/145-000">www.wago.com/2020-112/145-000</a> |
|    | <b>Nr. articol: 2020-113</b><br>1-conductor female plug; 1.5 mm <sup>2</sup> ; 13-pole; 1,50 mm <sup>2</sup> ; gray                              | <a href="http://www.wago.com/2020-113">www.wago.com/2020-113</a>                 |
|    | <b>Nr. articol: 2020-113/000-036</b><br>1-conductor female plug; 1.5 mm <sup>2</sup> ; 13-pole; 1,50 mm <sup>2</sup> ; gray, green-yellow        | <a href="http://www.wago.com/2020-113/000-036">www.wago.com/2020-113/000-036</a> |
|    | <b>Nr. articol: 2020-113/000-037</b><br>1-conductor female plug; 1.5 mm <sup>2</sup> ; 13-pole; 1,50 mm <sup>2</sup> ; green-yellow, gray        | <a href="http://www.wago.com/2020-113/000-037">www.wago.com/2020-113/000-037</a> |
|    | <b>Nr. articol: 2020-113/000-038</b><br>1-conductor female plug; 1.5 mm <sup>2</sup> ; 13-pole; 1,50 mm <sup>2</sup> ; gray, blue, green-yellow  | <a href="http://www.wago.com/2020-113/000-038">www.wago.com/2020-113/000-038</a> |
|    | <b>Nr. articol: 2020-113/000-039</b><br>1-conductor female plug; 1.5 mm <sup>2</sup> ; 13-pole; 1,50 mm <sup>2</sup> ; green-yellow, blue, gray  | <a href="http://www.wago.com/2020-113/000-039">www.wago.com/2020-113/000-039</a> |
|  | <b>Nr. articol: 2020-113/125-000</b><br>1-conductor female plug; Locking lever; 1.5 mm <sup>2</sup> ; 13-pole; 1,50 mm <sup>2</sup> ; gray       | <a href="http://www.wago.com/2020-113/125-000">www.wago.com/2020-113/125-000</a> |
|  | <b>Nr. articol: 2020-113/135-000</b><br>1-conductor female plug; Strain relief plate; 1.5 mm <sup>2</sup> ; 13-pole; 1,50 mm <sup>2</sup> ; gray | <a href="http://www.wago.com/2020-113/135-000">www.wago.com/2020-113/135-000</a> |
|  | <b>Nr. articol: 2020-113/145-000</b><br>1-conductor female plug; Strain relief plate; 1.5 mm <sup>2</sup> ; 13-pole; 1,50 mm <sup>2</sup> ; gray | <a href="http://www.wago.com/2020-113/145-000">www.wago.com/2020-113/145-000</a> |
|  | <b>Nr. articol: 2020-114</b><br>1-conductor female plug; 1.5 mm <sup>2</sup> ; 14-pole; 1,50 mm <sup>2</sup> ; gray                              | <a href="http://www.wago.com/2020-114">www.wago.com/2020-114</a>                 |
|  | <b>Nr. articol: 2020-114/000-036</b><br>1-conductor female plug; 1.5 mm <sup>2</sup> ; 14-pole; 1,50 mm <sup>2</sup> ; gray, green-yellow        | <a href="http://www.wago.com/2020-114/000-036">www.wago.com/2020-114/000-036</a> |
|  | <b>Nr. articol: 2020-114/000-037</b><br>1-conductor female plug; 1.5 mm <sup>2</sup> ; 14-pole; 1,50 mm <sup>2</sup> ; green-yellow, gray        | <a href="http://www.wago.com/2020-114/000-037">www.wago.com/2020-114/000-037</a> |
|  | <b>Nr. articol: 2020-114/000-038</b><br>1-conductor female plug; 1.5 mm <sup>2</sup> ; 14-pole; 1,50 mm <sup>2</sup> ; gray, blue, green-yellow  | <a href="http://www.wago.com/2020-114/000-038">www.wago.com/2020-114/000-038</a> |

Supus modificărilor.



**Nr. articol: 2020-114/000-039**

1-conductor female plug; 1.5 mm<sup>2</sup>; 14-pole; 1,50 mm<sup>2</sup>; green-yellow, blue, gray

[www.wago.com/2020-114/000-039](http://www.wago.com/2020-114/000-039)

**Nr. articol: 2020-114/125-000**

1-conductor female plug; Locking lever; 1.5 mm<sup>2</sup>; 14-pole; 1,50 mm<sup>2</sup>; gray

[www.wago.com/2020-114/125-000](http://www.wago.com/2020-114/125-000)

**Nr. articol: 2020-114/135-000**

1-conductor female plug; Strain relief plate; 1.5 mm<sup>2</sup>; 14-pole; 1,50 mm<sup>2</sup>; gray

[www.wago.com/2020-114/135-000](http://www.wago.com/2020-114/135-000)

**Nr. articol: 2020-114/145-000**

1-conductor female plug; Strain relief plate; 1.5 mm<sup>2</sup>; 14-pole; 1,50 mm<sup>2</sup>; gray

[www.wago.com/2020-114/145-000](http://www.wago.com/2020-114/145-000)



**Nr. articol: 2020-115**

1-conductor female plug; 1.5 mm<sup>2</sup>; 15-pole; 1,50 mm<sup>2</sup>; gray

[www.wago.com/2020-115](http://www.wago.com/2020-115)



**Nr. articol: 2020-115/000-036**

1-conductor female plug; 1.5 mm<sup>2</sup>; 15-pole; 1,50 mm<sup>2</sup>; gray, green-yellow

[www.wago.com/2020-115/000-036](http://www.wago.com/2020-115/000-036)



**Nr. articol: 2020-115/000-037**

1-conductor female plug; 1.5 mm<sup>2</sup>; 15-pole; 1,50 mm<sup>2</sup>; green-yellow, gray

[www.wago.com/2020-115/000-037](http://www.wago.com/2020-115/000-037)



**Nr. articol: 2020-115/000-038**

1-conductor female plug; 1.5 mm<sup>2</sup>; 15-pole; 1,50 mm<sup>2</sup>; gray, blue, green-yellow

[www.wago.com/2020-115/000-038](http://www.wago.com/2020-115/000-038)



**Nr. articol: 2020-115/000-039**

1-conductor female plug; 1.5 mm<sup>2</sup>; 15-pole; 1,50 mm<sup>2</sup>; green-yellow, blue, gray

[www.wago.com/2020-115/000-039](http://www.wago.com/2020-115/000-039)

**Nr. articol: 2020-115/125-000**

1-conductor female plug; Locking lever; 1.5 mm<sup>2</sup>; 15-pole; 1,50 mm<sup>2</sup>; gray

[www.wago.com/2020-115/125-000](http://www.wago.com/2020-115/125-000)

**Nr. articol: 2020-115/135-000**

1-conductor female plug; Strain relief plate; 1.5 mm<sup>2</sup>; 15-pole; 1,50 mm<sup>2</sup>; gray

[www.wago.com/2020-115/135-000](http://www.wago.com/2020-115/135-000)

**Nr. articol: 2020-115/145-000**

1-conductor female plug; Strain relief plate; 1.5 mm<sup>2</sup>; 15-pole; 1,50 mm<sup>2</sup>; gray

[www.wago.com/2020-115/145-000](http://www.wago.com/2020-115/145-000)



**Nr. articol: 2020-202**

2-conductor female connector; 1.5 mm<sup>2</sup>; 2-pole; 1,50 mm<sup>2</sup>; gray

[www.wago.com/2020-202](http://www.wago.com/2020-202)

















**Nr. articol: 2020-203**















2-conductor female connector; 1.5 mm<sup>2</sup>; 3-pole; 1,50 mm<sup>2</sup>; gray

[www.wago.com/2020-203](http://www.wago.com/2020-203)

Supus modificărilor.

|  |   |  |
|--|---|--|
|    | <b>Nr. articol:</b> 2020-203/000-036<br>2-conductor female connector; 1.5 mm <sup>2</sup> ; 3-pole; 1,50 mm <sup>2</sup> ; gray, green-yellow       | <a href="http://www.wago.com/2020-203/000-036">www.wago.com/2020-203/000-036</a> |
|    | <b>Nr. articol:</b> 2020-203/000-037<br>2-conductor female connector; 1.5 mm <sup>2</sup> ; 3-pole; 1,50 mm <sup>2</sup> ; green-yellow, gray       | <a href="http://www.wago.com/2020-203/000-037">www.wago.com/2020-203/000-037</a> |
|    | <b>Nr. articol:</b> 2020-203/000-038<br>2-conductor female connector; 1.5 mm <sup>2</sup> ; 3-pole; 1,50 mm <sup>2</sup> ; gray, blue, green-yellow | <a href="http://www.wago.com/2020-203/000-038">www.wago.com/2020-203/000-038</a> |
|    | <b>Nr. articol:</b> 2020-203/000-039<br>2-conductor female connector; 1.5 mm <sup>2</sup> ; 3-pole; 1,50 mm <sup>2</sup> ; green-yellow, blue, gray | <a href="http://www.wago.com/2020-203/000-039">www.wago.com/2020-203/000-039</a> |
|    | <b>Nr. articol:</b> 2020-204<br>2-conductor female connector; 1.5 mm <sup>2</sup> ; 4-pole; 1,50 mm <sup>2</sup> ; gray                             | <a href="http://www.wago.com/2020-204">www.wago.com/2020-204</a>                 |
|    | <b>Nr. articol:</b> 2020-204/000-036<br>2-conductor female connector; 1.5 mm <sup>2</sup> ; 4-pole; 1,50 mm <sup>2</sup> ; gray, green-yellow       | <a href="http://www.wago.com/2020-204/000-036">www.wago.com/2020-204/000-036</a> |
|    | <b>Nr. articol:</b> 2020-204/000-037<br>2-conductor female connector; 1.5 mm <sup>2</sup> ; 4-pole; 1,50 mm <sup>2</sup> ; green-yellow, gray       | <a href="http://www.wago.com/2020-204/000-037">www.wago.com/2020-204/000-037</a> |
|   | <b>Nr. articol:</b> 2020-204/000-038<br>2-conductor female connector; 1.5 mm <sup>2</sup> ; 4-pole; 1,50 mm <sup>2</sup> ; gray, blue, green-yellow | <a href="http://www.wago.com/2020-204/000-038">www.wago.com/2020-204/000-038</a> |
|  | <b>Nr. articol:</b> 2020-204/000-039<br>2-conductor female connector; 1.5 mm <sup>2</sup> ; 4-pole; 1,50 mm <sup>2</sup> ; green-yellow, blue, gray | <a href="http://www.wago.com/2020-204/000-039">www.wago.com/2020-204/000-039</a> |
|  | <b>Nr. articol:</b> 2020-205<br>2-conductor female connector; 1.5 mm <sup>2</sup> ; 5-pole; 1,50 mm <sup>2</sup> ; gray                             | <a href="http://www.wago.com/2020-205">www.wago.com/2020-205</a>                 |
|  | <b>Nr. articol:</b> 2020-205/000-036<br>2-conductor female connector; 1.5 mm <sup>2</sup> ; 5-pole; 1,50 mm <sup>2</sup> ; gray, green-yellow       | <a href="http://www.wago.com/2020-205/000-036">www.wago.com/2020-205/000-036</a> |
|  | <b>Nr. articol:</b> 2020-205/000-037<br>2-conductor female connector; 1.5 mm <sup>2</sup> ; 5-pole; 1,50 mm <sup>2</sup> ; green-yellow, gray       | <a href="http://www.wago.com/2020-205/000-037">www.wago.com/2020-205/000-037</a> |
|  | <b>Nr. articol:</b> 2020-205/000-038<br>2-conductor female connector; 1.5 mm <sup>2</sup> ; 5-pole; 1,50 mm <sup>2</sup> ; gray, blue, green-yellow | <a href="http://www.wago.com/2020-205/000-038">www.wago.com/2020-205/000-038</a> |
|  | <b>Nr. articol:</b> 2020-205/000-039<br>2-conductor female connector; 1.5 mm <sup>2</sup> ; 5-pole; 1,50 mm <sup>2</sup> ; green-yellow, blue, gray | <a href="http://www.wago.com/2020-205/000-039">www.wago.com/2020-205/000-039</a> |

Supus modificărilor.















|  |   |  |
|--|---|--|
|    | <b>Nr. articol: 2020-206</b><br>2-conductor female connector; 1.5 mm <sup>2</sup> ; 6-pole; 1,50 mm <sup>2</sup> ; gray                             | <a href="http://www.wago.com/2020-206">www.wago.com/2020-206</a>                 |
|    | <b>Nr. articol: 2020-206/000-036</b><br>2-conductor female connector; 1.5 mm <sup>2</sup> ; 6-pole; 1,50 mm <sup>2</sup> ; gray, green-yellow       | <a href="http://www.wago.com/2020-206/000-036">www.wago.com/2020-206/000-036</a> |
|    | <b>Nr. articol: 2020-206/000-037</b><br>2-conductor female connector; 1.5 mm <sup>2</sup> ; 6-pole; 1,50 mm <sup>2</sup> ; green-yellow, gray       | <a href="http://www.wago.com/2020-206/000-037">www.wago.com/2020-206/000-037</a> |
|    | <b>Nr. articol: 2020-206/000-038</b><br>2-conductor female connector; 1.5 mm <sup>2</sup> ; 6-pole; 1,50 mm <sup>2</sup> ; gray, blue, green-yellow | <a href="http://www.wago.com/2020-206/000-038">www.wago.com/2020-206/000-038</a> |
|    | <b>Nr. articol: 2020-206/000-039</b><br>2-conductor female connector; 1.5 mm <sup>2</sup> ; 6-pole; 1,50 mm <sup>2</sup> ; green-yellow, blue, gray | <a href="http://www.wago.com/2020-206/000-039">www.wago.com/2020-206/000-039</a> |
|    | <b>Nr. articol: 2020-207</b><br>2-conductor female connector; 1.5 mm <sup>2</sup> ; 7-pole; 1,50 mm <sup>2</sup> ; gray                             | <a href="http://www.wago.com/2020-207">www.wago.com/2020-207</a>                 |
|    | <b>Nr. articol: 2020-207/000-036</b><br>2-conductor female connector; 1.5 mm <sup>2</sup> ; 7-pole; 1,50 mm <sup>2</sup> ; gray, green-yellow       | <a href="http://www.wago.com/2020-207/000-036">www.wago.com/2020-207/000-036</a> |
|   | <b>Nr. articol: 2020-207/000-037</b><br>2-conductor female connector; 1.5 mm <sup>2</sup> ; 7-pole; 1,50 mm <sup>2</sup> ; green-yellow, gray       | <a href="http://www.wago.com/2020-207/000-037">www.wago.com/2020-207/000-037</a> |
|  | <b>Nr. articol: 2020-207/000-038</b><br>2-conductor female connector; 1.5 mm <sup>2</sup> ; 7-pole; 1,50 mm <sup>2</sup> ; gray, blue, green-yellow | <a href="http://www.wago.com/2020-207/000-038">www.wago.com/2020-207/000-038</a> |
|  | <b>Nr. articol: 2020-207/000-039</b><br>2-conductor female connector; 1.5 mm <sup>2</sup> ; 7-pole; 1,50 mm <sup>2</sup> ; green-yellow, blue, gray | <a href="http://www.wago.com/2020-207/000-039">www.wago.com/2020-207/000-039</a> |
|  | <b>Nr. articol: 2020-208</b><br>2-conductor female connector; 1.5 mm <sup>2</sup> ; 8-pole; 1,50 mm <sup>2</sup> ; gray                             | <a href="http://www.wago.com/2020-208">www.wago.com/2020-208</a>                 |
|  | <b>Nr. articol: 2020-208/000-036</b><br>2-conductor female connector; 1.5 mm <sup>2</sup> ; 8-pole; 1,50 mm <sup>2</sup> ; gray, green-yellow       | <a href="http://www.wago.com/2020-208/000-036">www.wago.com/2020-208/000-036</a> |
|  | <b>Nr. articol: 2020-208/000-037</b><br>2-conductor female connector; 1.5 mm <sup>2</sup> ; 8-pole; 1,50 mm <sup>2</sup> ; green-yellow, gray       | <a href="http://www.wago.com/2020-208/000-037">www.wago.com/2020-208/000-037</a> |
|  | <b>Nr. articol: 2020-208/000-038</b><br>2-conductor female connector; 1.5 mm <sup>2</sup> ; 8-pole; 1,50 mm <sup>2</sup> ; gray, blue, green-yellow | <a href="http://www.wago.com/2020-208/000-038">www.wago.com/2020-208/000-038</a> |

Supus modificărilor.















WAGO Kontakttechnik GmbH & Co. KG  
/Representative Office Romania  
Sos. Pipera-Tunari nr. 1/1  
building 1, 2nd floor | 077190 Voluntari, Ilfov  
Tel.: +40-(0)31 421 85 68 | Email: info-RO@wago.com

Aveți întrebări despre produsele noastre?  
Vă stăm la dispoziție pentru preluarea apelului la +40 (0) 31 421 85 68.

















|  |  |  |
|--|--|--|
|    | <b>Nr. articol:</b> 2020-208/000-039<br>2-conductor female connector; 1.5 mm <sup>2</sup> ; 8-pole; 1,50 mm <sup>2</sup> ; green-yellow, blue, gray  | <a href="http://www.wago.com/2020-208/000-039">www.wago.com/2020-208/000-039</a> |
|    | <b>Nr. articol:</b> 2020-209<br>2-conductor female connector; 1.5 mm <sup>2</sup> ; 9-pole; 1,50 mm <sup>2</sup> ; gray                              | <a href="http://www.wago.com/2020-209">www.wago.com/2020-209</a>                 |
|    | <b>Nr. articol:</b> 2020-209/000-036<br>2-conductor female connector; 1.5 mm <sup>2</sup> ; 9-pole; 1,50 mm <sup>2</sup> ; gray, green-yellow        | <a href="http://www.wago.com/2020-209/000-036">www.wago.com/2020-209/000-036</a> |
|    | <b>Nr. articol:</b> 2020-209/000-037<br>2-conductor female connector; 1.5 mm <sup>2</sup> ; 9-pole; 1,50 mm <sup>2</sup> ; green-yellow, gray        | <a href="http://www.wago.com/2020-209/000-037">www.wago.com/2020-209/000-037</a> |
|    | <b>Nr. articol:</b> 2020-209/000-038<br>2-conductor female connector; 1.5 mm <sup>2</sup> ; 9-pole; 1,50 mm <sup>2</sup> ; gray, blue, green-yellow  | <a href="http://www.wago.com/2020-209/000-038">www.wago.com/2020-209/000-038</a> |
|    | <b>Nr. articol:</b> 2020-209/000-039<br>2-conductor female connector; 1.5 mm <sup>2</sup> ; 9-pole; 1,50 mm <sup>2</sup> ; green-yellow, blue, gray  | <a href="http://www.wago.com/2020-209/000-039">www.wago.com/2020-209/000-039</a> |
|    | <b>Nr. articol:</b> 2020-210<br>2-conductor female connector; 1.5 mm <sup>2</sup> ; 10-pole; 1,50 mm <sup>2</sup> ; gray                             | <a href="http://www.wago.com/2020-210">www.wago.com/2020-210</a>                 |
|   | <b>Nr. articol:</b> 2020-210/000-036<br>2-conductor female connector; 1.5 mm <sup>2</sup> ; 10-pole; 1,50 mm <sup>2</sup> ; gray, green-yellow       | <a href="http://www.wago.com/2020-210/000-036">www.wago.com/2020-210/000-036</a> |
|  | <b>Nr. articol:</b> 2020-210/000-037<br>2-conductor female connector; 1.5 mm <sup>2</sup> ; 10-pole; 1,50 mm <sup>2</sup> ; green-yellow, gray       | <a href="http://www.wago.com/2020-210/000-037">www.wago.com/2020-210/000-037</a> |
|  | <b>Nr. articol:</b> 2020-210/000-038<br>2-conductor female connector; 1.5 mm <sup>2</sup> ; 10-pole; 1,50 mm <sup>2</sup> ; gray, blue, green-yellow | <a href="http://www.wago.com/2020-210/000-038">www.wago.com/2020-210/000-038</a> |
|  | <b>Nr. articol:</b> 2020-210/000-039<br>2-conductor female connector; 1.5 mm <sup>2</sup> ; 10-pole; 1,50 mm <sup>2</sup> ; green-yellow, blue, gray | <a href="http://www.wago.com/2020-210/000-039">www.wago.com/2020-210/000-039</a> |
|  | <b>Nr. articol:</b> 2020-211<br>2-conductor female connector; 1.5 mm <sup>2</sup> ; 11-pole; 1,50 mm <sup>2</sup> ; gray                             | <a href="http://www.wago.com/2020-211">www.wago.com/2020-211</a>                 |
|  | <b>Nr. articol:</b> 2020-211/000-036<br>2-conductor female connector; 1.5 mm <sup>2</sup> ; 11-pole; 1,50 mm <sup>2</sup> ; gray, green-yellow       | <a href="http://www.wago.com/2020-211/000-036">www.wago.com/2020-211/000-036</a> |
|  | <b>Nr. articol:</b> 2020-211/000-037<br>2-conductor female connector; 1.5 mm <sup>2</sup> ; 11-pole; 1,50 mm <sup>2</sup> ; green-yellow, gray       | <a href="http://www.wago.com/2020-211/000-037">www.wago.com/2020-211/000-037</a> |

Supus modificărilor.

|  |  |  |
|--|--|--|
|    | <p><b>Nr. articol: 2020-211/000-038</b><br/>2-conductor female connector; 1.5 mm<sup>2</sup>; 11-pole; 1,50 mm<sup>2</sup>; gray, blue, green-yellow</p> | <a href="http://www.wago.com/2020-211/000-038">www.wago.com/2020-211/000-038</a> |
|    | <p><b>Nr. articol: 2020-211/000-039</b><br/>2-conductor female connector; 1.5 mm<sup>2</sup>; 11-pole; 1,50 mm<sup>2</sup>; green-yellow, blue, gray</p> | <a href="http://www.wago.com/2020-211/000-039">www.wago.com/2020-211/000-039</a> |
|    | <p><b>Nr. articol: 2020-212</b><br/>2-conductor female connector; 1.5 mm<sup>2</sup>; 12-pole; 1,50 mm<sup>2</sup>; gray</p>                             | <a href="http://www.wago.com/2020-212">www.wago.com/2020-212</a>                 |
|    | <p><b>Nr. articol: 2020-212/000-036</b><br/>2-conductor female connector; 1.5 mm<sup>2</sup>; 12-pole; 1,50 mm<sup>2</sup>; gray, green-yellow</p>       | <a href="http://www.wago.com/2020-212/000-036">www.wago.com/2020-212/000-036</a> |
|    | <p><b>Nr. articol: 2020-212/000-037</b><br/>2-conductor female connector; 1.5 mm<sup>2</sup>; 12-pole; 1,50 mm<sup>2</sup>; green-yellow, gray</p>       | <a href="http://www.wago.com/2020-212/000-037">www.wago.com/2020-212/000-037</a> |
|    | <p><b>Nr. articol: 2020-212/000-038</b><br/>2-conductor female connector; 1.5 mm<sup>2</sup>; 12-pole; 1,50 mm<sup>2</sup>; gray, blue, green-yellow</p> | <a href="http://www.wago.com/2020-212/000-038">www.wago.com/2020-212/000-038</a> |
|    | <p><b>Nr. articol: 2020-212/000-039</b><br/>2-conductor female connector; 1.5 mm<sup>2</sup>; 12-pole; 1,50 mm<sup>2</sup>; green-yellow, blue, gray</p> | <a href="http://www.wago.com/2020-212/000-039">www.wago.com/2020-212/000-039</a> |
|  | <p><b>Nr. articol: 2020-213</b><br/>2-conductor female connector; 1.5 mm<sup>2</sup>; 13-pole; 1,50 mm<sup>2</sup>; gray</p>                             | <a href="http://www.wago.com/2020-213">www.wago.com/2020-213</a>                 |
|  | <p><b>Nr. articol: 2020-213/000-036</b><br/>2-conductor female connector; 1.5 mm<sup>2</sup>; 13-pole; 1,50 mm<sup>2</sup>; gray, green-yellow</p>       | <a href="http://www.wago.com/2020-213/000-036">www.wago.com/2020-213/000-036</a> |
|  | <p><b>Nr. articol: 2020-213/000-037</b><br/>2-conductor female connector; 1.5 mm<sup>2</sup>; 13-pole; 1,50 mm<sup>2</sup>; green-yellow, gray</p>       | <a href="http://www.wago.com/2020-213/000-037">www.wago.com/2020-213/000-037</a> |
|  | <p><b>Nr. articol: 2020-213/000-038</b><br/>2-conductor female connector; 1.5 mm<sup>2</sup>; 13-pole; 1,50 mm<sup>2</sup>; gray, blue, green-yellow</p> | <a href="http://www.wago.com/2020-213/000-038">www.wago.com/2020-213/000-038</a> |
|  | <p><b>Nr. articol: 2020-213/000-039</b><br/>2-conductor female connector; 1.5 mm<sup>2</sup>; 13-pole; 1,50 mm<sup>2</sup>; green-yellow, blue, gray</p> | <a href="http://www.wago.com/2020-213/000-039">www.wago.com/2020-213/000-039</a> |
|  | <p><b>Nr. articol: 2020-214</b><br/>2-conductor female connector; 1.5 mm<sup>2</sup>; 14-pole; 1,50 mm<sup>2</sup>; gray</p>                             | <a href="http://www.wago.com/2020-214">www.wago.com/2020-214</a>                 |
|  | <p><b>Nr. articol: 2020-214/000-036</b><br/>2-conductor female connector; 1.5 mm<sup>2</sup>; 14-pole; 1,50 mm<sup>2</sup>; gray, green-yellow</p>       | <a href="http://www.wago.com/2020-214/000-036">www.wago.com/2020-214/000-036</a> |















Supus modificărilor.

|  |  |  |
|--|--|--|
|    | <b>Nr. articol:</b> 2020-214/000-037<br>2-conductor female connector; 1.5 mm <sup>2</sup> ; 14-pole; 1,50 mm <sup>2</sup> ; green-yellow, gray       | <a href="http://www.wago.com/2020-214/000-037">www.wago.com/2020-214/000-037</a> |
|    | <b>Nr. articol:</b> 2020-214/000-038<br>2-conductor female connector; 1.5 mm <sup>2</sup> ; 14-pole; 1,50 mm <sup>2</sup> ; gray, blue, green-yellow | <a href="http://www.wago.com/2020-214/000-038">www.wago.com/2020-214/000-038</a> |
|    | <b>Nr. articol:</b> 2020-214/000-039<br>2-conductor female connector; 1.5 mm <sup>2</sup> ; 14-pole; 1,50 mm <sup>2</sup> ; green-yellow, blue, gray | <a href="http://www.wago.com/2020-214/000-039">www.wago.com/2020-214/000-039</a> |
|    | <b>Nr. articol:</b> 2020-215<br>2-conductor female connector; 1.5 mm <sup>2</sup> ; 15-pole; 1,50 mm <sup>2</sup> ; gray                             | <a href="http://www.wago.com/2020-215">www.wago.com/2020-215</a>                 |
|    | <b>Nr. articol:</b> 2020-215/000-036<br>2-conductor female connector; 1.5 mm <sup>2</sup> ; 15-pole; 1,50 mm <sup>2</sup> ; gray, green-yellow       | <a href="http://www.wago.com/2020-215/000-036">www.wago.com/2020-215/000-036</a> |
|    | <b>Nr. articol:</b> 2020-215/000-037<br>2-conductor female connector; 1.5 mm <sup>2</sup> ; 15-pole; 1,50 mm <sup>2</sup> ; green-yellow, gray       | <a href="http://www.wago.com/2020-215/000-037">www.wago.com/2020-215/000-037</a> |
|    | <b>Nr. articol:</b> 2020-215/000-038<br>2-conductor female connector; 1.5 mm <sup>2</sup> ; 15-pole; 1,50 mm <sup>2</sup> ; gray, blue, green-yellow | <a href="http://www.wago.com/2020-215/000-038">www.wago.com/2020-215/000-038</a> |
|  | <b>Nr. articol:</b> 2020-215/000-039<br>2-conductor female connector; 1.5 mm <sup>2</sup> ; 15-pole; 1,50 mm <sup>2</sup> ; green-yellow, blue, gray | <a href="http://www.wago.com/2020-215/000-039">www.wago.com/2020-215/000-039</a> |
| <b>Marking accessories</b>   |  |  |
|  | <b>Nr. articol:</b> 2000-121<br>Adaptor  | <a href="http://www.wago.com/2000-121">www.wago.com/2000-121</a>                 |
|  | <b>Nr. articol:</b> 2009-110<br>Marking strips; on reel; not stretchable; plain; snap-on type; white   | <a href="http://www.wago.com/2009-110">www.wago.com/2009-110</a>                 |
|  | <b>Nr. articol:</b> 2009-113<br>WMB-Inline; for Smart Printer; 2300 pieces on roll; plain; snap-on type; white                                       | <a href="http://www.wago.com/2009-113">www.wago.com/2009-113</a>                 |
|  | <b>Nr. articol:</b> 2009-113/000-002<br>WMB-Inline; for Smart Printer; 2300 pieces on roll; plain; snap-on type; yellow                              | <a href="http://www.wago.com/2009-113/000-002">www.wago.com/2009-113/000-002</a> |
|  | <b>Nr. articol:</b> 2009-113/000-005<br>WMB-Inline; for Smart Printer; 2300 pieces on roll; plain; snap-on type; red                                 | <a href="http://www.wago.com/2009-113/000-005">www.wago.com/2009-113/000-005</a> |
|  | <b>Nr. articol:</b> 2009-113/000-006<br>WMB-Inline; for Smart Printer; 2300 pieces on roll; plain; snap-on type; blue                                | <a href="http://www.wago.com/2009-113/000-006">www.wago.com/2009-113/000-006</a> |















Supus modificărilor.

WAGO Kontakttechnik GmbH & Co. KG  
/Representative Office Romania  
Sos. Pipera-Tunari nr. 1/1  
building 1, 2nd floor | 077190 Voluntari, Ilfov  
Tel.: +40-(0)31 421 85 68 | Email: info-RO@wago.com















Aveți întrebări despre produsele noastre?  
Vă stăm la dispoziție pentru preluarea apelului la +40 (0) 31 421 85 68.

|  |  |  |
|--|--|--|
|    | <b>Nr. articol: 2009-113/000-007</b><br>WMB-Inline; for Smart Printer; 2300 pieces on roll; plain; snap-on type; gray  | <a href="http://www.wago.com/2009-113/000-007">www.wago.com/2009-113/000-007</a> |
|    | <b>Nr. articol: 2009-113/000-012</b><br>WMB-Inline; for Smart Printer; 2300 pieces on roll; plain; snap-on type; orange  | <a href="http://www.wago.com/2009-113/000-012">www.wago.com/2009-113/000-012</a> |
|    | <b>Nr. articol: 2009-113/000-017</b><br>WMB-Inline; for Smart Printer; 2300 pieces on roll; plain; snap-on type; light green   | <a href="http://www.wago.com/2009-113/000-017">www.wago.com/2009-113/000-017</a> |
|    | <b>Nr. articol: 2009-113/000-023</b><br>WMB-Inline; for Smart Printer; 2300 pieces on roll; plain; snap-on type; green   | <a href="http://www.wago.com/2009-113/000-023">www.wago.com/2009-113/000-023</a> |
|    | <b>Nr. articol: 2009-113/000-024</b><br>WMB-Inline; for Smart Printer; 2300 pieces on roll; plain; snap-on type; violet  | <a href="http://www.wago.com/2009-113/000-024">www.wago.com/2009-113/000-024</a> |
|    | <b>Nr. articol: 2009-191</b><br>Group marker carrier   | <a href="http://www.wago.com/2009-191">www.wago.com/2009-191</a>                 |
|    | <b>Nr. articol: 793-3501</b><br>WMB marking card; as card; plain; snap-on type; white  | <a href="http://www.wago.com/793-3501">www.wago.com/793-3501</a>                 |
| <b>Protective Warning Marker</b>   |  |  |
|   | <b>Nr. articol: 2000-115</b><br>Protective warning marker; with high-voltage symbol, black; for 5 terminal blocks; yellow  | <a href="http://www.wago.com/2000-115">www.wago.com/2000-115</a>                 |
| <b>Push-In type wire jumper</b>  |  |  |
|  | <b>Nr. articol: 2009-402</b><br>Push-in type wire jumper; insulated; wire length 60 mm; Conductor cross section 0.75 mm <sup>2</sup> ; suitable for 2000 and 2020 Series rail-mounted terminal blocks; gray  | <a href="http://www.wago.com/2009-402">www.wago.com/2009-402</a>                 |
|  | <b>Nr. articol: 2009-404</b><br>Push-in type wire jumper; insulated; wire length 110 mm; Conductor cross section 0.75 mm <sup>2</sup> ; suitable for 2000 and 2020 Series rail-mounted terminal blocks; gray | <a href="http://www.wago.com/2009-404">www.wago.com/2009-404</a>                 |
|  | <b>Nr. articol: 2009-406</b><br>Push-in type wire jumper; insulated; wire length 250 mm; Conductor cross section 0.75 mm <sup>2</sup> ; suitable for 2000 and 2020 Series rail-mounted terminal blocks; gray | <a href="http://www.wago.com/2009-406">www.wago.com/2009-406</a>                 |
| <b>Jumper</b>  |  |  |
|  | <b>Nr. articol: 2000-402</b><br>Push-in type jumper bar; insulated; 2-way; Nominal current 14 A; light gray  | <a href="http://www.wago.com/2000-402">www.wago.com/2000-402</a>                 |
|  | <b>Nr. articol: 2000-402/000-005</b><br>Push-in type jumper bar; insulated; 2-way; Nominal current 14 A; red   | <a href="http://www.wago.com/2000-402/000-005">www.wago.com/2000-402/000-005</a> |
|  | <b>Nr. articol: 2000-402/000-006</b><br>Push-in type jumper bar; insulated; 2-way; Nominal current 14 A; blue  | <a href="http://www.wago.com/2000-402/000-006">www.wago.com/2000-402/000-006</a> |














Supus modificărilor.

|  |   |  |
|--|---|--|
|    | <b>Nr. articol: 2000-402/000-018</b><br>Push-in type jumper bar; insulated; 2-way; Nominal current 14 A; yellow-green   | <a href="http://www.wago.com/2000-402/000-018">www.wago.com/2000-402/000-018</a> |
|    | <b>Nr. articol: 2000-403</b><br>Push-in type jumper bar; insulated; 3-way; Nominal current 14 A; light gray             | <a href="http://www.wago.com/2000-403">www.wago.com/2000-403</a>                 |
|    | <b>Nr. articol: 2000-403/000-005</b><br>Push-in type jumper bar; insulated; 3-way; Nominal current 14 A; red            | <a href="http://www.wago.com/2000-403/000-005">www.wago.com/2000-403/000-005</a> |
|    | <b>Nr. articol: 2000-403/000-006</b><br>Push-in type jumper bar; insulated; 3-way; Nominal current 14 A; blue           | <a href="http://www.wago.com/2000-403/000-006">www.wago.com/2000-403/000-006</a> |
|    | <b>Nr. articol: 2000-404</b><br>Push-in type jumper bar; insulated; 4-way; Nominal current 14 A; light gray             | <a href="http://www.wago.com/2000-404">www.wago.com/2000-404</a>                 |
|    | <b>Nr. articol: 2000-404/000-005</b><br>Push-in type jumper bar; insulated; 4-way; Nominal current 14 A; red            | <a href="http://www.wago.com/2000-404/000-005">www.wago.com/2000-404/000-005</a> |
|    | <b>Nr. articol: 2000-404/000-006</b><br>Push-in type jumper bar; insulated; 4-way; Nominal current 14 A; blue           | <a href="http://www.wago.com/2000-404/000-006">www.wago.com/2000-404/000-006</a> |
|   | <b>Nr. articol: 2000-405</b><br>Push-in type jumper bar; insulated; 5-way; Nominal current 14 A; light gray             | <a href="http://www.wago.com/2000-405">www.wago.com/2000-405</a>                 |
|  | <b>Nr. articol: 2000-405/000-005</b><br>Push-in type jumper bar; insulated; 5-way; Nominal current 14 A; red            | <a href="http://www.wago.com/2000-405/000-005">www.wago.com/2000-405/000-005</a> |
|  | <b>Nr. articol: 2000-405/000-006</b><br>Push-in type jumper bar; insulated; 5-way; Nominal current 14 A; blue           | <a href="http://www.wago.com/2000-405/000-006">www.wago.com/2000-405/000-006</a> |
|  | <b>Nr. articol: 2000-405/011-000</b><br>Star point jumper; insulated; 3-way (1-3-5); IN = IN terminal block; light gray | <a href="http://www.wago.com/2000-405/011-000">www.wago.com/2000-405/011-000</a> |
|  | <b>Nr. articol: 2000-406</b><br>Push-in type jumper bar; insulated; 6-way; Nominal current 14 A; light gray             | <a href="http://www.wago.com/2000-406">www.wago.com/2000-406</a>                 |
|  | <b>Nr. articol: 2000-406/000-005</b><br>Push-in type jumper bar; insulated; 6-way; Nominal current 14 A; red            | <a href="http://www.wago.com/2000-406/000-005">www.wago.com/2000-406/000-005</a> |
|  | <b>Nr. articol: 2000-406/000-006</b><br>Push-in type jumper bar; insulated; 6-way; Nominal current 14 A; blue           | <a href="http://www.wago.com/2000-406/000-006">www.wago.com/2000-406/000-006</a> |
|  | <b>Nr. articol: 2000-406/020-000</b><br>Delta jumper; insulated; 1-2 3-4 5-6; IN = IN terminal block; light gray        | <a href="http://www.wago.com/2000-406/020-000">www.wago.com/2000-406/020-000</a> |

Supus modificărilor.

|  |  |  |
|--|--|--|
|    | <b>Nr. articol: 2000-407</b><br>Push-in type jumper bar; insulated; 7-way; Nominal current 14 A; light gray        | <a href="http://www.wago.com/2000-407">www.wago.com/2000-407</a>                 |
|    | <b>Nr. articol: 2000-407/000-005</b><br>Push-in type jumper bar; insulated; 7-way; Nominal current 14 A; red       | <a href="http://www.wago.com/2000-407/000-005">www.wago.com/2000-407/000-005</a> |
|    | <b>Nr. articol: 2000-407/000-006</b><br>Push-in type jumper bar; insulated; 7-way; Nominal current 14 A; blue      | <a href="http://www.wago.com/2000-407/000-006">www.wago.com/2000-407/000-006</a> |
|    | <b>Nr. articol: 2000-408</b><br>Push-in type jumper bar; insulated; 8-way; Nominal current 14 A; light gray        | <a href="http://www.wago.com/2000-408">www.wago.com/2000-408</a>                 |
|    | <b>Nr. articol: 2000-408/000-005</b><br>Push-in type jumper bar; insulated; 8-way; Nominal current 14 A; red       | <a href="http://www.wago.com/2000-408/000-005">www.wago.com/2000-408/000-005</a> |
|    | <b>Nr. articol: 2000-408/000-006</b><br>Push-in type jumper bar; insulated; 8-way; Nominal current 14 A; blue      | <a href="http://www.wago.com/2000-408/000-006">www.wago.com/2000-408/000-006</a> |
|    | <b>Nr. articol: 2000-409</b><br>Push-in type jumper bar; insulated; 9-way; Nominal current 14 A; light gray        | <a href="http://www.wago.com/2000-409">www.wago.com/2000-409</a>                 |
|  | <b>Nr. articol: 2000-409/000-005</b><br>Push-in type jumper bar; insulated; 9-way; Nominal current 14 A; red       | <a href="http://www.wago.com/2000-409/000-005">www.wago.com/2000-409/000-005</a> |
|  | <b>Nr. articol: 2000-409/000-006</b><br>Push-in type jumper bar; insulated; 9-way; Nominal current 14 A; blue      | <a href="http://www.wago.com/2000-409/000-006">www.wago.com/2000-409/000-006</a> |
|  | <b>Nr. articol: 2000-410</b><br>Push-in type jumper bar; insulated; 10-way; Nominal current 14 A; light gray       | <a href="http://www.wago.com/2000-410">www.wago.com/2000-410</a>                 |
|  | <b>Nr. articol: 2000-410/000-005</b><br>Push-in type jumper bar; insulated; 10-way; Nominal current 14 A; red      | <a href="http://www.wago.com/2000-410/000-005">www.wago.com/2000-410/000-005</a> |
|  | <b>Nr. articol: 2000-410/000-006</b><br>Push-in type jumper bar; insulated; 10-way; Nominal current 14 A; blue     | <a href="http://www.wago.com/2000-410/000-006">www.wago.com/2000-410/000-006</a> |
|  | <b>Nr. articol: 2000-433</b><br>Push-in type jumper bar; insulated; from 1 to 3; Nominal current 14 A; light gray  | <a href="http://www.wago.com/2000-433">www.wago.com/2000-433</a>                 |
|  | <b>Nr. articol: 2000-433/000-005</b><br>Push-in type jumper bar; insulated; from 1 to 3; Nominal current 14 A; red | <a href="http://www.wago.com/2000-433/000-005">www.wago.com/2000-433/000-005</a> |

Supus modificărilor.

|  |   |  |
|--|---|--|
|    | <b>Nr. articol: 2000-433/000-006</b><br>Push-in type jumper bar; insulated; from 1 to 3; Nominal current 14 A; blue   | <a href="http://www.wago.com/2000-433/000-006">www.wago.com/2000-433/000-006</a> |
|    | <b>Nr. articol: 2000-434</b><br>Push-in type jumper bar; insulated; from 1 to 4; Nominal current 14 A; light gray   | <a href="http://www.wago.com/2000-434">www.wago.com/2000-434</a>                 |
|    | <b>Nr. articol: 2000-435</b><br>Push-in type jumper bar; insulated; from 1 to 5; Nominal current 14 A; light gray   | <a href="http://www.wago.com/2000-435">www.wago.com/2000-435</a>                 |
|    | <b>Nr. articol: 2000-436</b><br>Push-in type jumper bar; insulated; from 1 to 6; Nominal current 14 A; light gray   | <a href="http://www.wago.com/2000-436">www.wago.com/2000-436</a>                 |
|    | <b>Nr. articol: 2000-437</b><br>Push-in type jumper bar; insulated; from 1 to 7; Nominal current 14 A; light gray   | <a href="http://www.wago.com/2000-437">www.wago.com/2000-437</a>                 |
|    | <b>Nr. articol: 2000-438</b><br>Push-in type jumper bar; insulated; from 1 to 8; Nominal current 14 A; light gray   | <a href="http://www.wago.com/2000-438">www.wago.com/2000-438</a>                 |
|    | <b>Nr. articol: 2000-439</b><br>Push-in type jumper bar; insulated; from 1 to 9; Nominal current 14 A; light gray   | <a href="http://www.wago.com/2000-439">www.wago.com/2000-439</a>                 |
|    | <b>Nr. articol: 2000-440</b><br>Push-in type jumper bar; insulated; from 1 to 10; Nominal current 14 A; light gray  | <a href="http://www.wago.com/2000-440">www.wago.com/2000-440</a>                 |
|    | <b>Nr. articol: 210-103</b><br>Wire commoning chain; insulated; 50 connections; black   | <a href="http://www.wago.com/210-103">www.wago.com/210-103</a>                   |
|  | <b>Nr. articol: 210-123</b><br>Wire commoning chain; insulated; 50 connections  | <a href="http://www.wago.com/210-123">www.wago.com/210-123</a>                   |
| <b>ferrule</b>   |   |  |
|   | <b>Nr. articol: 216-241</b><br>Ferrule; Sleeve for 0.5 mm <sup>2</sup> / 20 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; white | <a href="http://www.wago.com/216-241">www.wago.com/216-241</a>                   |
|   | <b>Nr. articol: 216-242</b><br>Ferrule; Sleeve for 0.75 mm <sup>2</sup> / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray | <a href="http://www.wago.com/216-242">www.wago.com/216-242</a>                   |
|   | <b>Nr. articol: 216-243</b><br>Ferrule; Sleeve for 1 mm <sup>2</sup> / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red     | <a href="http://www.wago.com/216-243">www.wago.com/216-243</a>                   |

## Descărcări

### Documentation

#### Additional Information

Technical explanations

Apr 3, 2019

pdf  
2,1 MB

Descărcare

## CAD/CAE-Data

Supus modificărilor.

WAGO Kontakttechnik GmbH & Co. KG  
/Representative Office Romania  
Sos. Pipera-Tunari nr. 1/1  
building 1, 2nd floor | 077190 Voluntari, Ilfov  
Tel.: +40-(0)31 421 85 68 | Email: info-RO@wago.com

Aveți întrebări despre produsele noastre?  
Vă stăm la dispoziție pentru preluarea apelului la +40 (0) 31 421 85 68.

## CAD data


2D/3D Models 2020-5477/1102-953

[URL](#)


[Descărcare](#)

## Installation Notes

### Assembly

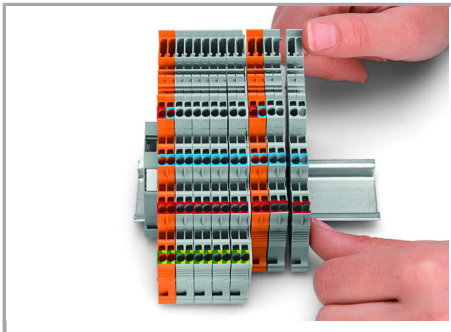


Snap individual terminal blocks onto the carrier rail and slide together.

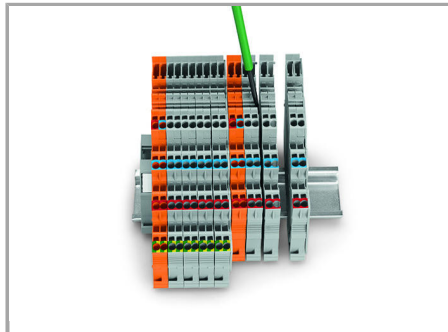

Separate terminal block assembly and slide individual terminal blocks laterally using an operating tool.

### Testing

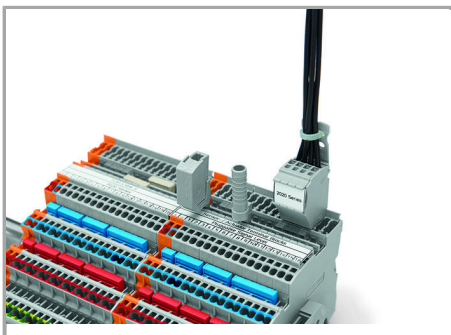


Testing via testing tap (2009-182) or test plug adapter (2009-174) (up to max. 42 V).


### Coding

Supus modificărilor.



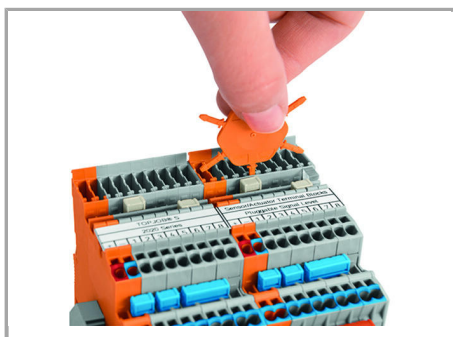


Insert coding pin into the corresponding slot and twist it off.

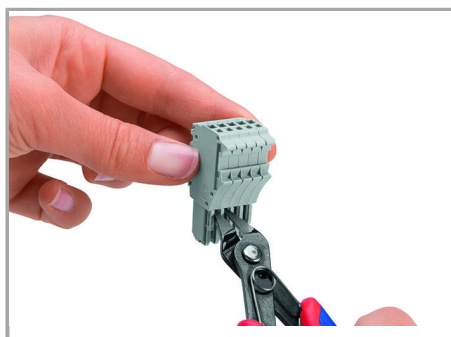


Remove the coding finger using a cutting tool.


### Locking

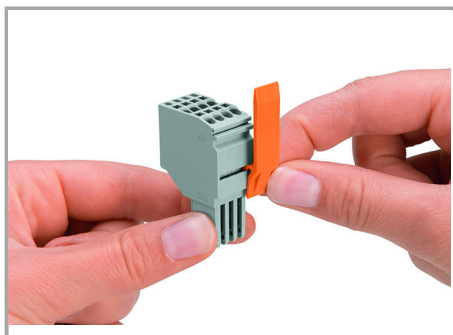

Slide the locking lever into position.

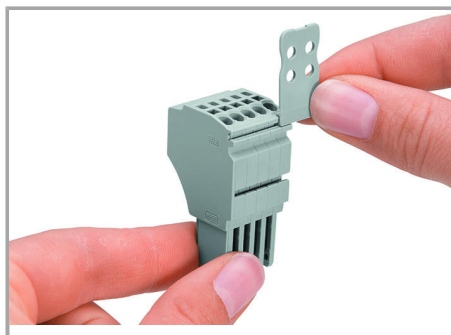


### Strain Relief

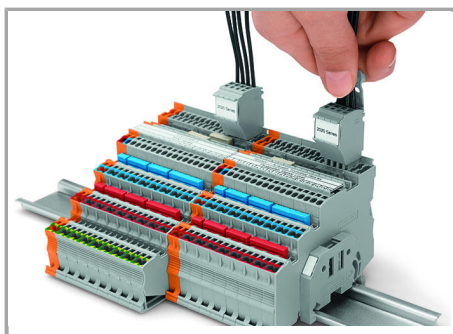

Removing a female plug via conductor bundle provided with strain relief plate.

### Marking

Supus modificărilor.

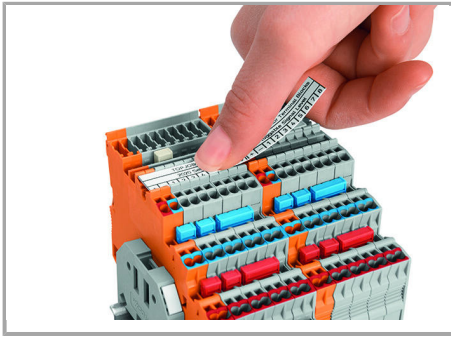

Labeling terminal blocks via marking strips (2009-110) or 3.5 mm wide WMB markers (793-35xx) – from the top or the side.

## Familie de produse

### TOPJOB® S

TOPJOB® S: In various industrial applications and modern building installations, WAGO's wide and versatile range of rail-mount terminal blocks provides more than just reliable electrical connections.

[Afișare globală produse din familie.](#)

Supus modificărilor.