
Draft Conditions related to Traffic

- **Intended to provide one cohesive package of improvements for Route 109 between the two separate projects**
  - **Safety concerns**
  - **Traffic signal operations**
  - **Pedestrian Connectivity**

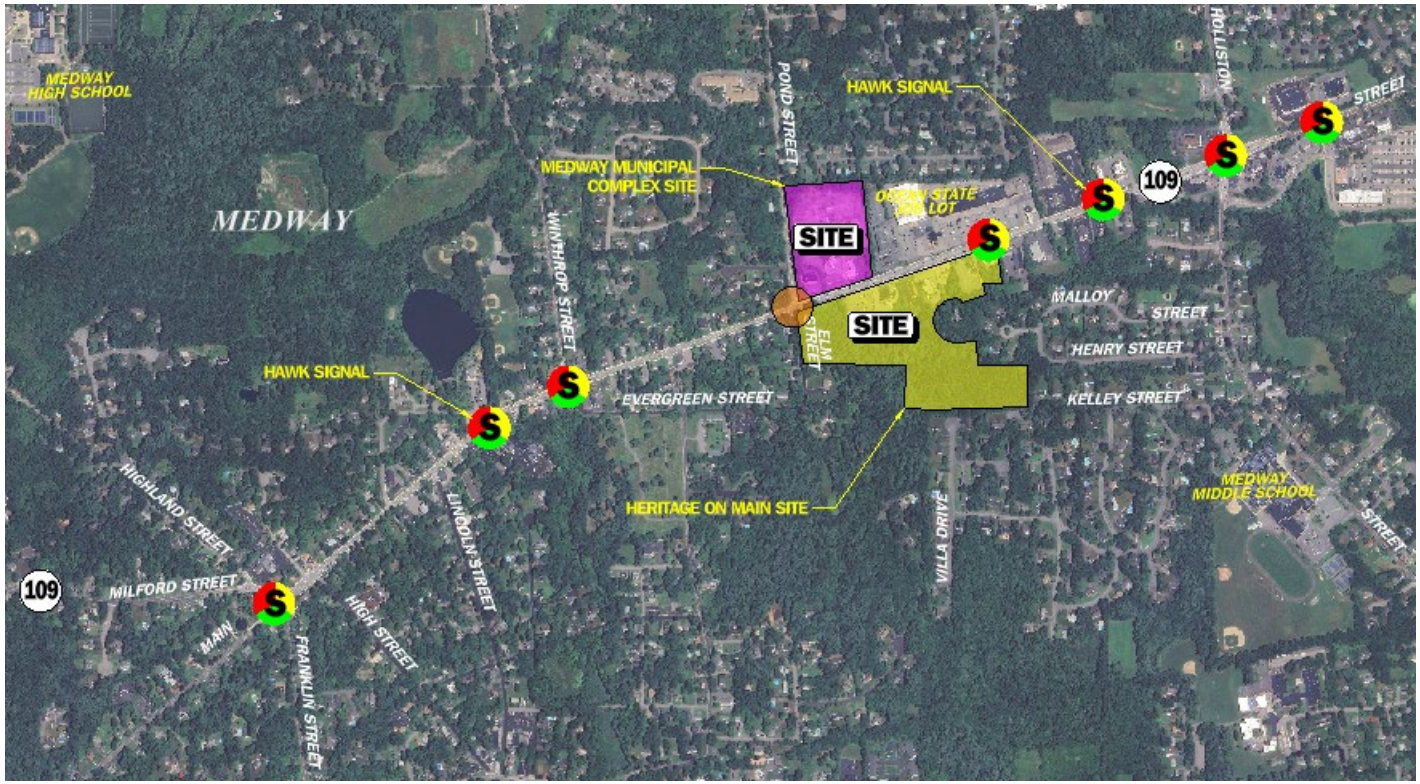

Heritage on Main Draft Conditions

- Coordinate with the Town of Medway to conduct RSAs at the intersection of Main Street at Milford Street and Franklin Street and Main Street at Holliston Street
- Coordinate with the Town to explore optimal phasing and or coordination plans that would include all coordinated signals along Route 109
- Determine if signals along corridor can be reasonably upgraded to an adaptive signal system.
- Coordinate with the Town of Medway to mill and overlay the remaining portion of Route 109 from the MMC limit to the Medway Place intersection in order to accommodate lane restriping.

Municipal Complex Draft Conditions

- To install an emergency signal across the three driveways for MMC and Heritage on Main driveway, that will be interconnected with the remaining signals
- Coordinate with the Heritage on Main project to mill and overlay Route 109 from Pond Street intersection to approximately 150 feet east of Town Hall/ Police Station Driveway in order to accommodate lane restriping
- Install RRFB at the existing crosswalks at Main Street and Pond Street intersection
- Provide signage and pavement marking improvements at the existing crosswalk at Pond Street and Drybridge Road

