


## 02 Recessed Spots Fixed LED>The COB IP54 Dark Light Range

## 10108H/B/W

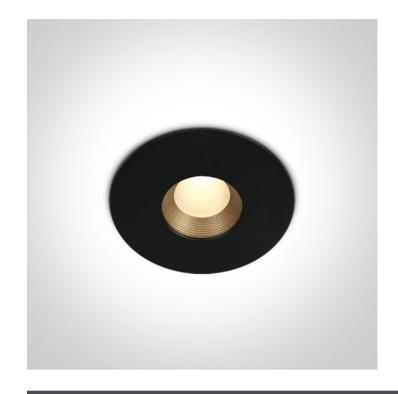

8W COB LED Dark light recessed Spot, IP54.

Supplied with non-dimmable LED driver.

Complies with standard EN60598-1 and any other specific standards.



Downloads









Dimensions





## **Physical Specification**

Item Group	02 Recessed Spots Fixed LED
Family	The COB IP54 Dark Light Range
Order Code	10108H/B/W
Colour	Black
Material	Die Cast
Shape	Circular
Height	55mm
Diameter	88mm
Cutout Hole Diameter	75mm
Recessed Ceiling	Yes
Depth Required	70mm
Indoor	Yes

Outdoor	Yes
Adjustable	No
Electrical Characteristics	
Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	8W
IP Rating	IP54
Light Source	LED built in
Dimmable	No
F Mark	F
Fitting	
Input Type	Constant Current
Input Current	200mA
Voltage	38V
Safety Class	
Power(Watts)	7,6W
IP Rating	IP54
Light Source	LED built in
LED Type	СОВ
LED Brand	Bridgelux
F Mark	F
Gear	
Gear Type	Led Driver

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	5-8,4W
Power Factor	0,9
Constant Current	Yes
200mA	25-42V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Cable
Brand	KEGU
Illumination Data  Colour Temperature	3000K
	3000K 600lm
Colour Temperature	
Colour Temperature  Lumen Output	600lm
Colour Temperature  Lumen Output  Light Efficiency	600lm 75lm/W
Colour Temperature  Lumen Output  Light Efficiency  CRI	600lm 75lm/W 90
Colour Temperature  Lumen Output  Light Efficiency  CRI  Beam Angle	600lm 75lm/W 90 36°
Colour Temperature  Lumen Output  Light Efficiency  CRI  Beam Angle  Illumination Diagram	600lm 75lm/W 90 36°
Colour Temperature  Lumen Output  Light Efficiency  CRI  Beam Angle  Illumination Diagram	600lm 75lm/W 90 36°
Colour Temperature  Lumen Output  Light Efficiency  CRI  Beam Angle  Illumination Diagram  Dark Light  Packing Info	600lm 75lm/W 90 36°  Yes
Colour Temperature  Lumen Output  Light Efficiency  CRI  Beam Angle  Illumination Diagram  Dark Light  Packing Info  Pcs/Carton	600lm 75lm/W 90 36°  Yes
Colour Temperature  Lumen Output  Light Efficiency  CRI  Beam Angle  Illumination Diagram  Dark Light  Packing Info  Pcs/Carton  Barcode	600lm  75lm/W  90  36°  Yes  50  5291889065166
Colour Temperature  Lumen Output  Light Efficiency  CRI  Beam Angle  Illumination Diagram  Dark Light  Packing Info  Pcs/Carton	600lm 75lm/W 90 36°  Yes

Warranty	5 Years
Weee Directive	Yes

Certification & Warranty