



50W LED recessed downlight, IP65. Suitable for Indoor/Outdoor installation.

Complete with 1200mA driver.

Complies with standard EN60598-1 and any other specific standards.



## Downloads



## Dimensions



## Gallery



## Physical Specification

Item Group

06 Downlights Fixed LED

Family

The Outdoor/Bathroom IP65 Range Die cast

Order Code

10150G/W/C

Colour

White

Material

Die Cast

Shape



Circular


Height

110mm


Diameter	225mm
Cutout Hole Diameter	210mm
Recessed Ceiling	Yes
Depth Required	140mm
Indoor	Yes
Outdoor	Yes
Adjustable	No

## Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	50W
IP Rating	IP65
Light Source	LED built in
Dimmable	No
Cable Length	200cm
F Mark	


Fitting	
Input Type	Constant Current
Input Current	1200mA
Voltage	37V
Safety Class	
Power(Watts)	44,4W
IP Rating	IP65
Light Source	LED built in

LED Type
LED Brand
F Mark

COB
Cree


## Gear

Gear Type
Input Voltage
50 Hz
60 Hz
Power(Watts)
Power Factor
Constant Current
1200mA
IP Rating
Safety Class
Dimmable
Housing Material
Output Terminal
Brand

Led Driver
220-240V
Yes
Yes
32,4-50,4W
0,9
Yes
27-42V
IP20

No
Plastic
Cable
Kegu

## Illumination Data

Colour Temperature
Lumen Output
Light Efficiency
CRI
Beam Angle
Illumination Diagram

4000K
4100lm
82lm/W
80
60°

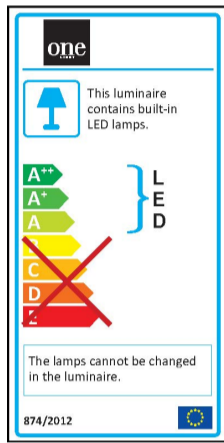

## Packing Info

Box Length
------------

24,5cm
--------

Box Width	24,5cm
Box Height	13cm
Box Weight	2kg
Pcs/Carton	4
Barcode	5291889051947
HS Code	9405409900

## Energy Label



## Certification & Warranty

Warranty	3 Years
Weee Directive	Yes