



8W COB LED Cylinder with SMD backlit LED with exchangeable reflectors.

Reflector must be order separately.
Complete with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions



Must be ordered separately



050206/B



050206/BS



050206/W



Physical Specification

Item Group
Family
Order Code
Colour
Material
Shape

New 2021 Edition 3
Wall & Ceiling LED
12108DB/B/W
Black
Aluminium
Circular

Height	80mm
Diameter	70mm
Surface Ceiling	Yes
Indoor	Yes
Adjustable	No


Electrical Characteristics

Gear	Built In
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	8W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	700mA
Voltage	8,75V
Power(Watts)	6,125W
IP Rating	IP20
Light Source	LED built in
LED Type	COB
LED Brand	Bridgelux

Gear

Gear Type
Input Voltage
50 Hz
60 Hz
Power(Watts)
Power Factor
Constant Current
700mA
IP Rating
Safety Class
Dimmable
Housing Material
Brand

Led Driver
220-240V
Yes
Yes
3,5-6,3W
0,9
Yes
5-9V
IP20

No
Plastic
KEGU

Illumination Data

Colour Temperature
Lumen Output
Light Efficiency
CRI
Beam Angle
Illumination Diagram
Dark Light

3000K
320lm + 100lm
52,5lm/W
90
36°


Yes

Packing Info

Box Length
Box Width
Box Height
Pcs/Carton
Barcode
HS Code

7,5cm
7,5cm
9cm
50
5291889070764
9405409900

Energy Label

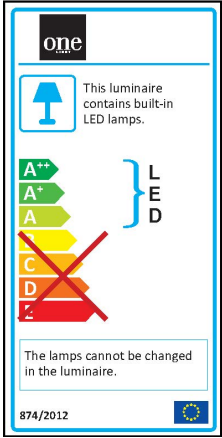

Certification & Warranty

Warranty

3 Years

Weee Directive

Yes