elights

2x11W COB LED Square Cylinder, with a modern design, ideal for residential and commercial illumination.

Complete with non-dimmable LED driver.
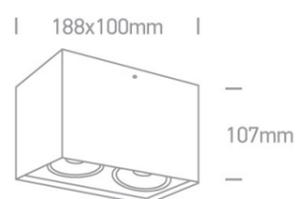
Complies with standard EN60598-1 and any other specific standards.

IP20 80 CRI CE

Downloads

IES

Dimensions

188x100mm

107mm

Gallery

Physical Specification

Item Group	14 Wall & Ceiling LED
Family	The COB Indoor Square Cylinders
Order Code	12211L/W/W
Colour	White
Material	Metal
Shape	Rectangular
Length	180mm

Width	100mm
Height	107mm
Surface Ceiling	Yes
Indoor	Yes
Adjustable	No

Electrical Characteristics

Gear	Built In

Fitting + Driver

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	⏚
Power(Watts)	2x11W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	▽F

Fitting

Input Type	Constant Current
Input Current	500mA
Voltage	2x18V
Power(Watts)	2x9W
IP Rating	IP20
Light Source	LED built in
LED Type	COB
LED Brand	Bridgelux

Gear

Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	7,5-12W
Power Factor	0,5
Constant Current	Yes
500mA	15-24V
IP Rating	IP20
Safety Class	
Dimmable	No
Brand	Eaglerise

Illumination Data

Colour Temperature	3000K
Lumen Output	2x830lm
Light Efficiency	75,45lm/W
CRI	80
Beam Angle	40°
Illumination Diagram	

Packing Info

Box Weight	1,4Kg
Pcs/Carton	8
Barcode	5291889047292
HS Code	9405409900

Energy Label

This luminaire contains built-in LED lamps.

L
E
D

The lamps cannot be changed in the luminaire.

874/2012
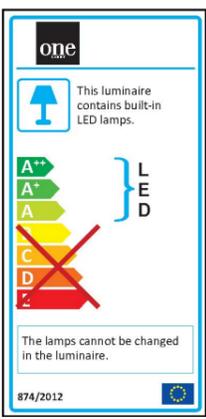
Certification & Warranty

Warranty	2 Years
Weee Directive	Yes