



COB LED recessed spot. Very elegant design with unique design of the reflector. Ideal for replacing halogen spots.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

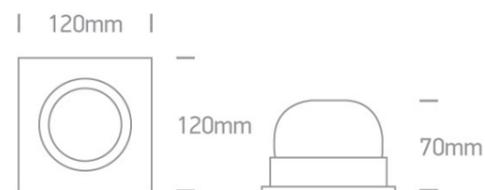

Physical Specification

Item Group	04 Recessed Spots Adjustable LED
Family	The COB Square Spots Aluminium
Order Code	51110A/AL/W
Colour	Aluminium
Material	Aluminium
Shape	Rectangular
Length	120mm
Width	120mm
Height	70mm
Cutout Hole Diameter	100mm
Recessed Ceiling	Yes
Depth Required	100mm

Indoor

Yes

Adjustable

1 Direction

Electrical Characteristics

Gear

External-Included

Fitting + Driver

Input Voltage

100-240V

50 Hz

Yes

60 Hz

Yes

Safety Class



Power(Watts)

10W

IP Rating

IP20

Light Source

LED built in

Dimmable

No

F Mark



Fitting

Input Type

Constant Current

Input Current

250mA

Voltage

38V

Safety Class



Power(Watts)

9,5W

IP Rating

IP20

Light Source

LED built in

LED Brand

Citizen

LED Number

1

F Mark



Gear

Gear Type

Led Driver

Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	7,5-10W
Power Factor	0,9
Constant Current	Yes
250mA	30-40V
IP Rating	IP20
Safety Class	
Dimmable	No
Ambient Temp	45°C
Operating Temp	85°C
Housing Material	Plastic
Output Terminal	Cable


Illumination Data

Colour Temperature	3000K
Lumen Output	825lm
Light Efficiency	82,5lm/W
CRI	80
Beam Angle	36°
Illumination Diagram	

Packing Info

Box Length	15cm
Box Width	14cm
Box Height	9,5cm
Pcs/Carton	20
Barcode	5291889033370
HS Code	9405409900

Energy Label

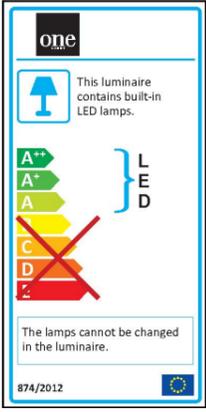

Certification & Warranty

Warranty

2 Years

Weee Directive

Yes