



COB Industrial High Bay, IP65.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions



Gallery



Physical Specification	
Item Group	21 Industrial & Floodlights
Family	The Industrial IP65 LED High Bay Waterproof
Order Code	63200A/G/C
Colour	Grey
Material	Die Cast
Shape	Circular
Height	520mm

Diameter	500mm
Suspended Ceiling	Yes
Indoor	Yes
Outdoor	Yes
Adjustable	No

Electrical Characteristics

Gear	Built In
Fitting + Driver	
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	200W
IP Rating	IP65
Light Source	LED built in
Dimmable	No
Cable Length	300cm
F Mark	

Fitting	
Input Type	Constant Current
Input Current	6000mA
Voltage	33V
Power(Watts)	198W
IP Rating	IP65
Light Source	LED built in
LED Type	COB
LED Brand	Epistar

LED Number	4
Gear	
Gear Type	Led Driver
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	196-216W
Power Factor	0,9
Constant Current	Yes
Output	6000mA
Voltage Range	32-36V
IP Rating	IP20
Safety Class	
Brand	Meanwell


Illumination Data

Colour Temperature	4000K
Lumen Output	13037lm
Light Efficiency	65,1lm/W
CRI	70
Beam Angle	90°
Illumination Diagram	

Packing Info

Box Weight	14,3Kg
Pcs/Carton	1
Barcode	5291889037538
HS Code	9405409900

Energy Label

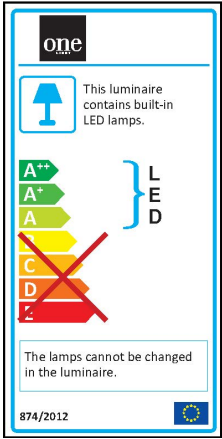

Certification & Warranty

Warranty

3 Years

Weee Directive

Yes