



3W COB LED inground, IP67, stainless steel 316, for path illumination.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

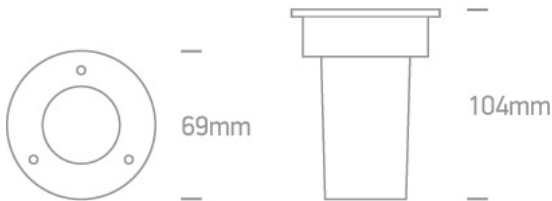

Gallery






Physical Specification

Item Group	19 Wall Recessed & Inground		
Family	The COB Inground Range 2-6W		
Order Code	69012/W		
Colour	Stainless Steel		
Material	Stainless Steel 316		
Diffuser Material	Glass		
Shape	Circular		

Height	104mm
Diameter	69mm
Cutout Hole Diameter	65mm
Inground	Yes
Depth Required	120mm+300mm drainage
Indoor	Yes
Outdoor	Yes
Adjustable	No
IK Rating	8

Electrical Characteristics

Gear	Built In
Fitting + Driver	
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	3W
IP Rating	IP67
Light Source	LED built in
Dimmable	No
Cable Length	200cm
F Mark	


Fitting	
Input Type	Constant Current
Input Current	350mA
Voltage	8V
Safety Class	
Power(Watts)	2,8W

IP Rating
Light Source
LED Type
LED Brand

IP67
LED built in
COB
Cree

Gear

Gear Type
Input Voltage
50 Hz
60 Hz
Power(Watts)
Power Factor
Constant Current
350mA
IP Rating
Safety Class
Dimmable
Ambient Temp
Operating Temp
Housing Material
Output Terminal
Brand
Protection

Led Driver
100-240V
Yes
Yes
1-3,5W
0,9
Yes
3-10V
IP20

No
-20~+55°C
80°C
Plastic
Connector
Eaglerise
Short Circuit

Illumination Data


Colour Temperature
Lumen Output
Light Efficiency
CRI
Beam Angle
Illumination Diagram

3000K
240lm
80lm/W
80
35°


Packing Info

Box Length	13cm
Box Width	7,5cm
Box Height	13cm
Box Weight	0,5Kg
Pcs/Carton	20
Barcode	5291889030157
HS Code	9405409900

Energy Label

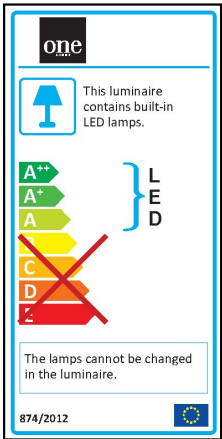

Certification & Warranty

Warranty	2 Years
Average Lifetime	50000hrs
Weee Directive	Yes