



10108FA/W/W



Complies with standard EN60598-1 and any other specific standards.



## Dimensions

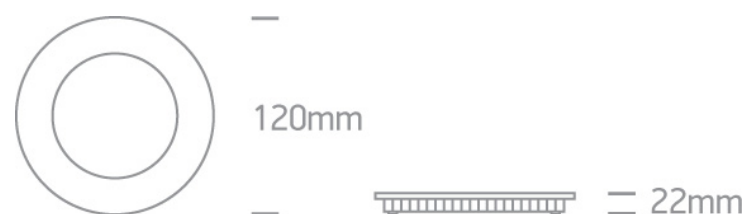

super slim!

## A white and blue electronic device, likely a power supply or converter, is shown. The device has a rectangular shape with blue plastic end caps. A white label on the top surface contains technical specifications and safety warnings. The label includes text such as "INPUT: 100-240VAC 50/60Hz", "OUTPUT: 5VDC 2.5A", and "POWER: 12.5W". It also features various safety symbols and a barcode. The device is positioned on a light gray surface.

89008UT

Item Group

## 06 Downlights Fixed LED

The 3-12W Round Recessed Panels Die cast

|                      |             |
|----------------------|-------------|
| Order Code           | 10108FA/W/W |
| Colour               | White       |
| Material             | Die Cast    |
| Diffuser Material    | Acrylic     |
| Shape                | Circular    |
| Height               | 22mm        |
| Diameter             | 120mm       |
| Cutout Hole Diameter | 108mm       |
| Recessed Ceiling     | Yes         |
| Depth Required       | 50mm        |
| Indoor               | Yes         |
| Adjustable           | No          |

Electrical Characteristics

|                  |                                                                                       |
|------------------|---------------------------------------------------------------------------------------|
| Gear             | External-Included                                                                     |
| Fitting + Driver |                                                                                       |
| Input Voltage    | 220-240V                                                                              |
| 50 Hz            | Yes                                                                                   |
| 60 Hz            | Yes                                                                                   |
| Safety Class     |  |
| Power(Watts)     | 8W                                                                                    |
| IP Rating        | IP40                                                                                  |
| Light Source     | LED built in                                                                          |
| Dimmable         | No                                                                                    |
| F Mark           |  |

|               |                  |
|---------------|------------------|
| Fitting       |                  |
| Input Type    | Constant Current |
| Input Current | 300mA            |
| Voltage       | 23V              |

|              |                                                                                   |
|--------------|-----------------------------------------------------------------------------------|
| Safety Class |  |
| Power(Watts) | 6,9W                                                                              |
| IP Rating    | IP40                                                                              |
| Light Source | LED built in                                                                      |
| LED Type     | SMD 2835                                                                          |
| LED Brand    | Epistar                                                                           |
| LED Number   | 42                                                                                |

Gear

|                  |                                                                                       |
|------------------|---------------------------------------------------------------------------------------|
| Gear Type        | Led Driver                                                                            |
| Input Voltage    | 220-240V                                                                              |
| 50 Hz            | Yes                                                                                   |
| 60 Hz            | Yes                                                                                   |
| Power(Watts)     | 4,2-7,2W                                                                              |
| Power Factor     | 0,6                                                                                   |
| Constant Current | Yes                                                                                   |
| Output           | 300mA                                                                                 |
| Voltage Range    | 14-24V                                                                                |
| IP Rating        | IP20                                                                                  |
| Safety Class     |  |
| Dimmable         | No                                                                                    |
| Ambient Temp     | 50°C                                                                                  |
| Operating Temp   | 75°C                                                                                  |
| Housing Material | Plastic                                                                               |
| Brand            | Lifud                                                                                 |

Illumination Data

|                    |        |
|--------------------|--------|
| Colour Temperature | 3000K  |
| Lumen Output       | 480lm  |
| Light Efficiency   | 60lm/W |
| CRI                | 80     |

|                      |
|----------------------|
| Beam Angle           |
| Illumination Diagram |

120°



Packing Info

|            |
|------------|
| Box Length |
| Box Width  |
| Box Height |
| Box Weight |
| Pcs/Carton |
| Barcode    |
| HS Code    |

18,5cm

3,1cm

13cm

0,250Kg

40

5291889044062

9405109890

Certification & Warranty

|                  |
|------------------|
| Warranty         |
| Average Lifetime |
| Weee Directive   |

2 Years

30000 hours

Yes