

06 Downlights Fixed LED>The IP54 Dark Light Bathroom Downlights Die cast **10120FD/W/C**



20W Dark Light SMD LED recessed downlight ideal for bathroom installation, IP54.

Complete with 300mA driver.

Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions



Gallery






Physical Specification

Item Group	06 Downlights Fixed LED
Family	The IP54 Dark Light Bathroom Downlights Die cast
Order Code	10120FD/W/C
Colour	White
Material	Die Cast
Shape	Circular
Height	54mm

Diameter	175mm
Cutout Hole Diameter	166mm
Recessed Ceiling	Yes
Depth Required	70mm
Indoor	Yes
Outdoor	Yes
Adjustable	No

## Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	20W
IP Rating	IP54
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	300mA
Voltage	65V
Safety Class	
Power(Watts)	19,5W
IP Rating	IP54
Light Source	LED built in
LED Type	SMD 2835

LED Brand
F Mark

Epistar


## Gear

Gear Type
Input Voltage
50 Hz
60 Hz
Power(Watts)
Power Factor
Constant Current
300mA
IP Rating
Safety Class
Dimmable
Housing Material
Output Terminal
Brand

Led Driver
220-240V
Yes
Yes
6-9W
0,9
Yes
20-30V
IP20

No
Plastic
Cable
Kegu

## Illumination Data

Colour Temperature
Lumen Output
Light Efficiency
CRI
Illumination Diagram
Dark Light

4000K
1700lm
85lm/W
80

Yes


## Packing Info

Box Length
Box Width

18,5cm
7,5cm

Box Height	18,5cm
Box Weight	0,55kg
Pcs/Carton	20
Barcode	5291889051435
HS Code	9405409900

## Energy Label

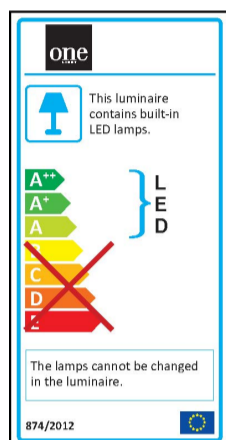

## Certification & Warranty

Warranty	2 Years
Weee Directive	Yes