



IP65 slim LED fitting .

Stainless steel clips and suspension included.

Polycarbonate body and diffuser.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

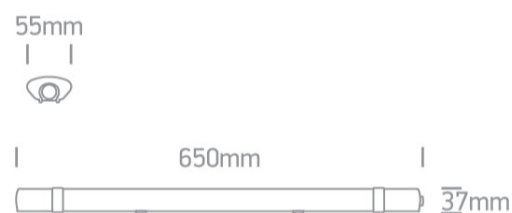

Gallery



Must be ordered separately



050084

Physical Specification


| | |
|-------------------|-----------------------------|
| Item Group | 21 Industrial & Floodlights |
| Family | The IP65 LED Slim Range PC |
| Order Code | 38118LA/D |
| Colour | White |
| Material | PC |
| Diffuser Material | PC |
| Shape | Rectangular |
| Length | 650mm |
| Width | 65mm |
| Height | 37mm |
| Surface Ceiling | Yes |
| Surface Wall | Yes |
| Indoor | Yes |
| Outdoor | Yes |
| Adjustable | No |
| IK Rating | 8 |

Electrical Characteristics

| | |
|------|----------|
| Gear | Built In |
|------|----------|

Fitting + Driver


| | |
|---------------|---|
| Input Voltage | 100-240V |
| 50 Hz | Yes |
| 60 Hz | Yes |
| Safety Class |  |
| Power(Watts) | 18W |
| IP Rating | IP65 |
| Light Source | LED built in |
| Dimmable | No |

| | |
|--------------|---|
| Cable Length | 50cm |
| F Mark |  |

Fitting

| | |
|--------------|------------------|
| Input Type | Constant Current |
| Power(Watts) | 18W |
| IP Rating | IP65 |
| Light Source | LED built in |
| LED Type | SMD 2835 |
| LED Brand | Sanan |

Gear

| | |
|------------------|---|
| Gear Type | Led Driver |
| Input Voltage | 100-240V |
| 50 Hz | Yes |
| 60 Hz | Yes |
| Power(Watts) | 18W |
| Power Factor | 0,9 |
| Constant Current | Yes |
| IP Rating | IP20 |
| Safety Class |  |
| Dimmable | No |
| Housing Material | Plastic |
| Output Terminal | Connector |
| Brand | Eaglerise |

Illumination Data

| | |
|--------------------|----------|
| Colour Temperature | 6000K |
| Lumen Output | 1600lm |
| Light Efficiency | 88,9lm/W |
| CRI | 80 |

Beam Angle

120°

Illumination Diagram



Packing Info

Box Length

66cm

Box Width

9,5cm

Box Height

9,2cm

Box Weight

0,25Kg

Pcs/Carton

20


Barcode

5291889051107

HS Code

9405104090

Energy Label

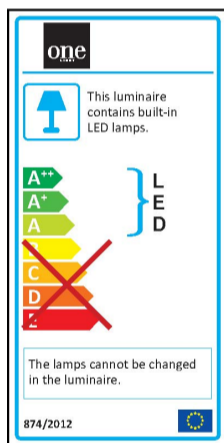

Certification & Warranty

Warranty

2 Years

Weee Directive

Yes