

06 Downlights Fixed LED>The COB Project Square Range Die cast

50130K/G/W



30W COB LED project round range downlight, IP53.

Complete with driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

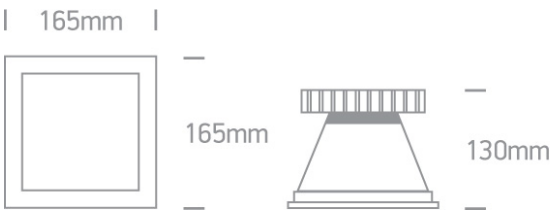

Gallery



Physical Specification



|            |                                       |
|------------|---------------------------------------|
| Item Group | 06 Downlights Fixed LED               |
| Family     | The COB Project Square Range Die cast |
| Order Code | 50130K/G/W                            |
| Colour     | Grey                                  |
| Material   | Die Cast                              |
| Shape      | Rectangular                           |
| Length     | 165mm                                 |

|                    |
|--------------------|
| Width              |
| Height             |
| Cutout Hole Width  |
| Cutout Hole Length |
| Recessed Ceiling   |
| Depth Required     |
| Indoor             |
| Adjustable         |

|       |
|-------|
| 165mm |
| 130mm |
| 147mm |
| 147mm |
| Yes   |
| 160mm |
| Yes   |
| No    |

Electrical Characteristics

|                  |
|------------------|
| Gear             |
|                  |
| Fitting + Driver |
|                  |
| Input Voltage    |
| 50 Hz            |
| 60 Hz            |
| Safety Class     |
| Power(Watts)     |
| IP Rating        |
| Light Source     |
| Dimmable         |
| F Mark           |

|   |
|---|
| External-Included   |
|   |
|   |
| 220-240V  |
| Yes   |
| Yes   |
|  |
| 30W   |
| IP53  |
| LED built in  |
| No  |
|  |

Fitting

|               |
|---------------|
| Input Type    |
| Input Current |
| Voltage       |
| Safety Class  |
| Power(Watts)  |
| IP Rating     |
| Light Source  |

|   |
|---|
| Constant Current  |
| 1100mA  |
| 26V   |
|  |
| 28,6W   |
| IP53  |
| LED built in  |

F Mark



Gear

Gear Type

Led Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Power(Watts)

20-32,4W

Power Factor

0,9

Constant Current

Yes

Output

1080mA

Voltage Range

18-30V

IP Rating

IP20

Safety Class



Dimmable

No

Ambient Temp

40°C

Operating Temp

80°C

Housing Material

Plastic

Output Terminal

Cable

Illumination Data

Colour Temperature

3000K

Lumen Output

1350lm

Light Efficiency

45lm/W

CRI

80

Beam Angle

100°

Illumination Diagram




Packing Info

Box Weight

1,6kg

|            |               |
|------------|---------------|
| Pcs/Carton | 12            |
| Barcode    | 5291889028307 |
| HS Code    | 9405409900    |

Energy Label

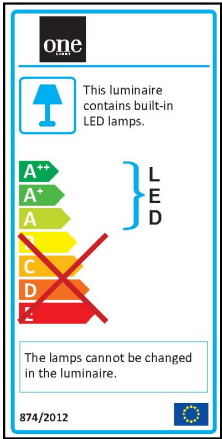

Certification & Warranty

|                |         |
|----------------|---------|
| Warranty       | 2 Years |
| Weee Directive | Yes     |