

15 Plafo>LED Die Cast Panel Range

62140RF/W/W



40W LED slim plafo light, IP40, suitable for residential and commercial application.

Supplied with non-dimmable LED driver.

Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions



Gallery



Accessories



050128

Physical Specification	
Item Group	15 Plafo
Family	LED Die Cast Panel Range
Order Code	62140RF/W/W
Colour	White
Material	Die Cast
Shape	Rectangular
Length	1200mm
Width	145mm
Height	50mm
Surface Ceiling	Yes
Indoor	Yes
Adjustable	No
Electrical Characteristics	
Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	40W
IP Rating	IP40
Light Source	LED built in
Dimmable	No
F Mark	
Fitting	
Input Type	Constant Current
Input Current	1000mA

Voltage
Safety Class
Power(Watts)
IP Rating
Light Source
LED Type
LED Brand
LED Number
F Mark

38V

38W
IP20
LED built in
SMD 2016
Sanan
300


Gear

Gear Type
Input Voltage
50 Hz
60 Hz
Power(Watts)
Power Factor
Constant Current
1000mA
IP Rating
Safety Class
Dimmable
Ambient Temp
Operating Temp
Housing Material
Output Terminal
Fast Connector
Fast Connector Type
Brand

Led Driver
220-240V
Yes
Yes
30-40W
0,9
Yes
30-40V
IP20

No
40°C
80°C
Plastic
Cable
Yes
Other
ONE Light


Illumination Data

Colour Temperature	3000K
Lumen Output	2700lm
Light Efficiency	67,5lm/W
CRI	80
Illumination Diagram	

Packing Info

Box Weight	4,3kg
Pcs/Carton	5
Barcode	5291889049890
HS Code	9405409900

Energy Label

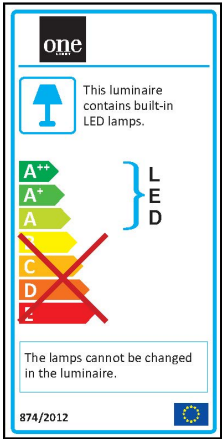

Certification & Warranty

Warranty	2 Years
Weee Directive	Yes