Rockwood

ASSA ABLOY
Opening Solutions

ESK-9100-HOLLOW METAL-SWING4
Single Electric Strike for Hollow Metal Doors Swing 4

Experience a safer
and more open world

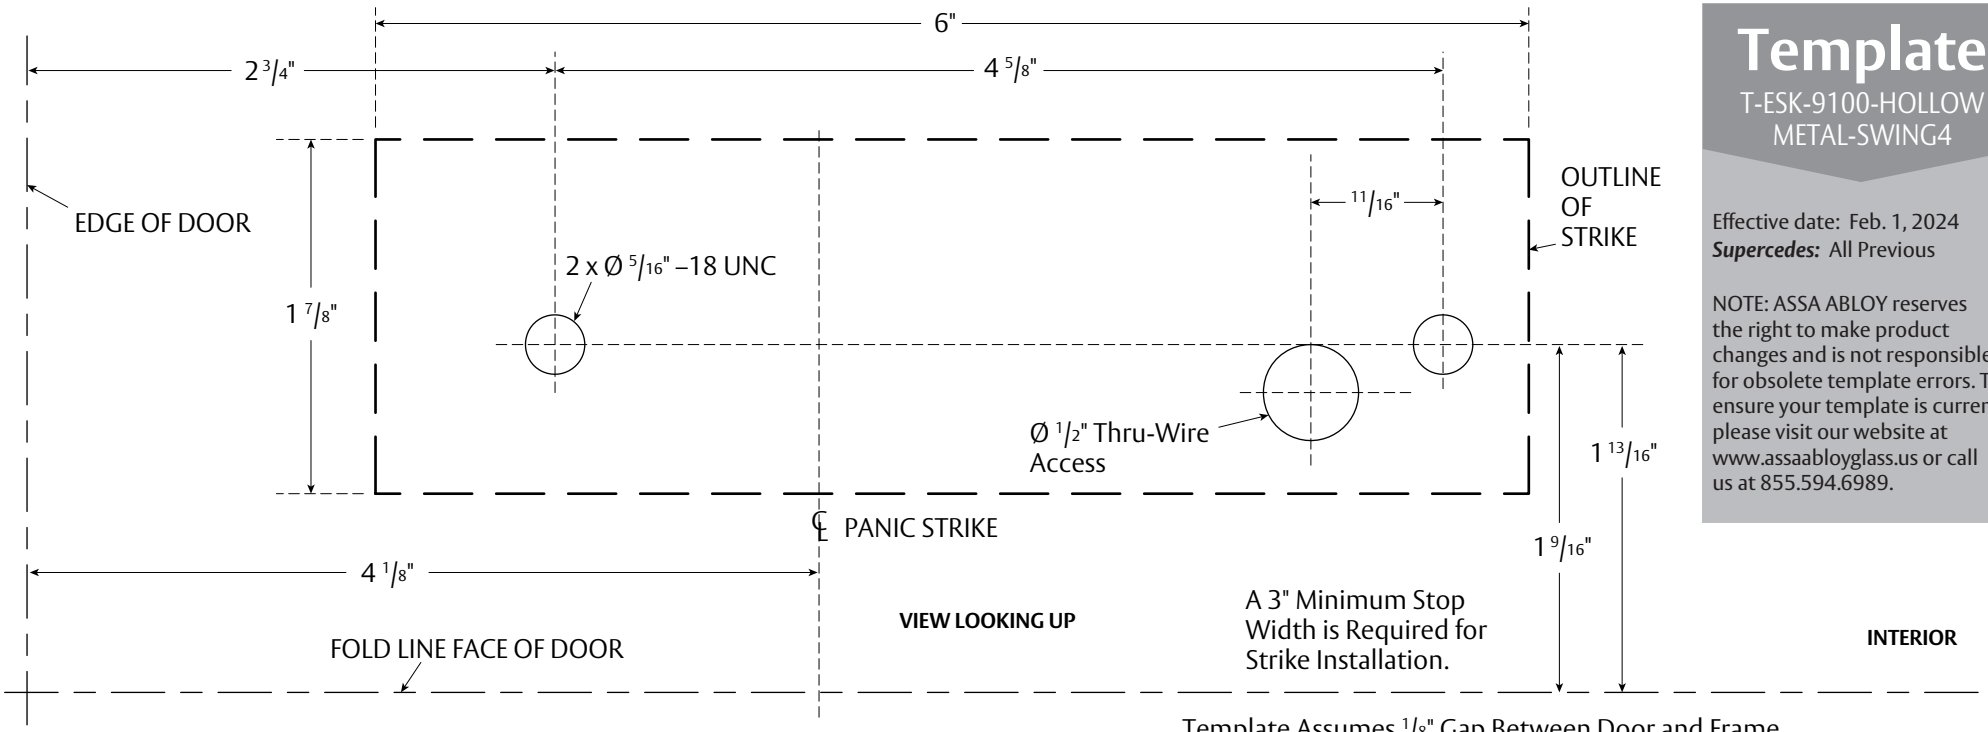

Template Assumes 1/8" Gap Between Door and Frame, 3/32" Gap Between Face of Door and Face of Stop.

Template

T-ESK-9100-HOLLOW METAL-SWING4

Effective date: Feb. 1, 2024
Supercedes: All Previous

NOTE: ASSA ABLOY reserves the right to make product changes and is not responsible for obsolete template errors. To ensure your template is current, please visit our website at www.assaabloyglass.us or call us at 855.594.6989.

Notes:
1. Allowable gap between doors is 1/8", consult factory if gap is not 1/8", allowable backset for double doors is 4 1/8".
2. View is from bottom of header.
3. Prep shown is for hollow metal frames only.
4. A 3" minimum stop width is required for strike installation.
5. 5/8" stop height only.
6. Backing plate of 12 ga. min. required in door stop for strike installation.
7. 5/16-18 fasteners provided.
8. It is recommended that frame be prepped by door/frame manufacturer.

PRINT AT 1:1 SCALE. VERIFY MEASUREMENTS AFTER PRINTING BEFORE USING THIS AS A TEMPLATE.

ASSA ABLOY Opening Solutions
Architectural Accessories Group
Rockwood, PA
P: 800.458.2424 • F: 800.922.9212
www.assaabloydooraccessories.us

Copyright © 2024, ASSA ABLOY Accessories and Door Controls Group, Inc. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited.