



A S T R O


L I N K



Wireless Integrated Avionics Module

AHRS, GPS, ADS-B In

Anatomy

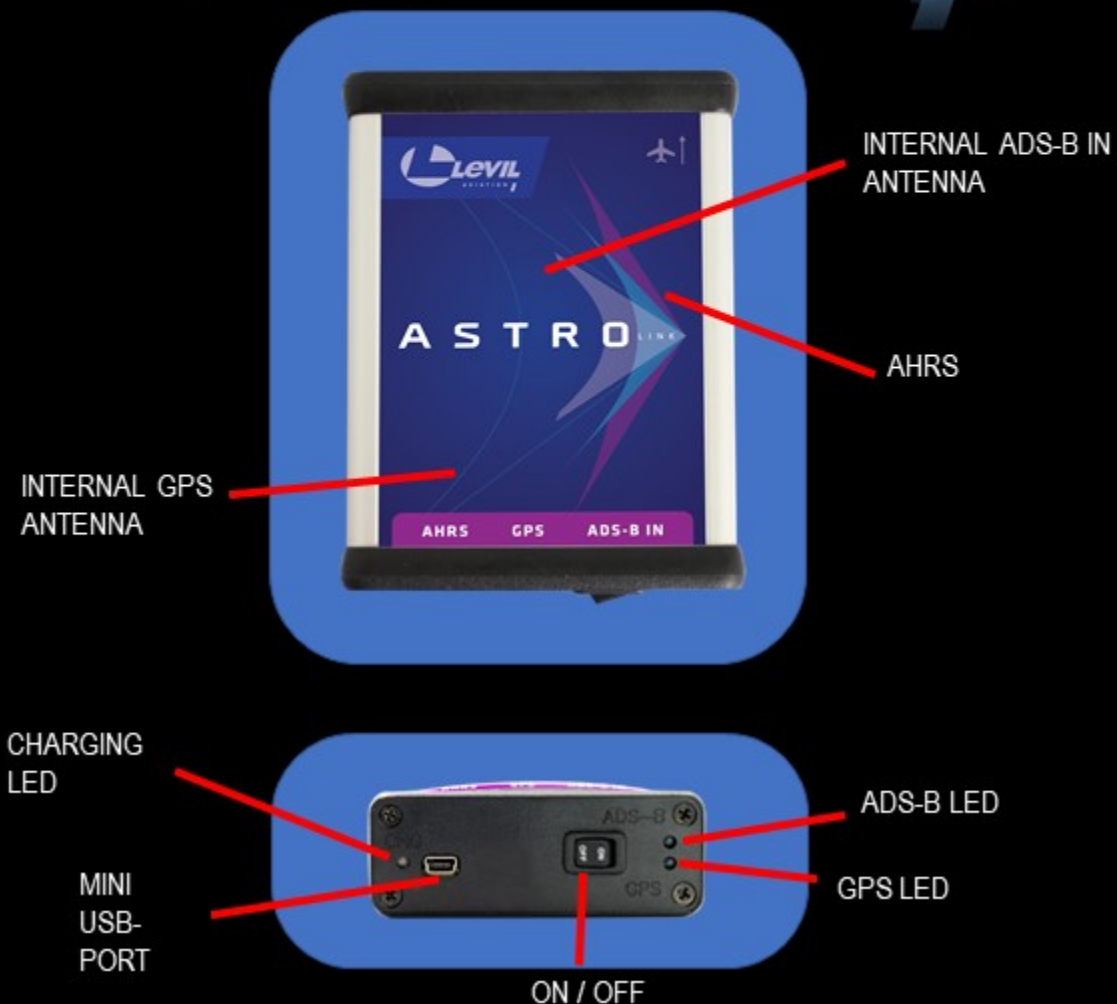


Package Contents

- / Wireless Astro Link unit
- / USB to Mini USB cable
- / Rubber stoppers or rubber pad
- / Protective bag

Charge Before Use

- / Fully charge the Astro Link using the USB cable supplied.
- / The LED next to the USB port indicates whether the device is charging.
- / When the LED goes off, the battery is fully charged. (It may take up to 4 hrs.)
- / 100% charged battery supplies power for about 5 hrs.

Alignment

- Find a location that will allow your Astro Link to have a clear view of the sky for GPS satellite reception and “line of sight” to ADS-B ground stations and other aircraft around you.
- Align the airplane icon on the Astro Link’s top label with the roll axis of your aircraft. ON/OFF switch should face the back of the aircraft. 
- Install Astro Link on a surface that is LEVEL with the horizon DURING un-accelerated, straight and level flight. It’s ok if it isn’t level on the ground (i.e. in tail draggers).

NOTE: An optional RAM suction cup mount is available on the website with swivel base for ease of installation.

- You may use our free AHRS Utility App available on the AppStore/Playstore, or any other compatible App with a horizon display to assist you with leveling the instrument. Caging capabilities are available using the AHRS Utility App.
- For optimal magnetic heading, install the Astro Link as far away from ferrous metals as possible. (i.e. magnetic compass, cell phones, steel airframe)
- Turn on by flipping the ON/OFF switch. GPS LED will light.

NOTE: **DO NOT** rely on the Astro Link for attitude & heading if it is not aligned as specified.

Connecting to your Favorite App

The Astro Link series offers the most compatibility with Apps on both iOS and Android platforms.

- Turn ON your Astro Link by flipping the ON/OFF switch. (LEDs will light up)
- Tap Settings icon on your tablet
- Tap WIFI and connect to the iLevil3 – xxxx network, where “xxxx” is your unique serial number
- Once your connection is established, a checkmark will appear next to the network name
- Run the Navigation App of your choice

The AHRS Utility App is a free application available for iPad/iPhone and Android devices for Astro Link troubleshooting, Alignment aid, Configuration etc.

Other advanced Apps may require subscriptions and offer more features than others. Some Apps may not support all the features of the Astro Link. You may choose to use one Nav App or a combination of Apps on multiple devices depending on your flying needs.

NOTE:

- For a complete list of compatible apps visit <https://levilaviation.com/compatibleapps/>
- To download a compatible App to your iPad/iPhone search using the AppStore on your tablet
- To download a compatible for your Android tablet search using the PlayStore on your tablet

Label	Status	Description
Power/GPS	Slow Blink Green: Solid Green: Off:	Power ON / No GPS Fix Power ON / GPS fix acquired Power Off
ADS-B	Slow Blink Green: Solid Green: Off:	Traffic Received Weather and traffic received No traffic or Weather received
Charging (with external power)	Solid Green: Off (w/ power): Off (no power):	Charging Battery 100% charged, not charging Not charging

NOTE:

The Astro Link has a charging temperature protection. If the battery is above 40°C (104°F) and the Astro Link is connected to external power, it will continue to operate from external power but the charging process will be disabled. The charging LED status will be set to OFF.

There are two ways to obtain heading information from the Astro Link, depending on the navigation App of choice, you may choose between the following:

- True Track: Heading information based on GPS track.
- Magnetic Heading: Heading information determined by a combination of a 3-axis magnetometer and gyros that form part of the internal AHRS.

When using Magnetic Heading, it is important to know the following:

- Magnetic fields caused by other Magnetic Compass etc., may affect the AHRS heading
- Verify your magnetic heading after following alignment and installation procedures: AHRS Utility App → options → Heading → Use magnetic
- In case of magnetic deviation, the internal AHRS will slowly learn your aircraft configuration during flight to compensate for errors. This learning process requires the aircraft to turn both clockwise and counter clockwise for at least 40 seconds. After turning, or at the end of your flight, verify the magnetic heading again using the AHRS Utility App. If the AHRS was able to successfully compensate for errors, you may store this data inside the Astro Link and use this configuration on the next power cycle: AHRS Utility → Device Config → Enable Configuration → Save Mag Data
- If the AHRS was unable to compensate for errors after turns, try using a different location for installation
- ERASE Magnetic data using AHRS Utility before attempting a different location or moving the Astro Link to a different aircraft or environment

Specifications

AHRS

- 360 degree pitch and bank operation
- GPS Independent attitude
- 500 deg/sec max turn rate
- 9Gs max rating
- Output: Roll, pitch, magnetic heading, slip indicator, rate of turn, G meter

ADS-B in (978/1090 MHz)

- Receives regional and continental NEXRAD reports broadcasted by ADS-B towers within range:
 - Regional every 2.5 min.
 - Continental every 15 min.
- Receives "GROUND TO AIR" traffic. Re-broadcast of traffic by ADS-B towers nearby
- Receives "AIR TO AIR" traffic reports from other aircraft operating 978/1090 MHz transmitters:
 - 978 MHz UAT ADS-B out
 - Mode-ES transponders with extended squitter

WIFI

- Android and iOS compatible
- Supports up to 10 devices connected simultaneously (UDP broadcast)
- Supports multiple protocols:
 - GDL90 (default)
 - NMEA

GPS

- Supports WAAS
- Cold Start < 60 sec. (open sky)
- 1 Hz output (5Hz optional)

Internal Battery

- Operating time: <= 5 hrs.
- Charging time USB - approx.. 4 hrs.

Environmental Requirements

- / Temperature range: -10° to 40 ° C (14 ° F to 104 ° F)
- / Clear view to sky for best GPS reception
- / Windshields with integrated heating elements will attenuate GPS
- / For best ADS-B reception line of sight view with ADS-B ground based towers and min 2000 ft
- / Traffic received over the 1090 MHz freq. will not be displayed until a GPS signal is acquired

Caution

- / Ferrous materials inside aircraft affect the magnetic compass reading
- / This product contains a Lithium-Ion battery; Li-Ion batteries are volatile
- / Failure to read and follow **Battery Safety Instructions** may result in fire, personal injury and property damage
- / The Astro Link will get hot after it's been running in direct sun; don't leave the iLevil ON or OFF parked on the ramp in the hot sun; **Use caution!**
- / AHRS/GPS data provided is not FAA certified. Do not use it as a primary instrument for IFR

Battery Safety Instructions

- / Batteries only have about a 30% charge when you receive your Astro Link
- / **Never charge batteries unattended.** When charging Lithium-Ion Batteries, you should constantly monitor the charging process to be able to respond to any problems that may occur
- / Always let batteries cool down to ambient temperature before charging
- / Charge batteries in a safe area away from flammable materials
- / Do not expose your device to direct sunlight (heat) for extended periods while operational
- / When transporting or temporarily storing in an airplane or vehicle, temperature range should be no less than 20 ° F (-12 ° C) and not more than 150 ° F (65 ° C)
- / Storing Lithium-Ion batteries at temperatures higher than 170 ° F for extended periods of time (more than 2 hrs.) may cause damage to battery and possible fire
- / **Short Circuits can cause fires!** If you accidentally short the battery, it must be placed in a safe observation area for approx. 15 mins. Nevertheless, for safety, the unit is protected by a 2 amp fuse which will blow if any component is shorted or when overcharging the battery.
- / DO NOT disassemble, remodel, drop, or let the Astro Link get wet!

Helpful Tips

- / If you encounter WIFI connection problems, try resetting the tablet's WIFI (disable/enable)
- / You may use our free AHRS Utility App to see battery percent, GPS signal power, etc.
- / Do Not switch the Astro Link ON/OFF button swiftly when resetting power to the Astro Link. When turning OFF the Astro Link, wait for it to complete the shut down sequence. Make sure the LEDs go OFF before turning the device ON again.
- / The internal AHRS has a max rate of turn of 500 deg/sec. Most likely you will exceed this limit (or "tumble" it) when playing with the Astro Link in your hands. If this is the case, and the AHRS did not recover, you may "tumble" it again, and set it on a level surface. It will recover within 4 sec.



Astro Link

Warranty

Levil Aviation warrants this product to the original purchaser to be free from defects in material and workmanship for a period of one year from the date of the original purchase. The following are not covered: software, damage resulting from accident, neglect, misuse, improper voltage supply or failure to follow operational guidelines supplied with this product.

Please register your product online at: www.levilaviation.com

Contact Us

Technical Support:

407-542-3971 ext. 101

Aviationsupport@levil.com

General Information:

407-542-3971 ext. 108

info@levil.com

Sales:

407-542-3971 ext. 106

sales@levil.com

www.levilaviation.com