
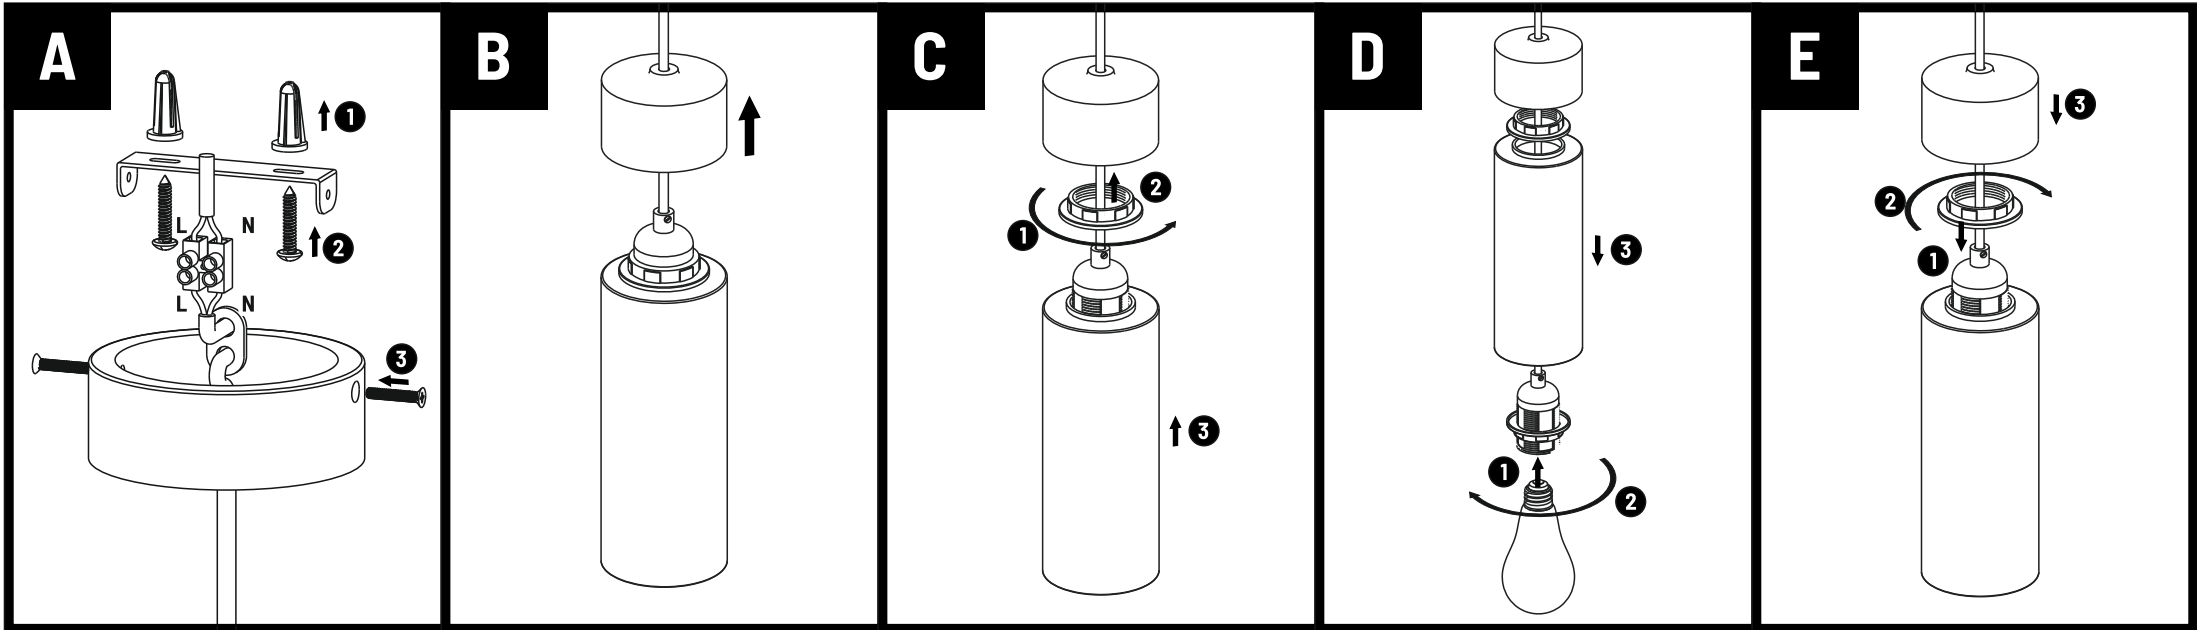


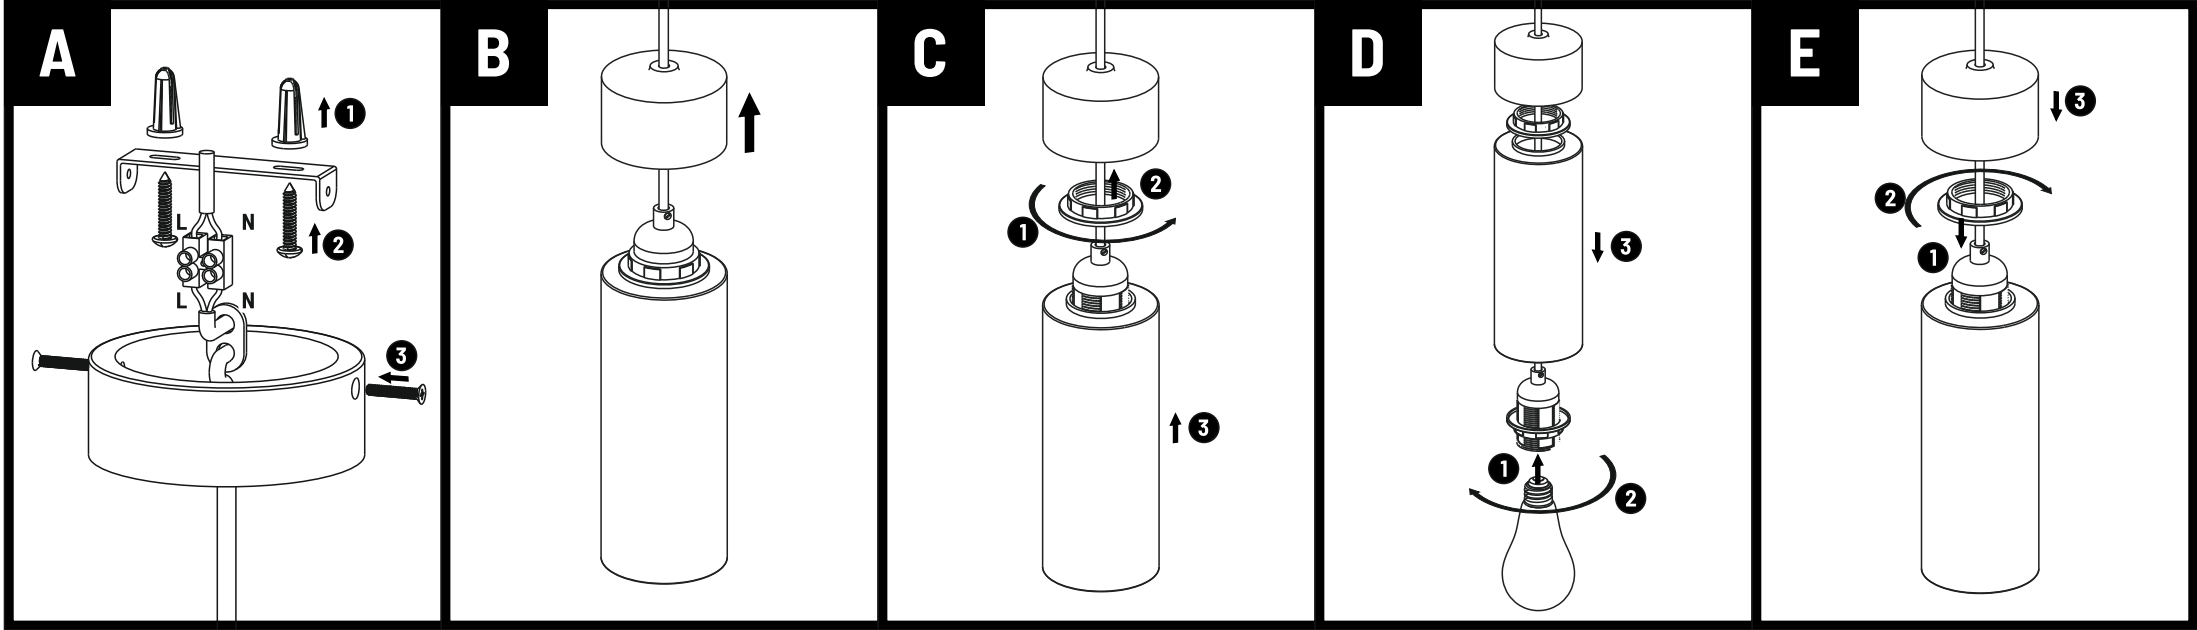

- ▲ Electrical connections may only be carried out by expert staff.
- ▲ Observe the installation instructions of VDE – 0100.
- ▲ Attention! Prior to starting installation work, de-energise the power line – remove the fuse and / or Set the switch to “OFF”.
- ▲ Use the luminaire in living areas only.
- ▲ Luminaries marked with  are suited to be mounted on normally inflammable materials. If this  Mark is missing, do not mount the luminaire on non – inflammable materials.
- ▲ Do not mount the luminaire on wet or conducting background.
- ▲ Protection class I  This luminaire be connected with its protective conductor (green – yellow) to the protective earth – terminal.
- ▲ Protection class II  . This luminaire is particularly isolated and must not be connected to a protective earth – terminal.
- ▲ Pay attention to the fact that electric lines are not damaged during installation.
- ▲ Designation of connecting terminals.
- ▲ L – phase N – neutral conductor  – protective conductor
- ▲  Minimum clearance between emitter edge and floodlighted surface $\geq 0,5$ mm.
- ▲ Only replace defective lamps by lamps of the same design, wattage and voltage.
- ▲ The care of luminaires is restricted to their surfaces. Wetness must not get into wiring spaces or to current – carrying parts.
- ▲ The manufacturers do not accept responsibility for injuries or defects by improper use of a luminaire.