



MINI MAG 27 SILVER 90 MAG

MINI MAG 27

- # CB Magnetic mobile antenna
- # Factory tuned at mid-band
- # 180° tiltable whip
- # Supplied with stainless steel spring for the best flexibility

TECHNICAL DATA

Type: central loaded
 Impedance: 50 Ω
 Frequency range: 27 ... 27.5 MHz
 Polarization: linear vertical
 SWR @ res. freq.: ≤ 1.2
 Max. power: 10Watts (CW) continuous, 50Watts (CW) short time
 Bandwidth @ SWR ≤ 2 : ≥ 280 kHz (23 channel)
 Cable Length/ Type/ Connector: 3m, 10ft/ RG 58/ UHF PL-259
 Height (approx.): 630 mm, 2 ft
 Weight (approx.): 575 gr, 1.25 ft
 Standard mount: Magnetic
 Mag mount overall size: $\varnothing 90$ mm, 3.5 in

P/N 2204905.74 MINI MAG 27


SILVER 90 MAG

- # CB & 10m Mobile antennas
- # 17/7 PH tapered stainless steel whip

TECHNICAL DATA

Type: base loaded
 Impedance: 50 Ω
 Frequency range: 26.5 ... 27.5 MHz
 Polarization: linear vertical
 SWR @ res. freq.: ≤ 1.2
 Max. power: 15 Watts (CW) continuous, 150 Watts (CW) short time
 Bandwidth @ SWR ≤ 2 : ≥ 1240 kHz (110 channel)
 Height (approx.): 890 mm, 2.9 ft
 Weight (approx.): 310 gr, 0.68 lb
 Mounting:
 SILVER 90 PL whip only with UHF-male (PL259)
 SILVER 90 MAG PM-100 PL magnetic mount
 Cable:
 SILVER 90 PL not supplied
 SILVER 90 MAG 3.6m, 11.8 ft/ RG58

P/N 2211906.05 SILVER 90 PL
 P/N 2211906.61 SILVER 90 MAG

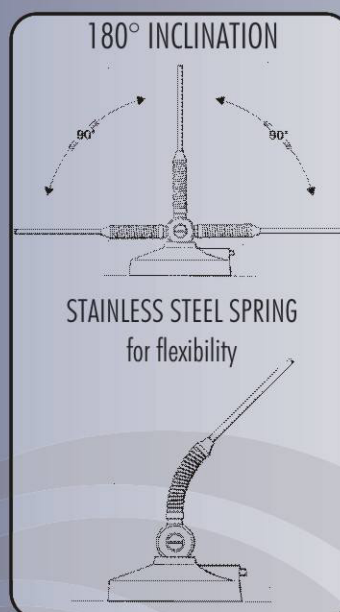

BLACK
CHROMED
TAPERED
STAINLESS
STEEL



MINI MAG 27

SILVER 90 MAG