


DIN 912

Śruby z łbem walcowym

Z gniazdem sześciokątnym

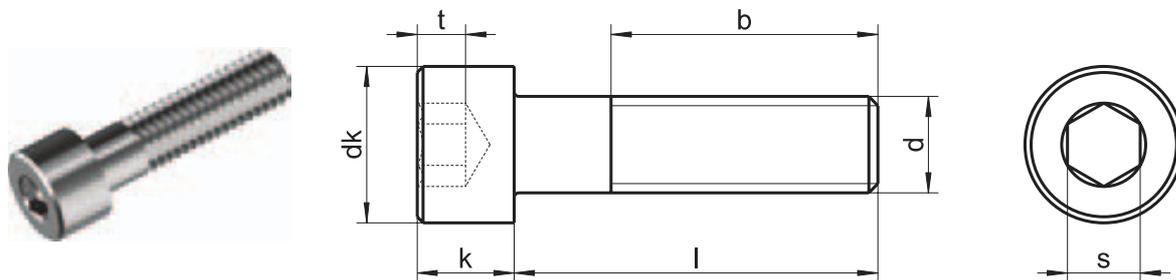

dk max.	3,0	3,8	4,5	5,5	7,0	8,5	10,0	13,0	16,0	18,0	21,0	24,0	27,0
k max.	1,6	2,0	2,5	3,0	4,0	5,0	6,0	8,0	10,0	12,0	14,0	16,0	18,0
s	1,5	1,5	2	2,5	3	4	5	6	8	10	12	14	14
b	15	16	17	18	20	22	24	28	32	36	40	44	48
t	0,7	1,0	1,1	1,3	2,0	2,5	3,0	4,0	5,0	6,0	7,0	8,0	9,0
●	1,5	1,5	2	2,5	3	4	5	6	8	10	12	14	14
Długość / Ø	M1,6	M2	M2,5	M3	M4	M5	M6	M8	M10	M12	M14	M16	M18
3	▲●	▲●											
4	▲●	▲●	▲●	▲●									
5	▲●	▲●	▲●	▲●	▲●								
6	▲●	▲●	▲●	▲●	▲●	▲●	▲●						
8	▲●	▲●	▲●	▲●	▲●	▲●	▲●						
10	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●					
12	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●				
14	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●				
16	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●			
18		▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●			
20		▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	
22			▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	
25			▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	
30				▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●
35				▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●
40				▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●
45				▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●
50				▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●
55					▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●
60					▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●
65					▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●
70					▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●
75					▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●
JS	1000	1000	1000	1000 ≥ 45 500	1000 ≥ 35 500	500 ≥ 45 200	500 ≥ 45 200 ≥ 75 100	200 ≥ 45 100	100	100 ≥ 55 50	25	25	25

▲ A2 / ● A4 | JS: Jednostka sprzedaży | Wszystkie wymiary podane w mm |