

AT-2412C / 2412D / 2412E / 2512C / 2612D / 2612E / 2812C / 2812D, DT-2412C, R1000 / 1400 / 1700, SR1400 / 1700 / 1900 / 2000, SRO2400, VVO2512AT, V2412AT / 2812AT / VO3112AT, VT1708 / 2009B / 2014B / 2214 / 2412B / 2514B / 2512C / 2812C

Frontal - Neumático (1:1)

Rear - Pneumatic



Descripción Description

Kit de toma de fuerza + brida (sin eje) toma constante 1:1 montaje en registro frontal de 4 taladros de la caja de cambios. Accionamiento neumático, salida ISO 4 taladros. Indicador de funcionamiento y eje adaptador opcional.

Base PTO + flange Kit (without shaft) constant mesh 1:1 mounting on rear 4 bolts-window of the Gearbox. Pneumatic shifting, output Iso 4 bolts. Optional: Passing contact switch and adapter shaft.

Datos Principales Main Data

Par nominal	Continuo Continuous		590
Torque (Nm)	Intermitente Intermittent		826
Potencia (1000 r.p.m.)	Power (1000 r.p.m.)		84 C.V // 62 kW
Lado de montaje	Mounting position		Posterior Rear
Sentido de giro de la bomba	Pump rotation		Izquierdo Anti ClockWise
Peso Weight (Kg)			8
Relación motor - Toma de Fuerza Engine to PTO ratio	R1000, R1400, R1700		1: 0,700
	SR1400, SR1700, SR1900, VT2014B, VT2214B, VT2514B, DT-2412C	Larga High	1: 0,880
		Normal	1: 0,700
	SR2000	Larga High	1: 0,820
		Normal	1: 0,650
	SRO2400	Larga High	1: 1,030
		Normal	1: 0,820
	VT1708, VT2009B		1: 0,700
	AT-2412C /D /E, AT-2512C, AT-2612D /E, AT-2812C /D, V-2412AT, V-2512AT, V-2812AT, VT-2512C, VT-2812C	Larga High	1: 0,903
		Normal	1: 0,700
	VO2512AT, VO3112AT	Larga High	1: 1,150
		Normal	1: 0,900
	VTO2214B, VTO2514B	Larga High	1: 1,094
		Normal	1: 0,880


Códigos y Combinaciones Part Numbers and Combinations

Kit toma de fuerza base con brida Base PTO Kit with flange + Kit de eje adaptador Adapter shaft kit			
		R1000, SR1700, ... (L=267mm)	110104
Salida Plato Flange output	1196K02	R1000, ... Retarder (L=302mm)	110304
Salida Bomba Pump output (DIN 5462)	1196K03	DT-2412C, V2412 (L=229 mm)	116504

AT-2412C / 2412D / 2412E / 2512C / 2612D / 2612E / 2812C / 2812D, DT-2412C, R1000 / 1400 / 1700, SR1400 / 1700 / 1900 / 2000, SRO2400, V/VO2512AT, V2412AT / 2812AT / VO3112AT, VT1708 / 2009B / 2014B / 2214 / 2412B / 2514B / 2512C / 2812C

Frontal - Neumático (1:1)

Rear - Pneumatic

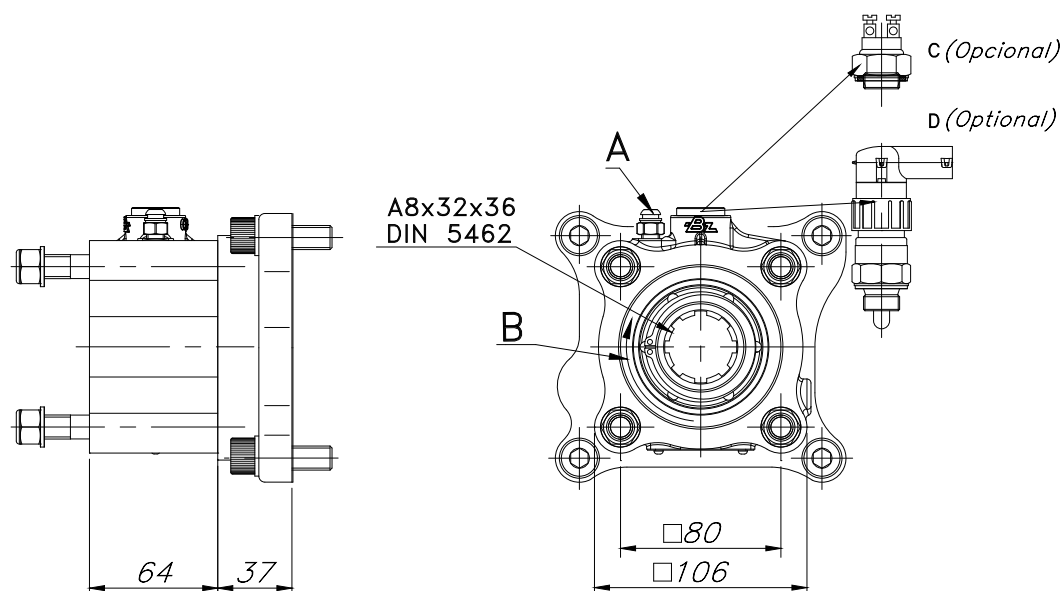

Notas Notes

A	Conexión PTO, rosca 1/8" GAS	A	Engage PTO, thread 1/8" BSP
B	Sentido de giro	B	Rotation
C	Interruptor neumático (100070018)	C	Passing contact switch. P/N 100070018
D	Interruptor de contacto (9024999)	D	Passing contact switch. P/N 9024999

Tipos de Salida Output Types

FLANGE TYPE	Part Number
SAE:	1100 7015504
	1300
	1400 7015604
DIN:	90 7015804
	100 7015704

Adaptador Plato / Flange Adapter

