

ER05W05V-MU2

5V / 1A Wall mounted type AC/DC adaptor



■ Features:

- Universal AC input / Full range
- ErP step II / CEC level VI compliance
- No load power consumption $P < 0.075W$
- Protections: Overload / Short circuit / Over Voltage



ELECTRICAL SPECIFICATION

MODEL	ER05W05V-MU2
-------	--------------

OUTPUT

Rated Voltage	5V
Rated Current	1A
Current Range	0 ÷ 1A
Rated Power	5W
Line Regulation	± 1%
Load Regulation	± 5%
Tolerance	± 8%
Ripple & Noise (max.)	250mV _{p-p}
Setup, Rise Time	5000ms, 30ms / 230VAC at full load
Hold up Time (typ.)	4ms / 230VAC at full load

INPUT

Voltage Range	90 ÷ 264VAC
Frequency Range	47 ÷ 63Hz
Efficiency (typ.)	73.77%
AC Current (typ.)	0.3A / 230VAC
No load Power Consumption (max.)	0.075W

PROTECTIONS

Overload	Range: 105-200% Auto-recovery.
Short Circuit	Type: hiccup mode, auto-recovery.
Over Voltage	Type: auto-recovery.

ER05W05V-MU2

5V / 1A Wall mounted type AC/DC adaptor



WORKING ENVIRONMENT

<i>Working Temperature</i>	0°C ÷ 45°C
<i>Working Humidity</i>	10 ÷ 90% RH non-condensing
<i>Storage Temperature and Humidity</i>	-20°C ÷ 85°C, 5 ÷ 90% RH non-condensing


SAFETY and EMC REGULATIONS

<i>Safety Standards</i>	Compliance to EN 62368
<i>Withstand Voltage</i>	IN/OUT: 3.6kVAC
<i>Isolation Resistance</i>	IN/OUT: 50MΩ/500VDC/25°C/70%
<i>EMC Emission</i>	Compliance to EN55032
<i>EMC Immunity</i>	Compliance to EN61000-4-2, -3, -4, -5
<i>Harmonic Current</i>	Compliance to EN61000-3-3; EN61000-3-2

OTHERS

<i>DC wire and plug</i>	Wire: 24AWG*2C, length = 1500mm	DC Plug: micro USB
<i>Net Weight / Dimensions</i>	55g / 37.375 x 23.56 x 54.37mm (L x W x H)	

MECHANICAL SPECIFICATION

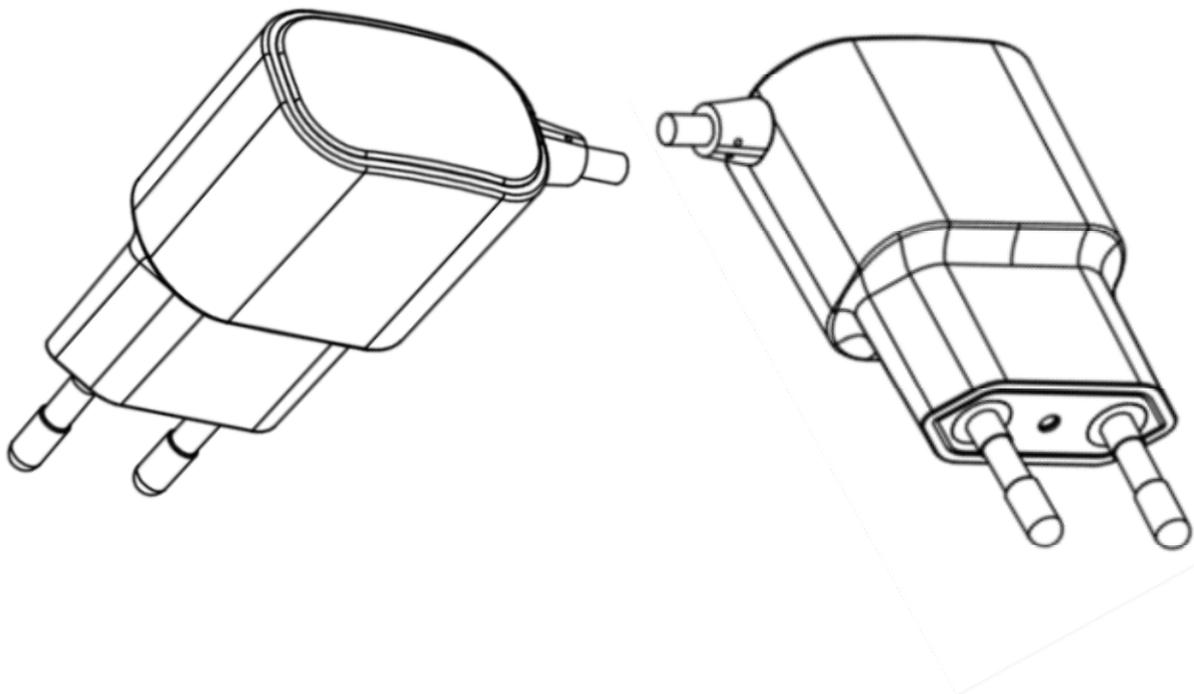


ER05W05V-MU2

5V / 1A Wall mounted type AC/DC adaptor



MECHANICAL SPECIFICATION: DC wire and plug

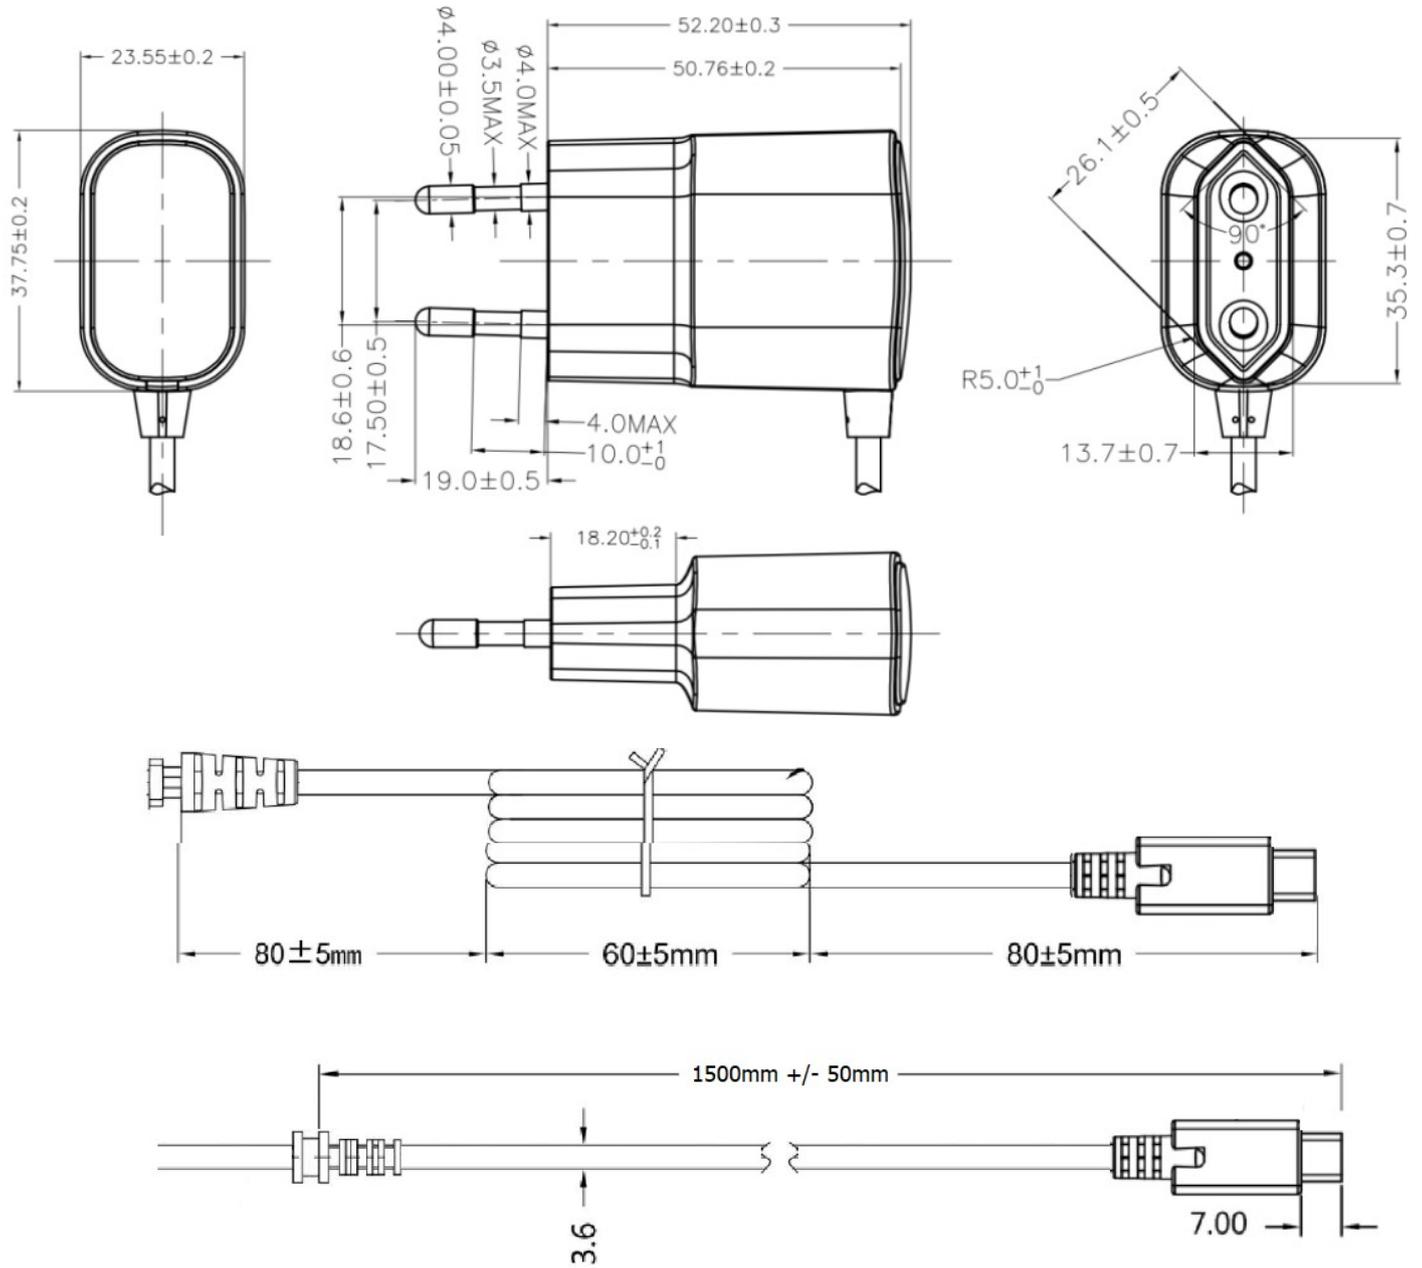

1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.
2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1µF / 47µF parallel capacitor.
3. Tolerance includes set up tolerance, line regulation and load regulation.
4. Setup and rise time is measured from 0 to 90% rated output voltage.
5. Power supply is considered as component not intended to apply by end-user. Power supply meets safety and EMC standards however the final equipment with power supply must be re-quality to comply with EMC Directives.