


GermanSolar®
LINKBEST 800W

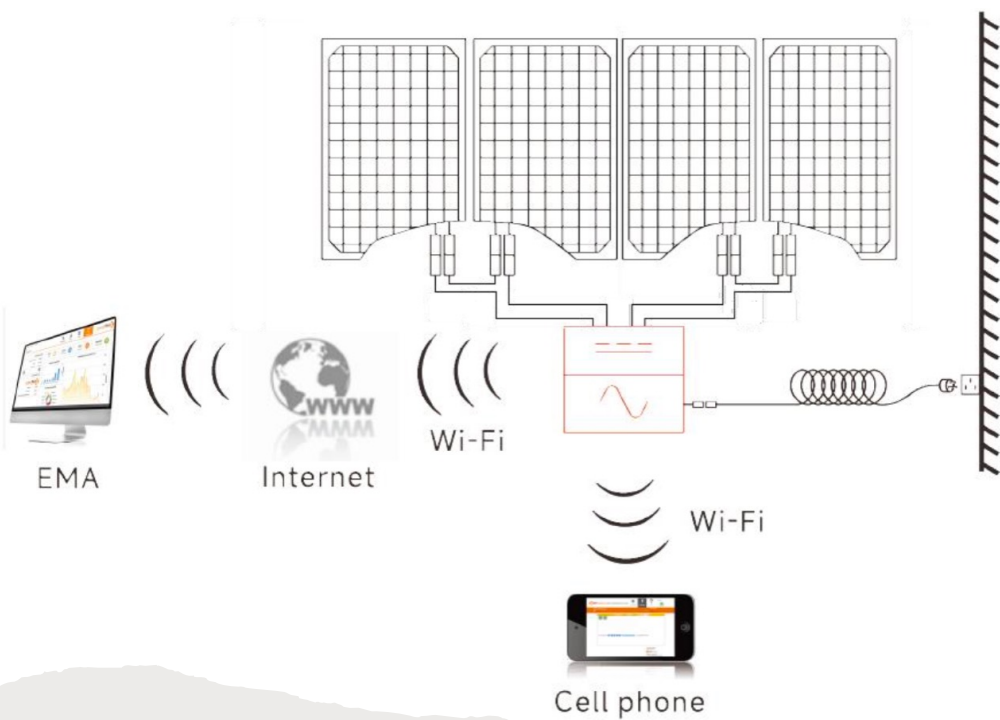

GermanSolar ®
LINKBEST 800W Schemat instalacji

Wykaz urządzeń akceptowany do dnia 31.12.2026 / List of devices accepted until 31.12.2026

289	U23-0770_1	31.12.2026	ALTENERGY POWER SYSTEM INC	Building 2, No. 522, Yatai Road, Nanhu District, Jiaxing City, Zhejiang 314050, Chiny	Falownik fotowoltaiczny (PV)	EZ1-M	A	V2
-----	------------	------------	-------------------------------	---	------------------------------------	-------	---	----

GermanSolar®

LINKBEST 800W

Wykaz certyfikowanych urządzeń



Recommended PV Module Power (STC) Range	300Wp-730Wp+
Operating Voltage Range	16V-60V
Isc PV	25A x 2
Maximum Continuous Output Power	799VA
Nominal Output Voltage/Range(1)	230V/184V-253V
Nominal Output Current	3.5A
Nominal Output Frequency/ Range(1)	50Hz/48Hz-51Hz
Enclosure Environmental Rating	IP67
Cable Length	5M as default
Communication	Built-in Wi-Fi
Isolation Design	High Frequency Transformers, Galvanically Isolated
Warranty	12 Years Standard



GermanSolar ®
LINKBEST 800W Dane techniczne EZ1-M

Project	
Nominal Max. Power(Pmax) *	200W *4pcs
Open Circuit Voltage (Voc)	23.52V
Short Circuit Current (Isc)	10.8A
Max. Power Voltage (Vmpp)	19.6V
Max. Power Current (Impp)	10.20A
Module Efficiency	18.15%
Power Tolerance	±3%
Dimensions	1050*1050*21 mm
	4 kg



GermanSolar ®

LINKBEST 800W Dane techniczne panel pv 200W