



Actinic BL TL(-K) / TL-D(-K)

Actinic BL TL 8W/10 1FM/10X25CC

With an optimized spectrum matching the eye sensitivity of the housefly, Actinic BL TL(-K)/TL-D(-K)/TL-E/PL-S and PL-L lamps are perfect for attracting insects. They have virtually no UV-B output, and so are perfectly safe. What's more, with the lowest mercury content in the industry and being 100% lead-free, these lamps represent a very good environmental choice. Furthermore, the availability of a wide range of form factors (straight (T5, T8, T12), circular (TL-E) and compact (PL-S/PL-L)) and wattages enables you to make all kinds of designs for your electronic fly killers

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information		UV Depreciation at 500 h	
Cap-Base	G5		17 %
Life to 50% Failures (Nom)	10,000 hour(s)	Operating and Electrical	
Useful Life (Nom)	5,000 hour(s)	Power Consumption	7.1 W
		Lamp Current (Nom)	0.145 A
		Voltage (Nom)	56 V
Light Technical		Mechanical and Housing	
Color Code	10	Bulb Shape	T16
Color Designation	Actinic	Net Weight (Piece)	25.300 g
Chromaticity Coordinate X (Nom)	222		
Chromaticity Coordinate Y (Nom)	210		
UV Depreciation at 1000 h	25 %		
UV Depreciation at 2000 h	35 %		

Actinic BL TL(-K) / TL-D(-K)

Approval and Application

Mercury (Hg) Content (Nom) 4.4 mg

UV

UV-A Radiation 100Hr (IEC) 1.60 W

Product Data

Order product name Actinic BL TL 8W/10 1FM/10X25CC

Full product name Actinic BL TL 8W/10 1FM/10X25CC

Full product code 871150026042027

Order code 928001001030

Material Nr. (12NC) 928001001030


Numerator - Quantity Per Pack 1

EAN/UPC - Product/Case 8711500260420

Numerator - Packs per outer box 250


EAN/UPC - Case 8711500260444

Dimensional drawing



Product	D (max)	A (max)	B (max)	B (min)	C (max)
Actinic BL TL 8W/10 1FM/10X25CC	16 mm	288.3 mm	295.4 mm	293 mm	302.5 mm

Photometric data

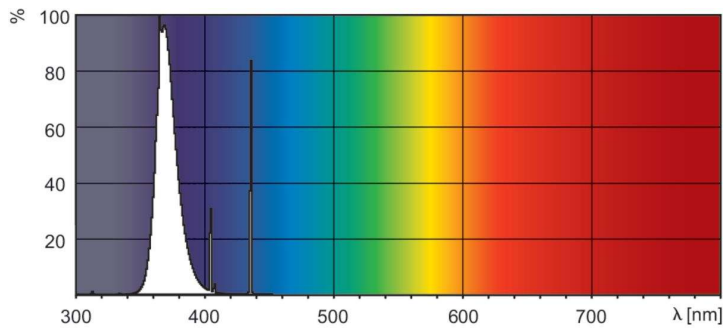

Spectral Power Distribution Colour - Actinic BL TL 8W/10 1FM/10X25CC

