

01

PORTABLE EV CHARGER

LOW POWER(8A-16A)



BN20

Product Overview

BN20 provides a low-power charging option. It offers max output power 3.6kW and 8A/10A/16A adjustable current, only 3kg weight, pretty light and small size with easy use and lower space-consuming. This product also provides reliable quality and high compatibility with competitive price.



Great water-proof performance

Suitable for all weather conditions



LED indicator

LED indicators showing charging status



Solid shell

Sturdy shell with IK10 protection

PRODUCT DETAILS



BN20 Low power(8A-16A)



Under voltage protection



Short circuit protection



Over-temp protection



Over load protection



Earth leakage protection




Lightning protection



Customizable plug



Type 1, Type 2, GB/T

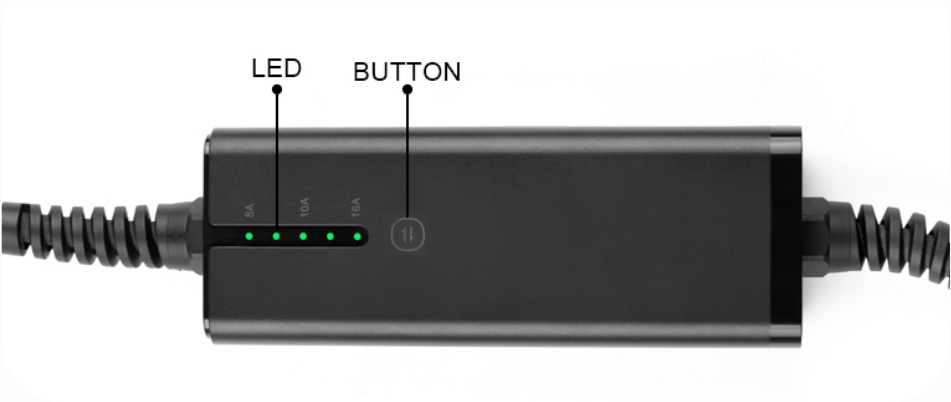

- The indicator represents the ongoing current in a different color.
- Switch between 3 different output currents by pressing button; the default is 8A/10A/16A.

Model BN20

Input & Output	
Input voltage/Output voltage	100~250V AC
Input frequency	47~63Hz
Max. output power	3.6kW
Max. output current	16A 1Phase
Charging interface type	Type 1, Type 2, GB/T

Working environment	
IP rating	IP66
Environment temperature	-25°C~+55°C
Relative humidity	0-95% non-condensing
Maximum altitude	<2000m
Cooling	Natural air cooling
Standby power consumption	<8W

Certificate	
Certificate	CE

Function	
Ethernet/WIFI/4G/Bluetooth	No
LCD	No
RCD	Type A / TypeA+6mA DC
LED Indicator light	✓
Current adjusting	✓

Mechanical	
Dimension (L/W/D)	189/66/48mm
Weight	3kg