



# HQS-12W-60LED-WW-WP-24V

Professional Led Strip, 12 W/m



## TECHNICAL DETAILS

|                                     |                                                                                     |
|-------------------------------------|-------------------------------------------------------------------------------------|
| SUPPLY VOLTAGE                      | 24 V $\pm$ 0.5 VDC                                                                  |
| POWER                               | 12 W/m                                                                              |
| CURRENT                             | 0.5 A/m                                                                             |
| POWER PER REEL (5M)                 | 60 W                                                                                |
| COLOR TEMPERATURE                   | 3000K                                                                               |
| BEAM ANGLE                          | 120°                                                                                |
| LUMINOUS FLUX PER METER             | 1140 lm                                                                             |
| CRI                                 | 80                                                                                  |
| MAXIMUM LENGTH FOR ONE SIDED SUPPLY | 5 m                                                                                 |
| IP PROTECTION DEGREE                | IP64                                                                                |
| WORKING TEMPERATURE                 | -25°C ~ 50°C                                                                        |
| STORAGE TEMPERATURE                 | -25°C ~ 60°C                                                                        |
| LED QTY (PER METER)                 | 60 LEDs/m                                                                           |
| WIDTH PCB                           | 10 mm                                                                               |
| CUT SECTION                         | 100 mm                                                                              |
| CONNECTION WIRE                     | 2 x AWG20 (0.52 mm <sup>2</sup> ) stranded wire, length = 140 mm: V+: red: V:-black |
| DIMENSIONS (L * W * H)              | 5000 x 10 x 1.26 mm                                                                 |
| PACKING                             | 5 m /roll (bag); 50 pcs / ctn; ctn dimensions: 45 x 25 x 25.6 cm                    |

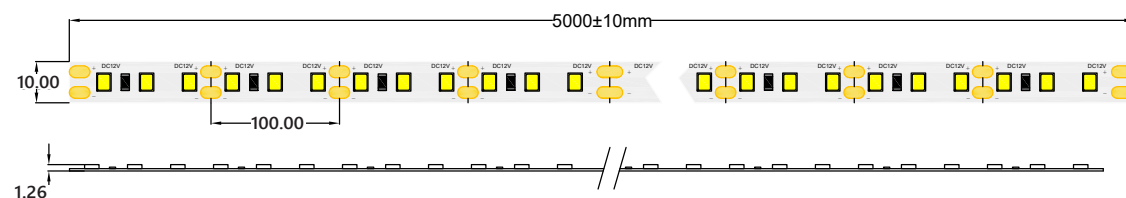


CONNECTORS PCB Width 10 mm



CLICK-10A-WP



CLICK-10B-WP




CLICK-10C-WP



MW LIGHTING

HQS-12W-60LED-WW-WP-24V

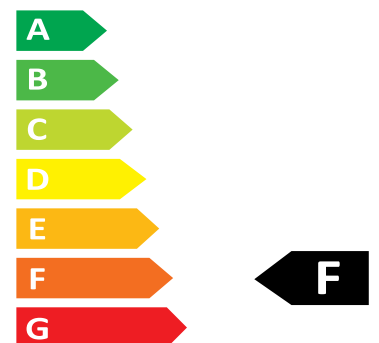

6 kWh/1000h



2019/2015