Montarent bouwlogistiek

Montarent
makes lifting easier

Montalift M30 - 4WDS

Self-erecting tower crane 36 tm on self-propelled undercarriage



SPECIFICATIONS

Self-erecting tower crane 36 tm

- Jib length 30,0 m and lifting height 22,4 m or maximum 34,1 m with raised jib (30º)
- Maximum capacity 4.000 kg, lifting, trolley and slewing motions controlled by inverter
- Octagonal galvanised mast and compact jib with lattice construction
- Equipped with maximum load and load moment safety systems
- Assembly and disassembly via radio control with display of information for the operator
- Steel counterweight of 17.500 kg with a slewing radius of 2,0 m, counterweight is removable
- 3 x LED lighting in the jib
- Selector switch for crane configurations
- CCS Crane Control System with smart set-up and Potain connect telematic modem

Self-propelled undercarriage 4WDS

- 4-wheel drive, choice of two driving speeds via inverter, controlled by pushbutton driving remote
- 4-wheel independent steering
- Heavy duty axles with hub reduction and 8 pcs 10.00 x 20HD tyres, rear axle pendulum
- Can be driven with the crane fully erected
- Four extendable hydraulic outriggers with a base of 3,9 x 4,0 m
- Power supply 400 V 32A-5P - 3 x 32A
- Transport dimensions: (l x w x h) 14,9 m x 2,9 m x 3,3 m, total weight 36,8 ton
- Options: generator or battery pack

T: +31(0)251-218188


info@montarent.nl
www.montarent.nl

Duiveland 4
1948 RB Beverwijk
The Netherlands

Montarent
bouwlogistiek

Montarent
makes lifting easier

Montalift M30 - 4WDS

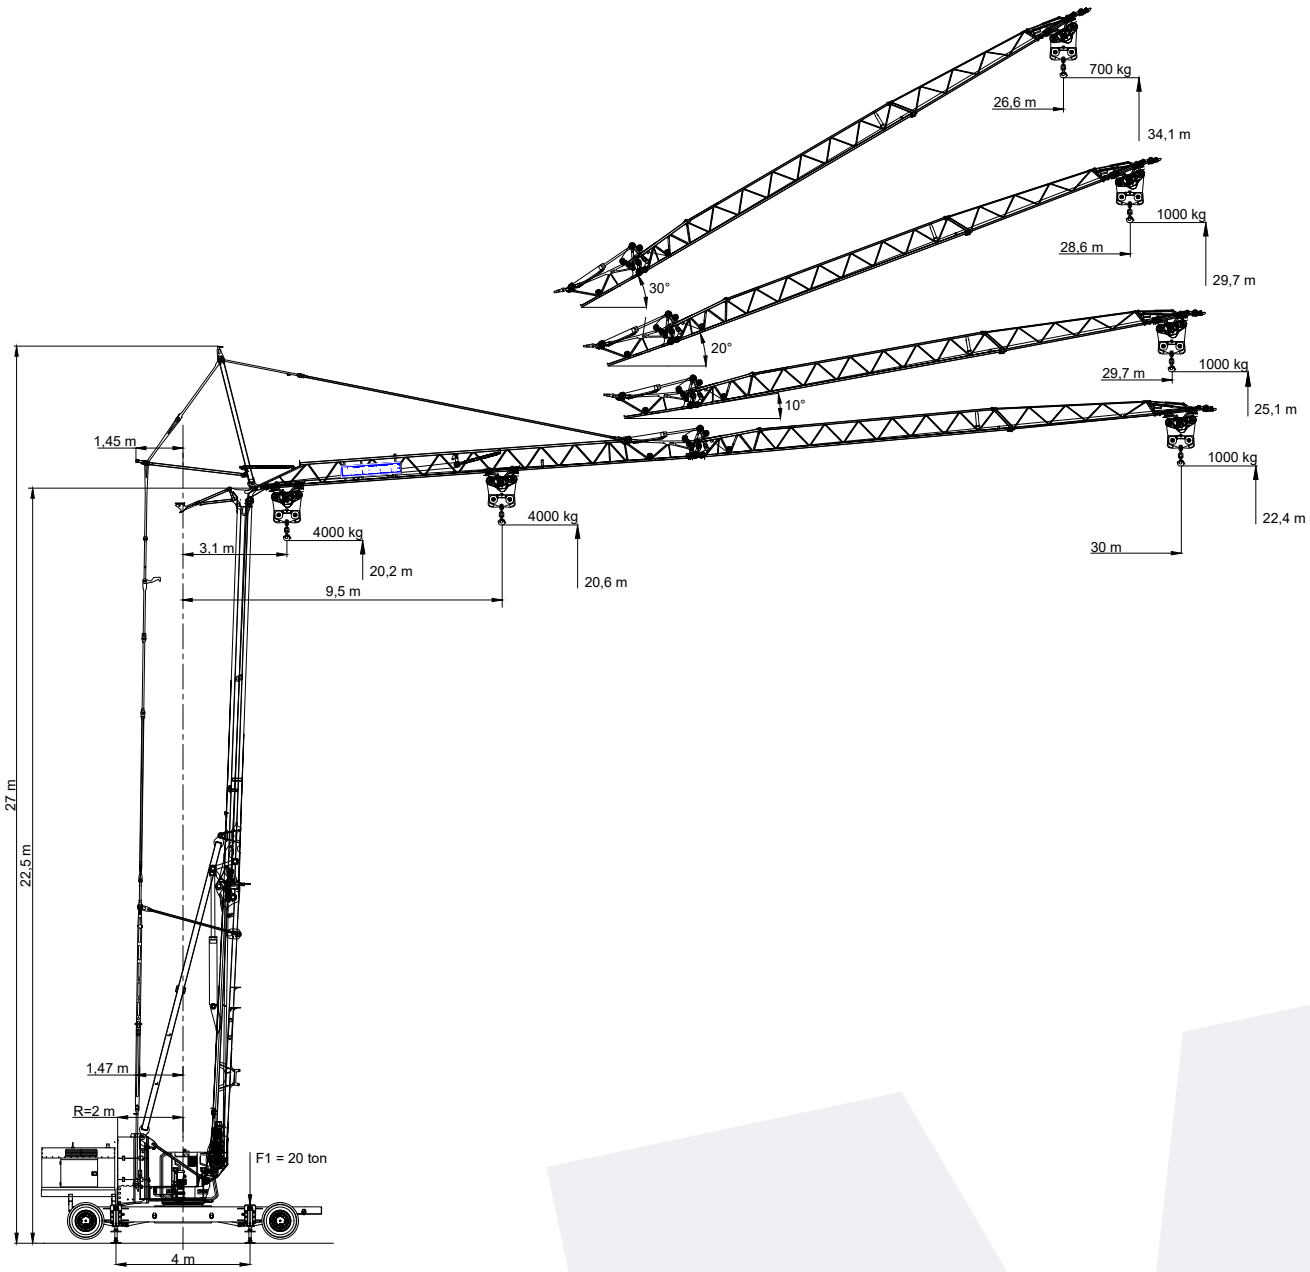

LOAD CHART

Radius (m)	9,0	11,0	12,0	16,0	17,0	23,0	25,0	26,0	28,0	30,0
Capacity (kg)	4.000	3.300	3.000	2.150	2.000	1.400	1.250	1.200	1.100	1.000

T: +31(0)251-218188

info@montarent.nl
www.montarent.nl

Duiveland 4
1948 RB Beverwijk
The Netherlands